

# 防水ハンドル

## WATERPROOF HANDLES



## 特徴 Feature


- 錠前は操作性に優れた防塵シャッター付新型リバーシブルキーTAK60を標準装備(A-1140-TAK60)
- 防水タイプ(Oリング・パッキン使用)
- 耐火・耐熱・耐塩・耐酸
- 左右兼用型
- The lock comes standard with the TAK60, a new-style reversible key with an easy-to-use dustproof shutter. (A-1140-TAK60)
- Waterproof.(using O-ring and sheet packing)
- Fire-resistant, heat-resistant, saltwater-resistant and acid-resistant.
- For both left-hand and right-hand use.





A-1140-1-1

A-1140-3-1 キーNo.2002

A-1140-6-1




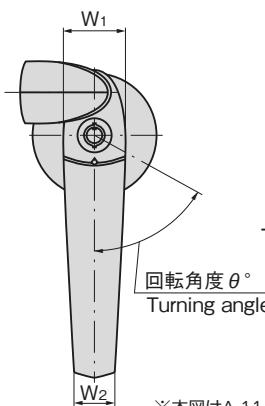
キーNo.TAK60  
KeyキーNo.0200  
Key

※本図はA-1140-1-1を基準に作図しています。  
※Based on A-1140-1-1.

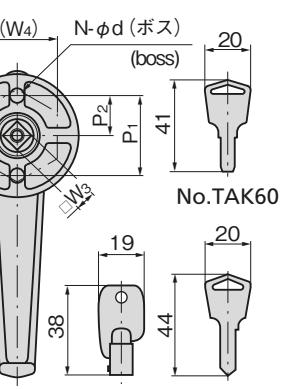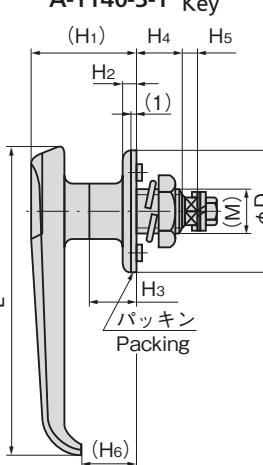

No.2002 No.0200

## パネル穴明け寸法 Panel drilling dimensions



ハンドル回転方向 Direction handle turns

ハンドル回転方向 Direction handle turns

- 仕様
- 材質: ステンレス鋼鋳物(SUS316)
  - 表面仕上: 鏡面バフ研磨
  - 鍵番号: A-1140-1~3/2002  
A-1140-1~6/TAK60, 0200

- 用途
- 屋外キュービクル・配分電盤・環境機器・食品機器・計測機器

- 納期考
- 標準在庫品
  - ハンドルを固定したタイプも製作致します。
  - A-1140-1~3はNo.2002キー1本付属しています。2本以上ご必要の際はご連絡ください。
  - マスタースистем、指定同番、鍵違いも製作します。お問合せください。

- 注意
- 耐熱形配電盤には必ず鍵付をご使用ください。
  - 施錠は錠前の構造上、鍵を押しながら回してください。
  - 本製品の止め金取付け用ねじは、緩み防止のため「緩み防止剤」の塗布をお奨め致します。

- Specifications
- Material: Cast stainless steel (SUS316)
  - Finish: Mirror surface buffing
  - Key No.: A-1140-1 to 3: 2002  
A-1140-1 to 6: TAK60, 0200

- Specific use
- Outdoor cubicle, power/distribution boards, environment equipment, food equipment and measuring equipment

- Remarks
- For heat-resistance power/distribution boards, be sure to use the product with key.
  - Due to the structure of the lock, the key must be pushed in as it is turned in order to release the lock.

- It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

※耐火形扉用把手の登録鍵番号はNo.0200です。ご注文の際にご指定ください。

商品番号 Product No.	RoHS CAD	鍵番号 Key No.	L	W1	W2	□W <sub>3</sub>	(W <sub>4</sub> )	(H <sub>1</sub> )	H <sub>2</sub>	H <sub>3</sub>	H <sub>4</sub>	H <sub>5</sub>	(H <sub>6</sub> )	P <sub>1</sub>	P <sub>2</sub>	N	φd	(M)	φD	θ°	最大適用板厚 Max. applicable panel thickness	製品質量(g) Mass	コード Code	単価 Price	量販価格 Bulk Price	数量 Quantity	単価 Price			
A-1140-1-1	● ZD/BD	2002																						03613	¥9,000	5個～	¥8,640			
A-1140-1-1-TAK60	● ZD/BD	TAK60																						04132	¥8,500	5個～	¥8,160			
A-1140-1-1-0200	● ZD/BD	0200	152	30	16	10	41	50	6	22	22.5	5	26	40		8		60	60	9.8		530	03573	¥8,500	5個～	¥8,160				
A-1140-1-2	● ZD/BD	鍵なし Without lock																						03610	¥7,000	5個～	¥6,720			
A-1140-2-1	● ZD/BD	2002																						03614	¥8,500	5個～	¥8,160			
A-1140-2-1-TAK60	● ZD/BD	TAK60																						04133	¥8,000	5個～	¥7,680			
A-1140-2-1-0200	● ZD/BD	0200	120	24	14					43	12		24			2	M22	48					340	03574	¥8,000	5個～	¥7,680			
A-1140-2-2	● ZD/BD	鍵なし Without lock								32	5	14.8		32			7		65	8.8				03611	¥6,000	5個～	¥5,760			
A-1140-3-1	● ZD/BD	2002								32	5	14.8		32			7		65	8.8			260	03615	¥8,300	5個～	¥7,970			
A-1140-3-1-TAK60	● ZD/BD	TAK60								38.5	9		21.5			45							04134	¥7,800	5個～	¥7,490				
A-1140-3-1-0200	● ZD/BD	0200	102	23	13	8																	03575	¥7,800	5個～	¥7,490				
A-1140-3-2	● ZD/BD	鍵なし Without lock																					03612	¥5,000	5個～	¥4,800				
A-1140-4-1-TAK60	● 3D	TAK60	90																				210	04135	¥7,600	5個～	¥7,296			
A-1140-4-1-0200	● ZD/BD	0200								27	42	5	12.5	11.3		25		15	1	3	M18	38	60	4	01144	¥7,600	5個～	¥7,296		
A-1140-5-1-TAK60	● ZD/BD	TAK60	80	20	13																		200	04136	¥7,600	5個～	¥7,296			
A-1140-5-1-0200	● ZD/BD	0200																					01133	¥7,600	5個～	¥7,296				
A-1140-6-1-TAK60	● 3D	TAK60	70																				196	04137	¥7,500	5個～	¥7,200			
A-1140-6-1-0200	● ZD/BD	0200																					01134	¥7,500	5個～	¥7,200				

●: RoHS指令対応品 ▲: RoHS指令に対応可能です。

※大量のご注文は更にお安くなります。