

# LM49200 Boomer® Audio Power Amplifier Series Stereo Class AB Audio Subsystem with a True Ground Headphone Amplifier

Check for Samples: [LM49200](#), [LM49200TLEVAL](#)

## FEATURES

- Differential Mono Input and Stereo Single-Ended Input
- 32-Step Digital Volume Control (-80 to +18dB)
- Three Independent Volume Channels (Left, Right, Mono)
- Separate Headphone Volume Control
- Flexible Output for Speaker and Headphone Output
- True Ground Headphone Amplifier Eliminates Large DC Blocking Capacitors Reducing PCB Space and Cost
- Receiver Pass-Through Capability
- Soft Enable Function
- RF Immunity Topology
- “Click and Pop” Suppression Circuitry
- Thermal Shutdown Protection
- Micro-Power Shutdown
- I<sup>2</sup>C Control Interface
- Available in Space-Saving DSBGA Package

## KEY SPECIFICATIONS

- Supply Voltage (VDD):  $2.7V \leq VDD \leq 5.5V$
- I<sup>2</sup>C Supply Voltage:  $1.7V \leq I2CVDD \leq 5.5V$
- Output power at VDD = 5V, 1% THD+N
  - RL = 8Ω speaker: 1.25W (typ)
  - RL = 32Ω headphone: 38mW (typ)
- Output power at VDD = 3.3V, 1% THD+N
  - RL = 8Ω speaker: 520W (typ)
  - RL = 32Ω headphone: 38mW (typ)
- PSRR:
  - VDD = 3.3V, 217Hz ripple, Mono In: 95dB (typ)
- Shutdown power supply current 0.02μA (typ)

## APPLICATIONS

- Portable Electronic Devices
- Mobile Phones
- PDAs

## DESCRIPTION

The LM49200 is a fully integrated audio subsystem with a stereo power amplifier capable of delivering 500mW of continuous average power per channel into 8Ω with 1% THD+N using a 3.3V supply. The LM49200 includes a separate stereo headphone amplifier that can deliver 35mW per channel into 32Ω.

The LM49200 has three input channels. A pair of single-ended inputs and a fully differential input channel. The LM49200 features a 32-step digital volume control on the input stage and an 8-step digital volume control on the headphone output stage.

The digital volume control and output modes are programmed through a two-wire I<sup>2</sup>C compatible interface that allows flexibility in routing and mixing audio channels.

The LM49200 is designed for cellular phone, PDA, and other portable handheld applications. The high level of integration minimizes external components. The True Ground headphone amplifier eliminates the physically large DC blocking output capacitors reducing required board space and reducing cost.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2009–2013, Texas Instruments Incorporated

## Typical Application

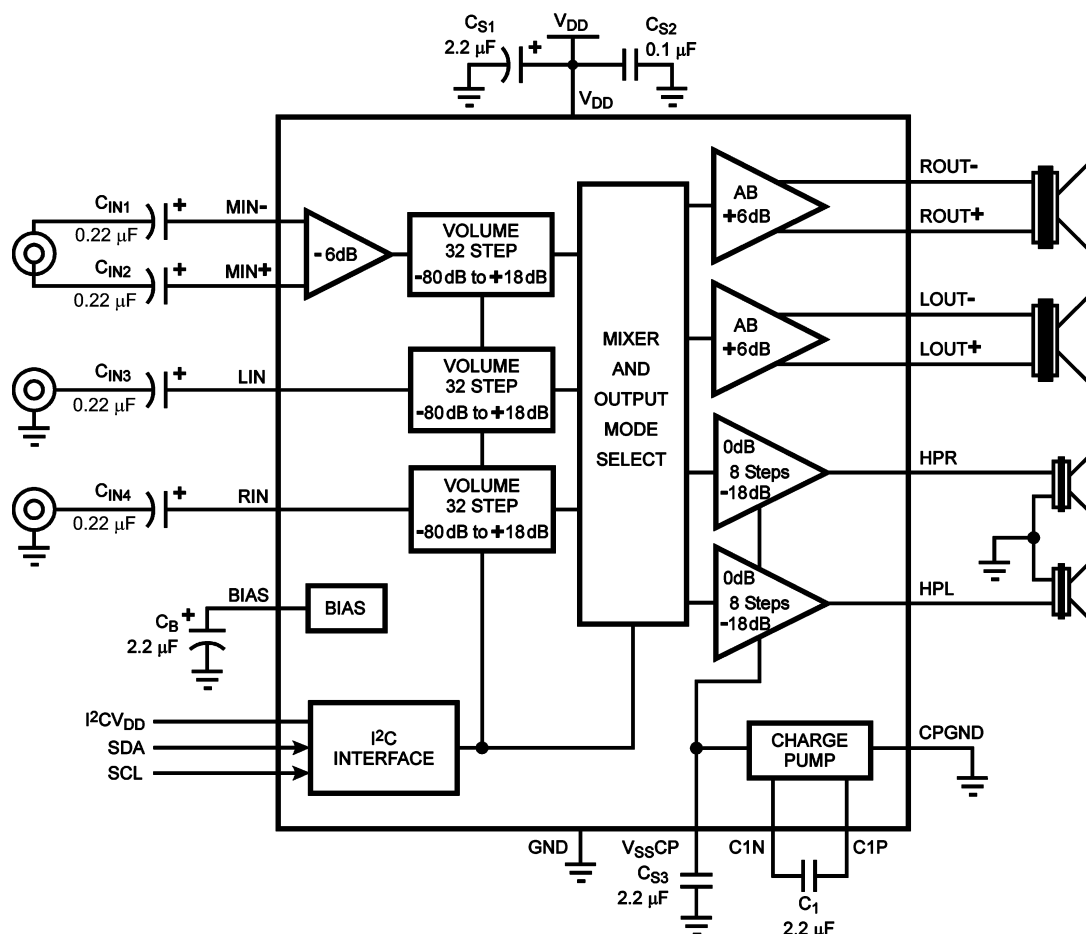
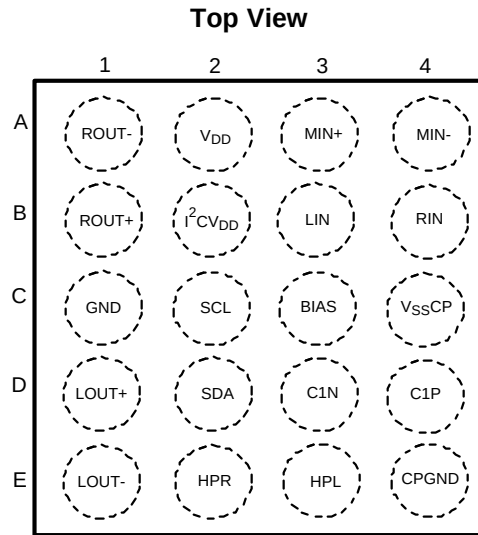


Figure 1. Typical Audio Application Circuit

## Connection Diagram



**Figure 2. 20 Bump DSBGA Package  
(Bump Side Down)  
See Package Number YZR0020BBA**

### Bump Descriptions

| Bump | Name                            | Pin Function                                   | Type          |
|------|---------------------------------|------------------------------------------------|---------------|
| A1   | ROUT-                           | Right Loudspeaker Negative Output              | Analog Output |
| A2   | VDD                             | Power Supply                                   | Power Input   |
| A3   | MIN+                            | Differential Mono Positive Input               | Analog Input  |
| A4   | MIN-                            | Differential Mono Negative Input               | Analog Input  |
| B1   | ROUT+                           | Right Loudspeaker Positive Output              | Analog Output |
| B2   | I <sup>2</sup> CV <sub>DD</sub> | I <sup>2</sup> C power supply                  | Power Input   |
| B3   | LIN                             | Single-ended Left Input                        | Analog Input  |
| B4   | RIN                             | Single-ended Right Input                       | Analog Input  |
| C1   | GND                             | Power Ground                                   | Ground        |
| C2   | SCL                             | I <sup>2</sup> C Clock                         | Digital Input |
| C3   | BIAS                            | Half-Supply Bias point, capacitor bypassed     | Analog Output |
| C4   | VSSCP                           | Negative Charge Pump Power Supply              | Analog Output |
| D1   | LOUT+                           | Left Loudspeaker Negative Output               | Analog Output |
| D2   | SDA                             | I <sup>2</sup> C Data                          | Digital Input |
| D3   | C1N                             | Negative Terminal Charge Pump Flying Capacitor | Analog Output |
| D4   | C1P                             | Positive Terminal Charge Pump Flying Capacitor | Analog Output |
| E1   | LOUT-                           | Left Loudspeaker Positive Output               | Analog Output |
| E2   | HPR                             | Right Headphone Output                         | Analog Output |
| E3   | HPL                             | Left Headphone Output                          | Analog Output |
| E4   | CPGND                           | Charge Pump Ground                             | Ground        |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

**Absolute Maximum Ratings**<sup>(1)(2)(3)</sup>

|                                                                   |                      |                                     |
|-------------------------------------------------------------------|----------------------|-------------------------------------|
| Supply Voltage <sup>(1)</sup>                                     |                      | 6.0V                                |
| Storage Temperature                                               |                      | –65°C to +150°C                     |
| Voltage at Any Input Pin                                          |                      | GND – 0.3 to V <sub>DD</sub> + 0.3V |
| Power Dissipation <sup>(4)</sup>                                  |                      | Internally Limited                  |
| ESD Rating <sup>(5)</sup>                                         |                      | 2000V                               |
| ESD Rating <sup>(6)</sup>                                         |                      | 200V                                |
| Junction Temperature (T <sub>JMAX</sub> )                         |                      | 150°C                               |
| Soldering Information                                             | Vapor Phase (60sec.) | 215°C                               |
|                                                                   | Infrared (15sec.)    | 220°C                               |
| See AN-1112 “Micro SMD Wafer Level Chip Scale Package” (SNVA009). |                      |                                     |
| Thermal Resistance                                                | θ <sub>JA</sub>      | 45.1°C/W                            |

- (1) “*Absolute Maximum Ratings*” indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (4) The maximum power dissipation must be derated at elevated temperatures and is dictated by T<sub>JMAX</sub>, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable power dissipation is P<sub>DMAX</sub> = (T<sub>JMAX</sub> – T<sub>A</sub>) / θ<sub>JA</sub> or the number given in *Absolute Maximum Ratings*, whichever is lower.
- (5) Human body model, applicable std. JESD22-A114C.
- (6) Machine model, applicable std. JESD22-A115-A.

**Operating Ratings**

|                                                                        |                                                   |
|------------------------------------------------------------------------|---------------------------------------------------|
| Temperature Range T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub> | –40°C ≤ T <sub>A</sub> ≤ 85°C                     |
| Supply Voltage (V <sub>DD</sub> )                                      | 2.7V ≤ V <sub>DD</sub> ≤ 5.5V                     |
| Supply Voltage (I <sup>2</sup> CV <sub>DD</sub> )                      | 1.7V ≤ I <sup>2</sup> CV <sub>DD</sub> ≤ 5.5V     |
|                                                                        | I <sup>2</sup> CV <sub>DD</sub> ≤ V <sub>DD</sub> |

## Electrical Characteristics $V_{DD} = 3.3V^{(1)(2)}$

The following specifications apply for  $V_{DD} = 3.3V$ ,  $T_A = 25^\circ C$ , all volume controls set to 0dB, unless otherwise specified.

LS = Loudspeaker, HP = Headphone.

| Parameter        |                                   | Test Conditions                                                                                                         | LM49200            |                       | Units<br>(Limits)    |
|------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------|----------------------|
|                  |                                   |                                                                                                                         | Typ <sup>(3)</sup> | Limits <sup>(4)</sup> |                      |
| $I_{DD}$         | Quiescent Power Supply Current    | $V_{IN} = 0$ , No Loads                                                                                                 |                    |                       |                      |
|                  |                                   | EP Receiver<br>(Output Mode Bit D4 = 1)                                                                                 | 1.2                | 1.7                   | mA (max)             |
|                  |                                   | Stereo LS only (Mode 2)                                                                                                 | 4                  | 5.5                   | mA (max)             |
|                  |                                   | Stereo HP only (Mode 8)                                                                                                 | 4.5                | 6.4                   | mA (max)             |
|                  |                                   | Stereo LS + Stereo HP (Mode 10)                                                                                         | 7.0                | 9.8                   | mA (max)             |
| $I_{SD}$         | Shutdown Current                  |                                                                                                                         | 0.02               | 1                     | $\mu A$ (max)        |
| $V_{OS}$         | Output Offset Voltage             | $V_{IN} = 0V$ , Mode 10                                                                                                 |                    |                       |                      |
|                  |                                   | LS output, $R_L = 8\Omega$ BTL<br>HP output, $R_L = 32\Omega$ SE                                                        | 2.5<br>1.4         | 15<br>5               | mV (max)<br>mV (max) |
| $P_O$            | Output Power                      | LS output, Mode 2, $R_L = 8\Omega$ BTL<br>THD+N = 1%, $f = 1kHz$                                                        | 520                | 450                   | mW (min)             |
|                  |                                   | HP output, Mode 8, $R_L = 32\Omega$ SE<br>THD+N = 1%, $f = 1kHz$                                                        | 38                 | 35                    | mW (min)             |
| THD+N            | Total Harmonic Distortion + Noise | LS output, $f = 1kHz$ , $R_L = 8\Omega$ BTL<br>$P_O = 250mW$ , Mode 2                                                   | 0.05               |                       | %                    |
|                  |                                   | HP output, $f = 1kHz$ , $R_L = 32\Omega$ SE<br>$P_O = 12mW$ , Mode 8                                                    | 0.02               |                       | %                    |
| SNR              | Signal-to-Noise Ratio             | LS output, $f = 1kHz$ ,<br>$V_{REF} = V_{OUT}$ (1%THD+N)<br>Gain = 0dB, A-weighted<br>LIN & RIN AC terminated           | 105                |                       | dB                   |
|                  |                                   | HP output, $f = 1kHz$ ,<br>$V_{REF} = V_{OUT}$ (1%THD+N)<br>Gain = 0dB, A-weighted<br>LIN & RIN AC terminated           | 101                |                       | dB                   |
| $\epsilon_{OUT}$ | Output Noise                      | A-weighted, Inputs terminated to AC GND, Output Referred                                                                |                    |                       |                      |
|                  |                                   | Right LS only, Mode 1                                                                                                   | 8                  |                       | $\mu V$              |
|                  |                                   | LS: Mode 1                                                                                                              | 8                  |                       | $\mu V$              |
|                  |                                   | LS: Mode 2                                                                                                              | 11                 |                       | $\mu V$              |
|                  |                                   | LS: Mode 3                                                                                                              | 14                 |                       | $\mu V$              |
|                  |                                   | HP: Mode 4                                                                                                              | 8                  |                       | $\mu V$              |
|                  |                                   | HP: Mode 8                                                                                                              | 9                  |                       | $\mu V$              |
| PSRR             | Power Supply Rejection Ratio      | $V_{RIPPLE} = 200mV_{PP}$ , $f_{RIPPLE} = 217Hz$ , $C_B = 2.2\mu F$<br>All inputs AC terminated to GND, output referred |                    |                       |                      |
|                  |                                   | LS: Mode 1, $R_L = 8\Omega$ BTL                                                                                         | 95                 |                       | dB                   |
|                  |                                   | LS: Mode 2, $R_L = 8\Omega$ BTL                                                                                         | 75                 |                       | dB                   |
|                  |                                   | HP: Mode 4, $R_L = 32\Omega$ SE                                                                                         | 90                 |                       | dB                   |
|                  |                                   | HP: Mode 8, $R_L = 32\Omega$ SE                                                                                         | 80                 |                       | dB                   |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the Absolute Maximum Ratings or other conditions beyond those indicated in the Recommended Operating Conditions is not implied. The Recommended Operating Conditions indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The Electrical Characteristics tables list ensured specifications under the listed Recommended Operating Conditions except as otherwise modified or specified by the Electrical Characteristics Conditions and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the Recommended Operation Conditions at the time of product characterization and are not ensured.
- (4) Datasheet min/max specification limits are ensured by test or statistical analysis.

## Electrical Characteristics $V_{DD} = 3.3V^{(1)(2)}$ (continued)

The following specifications apply for  $V_{DD} = 3.3V$ ,  $T_A = 25^\circ C$ , all volume controls set to 0dB, unless otherwise specified.  
LS = Loudspeaker, HP = Headphone.

| Parameter  |                                   | Test Conditions                                                                                      | LM49200            |                       | Units<br>(Limits)                    |
|------------|-----------------------------------|------------------------------------------------------------------------------------------------------|--------------------|-----------------------|--------------------------------------|
|            |                                   |                                                                                                      | Typ <sup>(3)</sup> | Limits <sup>(4)</sup> |                                      |
| CMRR       | Common-Mode Rejection Ratio       | f = 217Hz, $V_{CM} = 1V_{P-P}$<br>LS: $R_L = 8\Omega$ BTL, Mode 1<br>HP: $R_L = 32\Omega$ SE, Mode 4 | 60<br>66           |                       | dB<br>dB                             |
| $X_{TALK}$ | Crosstalk                         | LS: $P_O = 400mW$ , f = 1kHz, Mode 2                                                                 | 80                 |                       | dB                                   |
|            |                                   | HP: $P_O = 12mW$ , f = 1kHz, Mode 8                                                                  | 70                 |                       | dB                                   |
| $Z_{IN}$   | MIN, LIN, and RIN Input Impedance | Maximum Gain setting                                                                                 | 12.5               | 10<br>15              | k $\Omega$ (min)<br>k $\Omega$ (max) |
|            |                                   | Maximum Attenuation setting                                                                          | 110                | 90<br>130             | k $\Omega$ (min)<br>k $\Omega$ (max) |
| VOL        | Digital Volume Control Range      | Maximum Gain<br>Maximum Attenuation                                                                  | 18<br>–80          |                       | dB<br>dB                             |
| VOL        | Volume Control Step Size Error    |                                                                                                      | 0.2                |                       | dB                                   |
| $T_{WU}$   | Wake-Up Time from Shutdown        | $C_B = 2.2\mu F$ , HP, Normal Turn-On Mode                                                           | 29                 |                       | ms                                   |
|            |                                   | $C_B = 2.2\mu F$ , HP, Fast Turn-On Mode                                                             | 16                 |                       | ms                                   |

## Electrical Characteristics $V_{DD} = 5.0V^{(1)(2)}$

The following specifications apply for  $V_{DD} = 5.0V$ ,  $T_A = 25^\circ C$ , all volume controls set to 0dB, unless otherwise specified.  
LS = Loudspeaker, HP = Headphone.

| Parameter |                                   | Test Conditions                                                                             | LM49200            |                       | Units<br>(Limits)    |
|-----------|-----------------------------------|---------------------------------------------------------------------------------------------|--------------------|-----------------------|----------------------|
|           |                                   |                                                                                             | Typ <sup>(3)</sup> | Limits <sup>(4)</sup> |                      |
| $I_{DD}$  | Quiescent Power Supply Current    | $V_{IN} = 0$ , No Loads                                                                     |                    |                       |                      |
|           |                                   | EP Receiver<br>(Output Mode Bit D4 = 1)                                                     | 1.3                | 1.8                   | mA (max)             |
|           |                                   | Stereo LS only (Mode 2)                                                                     | 4.2                | 5.9                   | mA (max)             |
|           |                                   | Stereo HP only (Mode 8)                                                                     | 4.7                | 6.5                   | mA (max)             |
|           |                                   | Stereo LS + Stereo HP (Mode 10)                                                             | 7.3                | 10.1                  | mA (max)             |
| $I_{SD}$  | Shutdown Current                  |                                                                                             | 0.02               | 1                     | $\mu A$ (max)        |
| $V_{OS}$  | Output Offset Voltage             | $V_{IN} = 0V$ , Mode 10<br>LS output, $R_L = 8\Omega$ BTL<br>HP output, $R_L = 32\Omega$ SE | 2.5<br>1.4         | 15<br>5               | mV (max)<br>mV (max) |
|           |                                   |                                                                                             |                    |                       |                      |
| $P_O$     | Output Power                      | LS output, Mode 2, $R_L = 8\Omega$ BTL<br>THD+N = 1%, f = 1kHz                              | 1.25               |                       | W                    |
|           |                                   | HP output, Mode 8, $R_L = 32\Omega$ SE<br>THD+N = 1%, f = 1kHz                              | 38                 |                       | mW                   |
| THD+N     | Total Harmonic Distortion + Noise | LS output, f = 1kHz, $R_L = 8\Omega$ BTL<br>$P_O = 400mW$ , Mode 2                          | 0.05               |                       | %                    |
|           |                                   | HP output, f = 1kHz, $R_L = 32\Omega$ SE<br>$P_O = 12mW$ , Mode 8                           | 0.02               |                       | %                    |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the *Recommended Operation Conditions* at the time of product characterization and are not ensured.
- (4) Datasheet min/max specification limits are ensured by test or statistical analysis.

**Electrical Characteristics  $V_{DD} = 5.0V^{(1)(2)}$  (continued)**

The following specifications apply for  $V_{DD} = 5.0V$ ,  $T_A = 25^\circ C$ , all volume controls set to 0dB, unless otherwise specified.  
 LS = Loudspeaker, HP = Headphone.

| Parameter        |                                   | Test Conditions                                                                                                          | LM49200            |                       | Units<br>(Limits) |
|------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------|-------------------|
|                  |                                   |                                                                                                                          | Typ <sup>(3)</sup> | Limits <sup>(4)</sup> |                   |
| SNR              | Signal-to-Noise Ratio             | LS output, $f = 1kHz$ ,<br>$V_{REF} = V_{OUT}$ (1%THD+N)<br>Gain = 0dB, A-weighted<br>LIN & RIN AC terminated            | 109                |                       | dB                |
|                  |                                   | HP output, $f = 1kHz$ ,<br>$V_{REF} = V_{OUT}$ (1%THD+N)<br>Gain = 0dB, A-weighted<br>LIN & RIN AC terminated            | 101                |                       | dB                |
| $\epsilon_{OUT}$ | Output Noise                      | A-weighted, Inputs terminated to AC GND, Output Referred                                                                 |                    |                       |                   |
|                  |                                   | Right LS only, Mode 1                                                                                                    | 8                  |                       | $\mu V$           |
|                  |                                   | LS: Mode 1                                                                                                               | 8                  |                       | $\mu V$           |
|                  |                                   | LS: Mode 2                                                                                                               | 11                 |                       | $\mu V$           |
|                  |                                   | LS: Mode 3                                                                                                               | 14                 |                       | $\mu V$           |
|                  |                                   | HP: Mode 4                                                                                                               | 8                  |                       | $\mu V$           |
|                  |                                   | HP: Mode 8                                                                                                               | 9                  |                       | $\mu V$           |
|                  |                                   | HP: Mode 12                                                                                                              | 11                 |                       | $\mu V$           |
| PSRR             | Power Supply Rejection Ratio      | $V_{RIPPLE} = 200mV_{P-P}$ , $f_{RIPPLE} = 217Hz$ , $C_B = 2.2\mu F$<br>All inputs AC terminated to GND, output referred |                    |                       |                   |
|                  |                                   | LS: Mode 1, $R_L = 8\Omega$ BTL                                                                                          | 90                 |                       | dB                |
|                  |                                   | LS: Mode 2, $R_L = 8\Omega$ BTL                                                                                          | 70                 |                       | dB                |
|                  |                                   | HP: Mode 4, $R_L = 32\Omega$ SE                                                                                          | 87                 |                       | dB                |
|                  |                                   | HP: Mode 8, $R_L = 32\Omega$ SE                                                                                          | 77                 |                       | dB                |
| CMRR             | Common-Mode Rejection Ratio       | $f = 217Hz$ , $V_{CM} = 1V_{P-P}$<br>LS: $R_L = 8\Omega$ BTL, Mode 1<br>HP: $R_L = 32\Omega$ SE, Mode 4                  | 60<br>66           |                       | dB<br>dB          |
|                  |                                   | LS: $P_O = 1W$ , $f = 1kHz$ , Mode 2<br>HP: $P_O = 12mW$ , $f = 1kHz$ , Mode 8                                           | 80<br>70           |                       | dB<br>dB          |
| $X_{TALK}$       | Crosstalk                         | LS: $P_O = 1W$ , $f = 1kHz$ , Mode 2                                                                                     | 80                 |                       | dB                |
|                  |                                   | HP: $P_O = 12mW$ , $f = 1kHz$ , Mode 8                                                                                   | 70                 |                       | dB                |
| $Z_{IN}$         | MIN, LIN, and RIN Input Impedance | Maximum Gain setting                                                                                                     | 12.5               |                       | k $\Omega$        |
|                  |                                   | Maximum Attenuation setting                                                                                              | 110                |                       | k $\Omega$        |
| VOL              | Digital Volume Control Range      | Maximum Gain                                                                                                             | 18                 |                       | dB                |
|                  |                                   | Maximum Attenuation                                                                                                      | –80                |                       | dB                |
| VOL              | Volume Control Step Size Error    |                                                                                                                          | 0.2                |                       | dB                |
| $T_{WU}$         | Wake-Up Time from Shutdown        | $C_B = 2.2\mu F$ , HP, Normal Turn-On Mode                                                                               | 29                 |                       | ms                |
|                  |                                   | $C_B = 2.2\mu F$ , HP, Fast Turn-On Mode                                                                                 | 16                 |                       | ms                |

## I<sup>2</sup>C Interface<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5.0V$  and  $3.3V$ ,  $2.2V \leq I^2C\_V_{DD} \leq 5.5V$ ,  $T_A = 25^\circ C$ , unless otherwise specified.

| Parameter |                                     | Test Conditions | LM49200            |                           | Units<br>(Limits) |
|-----------|-------------------------------------|-----------------|--------------------|---------------------------|-------------------|
|           |                                     |                 | Typ <sup>(3)</sup> | Limits <sup>(4)(5)</sup>  |                   |
| $t_1$     | I <sup>2</sup> C Clock Period       |                 |                    | 2.5                       | $\mu s$ (min)     |
| $t_2$     | I <sup>2</sup> C Data Setup Time    |                 |                    | 100                       | ns (min)          |
| $t_3$     | I <sup>2</sup> C Data Stable Time   |                 |                    | 0                         | ns (min)          |
| $t_4$     | Start Condition Time                |                 |                    | 100                       | ns (min)          |
| $t_5$     | Stop Condition Time                 |                 |                    | 100                       | ns (min)          |
| $t_6$     | I <sup>2</sup> C Data Hold Time     |                 |                    | 100                       | ns (min)          |
| $V_{IH}$  | I <sup>2</sup> C Input Voltage High |                 |                    | $0.7 \times I^2C\_V_{DD}$ | V (min)           |
| $V_{IL}$  | I <sup>2</sup> C Input Voltage Low  |                 |                    | $0.3 \times I^2C\_V_{DD}$ | V (max)           |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Human body model, applicable std. JESD22-A114C.
- (4) Datasheet min/max specification limits are ensured by test or statistical analysis.
- (5) Refer to the I<sup>2</sup>C timing diagram, [Figure 32](#).

## I<sup>2</sup>C Interface<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5.0V$  and  $3.3V$ ,  $1.7V \leq I^2C\_V_{DD} \leq 2.2V$ ,  $T_A = 25^\circ C$ , unless otherwise specified.

| Parameter |                                     | Test Conditions | LM49200            |                           | Units<br>(Limits) |
|-----------|-------------------------------------|-----------------|--------------------|---------------------------|-------------------|
|           |                                     |                 | Typ <sup>(3)</sup> | Limits <sup>(4)(5)</sup>  |                   |
| $t_1$     | I <sup>2</sup> C Clock Period       |                 |                    | 2.5                       | $\mu s$ (min)     |
| $t_2$     | I <sup>2</sup> C Data Setup Time    |                 |                    | 250                       | ns (min)          |
| $t_3$     | I <sup>2</sup> C Data Stable Time   |                 |                    | 0                         | ns (min)          |
| $t_4$     | Start Condition Time                |                 |                    | 250                       | ns (min)          |
| $t_5$     | Stop Condition Time                 |                 |                    | 250                       | ns (min)          |
| $t_6$     | I <sup>2</sup> C Data Hold Time     |                 |                    | 250                       | ns (min)          |
| $V_{IH}$  | I <sup>2</sup> C Input Voltage High |                 |                    | $0.7 \times I^2C\_V_{DD}$ | V (min)           |
| $V_{IL}$  | I <sup>2</sup> C Input Voltage Low  |                 |                    | $0.3 \times I^2C\_V_{DD}$ | V (max)           |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensured specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not ensured.
- (3) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the *Recommended Operation Conditions* at the time of product characterization and are not ensured.
- (4) Datasheet min/max specification limits are ensured by test or statistical analysis.
- (5) Refer to the I<sup>2</sup>C timing diagram, [Figure 32](#).



## Typical Performance Characteristics

For all performance graphs, the Output Gains are set to 0dB, unless otherwise noted.

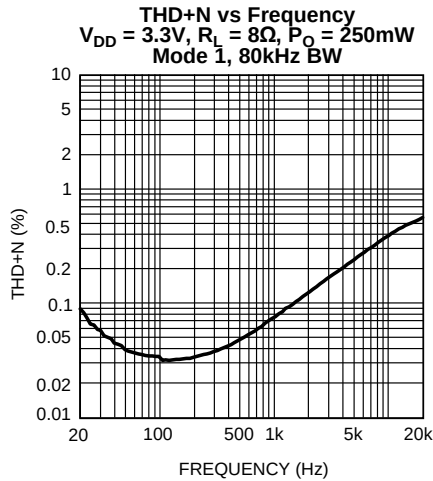


Figure 3.

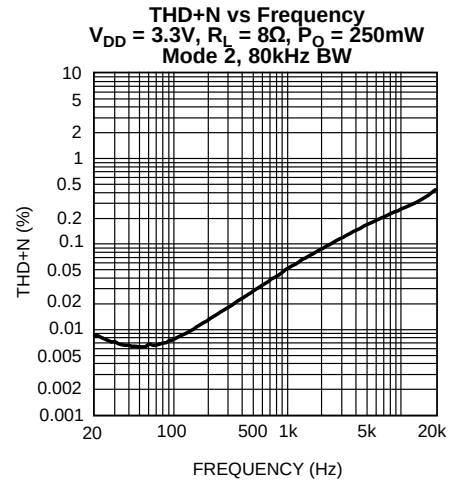


Figure 4.

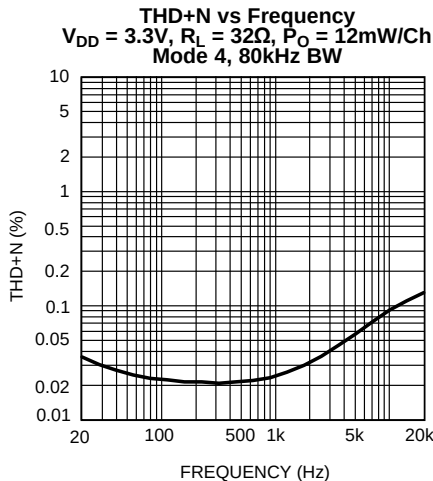


Figure 5.

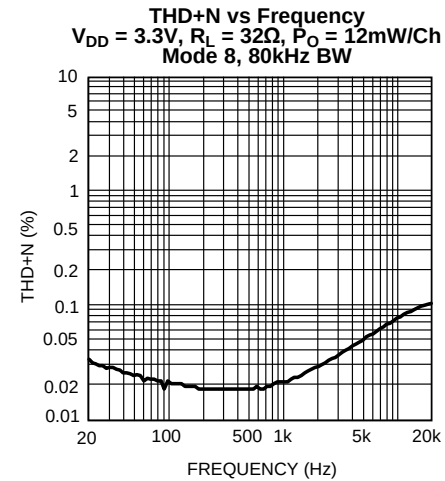


Figure 6.

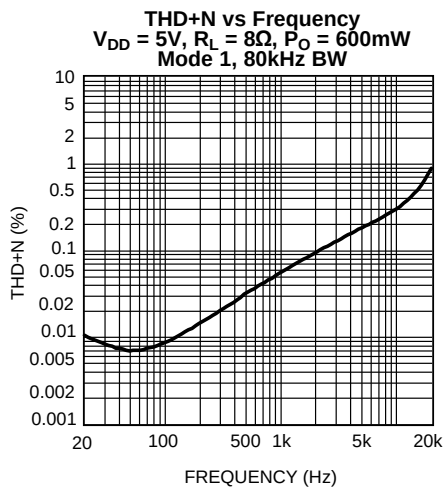


Figure 7.

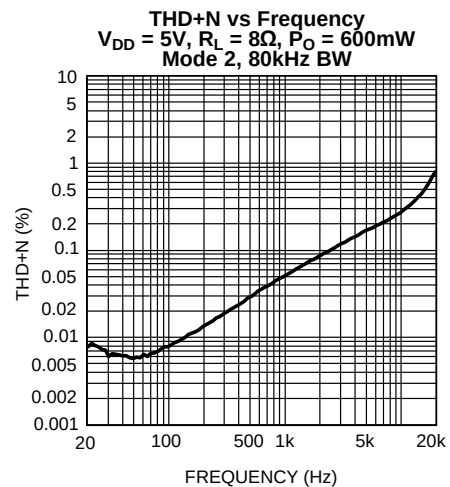


Figure 8.

## Typical Performance Characteristics (continued)

For all performance graphs, the Output Gains are set to 0dB, unless otherwise noted.

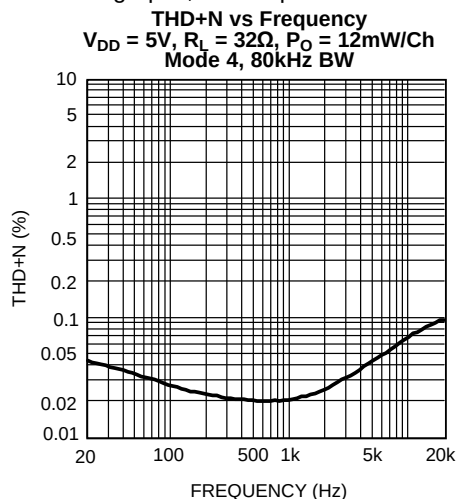


Figure 9.

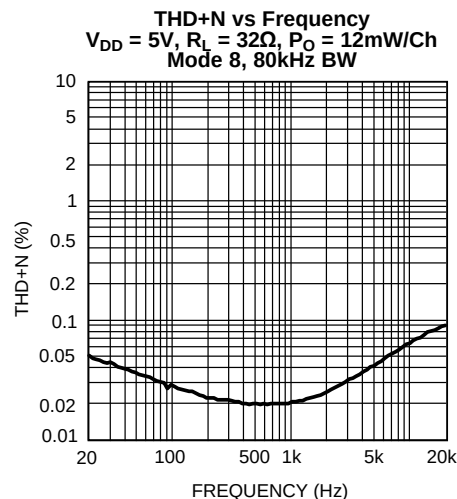


Figure 10.

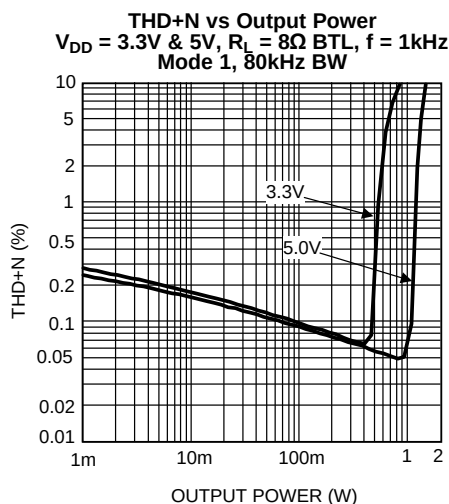


Figure 11.

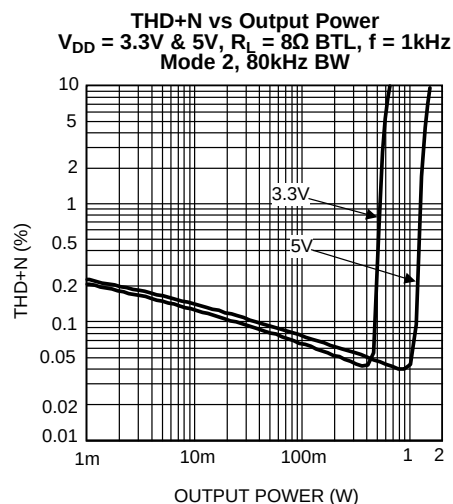


Figure 12.

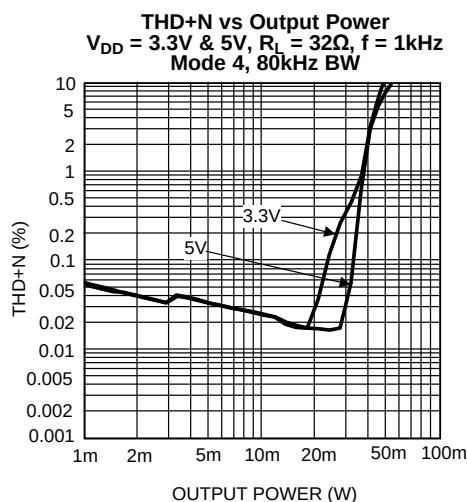


Figure 13.

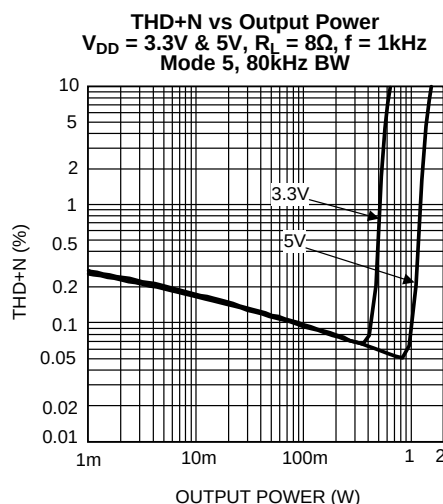


Figure 14.

## Typical Performance Characteristics (continued)

For all performance graphs, the Output Gains are set to 0dB, unless otherwise noted.

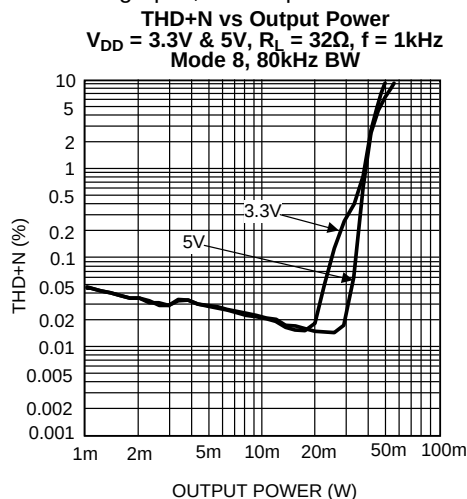


Figure 15.

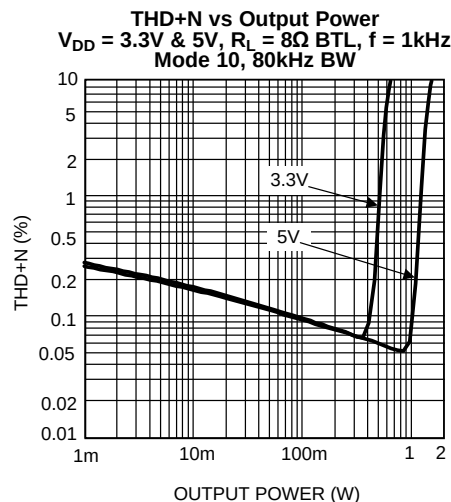


Figure 16.

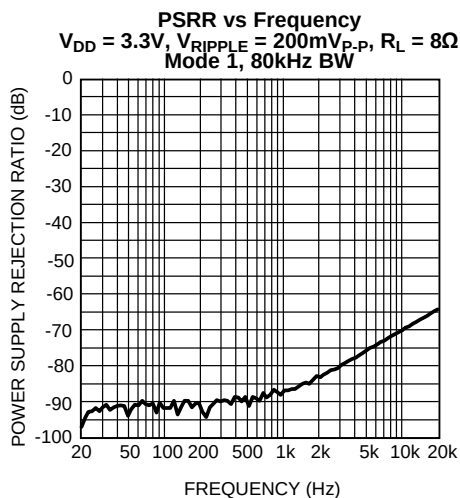


Figure 17.

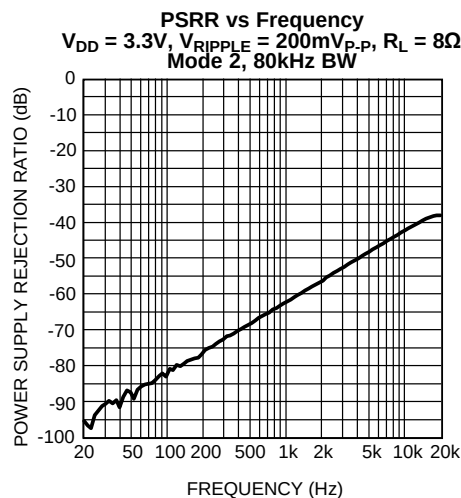


Figure 18.

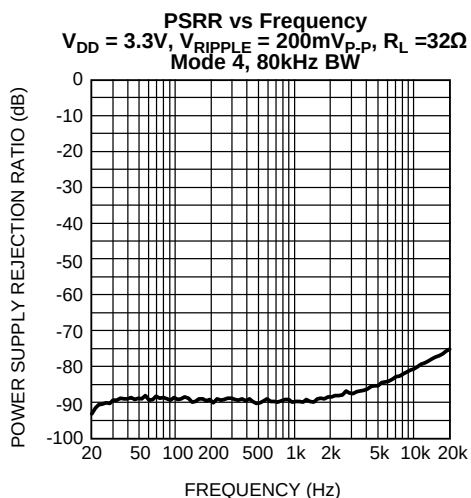


Figure 19.

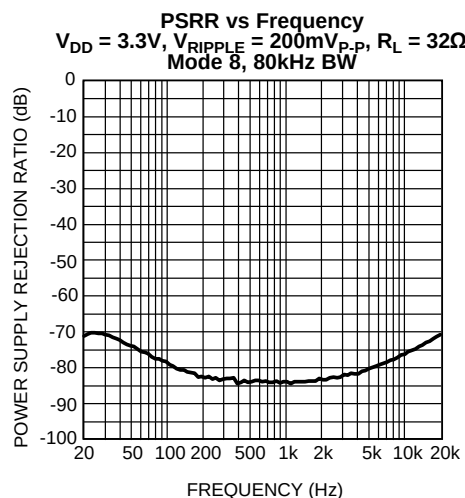


Figure 20.

## Typical Performance Characteristics (continued)

For all performance graphs, the Output Gains are set to 0dB, unless otherwise noted.

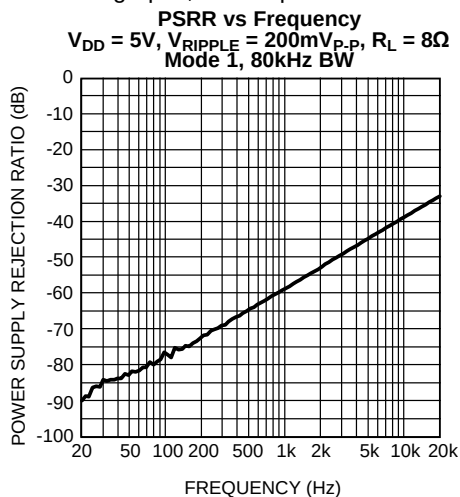


Figure 21.

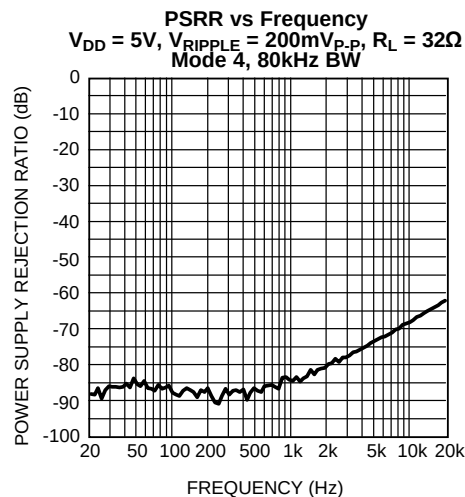


Figure 22.

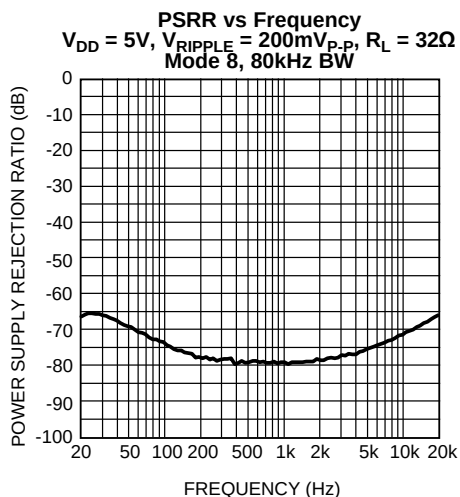


Figure 23.

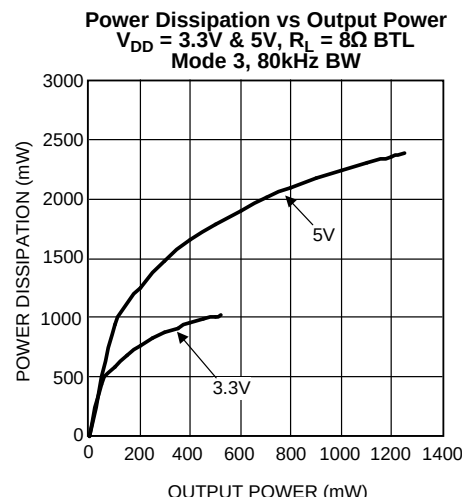


Figure 24.

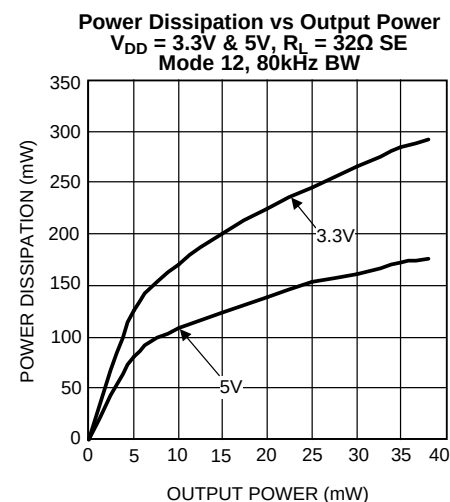


Figure 25.

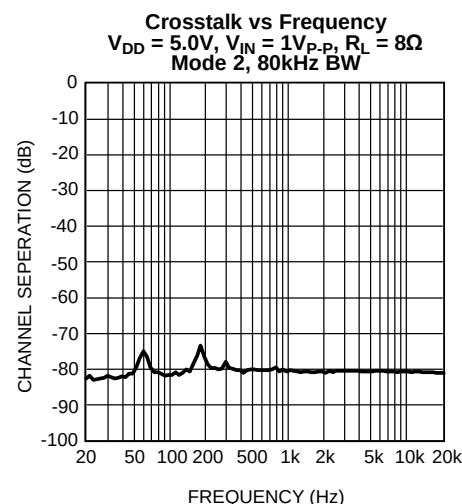


Figure 26.

## Typical Performance Characteristics (continued)

For all performance graphs, the Output Gains are set to 0dB, unless otherwise noted.

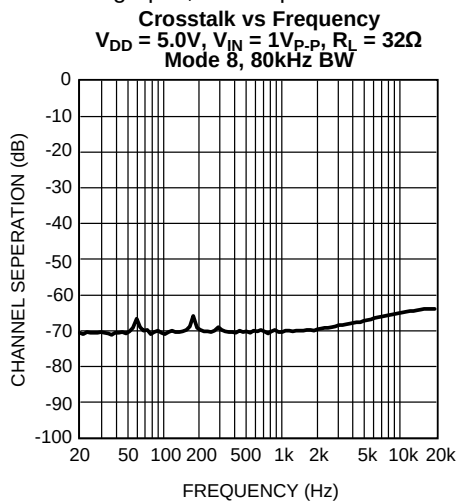


Figure 27.

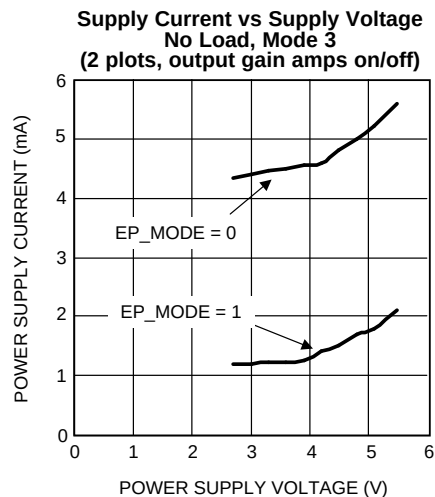


Figure 28.

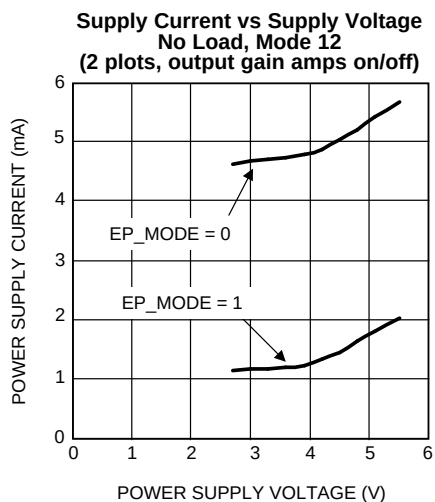


Figure 29.

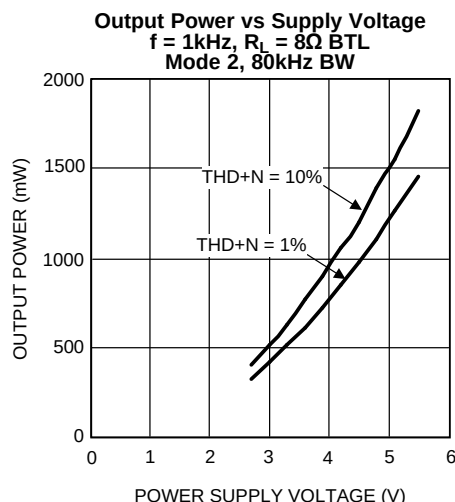


Figure 30.

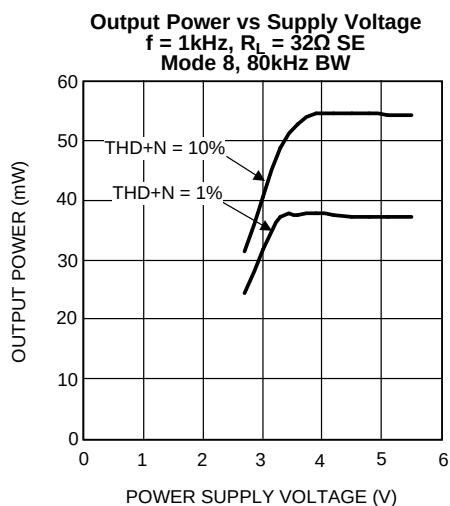


Figure 31.

## APPLICATION INFORMATION

### I<sup>2</sup>C COMPATIBLE INTERFACE

The LM49200 is controlled through an I<sup>2</sup>C compatible serial interface that consists of a serial data line (SDA) and a serial clock (SCL). The clock line is uni-directional. The data line is bi-directional (open drain). The LM49200 and the master can communicate at clock rates up to 400kHz. Figure 32 shows the I<sup>2</sup>C interface timing diagram. Data on the SDA line must be stable during the HIGH period of SCL. The LM49200 is a transmit/receive slave-only device, reliant upon the master to generate the SCL signal. Each transmission sequence is framed by a START condition and a STOP condition (Figure 33). Each data word, device address and data, transmitted over the bus is 8 bits long and is always followed by an acknowledge pulse (Figure 34). The LM49200 device address is 11111000.

### I<sup>2</sup>C INTERFACE POWER SUPPLY PIN (I<sup>2</sup>CV<sub>DD</sub>)

The LM49200's I<sup>2</sup>C interface is powered up through the I<sup>2</sup>CV<sub>DD</sub> pin. The LM49200's I<sup>2</sup>C interface operates at a voltage level set by the I<sup>2</sup>CV<sub>DD</sub> pin which can be set independent to that of the main power supply pin V<sub>DD</sub>. This is ideal whenever logic levels for the I<sup>2</sup>C interface are dictated by a microcontroller or microprocessor that is operating at a lower supply voltage than the main battery of a portable system

### I<sup>2</sup>C BUS FORMAT

The I<sup>2</sup>C bus format is shown in Figure 34. The START signal, the transition of SDA from HIGH to LOW while SCL is HIGH, is generated, alerting all devices on the bus that a device address is being written to the bus.

The 7-bit device address is written to the bus, most significant bit (MSB) first, followed by the R/W bit. R/W = 0 indicates the master is writing to the slave device, R/W = 1 indicates the master wants to read data from the slave device. Set R/W = 0; the LM49200 is a WRITE-ONLY device and will not respond to the R/W = 1. The data is latched in on the rising edge of the clock. Each address bit must be stable while SCL is HIGH. After the last address bit is transmitted, the master device releases SDA, during which time, an acknowledge clock pulse is generated by the slave device. If the LM49200 receives the correct address, the device pulls the SDA line low, generating an acknowledge bit (ACK).

Once the master device registers the ACK bit, the 8-bit register data word is sent. Each data bit should be stable while SCL is HIGH. After the 8-bit register data word is sent, the LM49200 sends another ACK bit. Following the acknowledgement of the register data word, the master issues a STOP bit, allowing SDA to go high while SCL is high.

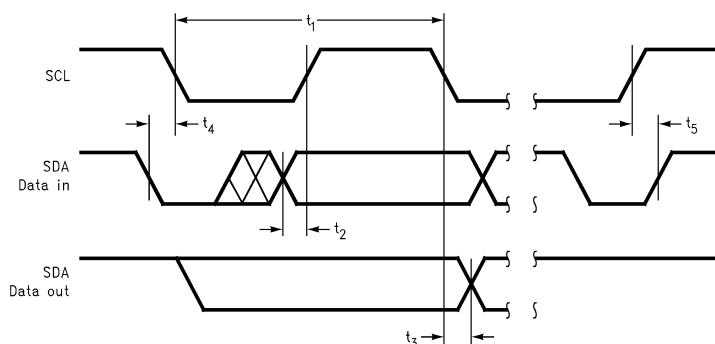


Figure 32. I<sup>2</sup>C Timing Diagram

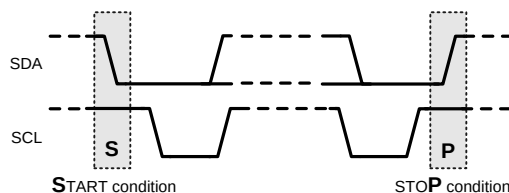
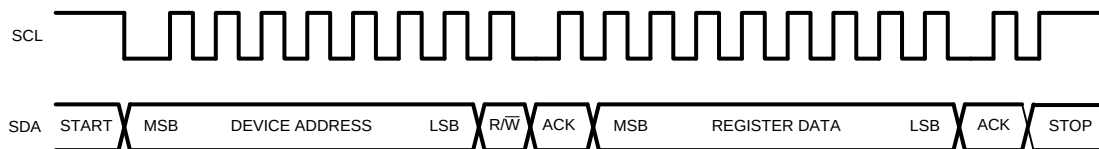


Figure 33. Start and Stop Diagram


**Figure 34. Start and Stop Diagram**
**Table 1. Chip Address**

|              | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
|--------------|----|----|----|----|----|----|----|----|
| Chip Address | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  |

**Table 2. Control Registers<sup>(1)</sup>**

| Register                      | D7 | D6 | D5 | D4                       | D3                          | D2                                                 | D1                          | D0                      |
|-------------------------------|----|----|----|--------------------------|-----------------------------|----------------------------------------------------|-----------------------------|-------------------------|
| Shutdown Control              | 0  | 0  | 0  | HPR_SD <sup>(2)</sup>    | 0                           | I <sup>2</sup> CV <sub>DD</sub> _SD <sup>(3)</sup> | Turn_On_Time <sup>(4)</sup> | Power_On <sup>(5)</sup> |
| Output Mode Control           | 0  | 1  | 0  | EP_Mode <sup>(6)</sup>   | Mode_Control <sup>(7)</sup> |                                                    |                             |                         |
| Headphone Output Gain Control | 1  | 0  | 0  | 0                        | 0                           | HP_Gain <sup>(8)</sup>                             |                             |                         |
| Mono Input Volume Control     | 1  | 0  | 1  | Mono_Vol <sup>(9)</sup>  |                             |                                                    |                             |                         |
| Left Input Volume Control     | 1  | 1  | 0  | Left_Vol <sup>(9)</sup>  |                             |                                                    |                             |                         |
| Right Input Volume Control    | 1  | 1  | 1  | Right_Vol <sup>(9)</sup> |                             |                                                    |                             |                         |

(1) **Notes:** All registers default to 0 on initial power-up.

(2) HPR\_SD: Right channel shutdown control. See [Table 3](#).

(3) I<sup>2</sup>CV<sub>DD</sub>\_SD: Control Enable Function. I<sup>2</sup>CV<sub>DD</sub> can be used to act as a hardware reset input. See [Table 3](#).

(4) Turn\_On\_Time: Reduces the turn on time for faster activation. See [Table 3](#).

(5) Power\_On: Master Power on bit. See [Table 3](#).

(6) EP\_Mode: EP (Receiver) Mode control. Right loudspeaker channel can be used as earpiece path. See [Table 4](#).

(7) Mode\_Control: Sets the output mode. See [Table 4](#).

(8) HP\_Gain: Sets the headphone amplifier output gain. See [Table 5](#).

(9) Mono\_Vol/Left\_Vol/Right\_Vol: Sets the input volume for Mono, Left and Right inputs. See [Table 6](#).

**Table 3. Shutdown Control Register**

| Bit | Name                                | Value                                                                             | Description                                                                                                                                                                                                       |
|-----|-------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Power_On                            | This bit is a master shutdown control bit and sets the device to be on or off.    |                                                                                                                                                                                                                   |
|     |                                     | Value                                                                             | Status                                                                                                                                                                                                            |
|     |                                     | 0                                                                                 | Master power off, device disable.                                                                                                                                                                                 |
|     |                                     | 1                                                                                 | Master power on, device enable.                                                                                                                                                                                   |
| 1   | Turn_On_Time                        | This bit sets the turn on time of the device.                                     |                                                                                                                                                                                                                   |
|     |                                     | Value                                                                             | Status                                                                                                                                                                                                            |
|     |                                     | 0                                                                                 | Normal Turn-on time                                                                                                                                                                                               |
|     |                                     | 1                                                                                 | Fast Turn-on time                                                                                                                                                                                                 |
| 2   | I <sup>2</sup> CV <sub>DD</sub> _SD | This bit allows the I <sup>2</sup> C supply voltage to be used as a reset signal. |                                                                                                                                                                                                                   |
|     |                                     | Value                                                                             | Status                                                                                                                                                                                                            |
|     |                                     | 0                                                                                 | I <sup>2</sup> CV <sub>DD</sub> acts as an active low reset input. If I <sup>2</sup> CV <sub>DD</sub> drops below 1.1V, the device resets and the I <sup>2</sup> C registers are restored to their default state. |
|     |                                     | 1                                                                                 | Normal Operation. I <sup>2</sup> CV <sub>DD</sub> voltage does not reset the device.                                                                                                                              |
| 4   | HPR_SD                              | This bit is used when only one channel of the headphone amplifier is needed.      |                                                                                                                                                                                                                   |
|     |                                     | 0                                                                                 | Normal headphone operation.                                                                                                                                                                                       |
|     |                                     | 1                                                                                 | Mono headphone output at left channel, right headphone in shutdown.                                                                                                                                               |

**Table 4. Output Mode Control Register<sup>(1)</sup>**

| Bits | Field        | Description                                                                     |                                                                                                                                                                                                                                                                                         |                               |                               |                                 |                                 |
|------|--------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------|---------------------------------|
| 3:0  | Mode_Control | These bits determine how the input signals are mixed and routed to the outputs. |                                                                                                                                                                                                                                                                                         |                               |                               |                                 |                                 |
|      |              | Value                                                                           | Mode                                                                                                                                                                                                                                                                                    | Left Loudspeaker              | Right Loudspeaker             | Left Headphone                  | Right Headphone                 |
|      |              | 0000                                                                            | 0                                                                                                                                                                                                                                                                                       | SD                            | SD                            | SD                              | SD                              |
|      |              | 0001                                                                            | 1                                                                                                                                                                                                                                                                                       | $G_M \times M$                | $G_M \times M$                | Mute                            | Mute                            |
|      |              | 0010                                                                            | 2                                                                                                                                                                                                                                                                                       | $G_L \times L$                | $G_L \times L$                | Mute                            | Mute                            |
|      |              | 011                                                                             | 3                                                                                                                                                                                                                                                                                       | $G_L \times L + G_M \times M$ | $G_R \times R + G_M \times M$ | Mute                            | Mute                            |
|      |              | 0100                                                                            | 4                                                                                                                                                                                                                                                                                       | SD                            | SD                            | $G_M \times M/2$                | $G_M \times M/2$                |
|      |              | 0101                                                                            | 5                                                                                                                                                                                                                                                                                       | $G_M \times M$                | $G_M \times M$                | $G_M \times M/2$                | $G_M \times M/2$                |
|      |              | 0110                                                                            | 6                                                                                                                                                                                                                                                                                       | $G_L \times L$                | $G_R \times R$                | $G_M \times M/2$                | $G_M \times M/2$                |
|      |              | 0111                                                                            | 7                                                                                                                                                                                                                                                                                       | $G_L \times L + G_M \times M$ | $G_L \times L + G_M \times M$ | $G_M \times M/2$                | $G_M \times M/2$                |
|      |              | 1000                                                                            | 8                                                                                                                                                                                                                                                                                       | SD                            | SD                            | $G_L \times L$                  | $G_R \times R$                  |
|      |              | 1001                                                                            | 9                                                                                                                                                                                                                                                                                       | $G_M \times M$                | $G_M \times M$                | $G_L \times L$                  | $G_R \times R$                  |
|      |              | 1010                                                                            | 10                                                                                                                                                                                                                                                                                      | $G_L \times L$                | $G_R \times R$                | $G_L \times L$                  | $G_R \times R$                  |
|      |              | 1011                                                                            | 11                                                                                                                                                                                                                                                                                      | $G_L \times L + G_M \times M$ | $G_R \times R + G_M \times M$ | $G_L \times L$                  | $G_R \times R$                  |
|      |              | 1100                                                                            | 12                                                                                                                                                                                                                                                                                      | SD                            | SD                            | $G_L \times L + G_M \times M/2$ | $G_R \times R + G_M \times M/2$ |
|      |              | 1101                                                                            | 13                                                                                                                                                                                                                                                                                      | $G_M \times M$                | $G_M \times M$                | $G_L \times L + G_M \times M/2$ | $G_R \times R + G_M \times M/2$ |
|      |              | 1110                                                                            | 14                                                                                                                                                                                                                                                                                      | $G_L \times L$                | $G_R \times R$                | $G_L \times L + G_M \times M/2$ | $G_R \times R + G_M \times M/2$ |
|      |              | 1111                                                                            | 15                                                                                                                                                                                                                                                                                      | $G_L \times L + G_M \times M$ | $G_R \times R + G_M \times M$ | $G_L \times L + G_M \times M/2$ | $G_R \times R + G_M \times M/2$ |
| 4    | EP Mode      | This bit sets the loudspeaker amplifiers for earpiece mode.                     |                                                                                                                                                                                                                                                                                         |                               |                               |                                 |                                 |
|      |              | Value                                                                           | Status                                                                                                                                                                                                                                                                                  |                               |                               |                                 |                                 |
|      |              | 0                                                                               | Normal loudspeaker operation, control determined by bits 3:0.                                                                                                                                                                                                                           |                               |                               |                                 |                                 |
|      |              | 1                                                                               | Bit overrides bits 3:0. Right loudspeaker amplifier bias current reduced for low power operation. Left loudspeaker amplifier shutdown. Mono input path active and signal routed to right loudspeaker output. Left & right input gain amplifiers shutdown for reduced power consumption. |                               |                               |                                 |                                 |

- (1) M : MIN, Mono differential input  
 L : LIN, Left single-ended input  
 R : RIN, Right single-ended input  
 SD : Shutdown  
 $G_M$  : Mono\_Vol setting determined by the Mono Input Volume Control register, See [Table 6](#).  
 $G_L$  : Left\_Vol setting determined by the Left Input Volume Control register, See [Table 6](#).  
 $G_R$  : Right\_Vol setting determined by the Right Input Volume Control register, See [Table 6](#).

**Table 5. Output Gain Control Register**

| Bits | Field   | Description                                                 |           |
|------|---------|-------------------------------------------------------------|-----------|
| 2:0  | HP_GAIN | These bits set the gain of the headphone output amplifiers. |           |
|      |         | Value                                                       | Gain (dB) |
|      |         | 000                                                         | 0         |
|      |         | 001                                                         | -1.2      |
|      |         | 010                                                         | -2.5      |
|      |         | 011                                                         | -4.0      |
|      |         | 100                                                         | -6.0      |
|      |         | 101                                                         | -8.5      |
|      |         | 110                                                         | -12       |
|      |         | 111                                                         | -18       |



**Table 6. Input Volume Control Registers**

| Bits | Fields                            | Description                                                            |       |           |
|------|-----------------------------------|------------------------------------------------------------------------|-------|-----------|
| 4:0  | Mono_Vol<br>Right_Vol<br>Left_Vol | These bits set the input volume for each input volume register listed. |       |           |
|      |                                   | Volume Step                                                            | Value | Gain (dB) |
|      |                                   | 1                                                                      | 00000 | –80.0     |
|      |                                   | 2                                                                      | 00001 | –46.5     |
|      |                                   | 3                                                                      | 00010 | –40.5     |
|      |                                   | 4                                                                      | 00011 | –34.5     |
|      |                                   | 5                                                                      | 00100 | –30.0     |
|      |                                   | 6                                                                      | 00101 | –27.0     |
|      |                                   | 7                                                                      | 00110 | –24.0     |
|      |                                   | 8                                                                      | 00111 | –21.0     |
|      |                                   | 9                                                                      | 01000 | –18.0     |
|      |                                   | 10                                                                     | 01001 | –15.0     |
|      |                                   | 11                                                                     | 01010 | –13.5     |
|      |                                   | 12                                                                     | 01011 | –12.0     |
|      |                                   | 13                                                                     | 01100 | –10.5     |
|      |                                   | 14                                                                     | 01101 | –9.0      |
|      |                                   | 15                                                                     | 01110 | –7.5      |
|      |                                   | 16                                                                     | 01111 | –6.0      |
|      |                                   | 17                                                                     | 10000 | –4.5      |
|      |                                   | 18                                                                     | 10001 | –3.0      |
|      |                                   | 19                                                                     | 10010 | –1.5      |
|      |                                   | 20                                                                     | 10011 | 0.0       |
|      |                                   | 21                                                                     | 10100 | 1.5       |
|      |                                   | 22                                                                     | 10101 | 3.0       |
|      |                                   | 23                                                                     | 10110 | 4.5       |
|      |                                   | 24                                                                     | 10111 | 6.0       |
|      |                                   | 25                                                                     | 11000 | 7.5       |
|      |                                   | 26                                                                     | 11001 | 9.0       |
|      |                                   | 27                                                                     | 11010 | 10.5      |
|      |                                   | 28                                                                     | 11011 | 12.0      |
|      |                                   | 29                                                                     | 11100 | 13.5      |
|      |                                   | 30                                                                     | 11101 | 15.0      |
|      |                                   | 31                                                                     | 11110 | 16.5      |
|      |                                   | 32                                                                     | 11111 | 18.0      |

## TURN\_ON\_TIME BIT

The Turn\_On\_Time bit determines the delay time from the Power\_On bit set to '1' and the internal circuits ready. For input capacitor values up to 0.47µF the Turn\_On\_Time bit can be set to fast mode by setting the bit to a '1'. When the input capacitor values are larger than 0.47µF then the Turn\_On\_Time bit should be set to '0' for normal turn-on time and higher delay. This allows sufficient time to charge the input capacitors to the  $\frac{1}{2} V_{DDLS}$  bias voltage.

## POWER\_ON BIT

The Power\_On bit is the master control bit to activate or deactivate the LM49200. All registers can be loaded independent of the Power\_On bit setting as long as the IC is powered correctly. Cycling the Power\_On bit does not change the values of any registers nor return all bits to the default power on value of zero. The Power\_On bit only determines whether the IC is on or off.

## HPR\_SD BIT

The HPR\_SD bit will deactivate the right headphone output amplifier. This bit is provided to reduce power consumption when only one headphone output is needed.

## MODE\_CONTROL BITS

In the LM49200 OUTPUT MODE CONTROL register (Table 4), Bit B5 (EP Bypass) controls the operation of the Earpiece Bypass path. If EP Bypass = 0, it would act under normal output mode operation set by bits B3, B2, B1, and B0. If EP Bypass = 1, it overrides the B3, B2, B1, and B0 Bits and enables the Receiver Bypass path, a class AB amplifier, to the speaker output.

Bit B4 (HPR\_SD) of the OUPUT MODE CONTROL register controls the right headphone shutdown. If HPR\_SD = 1, the right headphone output is disabled.

The LM49200 includes a comprehensive mixer multiplexer controlled through the I<sup>2</sup>C interface. The mixer/multiplexer allows any input combination to appear on any output of LM49200. Multiple input paths can be selected simultaneously. Under these conditions, the selected inputs are mixed together and output on the selected channel. Table 5 shows how the input signals are mixed together for each possible input selection.

## HP\_GAIN BITS

The headphone outputs have an additional, single volume control set by the three HP\_Gain bits in the Output Gain Control register. The HP\_Gain volume setting controls the output level for both the left and the right headphone outputs.

## LS (EP\_MODE) BIT

The LS (EP\_Mode) bit selects the amount of bias current in the loudspeaker amplifier. Setting the LS (EP\_Mode) bit to a '1' will reduce the amount of current from the V<sub>DD</sub>LS supply by approximately 0.5mA. The THD performance of the loudspeaker amplifier will be reduced as a result of lower bias current. See the performance graphs in [Typical Performance Characteristics](#) above.

## VOLUME CONTROL BITS

The LM49200 has three independent 32-step volume controls, one for each of the inputs. The five bits of the Volume Control registers sets the volume for the specified input channel.

## SHUTDOWN FUNCTION

The LM49200 features the following shutdown controls.

Bit B4 (GAMP\_SD) of the SHUTDOWN CONTROL register controls the gain amplifiers. When GAMP\_SD = 1, it disables the gain amplifiers that are not in use. For example, in Modes 1, 4 and 5, the Mono inputs are in use, so the Left and Right input gain amplifiers are disabled, causing the I<sub>DD</sub> to be minimized.

Bit B0 (PWR\_On) of the SHUTDOWN CONTROL register is the global shutdown control for the entire device. Set PWR\_On = 0 for normal operation. PWR\_On = 1 overrides any other shutdown control bit.

## DIFFERENTIAL AMPLIFIER EXPLANATION

The LM49200 features a differential input stage, which offers improved noise rejection compared to a single-ended input amplifier. Because a differential input amplifier amplifies the difference between the two input signals, any component common to both signals is cancelled. An additional benefit of the differential input structure is the possible elimination of the DC input blocking capacitors. Since the DC component is common to both inputs, and thus cancelled by the amplifier, the LM49200 can be used without input coupling capacitors when configured with a differential input signal.

## BRIDGE CONFIGURATION EXPLAINED

By driving the load differentially through the MONO outputs, an amplifier configuration commonly referred to as "bridged mode" is established. Bridged mode operation is different from the classical single-ended amplifier configuration where one side of the load is connected to ground.

A bridge amplifier design has a few distinct advantages over the single-ended configuration, as it provides differential drive to the load, thus doubling output swing for a specified supply voltage. Four times the output power is possible as compared to a single-ended amplifier under the same conditions. This increase in attainable output power assumes that the amplifier is not current limited or clipped.

A bridge configuration, such as the one used in LM49200, also creates a second advantage over single-ended amplifiers. Since the differential outputs are biased at half-supply, no net DC voltage exists across the load. This eliminates the need for an output coupling capacitor which is required in a single supply, single-ended amplifier configuration. Without an output coupling capacitor, the half-supply bias across the load would result in both increased internal IC power dissipation and also possible loudspeaker damage.

## POWER DISSIPATION

Power dissipation is a major concern when designing a successful amplifier, whether the amplifier is bridged or single-ended. A direct consequence of the increased power delivered to the load by a bridge amplifier is an increase in internal power dissipation. The power dissipation of the LM49200 varies with the mode selected. The maximum power dissipation occurs in modes where all inputs and outputs are active (Modes 6, 7, 8, 9, 10, 11, 13, 14, 15). The power dissipation is dominated by the Class AB amplifier. The maximum power dissipation for a given application can be derived from the power dissipation graphs or from [Equation 1](#).

$$P_{DMAX} = 4 \cdot (V_{DD})^2 / (2\pi^2 R_L) \quad (1)$$

It is critical that the maximum junction temperature ( $T_{JMAX}$ ) of 150°C is not exceeded.  $T_{JMAX}$  can be determined from the power derating curves by using  $P_{DMAX}$  and the PC board foil area. By adding additional copper foil, the thermal resistance of the application can be reduced from the free air value, resulting in higher  $P_{DMAX}$ . Additional copper foil can be added to any of the leads connected to the LM49200. It is especially effective when connected to  $V_{DD}$ , GND, and the output pins. Refer to the application information on the LM49200 reference design board for an example of good heat sinking. If  $T_{JMAX}$  still exceeds 150°C, then additional changes must be made. These changes can include reduced supply voltage, higher load impedance, or reduced ambient temperature. Internal power dissipation is a function of output power. Refer to the curves in [Typical Performance Characteristics](#) for power dissipation information for different output powers and output loading.

## POWER SUPPLY BYPASSING

As with any amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. The capacitor location on both the bypass and power supply pins should be as close to the device as possible. Typical applications employ a 5V regulator with 10µF tantalum or electrolytic capacitor and a ceramic bypass capacitor which aid in supply stability. This does not eliminate the need for bypassing the supply nodes of the LM49200. The selection of a bypass capacitor, especially  $C_B$ , is dependent upon PSRR requirements, click and pop performance, system cost, and size constraints.

## GROUND REFERENCED HEADPHONE AMPLIFIER

The LM49200 features a low noise inverting charge pump that generates an internal negative supply voltage. This allows the headphone outputs to be biased about GND instead of a nominal DC voltage, like traditional headphone amplifiers. Because there is no DC component, the large DC blocking capacitors (typically 220µF) are not necessary. The coupling capacitors are replaced by two small ceramic charge pump capacitors, saving board space and cost. Eliminating the output coupling capacitors also improves low frequency response. In traditional headphone amplifiers, the headphone impedance and the output capacitor from a high-pass filter that not only blocks the DC component of the output, but also attenuates low frequencies, impacting the bass response. Because the LM49200 does not require the output coupling capacitors, the low frequency response of the device is not degraded by external components. In addition to eliminating the output coupling capacitors, the ground referenced output nearly doubles the available dynamic range of the LM49200 headphone amplifiers when compared to a traditional headphone amplifier operating from the same supply voltage.

## INPUT CAPACITOR SELECTION

Input capacitors may be required for some applications, or when the audio source is single-ended. Input capacitors block the DC component of the audio signal, eliminating any conflict between the DC component of the audio source and the bias voltage of the LM49200. The input capacitors create a high-pass filter with the input resistors  $R_{IN}$ . The -3dB point of the high-pass filter is found using equation below.

$$f = 1 / 2\pi R_{IN} C_{IN} \quad (\text{Hz})$$

where

- the value of  $R_{IN}$  is given in the [Electrical Characteristics](#) Table. (2)

High-pass filtering the audio signal helps protect the speakers. When the LM49200 is using a single-ended source, power supply noise on the ground is seen as an input signal. Setting the high-pass filter point above the power supply noise frequencies, 217Hz in a GSM phone, for example, filters out the noise such that it is not amplified and heard on the output. Capacitors with a tolerance of 10% or better are recommended for impedance matching and improved CMRR and PSRR.

## CHARGE PUMP FLYING CAPACITOR ( $C_1$ )

The flying capacitor ( $C_1$ ), see [Figure 1](#), affects the load regulation and output impedance of the charge pump. A  $C_1$  value that is too low results in a loss of current drive, leading to a loss of amplifier headroom. A higher valued  $C_1$  improves load regulation and lowers charge pump output impedance to an extent. Above 2.2 $\mu$ F, the  $R_{DS(ON)}$  of the charge pump switches and the ESR of  $C_1$  and  $C_{S5}$  dominate the output impedance. A lower value capacitor can be used in systems with low maximum output power requirements.

## CHARGE PUMP HOLD CAPACITOR ( $C_{S3}$ )

The value and ESR of the hold capacitor ( $C_{S5}$ ) directly affects the ripple on  $CPV_{SS}$ . Increasing the value of  $C_{S5}$  reduces output ripple. Decreasing the ESR of  $C_{S5}$  reduces both output ripple and charge pump output impedance. A lower value capacitor can be used in systems with low maximum output power requirements.

## Demo Board Circuit

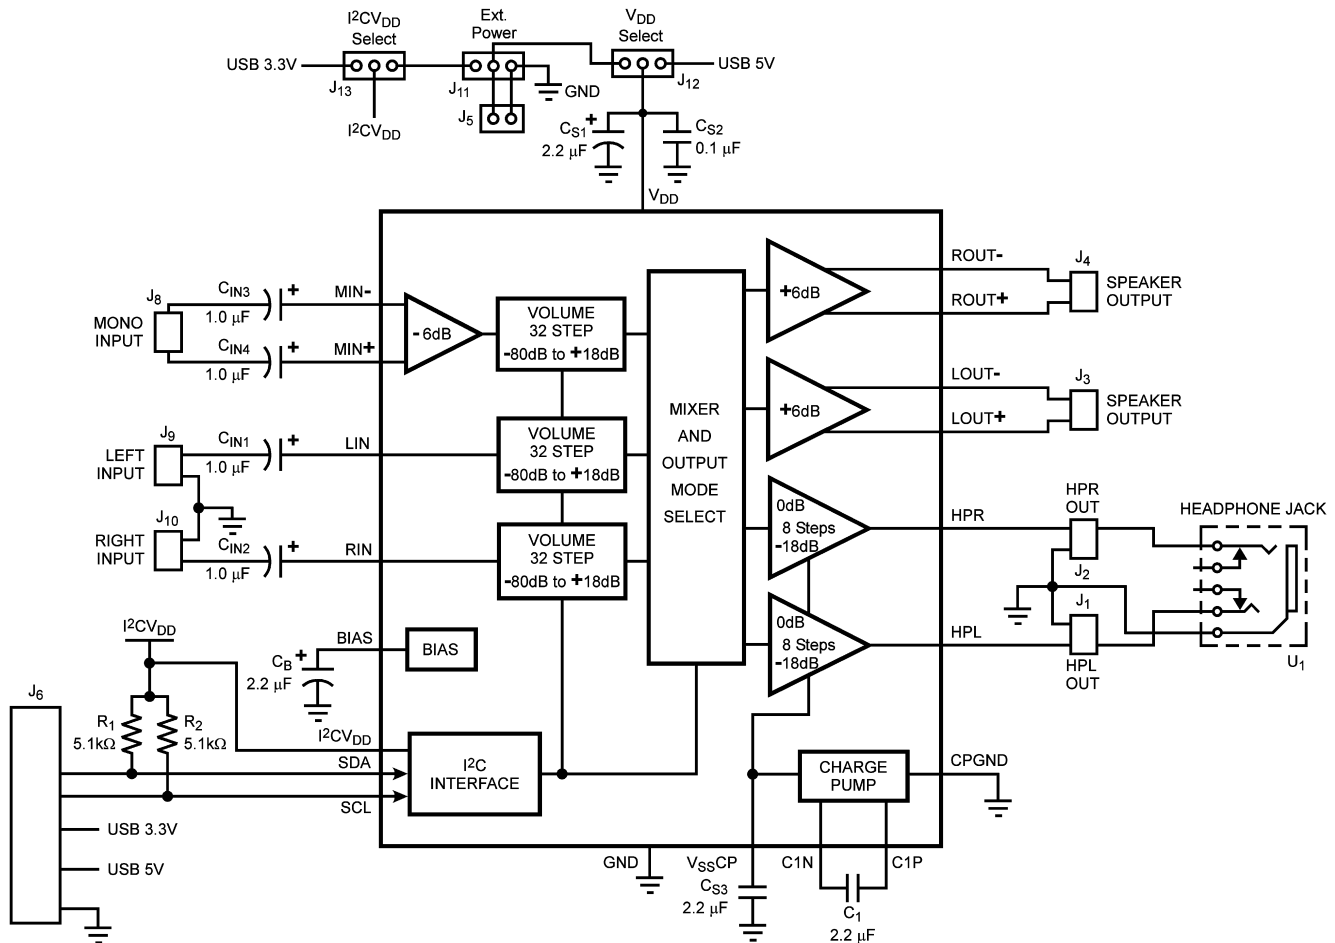


Figure 35. Demo Board Circuit

## Demonstration Board

The demonstration board (see Figure 35) has connection and jumper options to be powered from the USB bus, from external power supplies or a combination of both. Additional options are to power  $I^2CV_{DD}$  and  $V_{DD}$  from a single power supply or separate power supplies, as long as the voltage limits for each power supply are not exceeded. See the [Operating Ratings](#) for each supply's limit range. When powered from the USB bus the  $I^2CV_{DD}$  will be set to 3.3V and the  $V_{DD}$  will be set to 5V. Jumper headers J13 and J12 must be set accordingly. If a single power supply for  $I^2CV_{DD}$  and  $V_{DD}$  is desired then header J5 should be used with a jumper added to header J11 to connect  $I^2CV_{DD}$  to the external supply voltage connected to J5.

Connection headers J1 and J2 are provided along with the stereo headphone jack J4 for easily connection and monitoring of the headphone outputs.

## LM49200 microSMD Demo Board Views

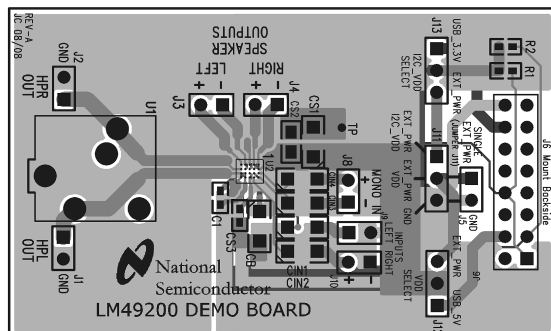


Figure 36. Composite View

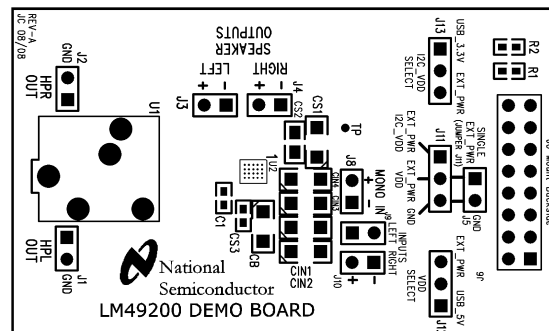


Figure 37. Silk Screen

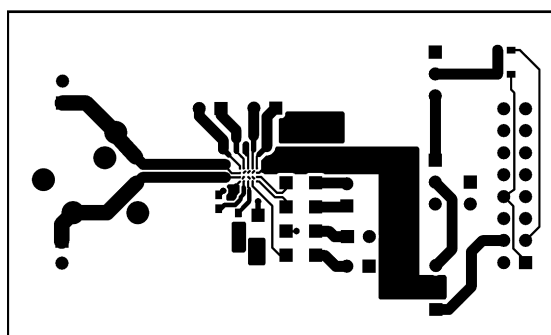


Figure 38. Top Layer

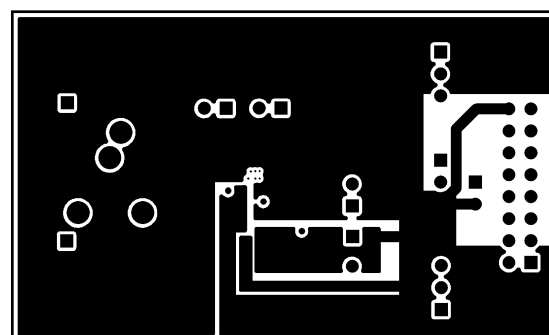


Figure 39. Internal Layer 1

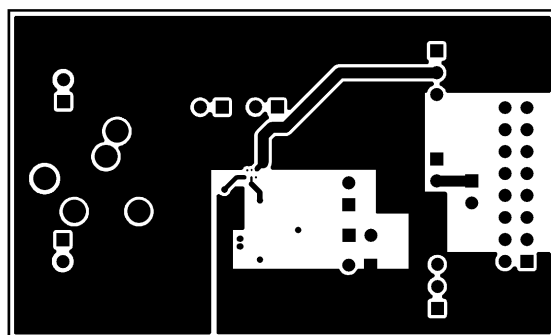


Figure 40. Internal Layer 2

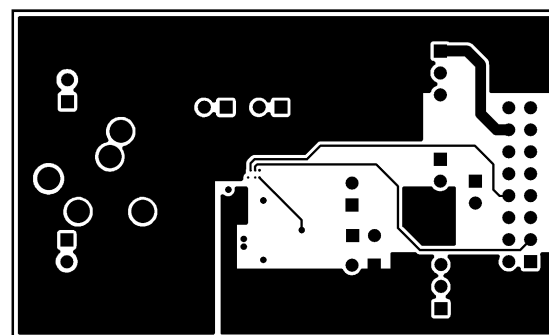


Figure 41. Bottom Layer

## LM49200 Reference Demo Board Bill Of Materials

**Table 7. Bill Of Materials**

| Designator                                                                                                                               | Value | Tolerance | Part Description                  | Comment                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|-----------------------------------|-----------------------------------------------------------------------------------|
| R <sub>1</sub> , R <sub>2</sub>                                                                                                          | 5.1kΩ | 5%        | 1/10W, 0603 Resistors             |                                                                                   |
| C <sub>IN1</sub> , C <sub>IN2</sub><br>C <sub>IN3</sub> , C <sub>IN4</sub>                                                               | 1μF   | 10%       | 1206, X7R Ceramic Capacitor       |                                                                                   |
| C <sub>S1</sub> , C <sub>B</sub>                                                                                                         | 2.2μF | 10%       | Size A, Tantalum Capacitor        |                                                                                   |
| C <sub>S2</sub>                                                                                                                          | 0.1μF | 10%       | 0805, 16V, X7R Ceramic Capacitor  |                                                                                   |
| C <sub>S3</sub> , C <sub>1</sub>                                                                                                         | 2.2μF | 10%       | 0603, 10V, X7R Ceramic Capacitor  |                                                                                   |
| U <sub>2</sub>                                                                                                                           |       |           | LM49200TL                         |                                                                                   |
| J <sub>1</sub> , J <sub>2</sub> , J <sub>3</sub><br>J <sub>4</sub> , J <sub>5</sub> , J <sub>8</sub><br>J <sub>9</sub> , J <sub>10</sub> |       |           | 0.100" 1x2 header, vertical mount | Input, Output, V <sub>DD</sub> , GND                                              |
| J <sub>11</sub> , J <sub>12</sub> , J <sub>13</sub>                                                                                      |       |           | 0.100" 1x3 header, vertical mount | V <sub>DD</sub> Selects, V <sub>DD</sub> , I <sup>2</sup> C V <sub>DD</sub> , GND |
| J <sub>6</sub>                                                                                                                           |       |           | 16 pin header                     | I <sup>2</sup> C Connector                                                        |
| U <sub>1</sub>                                                                                                                           |       |           | Headphone Jack                    |                                                                                   |

## PCB Layout Guidelines

This section provides practical guidelines for mixed signal PCB layout that involves various digital/analog power and ground traces. Designers should note that these are only "rule-of-thumb" recommendations and the actual results will depend heavily on the final layout.

## General Mixed Signal Layout Recommendations

### SINGLE-POINT POWER AND GROUND CONNECTIONS

The analog power traces should be connected to the digital traces through a single point (link). A "Pi-filter" can be helpful in minimizing high frequency noise coupling between the analog and digital sections. It is further recommended to put digital and analog power traces over the corresponding digital and analog ground traces to minimize noise coupling.

### PLACEMENT OF DIGITAL AND ANALOG COMPONENTS

All digital components and high-speed digital signals traces should be located as far away as possible from analog components and circuit traces.

### AVOIDING TYPICAL DESIGN AND LAYOUT PROBLEMS

Avoid ground loops or running digital and analog traces parallel to each other (side-by-side) on the same PCB layer. When traces must cross over each other do it at 90 degrees. Running digital and analog traces at 90 degrees to each other from the top to the bottom side as much as possible will minimize capacitive noise coupling and cross talk.

**REVISION HISTORY**

| Rev | Date       | Description                                         |
|-----|------------|-----------------------------------------------------|
| 1.0 | 05/21/09   | Initial release.                                    |
| A   | 04/08/2013 | Changed layout of National Data Sheet to TI format. |



## PACKAGING INFORMATION

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| LM49200TL/NOPB        | Active        | Production           | DSBGA (YZR)   20 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GL3                 |
| LM49200TL/NOPB.A      | Active        | Production           | DSBGA (YZR)   20 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GL3                 |
| LM49200TLX/NOPB       | Active        | Production           | DSBGA (YZR)   20 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GL3                 |
| LM49200TLX/NOPB.A     | Active        | Production           | DSBGA (YZR)   20 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | GL3                 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

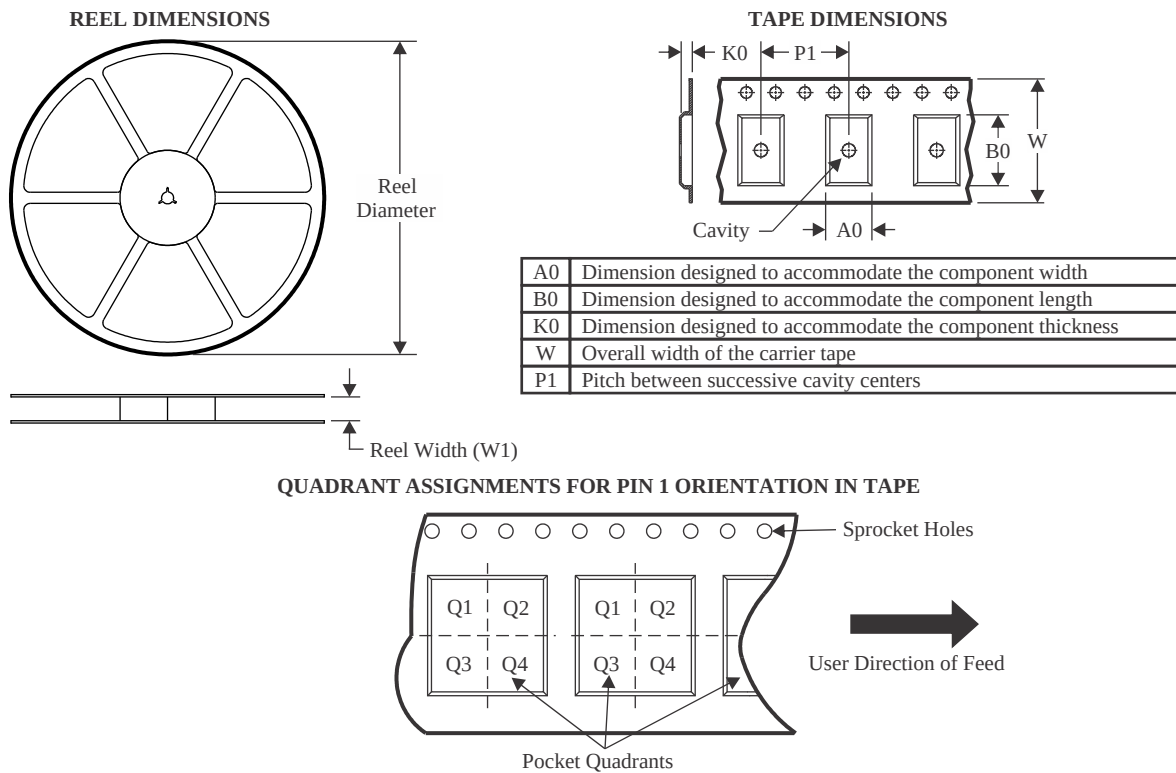

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM49200TL/NOPB  | DSBGA        | YZR             | 20   | 250  | 178.0              | 8.4                | 2.18    | 2.69    | 0.76    | 4.0     | 8.0    | Q1            |
| LM49200TLX/NOPB | DSBGA        | YZR             | 20   | 3000 | 178.0              | 8.4                | 2.18    | 2.69    | 0.76    | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

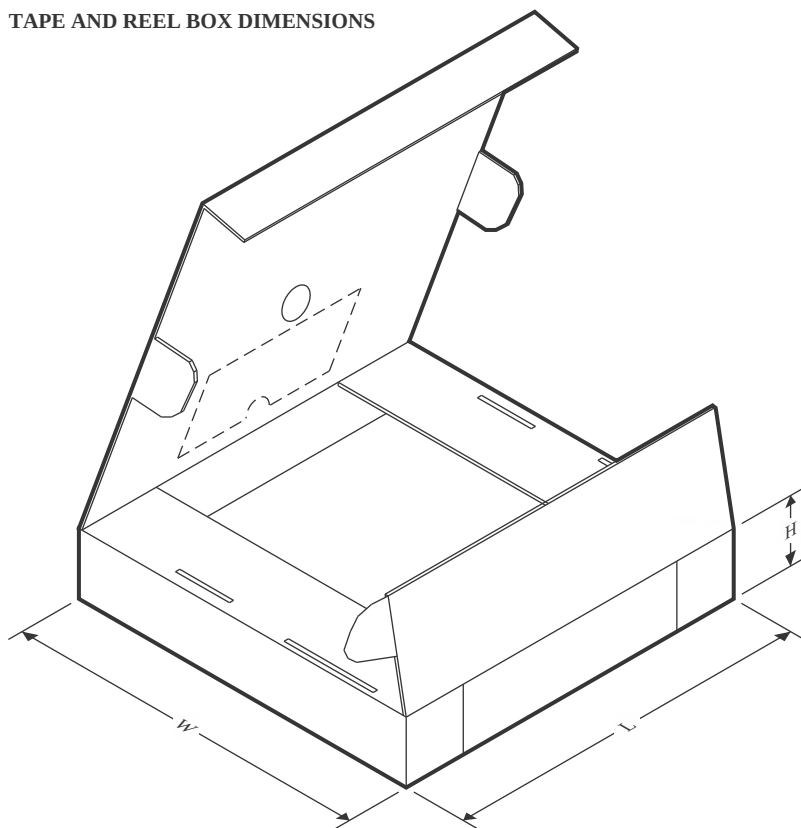

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM49200TL/NOPB  | DSBGA        | YZR             | 20   | 250  | 208.0       | 191.0      | 35.0        |
| LM49200TLX/NOPB | DSBGA        | YZR             | 20   | 3000 | 208.0       | 191.0      | 35.0        |



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025