




DWG NO:	0097-0542
REVISIONS	
ECO-E4047 REDRAWN, .LBS/M WAS 10.6 HGE 04/19/89 BJ 04/19/89	10
ECO-E4572 ADDED MAT'L TEST NOTE HGE 09/12/89 BJ 09/12/89	11
ECO-E4929 ADDED DIMENSIONS RLS 01/30/90 EWS 01/30/90	12
ECO-E5167 UPDATED FORMAT ADDED .030 MIN DIM AND WITHIN 2° NOTE SDH 09/27/05 DG 09/27/05	13

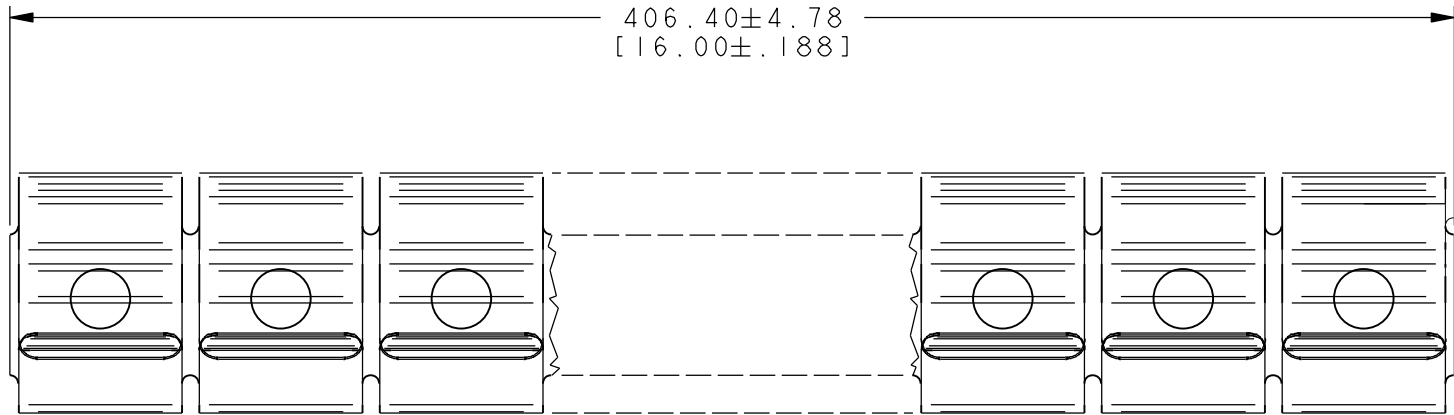


TOP FORMED VIEW

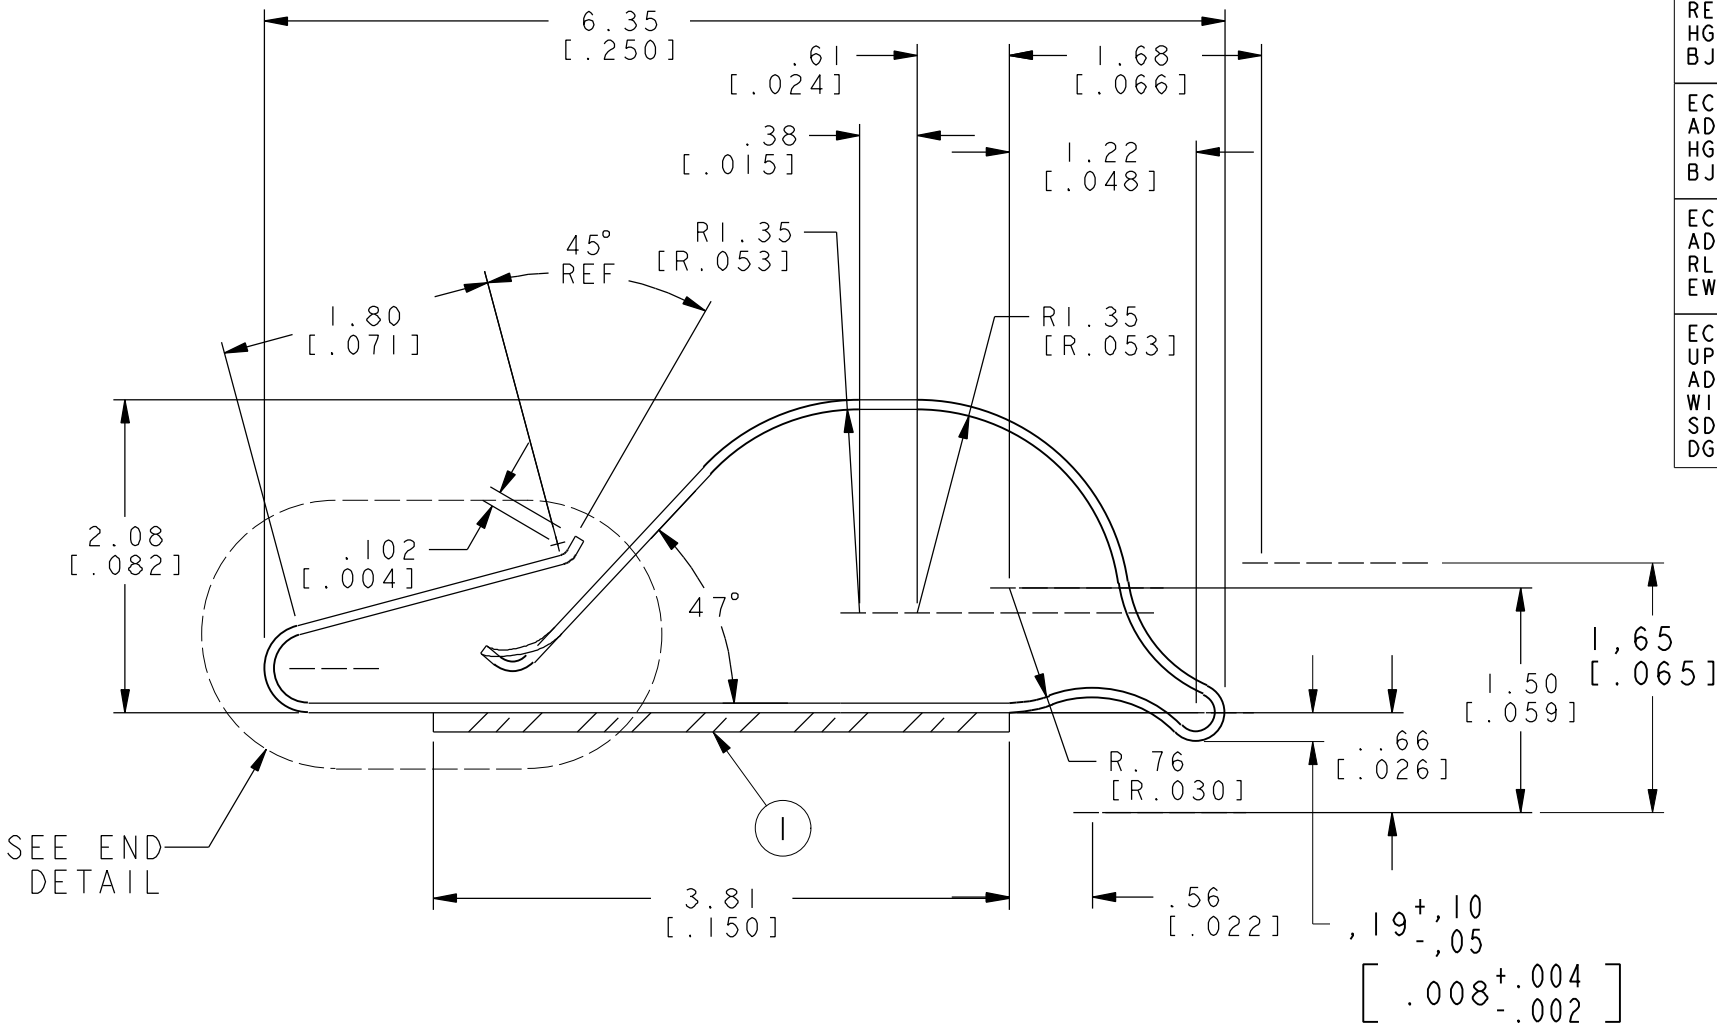


PART END PROFILE

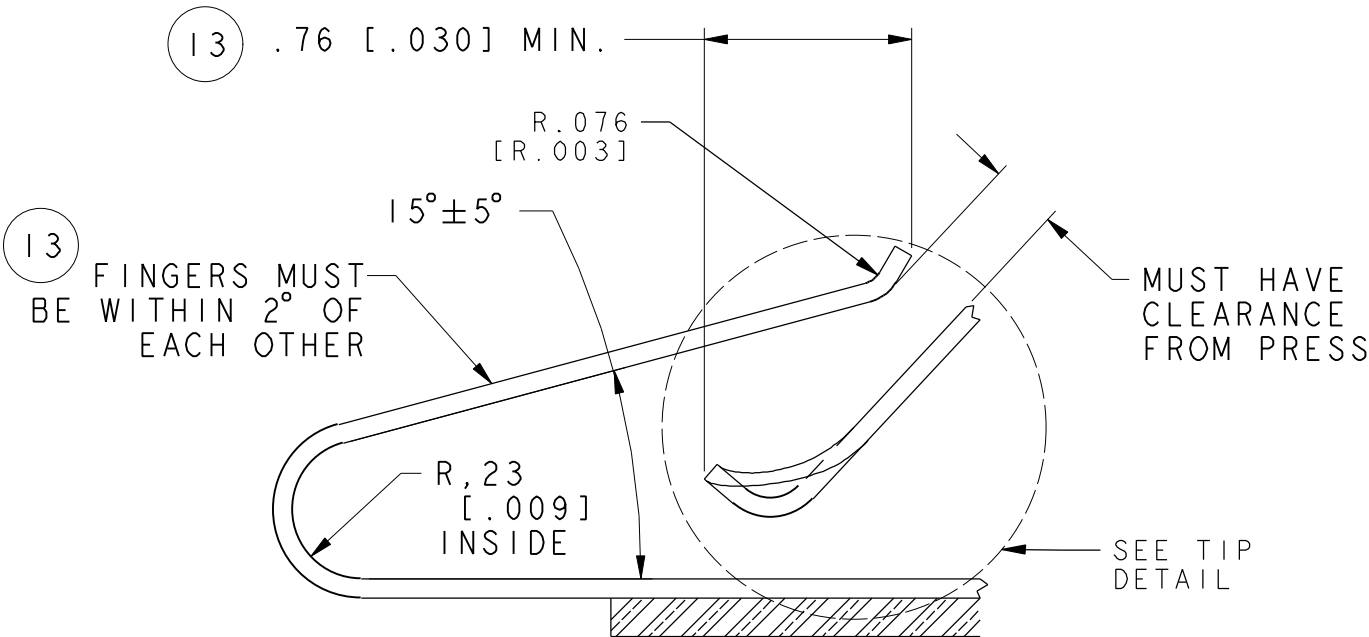


END DETAIL

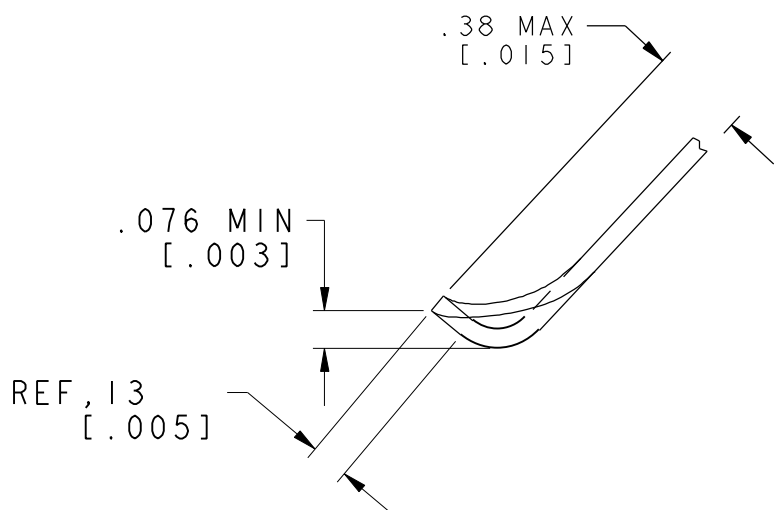

TIP DETAIL

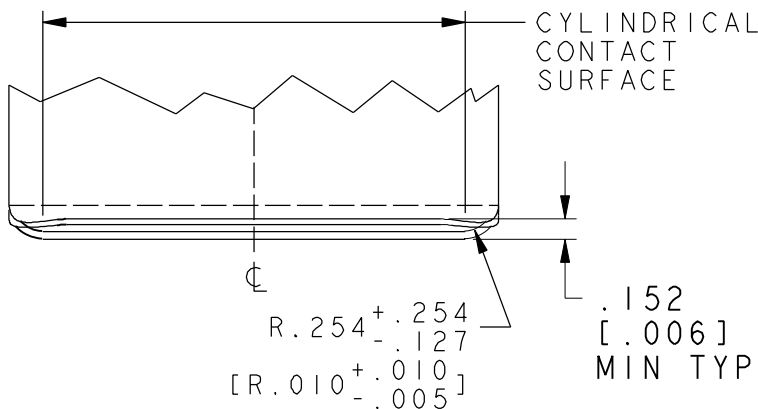

FINGER DETAIL

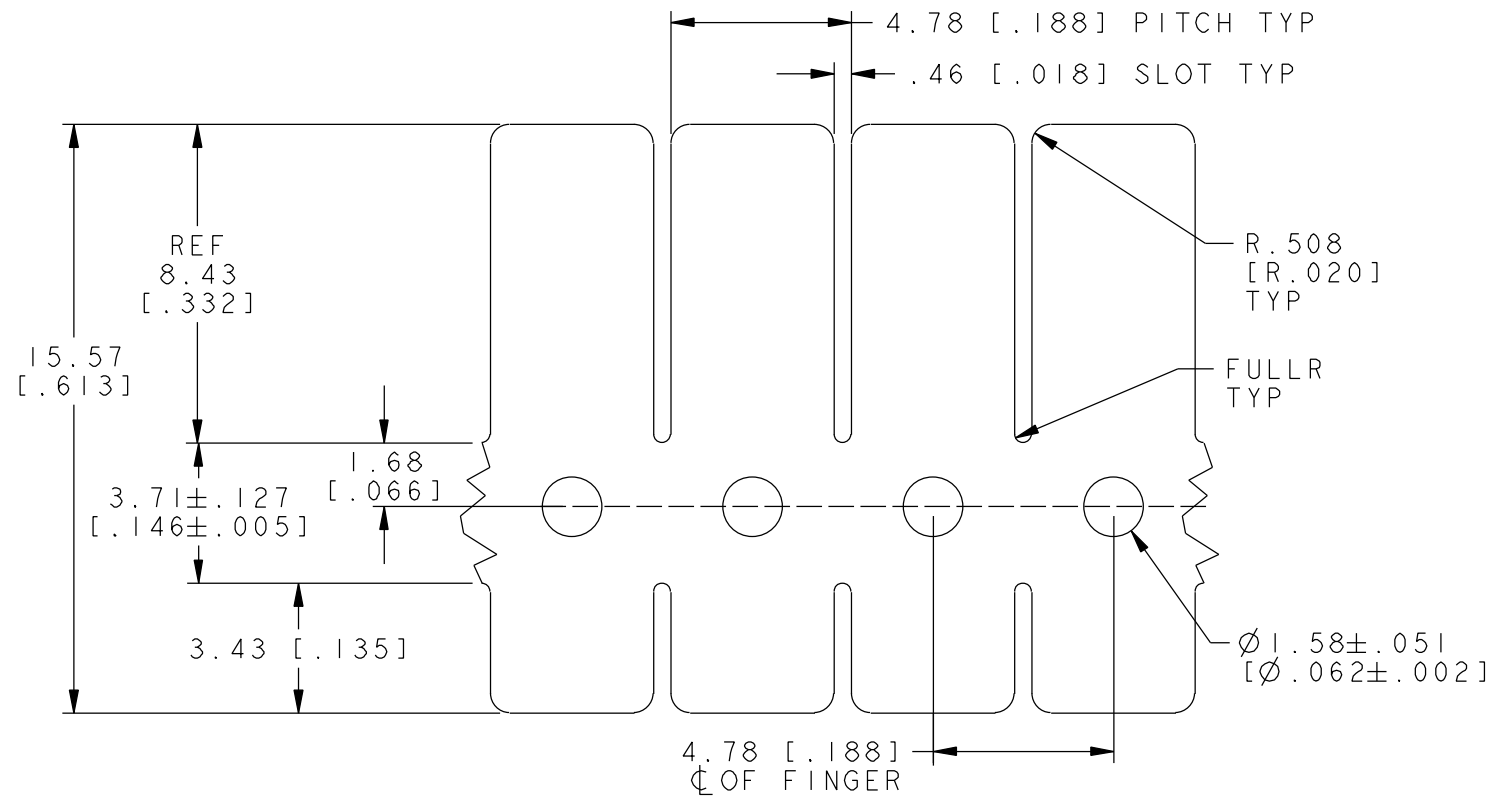

FLAT PATTERN

NOTE: WHEN SUPPLIED IN 25 FT. LENGTH CUT FROM PRESS TO BE 25 FT, 2.5 IN, ± 2 IN.

MATERIAL TEST: 11
CUT 6.35 [0.250] WIDE SPECIMEN ACROSS STRIP, BEND 90° WITH WIPING MOTION AROUND 3.18 [0.125] DIA PIN. WHEN RELEASED THE RADIUS OF THE BEND SHALL BE 2.29-2.54 [0.090-.100] OR TENSIL STRENGTH, 70,000-80,000 PSI

1	3.81 [0.150] PRESSURE SENSITIVE TAPE (SEE DWG 0097- 0446)
ITEM	DESCRIPTION
MATERIAL:	.064 ± .005 THICK [0.0025 ± .0002] BeCu ALLOY 25 1/4 HARD
HEAT TREAT:	TO MEET PERFORMANCE TEST (DPH 373 USING 200 GRAM LOAD)
THICKNESS AFTER:	CLEANING AND BEFORE PLATING: .053 [0.0021] MIN
FINISH:	AS REQUIRED
UNITS:	MM [INCH] SCALE: NTS
CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED.	
DELAWARE WATER GAP PENNSYLVANIA DRAWN BY: HGE CHECKED: BJ APPROVED: BJ DATE: 04/19/89 DATE: 05/11/89 DATE: 05/11/89	
LAIRD STANDARD	
REF. DWG. NO. DOUBLE FOLDED SHIELDING STRIP	
DWG. NO.	0097-0542
REV	13
SHEET 1 OF 1	