


Power Transformers

Class B
UL Recognized



UL File E53148

PC Mount: Flat Pack™

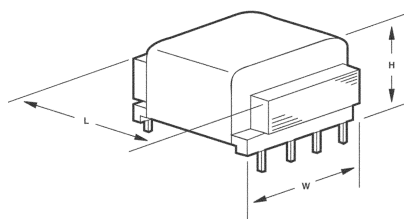

:: Description

The Triad Flat pack power transformer is designed to meet the needs of lower clearance PC board and solid state power designs. These units can also be used for control and instrumentation applications. Voltages and currents were chosen for widely used power applications. It is offered in a dual primary and dual secondary configuration.

:: Specifications

Primary: 115/230 V, 50/60 Hz | **Hi Pot Tested:** 2,000 VRMS | **Low Profile:** Allows 3/4" card spacing for 2.5 VA units; Allows 1" card spacing for 6 VA units; Allows 1 1/4" card spacing for 12 VA units; Allows 1 1/2" card spacing for 24 VA and 48 VA units.

:: Flat Pack

Section	Type No.	VA	Secondary		Dimensions					Wt. Oz.
			Series	Parallel	H	W	L	A	B	
A	FP10-250	2.5	10.0V CT @ 0.25A	5.0V @ 0.5A	0.650	1.562	1.875	1.600	0.375	5
	FP12-200		12.6V CT @ 0.2A	6.3V @ 0.4A						
	FP16-150		16.0 CT @ 0.15A	8.0V @ 0.3A						
	FP20-125		20.0 CT @ 0.125A	10.0V @ 0.25A						
	FP24-100		24.0 CT @ 0.1A	12.0V @ 0.2A						
	FP30-85		30.0V CT @ 0.08A	15.0V @ 0.16A						
	FP34-75		34.0V CT @ 0.075A	17.0V @ 0.15A						
	FP40-60		40.0V CT @ 0.06A	20.0V @ 0.12A						
	FP56-45		56.0V CT @ 0.045A	28.0V @ 0.09A						
	FP88-28		88.0V CT @ 0.028A	44.0V @ 0.056A						
	FP120-20		120.0V CT @ 0.02A	60.0V @ 0.04A						
	FP230-10		230.0V CT @ 0.01A	115.0V @ 0.02A						
B	FP10-600	6.0	10.0V CT @ 0.6A	5.0V @ 1.2A	0.875	1.562	1.875	1.600	0.375	7
	FP12-475		12.6V CT @ 0.475A	6.3V @ 0.95A						
	FP16-375		16.0 CT @ 0.375A	8.0V @ 0.75A						
	FP20-300		20.0 CT @ 0.3A	10.0V @ 0.8A						
	FP24-250		24.0 CT @ 0.25A	12.0V @ 0.5A						
	FP30-200		30.0V CT @ 0.2A	15.0V @ 0.4A						
	FP34-170		34.0V CT @ 0.17A	17.0V @ 0.34A						
	FP40-150		40.0V CT @ 0.15A	20.0V @ 0.3A						
	FP56-100		56.0V CT @ 0.1A	28.0V @ 0.2A						
	FP88-65		88.0V CT @ 0.065A	44.0V @ 0.13A						
	FP120-50		120.0V CT @ 0.05A	60.0V @ 0.1A						
	FP230-25		230.0V CT @ 0.025A	115.0V @ 0.05A						
C	FP10-1200	12.0	10.0V CT @ 1.2A	5.0V @ 2.4A	1.062	2.000	2.500	2.000	0.500	11
	FP12-950		12.6V CT @ 0.95A	6.3V @ 1.9A						
	FP16-750		16.0 CT @ 0.75A	8.0V @ 1.5A						
	FP20-600		20.0 CT @ 0.6A	10.0V @ 1.2A						
	FP24-500		24.0 CT @ 0.5A	12.0V @ 1.0A						
	FP30-400		30.0V CT @ 0.4A	15.0V @ 0.8A						
	FP34-340		34.0V CT @ 0.34A	17.0V @ 0.68A						
	FP40-300		40.0V CT @ 0.3A	20.0V @ 0.6A						
	FP56-200		56.0V CT @ 0.2A	28.0V @ 0.4A						
	FP88-130		88.0V CT @ 0.13A	44.0V @ 0.26A						
	FP120-100		120.0V CT @ 0.1A	60.0V @ 0.2A						
	FP230-50		230.0V CT @ 0.05A	115.0V @ 0.1A						
D	FP10-2400	24	10.0V CT @ 2.4A	5.0V @ 4.8A	1.375	2.25	2.87	1.9	0.600	15
	FP12-1900		12.6V CT @ 1.9A	6.3V @ 3.8A						
	FP16-1500		16.0V CT @ 1.5A	8.0V @ 3.0A						
	FP20-1200		20.0V CT @ 1.2A	10.0V @ 2.4A						
	FP24-1000		24.0V CT @ 1.0A	12.0V @ 2.0A						
	FP30-800		30V CT @ 0.80mA	15.0V @ 1.6A						
	FP34-700		34V CT @ 0.70mA	17.0V @ 1.4A						
	FP40-600		56V CT @ 0.60mA	20.0V @ 1.2A						
E	FP56-425	48	56V CT @ 0.425mA	28.0V @ 0.85A	1.375	2.5	3.12	2.18	0.600	21
	FP10-4800		10V CT @ 4.8A	5.0V @ 9.6A						
	FP12-3800		12.6V CT @ 3.8A	6.3V @ 7.6A						
	FP16-3000		16V CT @ 3.0A	8.0V @ 6.0A						
	FP20-2400		20.0V CT @ 2.4A	10.0V @ 4.8A						
	FP24-2000		24.0V CT @ 2.0A	12.0V @ 4.0A						
	FP30-1600		30.0V CT @ 1.6A	15.0V @ 3.2A						
	FP34-1400		34.0V CT @ 1.4A	17.0V @ 2.8A						
	FP40-1200		40.0V CT @ 1.2A	20.0V @ 2.4A						
	FP56-850		56.0V CT @ 0.85A	28.0V @ 1.7A						

CT = Center Tap

:: Outline Dimensions

Technical Notes

1. Hi-pot tested at 2,000 VRMS.
2. Split bobbin with side-by-side windings to reduce capacitance and eliminate the need for a static shield.

