

OMRON's Next-generation Platform for a Wide Range of Detection

- Features a Power Tuning function that optimizes light reception at the press of a button.
- Combines newly developed 4-element LEDs with an APC circuit to ensure stable, long-term LED performance.
- Utilizes OMRON's innovative wire-saving connector.
- 2-channel models achieve the thinnest profile in the industry, at only 5 mm per channel.
- 2-channel models also offer AND/OR control output.



Be sure to read *Safety Precautions* on page 15.




Features

Equipped with an Industry's First Power Tuning (Optimum Light Setting) Function

The E3X-DA-S/MDA features a Power Tuning function that optimizes power at the press of a button.

This function easily but securely resolves saturation due to short sensing distances or insufficient incident light due to long sensing distances.


In addition, the response speed does not change as mode selection has tuned the power.

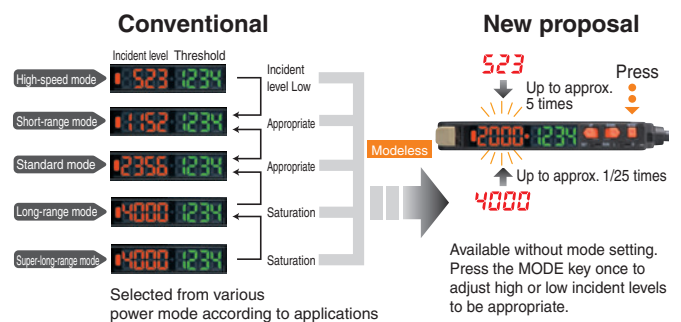

Adoption of Newly Developed 4-Element LEDs and an APC (Auto Power Control) Circuit Achieves Long-term Reliable Detection at the Highest Level in the Industry

The long-term reliable detection at the highest level in the industry is achieved with the innovative APC circuit whose performance is proved by E3X-DA-N series and the newly developed high-power LEDs (4-element type) to ensure super stable, long-term LED performance.

Stable performance is always available without the ON/OFF setting of an APC circuit.

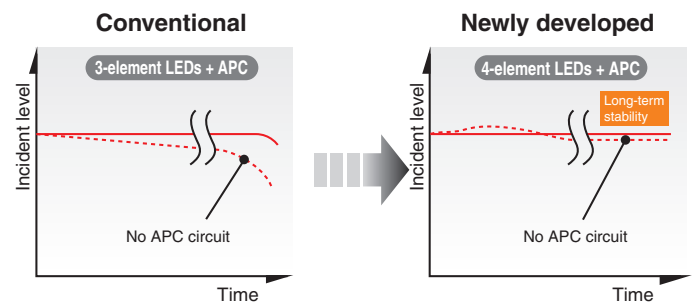


OMRON's Innovative Wire-saving Connector Inherited from the E3X-DA-N

The amplifier units with connectors supply the power to slave connectors via a master connector. This offers three following advantages.

1. Greatly reduced wiring work
2. Improved space usability due to the unnecessary of relay connectors
3. Simple stock management due to the unnecessary of distinction between master and slave for amplifiers


Wire-saving Connector Model



Reduced Wiring and Space Requirements for Power Lines

<When using 5 amplifier units>


The number of terminal blocks, number of wires, number of crossovers, and wiring work are all reduced.

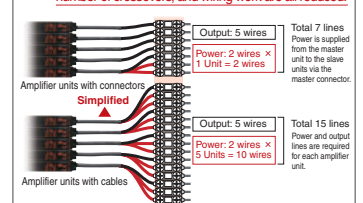

Models available for a wide variety of applications at manufacturing sites


Industry Leading Two Amplifiers Loaded in a Small Body 2-channel models

Two amplifiers are loaded in a 10 mm-wide body. Space usability can be approximately doubled. In addition, approximately 40% of the energy can be saved. (compared to the value per channel of the former model)

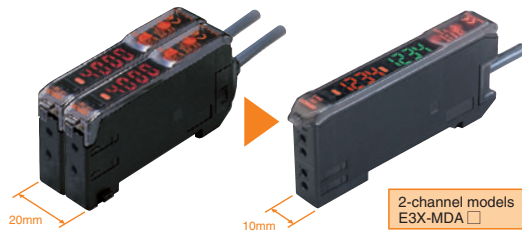

Simpler Digital Fiber Sensors Simple & Easy Single-function Models

Required performance and functions have been reviewed from basic points to improve high-performance but hard-to-use digital models. Digital fiber sensors, used in the sense as if using volume type sensors, are added to the basic functions such as an APC function and digital display.

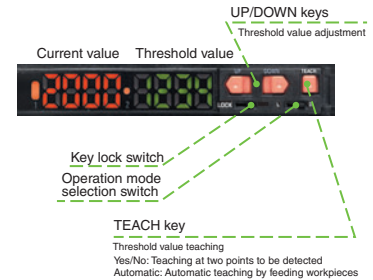

High-speed and High-resolution Analog Output Supports Wide Variety of Applications Advanced Analog Output Models


Analog Control Output

The voltage in the range of 1 to 5 V is output according to the incident level (digital display). Wide variety of applications is possible including positioning control or difference detection with multiple levels.





High-speed and High Resolution

Detection modes can be switched in accordance with applications. High-speed response of 80 μ s (super-high-speed mode) supports the positioning controls that require high-speed control.




Area Output Function Area Judgment Is Possible Advanced, Twin-output Models

Only one sensor is enough for area judgment for height or others that has required multiple sensors. Setting two threshold values allows easy output inside and outside range.



Remote Input Function Sensors Controlled from Outside Advanced, External-input Models


Remote settings for teaching/power tuning/light OFF are possible with input signals. The remote input function meets the diversifying demands such as remote settings made for frequent teaching due to level change corresponding to workpiece change or remote operation check of sensors before operation.




Equipped with an Industry's First ATC Function that Resolves Problems at Manufacturing Sites Advanced ATC Models

OMRON's unique algorithm is equipped to distinguish dust or dirt and the change of workpieces. Automatic correction of threshold values by sensors in accordance with changes prevents malfunctions and improves the operating rates of machines. The ATC function is especially effective for the applications that require high-resolution detection.

Fixed Threshold Value Method (Conventional Models)

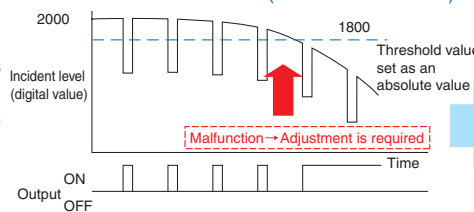

Corrected Threshold Value Method (ATC Models)

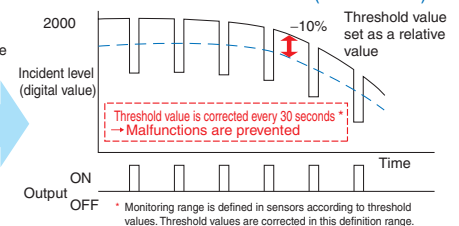



* Monitoring range is defined in sensors according to threshold values. Threshold values are corrected in this definition range.



Ordering Information

Amplifier Units

Amplifier Units with Cables (2 m) [Refer to *Dimensions* on page 17.]

| Item | | Appearance | Functions | Model | |
|---|-----------------------|---|---|-----------------|-----------------|
| | | | | NPN output | PNP output |
| Single-function models | |  | --- | E3X-DA11SE-S 2M | E3X-DA41SE-S 2M |
| Standard models | | | Timer, Response speed change | E3X-DA11-S 2M | E3X-DA41-S 2M |
| Mark-detecting models (multiple color light sources) | Green LED | | | E3X-DAG11-S 2M | E3X-DAG41-S 2M |
| | Blue LED | | | E3X-DAB11-S 2M | E3X-DAB41-S 2M |
| | Infrared LED | | | E3X-DAH11-S 2M | E3X-DAH41-S 2M |
| Advanced models | External-input models | | Remote setting, counter, differential operation | E3X-DA11RM-S 2M | E3X-DA41RM-S 2M |
| | Twin-output models | | Area output, self-diagnosis, differential operation | E3X-DA11TW-S 2M | E3X-DA41TW-S 2M |
| | ATC function models | | ATC (Threshold value automatic correction) | E3X-DA11AT-S 2M | E3X-DA41AT-S 2M |
| | Analog output models | | Analog output models | E3X-DA11AN-S 2M | E3X-DA41AN-S 2M |
| 2-channel models | |  | AND/OR output | E3X-MDA11 2M | E3X-MDA41 2M |

Amplifier Units with Connectors



| Item | | Appearance | Functions | Model | |
|---|-----------------------|---|---|-------------|-------------|
| | | | | NPN output | PNP output |
| Single-function models | |  | --- | E3X-DA6SE-S | E3X-DA8SE-S |
| Standard models | | | Timer, Response speed change | E3X-DA6-S | E3X-DA8-S |
| Mark-detecting models (multiple color light sources) | Green LED | | | E3X-DAG6-S | E3X-DAG8-S |
| | Blue LED | | | E3X-DAB6-S | E3X-DAB8-S |
| | Infrared LED | | | E3X-DAH6-S | E3X-DAH8-S |
| Advanced models | External-input models | | Remote setting, counter, differential operation | E3X-DA6RM-S | E3X-DA8RM-S |
| | Twin-output models | | Area output, self-diagnosis, differential operation | E3X-DA6TW-S | E3X-DA8TW-S |
| | ATC function models | | ATC (Threshold value automatic correction) | E3X-DA6AT-S | E3X-DA8AT-S |
| 2-channel models | |  | AND/OR output | E3X-MDA6 | E3X-MDA8 |

Ratings and Specifications

| | | Light source | Response time | Control output/input | | | Functions | | | | | |
|-------------------------|-----------------------|--------------|----------------|-----------------------------------|----------|---------------|--------------|-------|-------------------------|------------------------|---------|-----|
| | | | | ON/OFF output | Input | Analog output | Power tuning | Timer | Interference prevention | Differential detection | counter | ATC |
| Single-function models | | Red LED | 1 ms | Only main | --- | --- | --- | --- | ○ | --- | --- | --- |
| Standard models | | | 50 μs to 4 ms | | | | ○ | ○ | | | | |
| Mark-detecting models | E3X-DA□G-S | Green LED | 50 μs to 4 ms | Only main | --- | --- | ○ | ○ | ○ | --- | --- | --- |
| | 3X-DA□B-S | Blue LED | | | | | | | | | | |
| | E3X-DA□H-S | Infrared LED | | | | | | | | | | |
| Ad- vanced models | Twin-output models | Red LED | 50 μs to 4 ms | Only main | (1 line) | --- | ○ | ○ | ○ | --- | ○ | --- |
| | External-input models | | 80 μs to 4 ms | Main + sub (2 lines) | | | | | | | --- | --- |
| | ATC function models | | 130 μs to 4 ms | | --- | | | | | | | |
| | Analog output | | 80 μs to 4 ms | Only main | | | | | | | --- | --- |
| 2-channel models | | Red LED | 130 μs to 4 ms | Main + main (2 independent lines) | --- | --- | ○ | ○ | ○ | --- | --- | --- |

Amplifier Unit Connectors (Order Separately)

Note: Protector seals are provided as accessories. [\[Refer to Dimensions on page 19.\]](#)

| Item | Appearance | Cable length | No. of conductors | Model |
|------------------|---|--------------|-------------------|----------|
| Master Connector |  | 2 m | 3 | E3X-CN11 |
| | | | 4 | E3X-CN21 |
| Slave Connector |  | | 1 | E3X-CN12 |
| | | | 2 | E3X-CN22 |

Combining Amplifier Units and Connectors





Amplifier Units and Connectors are sold separately. Refer to the following tables when placing an order.

| Amplifier Unit | | | Applicable Connector (Order Separately) | |
|---|-------------|-------------|---|-----------------|
| Model | NPN output | PNP output | Master Connector | Slave Connector |
| Single-function models | E3X-DA6SE-S | E3X-DA8SE-S | E3X-CN11 | E3X-CN12 |
| Standard models | E3X-DA6-S | E3X-DA8-S | | |
| Mark-detecting models (multiple color light sources) | E3X-DAG6-S | E3X-DAG8-S | | |
| | E3X-DAB6-S | E3X-DAB8-S | | |
| | E3X-DAH6-S | E3X-DAH8-S | E3X-CN21 | E3X-CN22 |
| Advanced models | E3X-DA6TW-S | E3X-DA8TW-S | | |
| | E3X-DA6RM-S | E3X-DA8RM-S | | |
| | E3X-DA6AT-S | E3X-DA8AT-S | | |
| 2-channel models | E3X-MDA6 | E3X-MDA8 | | |

When Using 5 Amplifier Units

| | | |
|---------------------------|---|---|
| Amplifier Units (5 Units) | + | 1 Master Connector + 4 Slave Connectors |
|---------------------------|---|---|

Mobile Console (Order Separately) [\[Refer to Dimensions on page 20.\]](#)


| Appearance | Model | Remarks |
|---|---------------------------------------|---|
|  | E3X-MC11-SV2 (model number of set) | Mobile Console with Head, Cable, and AC adapter provided as accessories |
|  | E3X-MC11-C1-SV2 | Mobile Console |
|  | E3X-MC11-H1 | Head |
|  | E39-Z12-1 | Cable (1.5 m) |

Note: Use the E3X-MC11-SV2 Mobile Console for the E3X-DA-S/MDA-series Amplifier Units.


The E3X-MC11-SV2 is an upgraded version of the E3X-MC11-S that is fully interchangeable with the older model.

Accessories (Order Separately)

Mounting Bracket [\[Refer to E39-L/F39-L/E39-S/E39-R.\]](#)

| Appearance | Model | Quantity |
|---|----------|----------|
|  | E39-L143 | 1 |

End Plate [\[Refer to PFP-□.\]](#)

| Appearance | Model | Quantity |
|---|-------|----------|
|  | PFP-M | 1 |

Ratings and Specifications

Refer to pages 17 to 20 for dimensions.

Amplifier Units

| Type | | Single-function models | Standard models | Mark-detecting models (multiple color light sources) | | |
|--------------------------------------|--------------------------------|--|--|--|-------------------|----------------------|
| | | | | Green LED | Blue LED | Infrared LED |
| Item | Model | E3X-DA□SE-S | E3X-DA□-S | E3X-DAG□-S | E3X-DAB□-S | E3X-DAH□-S |
| Light source (wavelength) | | Red LED (635 nm) | | Green LED (525 nm) | Blue LED (470 nm) | Infrared LED (870nm) |
| Power supply voltage | | 12 to 24 VDC ±10%, ripple (p-p) 10% max. | | | | |
| Power consumption | | 960 mW max. (current consumption: 40 mA max. at power supply voltage of 24 VDC) | | | | |
| Control output | | Load power supply voltage: 26.4 VDC; NPN/PNP open collector; load current: 50 mA max.; residual voltage: 1 V max. | | | | |
| Remote control input | | No-voltage input (contact/non-contact) | --- | | | |
| Protection circuits | | Reverse polarity for power supply connection, output short-circuit | | | | |
| Re-sponse time | Super-high-speed mode | --- | Operate: 48 μs, reset: 50 μs *1, *2 | | | |
| | High-speed mode | --- | Operate/reset: 250 μs | | | |
| | Standard mode | Operate or reset: 1 ms | | | | |
| | High-resolution mode | --- | Operate or reset: 4 ms | | | |
| Sensitivity setting | | Teaching or manual method | | | | |
| Functions | Power tuning | --- | Light emission power and reception gain, digital control method | | | |
| | Timer function | --- | Select from OFF-delay, ON-delay, or one-shot timer. 1 ms to 5 s (1 to 20 ms set in 1-ms increments, 20 to 200 ms set in 10-ms increments, 200 ms to 1 s set in 100-ms increments, and 1 to 5 s set in 1 s-increments) | | | |
| | Automatic power control (APC) | High-speed control method for emission current | | | | |
| | Zero-reset | --- | Negative values can be displayed. (Threshold value is shifted.) | | | |
| | Initial reset | Settings can be returned to defaults as required. | | | | |
| | Mutual interference prevention | Possible for up to 10 Units *3 | | | | |
| Display | | Operation indicator (orange) | Operation indicator (orange), Power Tuning indicator (orange) | | | |
| Digital display | | incident level + threshold | Select from incident level + threshold or other 6 patterns | | | |
| Display orientation | | --- | Switching between normal/reversed display is possible. | | | |
| Ambient illumination (Receiver side) | | Incandescent lamp: 10,000 lux max. Sunlight: 20,000 lux max. | | | | |
| Ambient temperature range | | Operating: Groups of 1 to 2 Amplifiers: -25°C to 55°C Groups of 3 to 10 Amplifiers: -25°C to 50°C Groups of 11 to 16 Amplifiers: -25°C to 45°C Storage: -30°C to 70°C (with no icing or condensation) | | | | |
| Ambient humidity range | | Operating and storage: 35% to 85% (with no condensation) | | | | |
| Insulation resistance | | 20 MΩ min. (at 500 VDC) | | | | |
| Dielectric strength | | 1,000 VAC at 50/60 Hz for 1 minute | | | | |
| Vibration resistance | | Destruction: 10 to 55 Hz with a 1.5-mm double amplitude for 2 hrs each in X, Y and Z directions | | | | |
| Shock resistance | | Destruction: 500 m/s ² , for 3 times each in X, Y and Z directions | | | | |
| Degree of protection | | IEC 60529 IP50 (with Protective Cover attached) | | | | |
| Connection method | | Pre-wired or amplifier unit connector | | | | |
| Weight (packed state) | | Pre-wired model: Approx. 100 g, Amplifier unit connector model: Approx. 55 g | | | | |
| Materials | Case | Polybutylene terephthalate (PBT) | | | | |
| | Cover | Polycarbonate (PC) | | | | |
| Accessories | | Instruction manual | | | | |

*1. Communications are disabled if the detection mode is selected during super-high-speed mode, and the communications functions for mutual interference prevention and the Mobile Console will not function.

*2. PNP output is as follows: Operate: 53 μs, reset: 55 μs.

*3. Mutual interference prevention can be used for only up to 6 Units if power tuning is enabled.

| Type | | Advanced models | | | | 2-channel models |
|---------------------------|--------------------------------|--|----------------------------|-----------------------------|---|---|
| | | External input mod-els | Twin output mod-els | ATC function mod-els | Analog output mod-els | |
| Item | Model | E3X-DA□RM-S | E3X-DA□TW-S | E3X-DA□AT-S | E3X-DA□AN-S | E3X-MDA□ |
| Light source (wavelength) | | Red LED (635 nm) | | | | |
| Power supply voltage | | 12 to 24 VDC ±10%, ripple (p-p) 10% max. | | | | |
| Power consumption | | 1,080 mW max. (current consumption: 45 mA max. at power supply voltage of 24 VDC) | | | | |
| Control output | ON/OFF output | Load power supply voltage: 26.4 VDC; NPN/PNP open collector; load current: 50 mA max.; residual voltage: 1 V max. | | | | |
| | Analog output | --- | | | Control output Voltage output: 1 to 5 VDC (Connection load 10 kΩ min.) Temperature characteristics 0.3%F.S./°C Response speed/repeat accuracy Super-high-speed mode: 80 μs/1.5%F.S. High-speed mode: 250 μs/1.5%F.S. Standard mode: 1 ms/1%F.S. High-resolution mode: 4 ms/0.75%F.S. | --- |
| Remote control input | | No-voltage input (contact/non-contact) *1 | --- | | | |
| Protection circuits | | Reverse polarity for power supply connection, output short-circuit | | | | |
| Re-sponse time | Super-high-speed mode | Operate: 48 μs, reset: 50 μs *2, *3, *4 | Operate or reset: 80 μs *2 | Operate or reset: 130 μs *2 | Operate or reset: 80 μs *2 | Operate or reset: 130 μs *2, *5 |
| | High-speed mode | Operate or reset: 250 μs | | | | Operate or reset: 450 μs |
| | Standard mode | Operate or reset: 1ms | | | | |
| | High-resolution mode | Operate or reset: 4ms | | | | |
| Sensitivity setting | | Teaching or manual method | | | | |
| Func-tions | Power tuning | Light emission power and reception gain, digital control method | | | | |
| | Differential de-tection | Switchable between single edge and double edge detection mode Single edge: Can be set to 250 μs, 500 μs, 1 ms, 10 ms, or 100 ms. Double edge: Can be set to 500 μs, 1 ms, 2 ms, 20 ms, or 200 ms. | | | --- | |
| | Timer function | Select from OFF-delay, ON-delay, or one-shot timer. 1 ms to 5 s (1 to 20 ms set in 1-ms increments, 20 to 200 ms set in 10-ms increments, 200 ms to 1 s set in 100-ms increments, and 1 to 5 s set in 1 s-increments) | | | | |
| | Automatic power control (APC) | High-speed control method for emission current | | | | |
| | Zero-reset | Negative values can be displayed. (Threshold value is shifted.) | | | | |
| | Initial reset | Settings can be returned to defaults as required. | | | | |
| | Mutual interference prevention | Possible for up to 10 Units *6 | | | | Possible for up to 9 Units (18 channels) *7 |
| | Counter | Switchable between up counter and down counter. Set count: 0 to 9,999,999 | --- | | | |

*1. Input Specifications

| | Contact input (relay or switch) | Non-contact input (transistor) |
|------------|---|---|
| NPN | ON: Shorted to 0 V (sourcing current: 1 mA max.). OFF: Open or shorted to Vcc. | ON: 1.5 V max. (sourcing current: 1 mA max.). OFF: Vcc - 1.5 V to Vcc (leakage current: 0.1 mA max.) |
| PNP | ON: Shorted to Vcc (sinking current: 3 mA max.). OFF: Open or shorted to 0 V. | ON: Vcc - 1.5 V to Vcc (sinking current: 3 mA max.). OFF: 1.5 V max. (leakage current: 0.1 mA max.) |

*2. Communications are disabled if the detection mode is selected during super-high-speed mode, and the communications functions for mutual interference prevention and the Mobile Console will not function.

*3. PNP output is as follows: Operate: 53 μs, reset: 55 μs.

*4. When counter is enabled: 80 μs for operate and reset respectively.

*5. When differential output is selected for the output setting, the second channel output is 200 μs for operation and reset respectively.

*6. Mutual interference prevention can be used for only up to 6 Units if power tuning is enabled.

*7. Mutual interference prevention can be used for up to 5 Units (10 channels) if power tuning is enabled.

| Type | | Advanced models | | | | 2-channel models |
|--------------------------------------|-------------|--|--|--|---|--|
| | | External input models | Twin-output models | ATC function models | Analog output models | |
| Item | Model | E3X-DA□RM-S | E3X-DA□TW-S | E3X-DA□AT-S | E3X-DA□AN-S | E3X-MDA□ |
| Functions | I/O setting | External input setting (Select from teaching, power tuning, zero reset, light OFF, or counter reset.) | Output setting (Select from channel 2 output, area output, or self-diagnosis.) | Output setting (Select from channel 2 output, area output, self-diagnosis output, or ATC error output) | Analog output setting (offset voltage adjustable) | Output setting (Select from channel 2 output, AND, OR, leading edge sync, falling edge sync, or differential output) |
| | | Operation indicator (orange), Power Tuning indicator (orange) | Operation indicator for channel 1 (orange), Operation indicator for channel 2 (orange) | | | Operation indicator (orange), Power Tuning indicator (orange) |
| Digital display | | Select from incident level + threshold or other 7 patterns | Select from incident level + threshold or other 6 patterns | | | Select from incident level for channel 1 + incident level for channel 2 or other 7 patterns |
| Display orientation | | Switching between normal/reversed display is possible. | | | | |
| Ambient illumination (Receiver side) | | Incandescent lamp: 10,000 lux max. Sunlight: 20,000 lux max. | | | | |
| Ambient temperature range | | Operating: Groups of 1 to 2 Amplifiers: -25°C to 55°C Groups of 3 to 10 Amplifiers: -25°C to 50°C Groups of 11 to 16 Amplifiers: -25°C to 45°C Storage: -30°C to 70°C (with no icing or condensation) | | | | |
| Ambient humidity range | | Operating and storage: 35% to 85% (with no condensation) | | | | |
| Insulation resistance | | 20 MΩ min. (at 500 VDC) | | | | |
| Dielectric strength | | 1,000 VAC at 50/60 Hz for 1 minute | | | | |
| Vibration resistance | | Destruction: 10 to 55 Hz with a 1.5-mm double amplitude for 2 hrs each in X, Y and Z directions | | | | |
| Shock resistance | | Destruction: 500 m/s², for 3 times each in X, Y and Z directions | | | | |
| Degree of protection | | IEC 60529 IP50 (with Protective Cover attached) | | | | |
| Connection method | | Pre-wired or amplifier unit connector | | | | |
| Weight (packed state) | | Pre-wired model: Approx. 100 g, Amplifier unit connector model: Approx. 55 g | | | | |
| Materials | Case | Polybutylene terephthalate (PBT) | | | | |
| | Cover | Polycarbonate (PC) | | | | |
| Accessories | | Instruction manual | | | | |

Amplifier Unit Connectors

| Item | Model | E3X-CN11/21/22 | E3X-CN12 |
|-----------------------|----------|---|--------------|
| Rated current | | 2.5 A | |
| Rated voltage | | 50 V | |
| Contact resistance | | 20 mΩ max. (20 mVDC max., 100 mA max.) (The figure is for connection to the Amplifier Unit and the adjacent Connector. It does not include the conductor resistance of the cable.) | |
| No. of insertions | | Destruction: 50 times (The figure for the number of insertions is for connection to the Amplifier Unit and the adjacent Connector.) | |
| Materials | Housing | Polybutylene terephthalate (PBT) | |
| | Contacts | Phosphor bronze/gold-plated nickel | |
| Weight (packed state) | | Approx. 55 g | Approx. 25 g |

Mobile Console

| Item | Model | E3X-MC11-SV2 |
|--|-------|---|
| Applicable Sensors | | E3X-DA-S E3X-MDA E3C-LDA E2C-EDA |
| Power supply voltage | | Charged with AC adapter |
| Connection method | | Connected via adapter |
| Weight (packed state) | | Approx. 580 g (Console only: 120 g) |
| Refer to <i>Instruction Manual</i> provided with the Mobile Console for details. | | |

Sensing Distance Through-beam Models

(Unit: mm)

| Type | | | Model | E3X-DA□-S | | | | E3X-MDA□ | | | |
|---------------------|------------------------------------|--|-------|----------------------|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Standard models | Flexible (new standard) | E32-T11R/E32-T12R/E32-T15XR/E32-TC200BR(B4R) | | 700 | 530 | 350 | 140 | 450 | 350 | 230 | 140 |
| | | E32-T14LR/E32-T15YR/E32-T15ZR | | 270 | 210 | 130 | 50 | 170 | 130 | 85 | 50 |
| | | E32-T21R/E32-T22R/E32-T222R/E32-T25XR/E32-TC200FR(F4R) | | 160 | 130 | 75 | 30 | 100 | 75 | 50 | 30 |
| | | E32-T24R/E32-T25YR/E32-T25ZR | | 60 | 50 | 25 | 10 | 35 | 27 | 18 | 10 |
| | Standard | E32-TC200/E32-T12/E32-T15X/E32-TC200B(B4) | | 1,000 | 760 | 500 | 200 | 650 | 500 | 330 | 200 |
| | | E32-T14L/E32-T15Y/E32-T15Z | | 600 | 460 | 300 | 120 | 390 | 300 | 200 | 120 |
| | | E32-TC200A | | 900 | 680 | 450 | 180 | 580 | 450 | 300 | 180 |
| | | E32-TC200E/E32-T22/E32-T222/E32-T25X/E32-TC200F(F4) | | 270 | 220 | 125 | 50 | 170 | 130 | 85 | 50 |
| | Break-resistant | E32-T24/E32-T25Y/E32-T25Z | | 160 | 130 | 75 | 30 | 100 | 70 | 45 | 30 |
| | | E32-T11/E32-T12B/E32-T15XB | | 900 | 680 | 450 | 180 | 580 | 450 | 300 | 180 |
| | | E32-T21/E32-T221B/E32-T22B | | 240 | 200 | 110 | 45 | 150 | 110 | 70 | 45 |
| | Fluorine coating | E32-T25XB | | 180 | 150 | 85 | 35 | 125 | 95 | 60 | 35 |
| | | E32-T11U | | 900 | 680 | 450 | 180 | 580 | 450 | 300 | 180 |
| Special-beam models | Long-distance, high power | E32-T17L | | 20,000*1 | 20,000*1 | 10,000 | 4,000 | 13,000 | 10,000 | 6,500 | 4,000 |
| | | E32-TC200 + E39-F1 | | 4,000*2 | 4,000*2 | 2,600 | 1,500 | 4,000 | 3,700 | 2,400 | 1,500 |
| | | E32-T11R + E39-F1 | | 4,000*2 | 3,700 | 2,400 | 970 | 3,100 | 2,400 | 1,600 | 970 |
| | | E32-T11 + E39-F1 | | 4,000*2 | 3,600 | 2,300 | 930 | 3,000 | 2,300 | 1,500 | 930 |
| | | E32-T14 | | 4,000*2 | 3,400 | 2,250 | 900 | 2,900 | 2,200 | 1,450 | 900 |
| | | E32-T11L/E32-T12L | | 1,700 | 1,330 | 870 | 350 | 1,100 | 870 | 580 | 350 |
| | | E32-T11L + E39-F2 | | 910 | 800 | 500 | 180 | 600 | 520 | 340 | 180 |
| | | E32-T11R + E39-F2 | | 520 | 400 | 250 | 100 | 330 | 260 | 170 | 100 |
| | | E32-T11 + E39-F2 | | 820 | 660 | 430 | 160 | 530 | 430 | 280 | 160 |
| | Ultracom-compact, ultrafine sleeve | E32-T21L/E32-T22L | | 540 | 440 | 250 | 100 | 340 | 260 | 170 | 100 |
| | | E32-T223R | | 160 | 130 | 75 | 30 | 110 | 85 | 55 | 30 |
| | | E32-T33-S5 | | 53 | 44 | 25 | 10 | 35 | 28 | 18 | 10 |
| | | E32-T333-S5 | | 12 | 10 | 6 | 4 | 8 | 6 | 5 | 4 |
| | Fine beam | E32-T334-S5 | | 6 | 5 | 3 | 2 | 4 | 3 | 2 | 2 |
| | | E32-T22S | | 2,500 | 1,900 | 1,250 | 500 | 1,600 | 1,250 | 830 | 500 |
| | Area sensing | E32-T24S | | 1,750 | 1,300 | 870 | 350 | 1,100 | 870 | 580 | 350 |
| | | E32-T16PR | | 1,100 | 840 | 560 | 220 | 730 | 560 | 370 | 220 |
| | | E32-T16P | | 1,500 | 1,100 | 750 | 300 | 970 | 750 | 500 | 300 |
| | | E32-T16JR | | 980 | 750 | 480 | 190 | 600 | 480 | 320 | 190 |
| | | E32-T16J | | 1,300 | 1,000 | 650 | 260 | 800 | 650 | 430 | 260 |
| | | E32-T16WR | | 1,700 | 1,300 | 850 | 340 | 1,100 | 860 | 570 | 340 |
| | | E32-T16W | | 2,300 | 1,800 | 1,150 | 450 | 1,400 | 1,100 | 730 | 450 |
| | | E32-T16 | | 3,700 | 2,800 | 1,850 | 740 | 2,400 | 1,800 | 1,200 | 740 |
| | | E32-M21 | | 750 | 610 | 350 | 140 | 470 | 360 | 240 | 140 |

*1. The optical fiber for the E32-T17L is 10 m long on each side, so the value is 20,000 mm

*2. The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

| Type | | | Model | E3X-DA□-S | | | | E3X-MDA□ | | | |
|------------------------------|--------------------|--------------------|-------|----------------------|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Environment resistant models | Heat-resistant | E32-T51 | | 1,000 | 760 | 500 | 200 | 650 | 500 | 330 | 200 |
| | | E32-T54 | | 300 | 230 | 150 | 60 | 190 | 150 | 100 | 60 |
| | | E32-T81R-S | | 360 | 280 | 180 | 70 | 230 | 180 | 120 | 70 |
| | | E32-T61-S + E39-F2 | | 600 | 450 | 300 | 120 | 390 | 300 | 200 | 120 |
| | | E32-T61-S + E39-F1 | | 4,000 | 3,400 | 2,200 | 900 | 3,000 | 2,200 | 1,450 | 900 |
| | | E32-T84S-S | | 1,750 | 1,300 | 870 | 350 | 1,100 | 870 | 570 | 350 |
| | | E32-T61-S | | 600 | 450 | 300 | 120 | 390 | 300 | 200 | 120 |
| | Chemical resistant | E32-T11F | | 2,500 | 2,000 | 1,300 | 520 | 1,600 | 1,300 | 850 | 520 |
| | | E32-T12F | | 4,000* | 3,000 | 2,000 | 800 | 2,600 | 2,000 | 1,300 | 800 |
| | | E32-T14F | | 500 | 400 | 250 | 100 | 320 | 250 | 160 | 100 |
| | | E32-T51F | | 1,800 | 1,400 | 900 | 350 | 1,190 | 920 | 600 | 350 |
| | | E32-T81F-S | | 920 | 700 | 460 | 190 | 600 | 460 | 300 | 190 |
| | Vacuum resistant | E32-T51V | | 260 | 200 | 130 | 50 | 170 | 130 | 85 | 50 |
| | | E32-T51V + E39-F1V | | 1,350 | 1,000 | 680 | 260 | 850 | 650 | 430 | 260 |
| | | E32-T54V | | 210 | 130 | 100 | 35 | 110 | 85 | 55 | 35 |
| | | E32-T54V + E39-F1V | | 660 | 500 | 330 | 180 | 420 | 320 | 210 | 180 |
| | | E32-T84SV | | 630 | 480 | 320 | 130 | 410 | 310 | 200 | 130 |

* The optical fiber for the E32-T12F is 2 m long on each side, so the sensing distance is 4,000 mm.

Reflective Models

(Unit: mm)

| Type | | | Model | E3X-DA□-S | | | | E3X-MDA□ | | | |
|-----------------|-------------------------|--|-------|----------------------|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Standard models | Flexible (new standard) | E32-D11R/E32-D12R/E32-D15XR/E32-DC200BR(B4R) | | 300 | 170 | 120 | 50 | 170 | 120 | 80 | 50 |
| | | E32-D14LR | | 80 | 45 | 30 | 14 | 45 | 33 | 22 | 14 |
| | | E32-D15YR/E32-D15ZR | | 70 | 40 | 26 | 12 | 40 | 29 | 19 | 12 |
| | | E32-D211R/E32-D21R/E32-D22R/E32-D25XR/E32-DC200FR(F4R) | | 50 | 30 | 20 | 8 | 30 | 22 | 14 | 8 |
| | | E32-D24R | | 26 | 15 | 10 | 4 | 15 | 10 | 6 | 4 |
| | | E32-D25YR/E32-D25ZR | | 14 | 8 | 5 | 2 | 8 | 5 | 3.3 | 2 |
| | Standard | E32-DC200/E32-D15X/E32-DC200B(B4) | | 500 | 300 | 200 | 90 | 300 | 210 | 130 | 90 |
| | | E32-D12 | | 400 | 230 | 160 | 70 | 230 | 160 | 100 | 70 |
| | | E32-D14L | | 200 | 110 | 80 | 36 | 110 | 80 | 50 | 36 |
| | | E32-D15Y/E32-D15Z | | 170 | 100 | 65 | 30 | 100 | 70 | 45 | 30 |
| | | E32-D211/E32-DC200E/E32-D22/E32-D25X/E32-DC200F(F4) | | 130 | 80 | 50 | 22 | 80 | 55 | 35 | 22 |
| | | E32-D24 | | 50 | 30 | 20 | 8 | 30 | 22 | 14 | 8 |
| | | E32-D25Y/E32-D25Z | | 35 | 20 | 12 | 6 | 20 | 14 | 9 | 6 |
| | Break-resistant | E32-D11/E32-D15XB | | 300 | 170 | 120 | 50 | 170 | 125 | 80 | 50 |
| | | E32-D21B/E32-D221B | | 110 | 70 | 45 | 20 | 70 | 50 | 30 | 20 |
| | | E32-D21/E32-D22B | | 50 | 30 | 20 | 8 | 30 | 22 | 14 | 8 |
| | | E32-D25XB | | 85 | 50 | 30 | 15 | 50 | 35 | 23 | 15 |
| | Fluorine coating | E32-D11U | | 300 | 170 | 120 | 50 | 170 | 125 | 80 | 50 |

| Type | | | Model | E3X-DA□-S | | | | E3X-MDA□ | | | |
|------------------------------|--------------------------------|-----------------------------|-------|---|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Special-beam models | Long distance, high power | E32-D16 | | 40 to 1,000 | 40 to 700 | 40 to 450 | 40 to 240 | 40 to 600 | 40 to 490 | 40 to 300 | 40 to 240 |
| | | E32-D11L | | 650 | 400 | 260 | 110 | 400 | 270 | 180 | 110 |
| | | E32-D21L/E32-D22L | | 210 | 130 | 80 | 35 | 130 | 85 | 55 | 35 |
| | Ultracompact, ultrafine sleeve | E32-D33 | | 25 | 16 | 10 | 4 | 16 | 10 | 6 | 4 |
| | | E32-D331 | | 5 | 3 | 2 | 0.8 | 3 | 2 | 1.3 | 0.8 |
| | Coaxial/small spot | E32-CC200R | | 250 | 150 | 100 | 45 | 150 | 105 | 65 | 45 |
| | | E32-CC200 | | 500 | 300 | 200 | 90 | 300 | 210 | 140 | 90 |
| | | E32-D32L | | 250 | 150 | 100 | 45 | 150 | 100 | 65 | 45 |
| | | E32-C31/E32-D32 | | 120 | 75 | 50 | 22 | 75 | 50 | 30 | 22 |
| | | E32-C42 + E39-F3A | | Spot diameter variable in the range 0.1 to 0.6 mm at distances in the range 6 to 15 mm. | | | | | | | |
| | | E32-D32 + E39-F3A | | Spot diameter variable in the range 0.5 to 1 mm at distances in the range 6 to 15 mm. | | | | | | | |
| | | E32-C41 + E39-F3A-5 | | 0.1-mm dia. spot at a distance of 7 mm. | | | | | | | |
| | | E32-C31 + E39-F3A-5 | | 0.5-mm dia. spot at a distance of 7 mm. | | | | | | | |
| | | E32-C41 + E39-F3B | | 0.2-mm dia. spot at a distance of 17 mm. | | | | | | | |
| | | E32-C31 + E39-F3B | | 0.5-mm dia. spot at a distance of 17 mm. | | | | | | | |
| | | E32-C31 + E39-F3C | | Spot diameter of 4 mm max. at distances in the range 0 to 20 mm. | | | | | | | |
| | Area sensing | E32-D36P1 | | 250 | 150 | 100 | 45 | 150 | 100 | 65 | 45 |
| | Retroreflective | E32-R21 + E39-R3 (provided) | | 10 to 250 | | | | | | | |
| | | E32-R16 + E39-R1 (provided) | | 150 to 1,500 | | | | | | | |
| | Convergent-reflective | E32-L25/E32-L25A | | 3.3 | | | | | | | |
| | | E32-L24S | | 0 to 4 | | | | | | | |
| | | E32-L24L | | 2 to 6 (center 4) | | | | | | | |
| | | E32-L25L | | 5.4 to 9 (center 7.2) | | | | | | | |
| | | E32-L86 | | 4 to 10 | | | | | | | |
| Environment-resistant models | Heat-resistant | E32-D51 | | 400 | 230 | 160 | 72 | 230 | 165 | 110 | 72 |
| | | E32-D81R-S | | 150 | 90 | 60 | 27 | 90 | 63 | 40 | 27 |
| | | E32-D61-S | | | | | | | | | |
| | | E32-D73-S | | 100 | 60 | 40 | 18 | 60 | 40 | 25 | 18 |
| | Chemical-resistant | E32-D12F | | 160 | 95 | 65 | 30 | 95 | 70 | 45 | 30 |
| | | E32-D14F | | 70 | 40 | 30 | 10 | 40 | 28 | 18 | 10 |

Application-specific Models

(Unit: mm)

| Type | | | Model | E3X-DA□-S | | | | E3X-MDA□ | | | |
|-----------------------------|---|-------------------|-------|--|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Application-specific models | Label detection | E32-G14 | | 10 | | | | | | | |
| | | E32-T14 | | 4,000* | 3,400 | 2,250 | 900 | 2,900 | 2,200 | 1,450 | 900 |
| | Liquid-level detection | E32-L25T | | Applicable tube: Transparent tube with a diameter in the range 8 to 10 mm and a recommended wall thickness of 1 mm | | | | | | | |
| | | E32-D36T | | Applicable tube: Transparent tube (no restriction on diameter) | | | | | | | |
| | | E32-A01 | | Applicable tube: Transparent tube with a diameter of 3.2, 6.4, or 9.5 mm and a recommended wall thickness of 1 mm | | | | | | | |
| | | E32-A02 | | Applicable tube: Transparent tube with a diameter in the range 6 to 13 mm and a recommended wall thickness of 1 mm | | | | | | | |
| | | E32-D82F1(F2) | | Liquid-contact model | | | | | | | |
| | Glass-substrate alignment | E32-L16-N | | 0 to 15 | | 0 to 12 | | 0 to 15 | | 0 to 12 | |
| | | E32-A08 | | 10 to 20 | | --- | | 10 to 20 | | --- | |
| | | E32-A07E1(E2) | | 15 to 25 | | --- | | 15 to 25 | | --- | |
| | | E32-L66 | | 5 to 18 | | 5 to 16 | | --- | | 5 to 14 | |
| | Glass-substrate Mapping | E32-A09/E32-A09H | | 15 to 38 | | --- | | 15 to 38 | | --- | |
| | | E32-A09H2 | | 20 to 30 | | --- | | 20 to 30 | | --- | |
| | Wafer mapping | E32-A03/E32-A03-1 | | 1,150 | 890 | 600 | 250 | 750 | 580 | 380 | 250 |
| | | E32-T24S | | 1,750 | 1,300 | 870 | 350 | 1,100 | 870 | 580 | 350 |
| | | E32-A04/E32-A04-1 | | 460 | 340 | 225 | 100 | 300 | 220 | 145 | 100 |
| | Soda glass with reflection factor If 7% | E32-L64 | | 1 to 5 | | --- | | --- | | 1 to 5 | |
| | | E32-A10 | | 0 to 8 | | 0 to 6 | | 0 to 4 | | 0 to 4 | |

* The optical fiber for the E32-T14 is 2 m long on each side, so the sensing distance is 4,000 mm.

Green, Blue, and Infrared Light Sources

(Unit: mm)

| Type | | | E3X-DAG□-S/DAB□-S | | | | E3X-DAH□-S | | | |
|-----------------------------|-----------------|--|----------------------|---------------|-----------------|-----------------------|----------------------|---------------|-----------------|-----------------------|
| | | | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode | High-resolution mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam models | Standard | E32-T11R/E32-T12R/E32-T15XR/E32-TC200BR(B4R) | 65 | 50 | 35 | 30 | 280 | 190 | 130 | 55 |
| | | E32-T14LR/E32-T15YR/E32-T15ZR | 25 | 20 | 22 | 12 | 100 | 75 | 80 | 21 |
| | | E32-TC200/E32-T12/E32-T15X/E32-TC200B(B4) | 100 | 75 | 50 | 45 | 400 | 280 | 180 | 80 |
| | | E32-T14L/E32-T15Y/E32-T15Z | 50 | 40 | 30 | 25 | 240 | 160 | 110 | 45 |
| | Special beam | E32-T11L/E32-T12L | 150 | 120 | 85 | 75 | 700 | 490 | 320 | 140 |
| Reflective models | Standard | E32-D11R/E32-D12R/E32-D15XR/E32-DC200BR(B4R) | 17 | 14 | 10 | 8 | 120 | 90 | 60 | 21 |
| | | E32-D14LR | 4.4 | 3.5 | 2.5 | 2.2 | 32 | 24 | 16 | 5.5 |
| | | E32-D15YR/E32-D15ZR | 4.2 | 3.3 | 2.2 | 2.1 | 28 | 20 | 13 | 5 |
| | | E32-DC200/E32-D15X/E32-DC200B(B4) | 32 | 25 | 16 | 16 | 200 | 150 | 100 | 35 |
| | | E32-D14L | 11 | 9 | 6 | 5.5 | 80 | 60 | 40 | 14 |
| | | E32-D15Y/E32-D15Z | 10 | 8 | 5.5 | 5 | 65 | 50 | 33 | 11 |
| | Special beam | E32-D11L | 44 | 35 | 22 | 22 | 260 | 190 | 130 | 45 |
| | | E32-CC200R | 15 | 12 | 8 | 7.5 | 100 | 75 | 50 | 17 |
| | | E32-CC200 | 32 | 25 | 16 | 16 | 200 | 150 | 100 | 35 |
| | | E32-D32L | 15 | 12 | 8 | 7.5 | 100 | 75 | 50 | 17 |
| | | E32-C31/E32-D32 | 7.5 | 6 | 4 | 3.5 | 50 | 37 | 25 | 8.5 |
| Application-specific models | Label detection | E32-T14 | 320 | 260 | 220 | 160 | 1,800 | 1,200 | 820 | 360 |
| | | E32-G14 | 10 | | | | 10 | | | |

Refer to *E32 Series* for details on Fiber Units.

Output Circuit Diagrams

NPN Output

| Model | Operation mode | Timing charts | Operation selector | Output circuit |
|--|----------------|---------------|--------------------|----------------|
| E3X-DA11-S E3X-DA6-S E3X-DAG11-S E3X-DAG6-S E3X-DAB11-S E3X-DAB6-S E3X-DA11SE-S E3X-DA6SE-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA11TW-S E3X-DA6TW-S E3X-MDA11 E3X-MDA6 E3X-DA11AT-S E3X-DA6AT-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA11RM-S E3X-DA6RM-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA11AN-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |

Note: 1. The ON/OFF regions when areas settings are used with the E3X-DA□TW-S are as follows:
 LIGHT ON: ON when the incident level is between the thresholds for channels 1 and 2.
 DARK ON: OFF when the incident level is between the thresholds for channels 1 and 2.

2. Timing Charts for Timer Function Settings (T: Set Time)

| ON delay | OFF delay | One-shot |
|----------|-----------|----------|
| | | |

3. Control Output (AND, OR, Sync) and Timing Chart for Timer Settings (T: Set Time)

| | |
|----------------|---------------------|
| CH1 ON | CH1 ON |
| CH1 OFF | CH1 OFF |
| CH2 ON | CH2 ON |
| CH2 OFF | CH2 OFF |
| OUT (AND) ON | ON delay (AND) ON |
| OUT (AND) OFF | OFF delay (AND) OFF |
| OUT (OR) ON | OFF delay (AND) OFF |
| OUT (OR) OFF | One-shot (AND) ON |
| OUT (sync) ON | One-shot (AND) OFF |
| OUT (sync) OFF | |

PNP Output

| Model | Operation mode | Timing chart | Operation selector | Output circuit |
|--|----------------|--------------|--------------------|----------------|
| E3X-DA41-S E3X-DA8-S E3X-DAG41-S E3X-DAG8-S E3X-DAB41-S E3X-DAB8-S E3X-DA41SE-S E3X-DA8SE-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA41TW-S E3X-DA8TW-S E3X-MDA41 E3X-DA41AT-S E3X-DA8AT-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA41RM-S E3X-DA8RM-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |
| E3X-DA41AN-S | Light-ON | | LIGHT ON (L-ON) | |
| | Dark-ON | | DARK ON (D-ON) | |

Note: The ON/OFF regions when areas settings are used with the E3X-DA□TW-S are as follows:
 LIGHT ON: ON when the incident level is between the thresholds for channels 1 and 2.
 DARK ON: OFF when the incident level is between the thresholds for channels 1 and 2.


Nomenclature

Amplifier Units

E3X-DA□-S

E3X-DA□RM-S


E3X-DA□AN-S

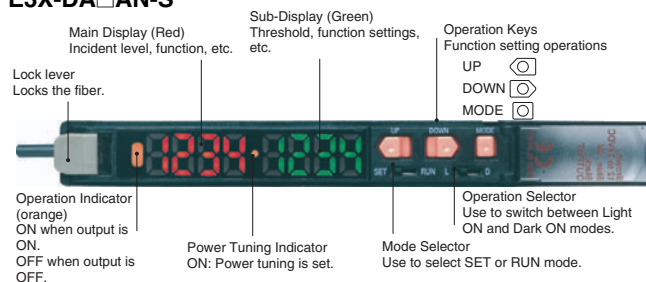

E3X-DA□TW-S

E3X-DA□AT-S

E3X-MDA□

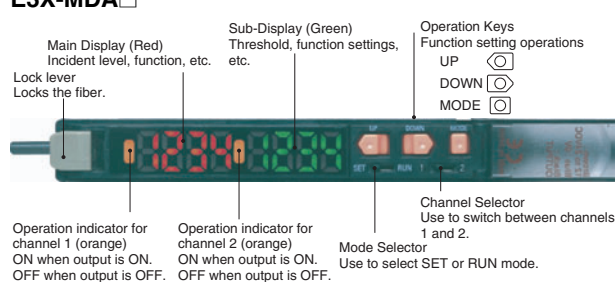

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

Amplifier Unit

● Designing

Operation after Turning Power ON


The Sensor is ready to detect within 200 ms after the power supply is turned ON. If the Sensor and load are connected to separate power supplies, be sure to turn ON the Sensor first.

● Mounting


Connecting and Disconnecting Connectors

Mounting Connectors

1. Insert the Master or Slave Connector into the Amplifier Unit until it clicks into place.

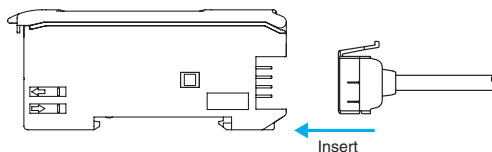


2. Attach the protector seals (provided as accessories) to the sides of master and slave connectors that are not connected.

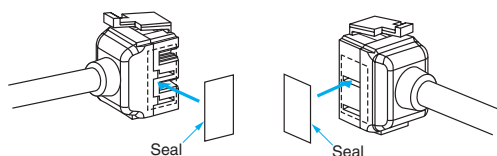

Note: Attach the seals to the sides with grooves.

Removing Connectors


1. Slide the slave Amplifier Unit(s) for which the Connector is to be removed away from the rest of the group.
2. After the Amplifier Unit(s) has been separated, press down on the lever on the Connector and remove it. (Do not attempt to remove Connectors without separating them from other Amplifier Units first.)

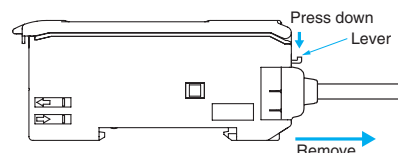


Adding and Removing Amplifier Units

Adding Amplifier Units

1. Mount the Amplifier Units one at a time onto the DIN track.



2. Slide the Amplifier Units together, line up the clips, and press the Amplifier Units together until they click into place.

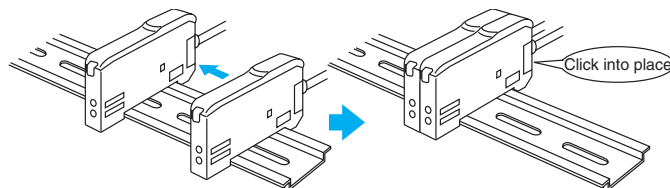


Removing Amplifier Units

Slide Amplifier Units away from each other, and remove from the DIN track one at a time. (Do not attempt to remove Amplifier Units from the DIN track without separating them first.)

- Note: 1. The specifications for ambient temperature will vary according to the number of Amplifier Units used together. For details, refer to *Ratings and Specifications*.
2. Always turn OFF the power supply before joining or separating Amplifier Units.


Mounting the End Plate (PFP-M)

An End Plate should be used if there is a possibility of the Amplifier Unit moving, e.g., due to vibration. If a Mobile Console is going to be mounted, connect the End Plate in the direction shown in the following diagram.



Mounting the Mobile Console Head

Leave a gap of at least 20 mm between the nearest Amplifier Unit and the Mobile Console head.




Fiber Connection

The E3X Amplifier Unit has a lock button for easy connection of the Fiber Unit. Connect or disconnect the fibers using the following procedures:


1. Connection

Open the protective cover, insert the fibers according to the fiber insertion marks on the side of the Amplifier Unit, and lower the lock lever.

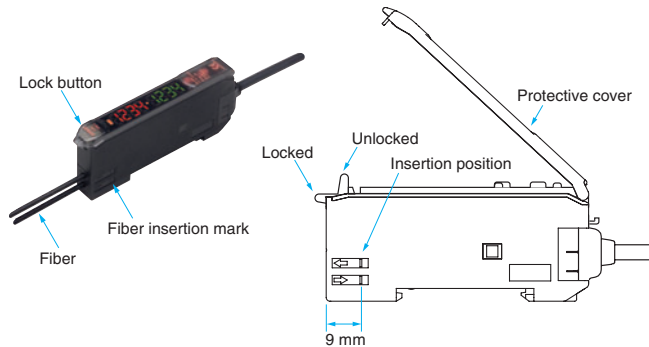


Note: If one of the fibers from the Fiber Unit has a white line, such as with a Coaxial Sensor, that fiber is for the Emitter. Insert it into the Emitter section. Refer to Dimensions for the Fiber Unit to see if there is an Emitter fiber.

Fibers with E39-F9 Attachment

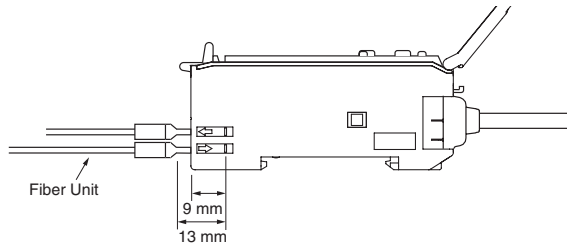


Fibers That Cannot Be Free-Cut (with Sleeves)

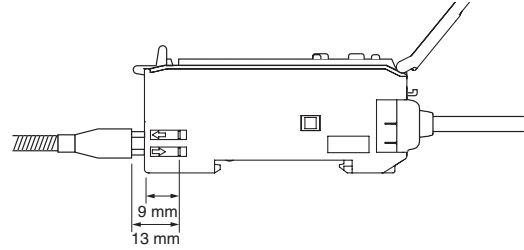

2. Disconnecting Fibers

Remove the protective cover and raise the lock lever to pull out the fibers.

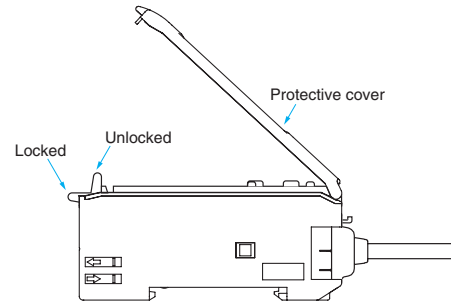

Note: 1. To maintain the fiber properties, confirm that the lock is released before removing the fibers.
2. Be sure to lock or unlock the lock button within an ambient temperature range between -10°C and 40°C .

● Adjusting

Mutual Interference Protection Function

There may be some instability in the digital display values due to light from other sensors. If this occurs, decrease the sensitivity (i.e., decrease the power or increase the threshold) to perform stable detection.

EEPROM Writing Error

If the data is not written to the EEPROM correctly due to a power failure or static-electric noise, initialize the settings with the keys on the Amplifier Unit. ERR/EEP will flash on the display when a writing error has occurred.

Optical Communications

Several Amplifier Units can be slid together and used in groups. Do not, however, slide the Amplifier Units or attempt to remove any of the Amplifier Units during operation.

● Others

Protective Cover

Always keep the protective cover in place when using the Amplifier Unit.

Mobile Console

Use the E3X-MC11-SV2 Mobile Console for the E3X-DA-S-series Amplifier Units.


(Unit: mm)

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Amplifier Units

Amplifier Units with Cables


E3X-DA11-S
E3X-DA41-S
E3X-DAG11-S
E3X-DAG41-S
E3X-DAB11-S
E3X-DAB41-S
E3X-DA11RM-S
E3X-DA41RM-S
E3X-DA11TW-S
E3X-DA41TW-S
E3X-DA11SE-S
E3X-DA41SE-S
E3X-DA11AT-S
E3X-DA41AT-S
E3X-DA11AN-S
E3X-DA41AN-S
E3X-MDA11
E3X-MDA41

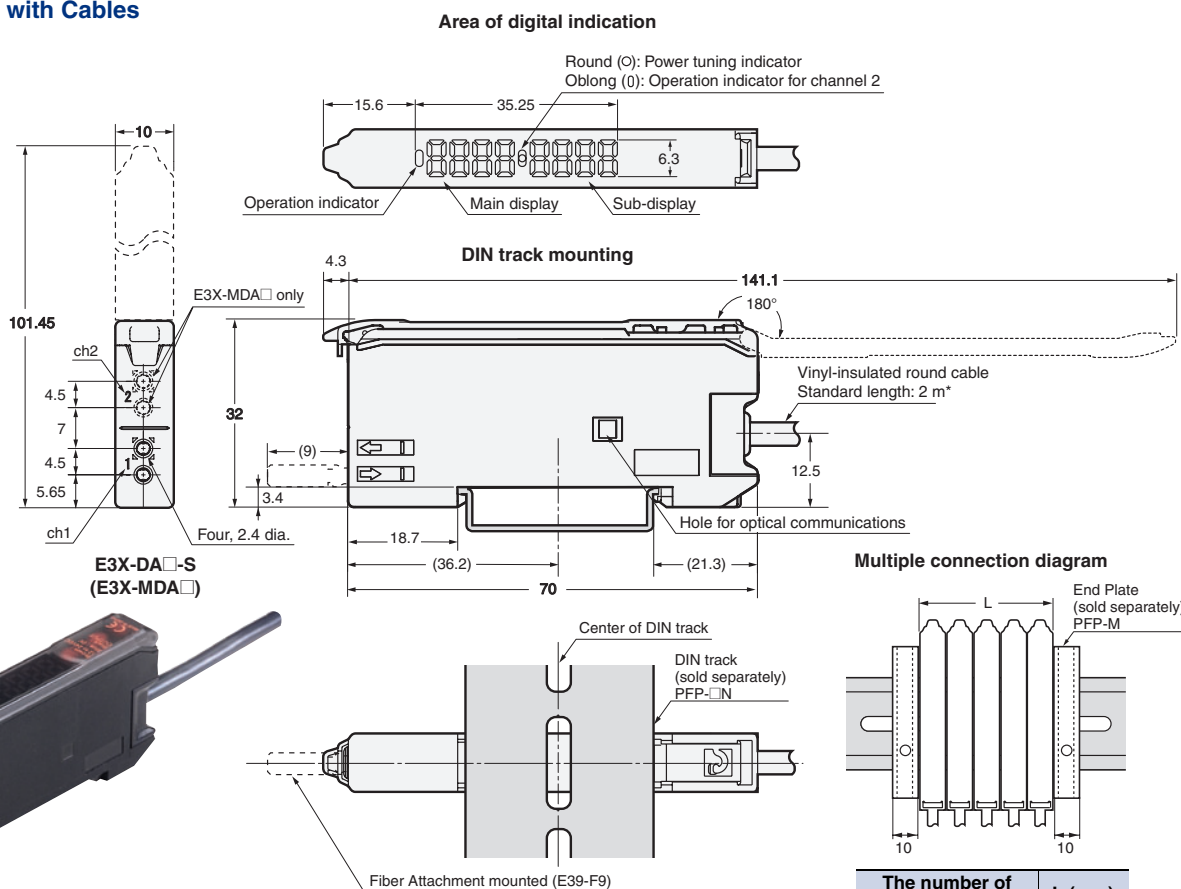

* Cable Specifications

| | |
|---|--|
| E3X-DA11-S -DA41-S -DAG11-S -DAG41-S -DAB11-S -DAB41-S | 4-dia., 3-conductor (Conductor cross section: 0.2 mm ² insulator diameter: 1.1 mm) |
| E3X-DA11TW-S -DA41TW-S -D41RM-S -DA41RM-S | 4-dia., 4-conductor (Conductor cross section: 0.2 mm ² insulator diameter, 1.1 mm) |
| E3X-MDA11 -MDA41 | 4-dia., 2-conductor (Conductor cross section: 0.2 mm ² insulator diameter: 1.1 mm) |


| The number of expansion | L (mm) |
|-------------------------|--------|
| 1 | 10 |
| 2 | 20 |
| 3 | 30 |
| 4 | 40 |
| 5 | 50 |
| 6 | 60 |
| 7 | 70 |
| 8 | 80 |
| 9 | 90 |
| 10 | 100 |

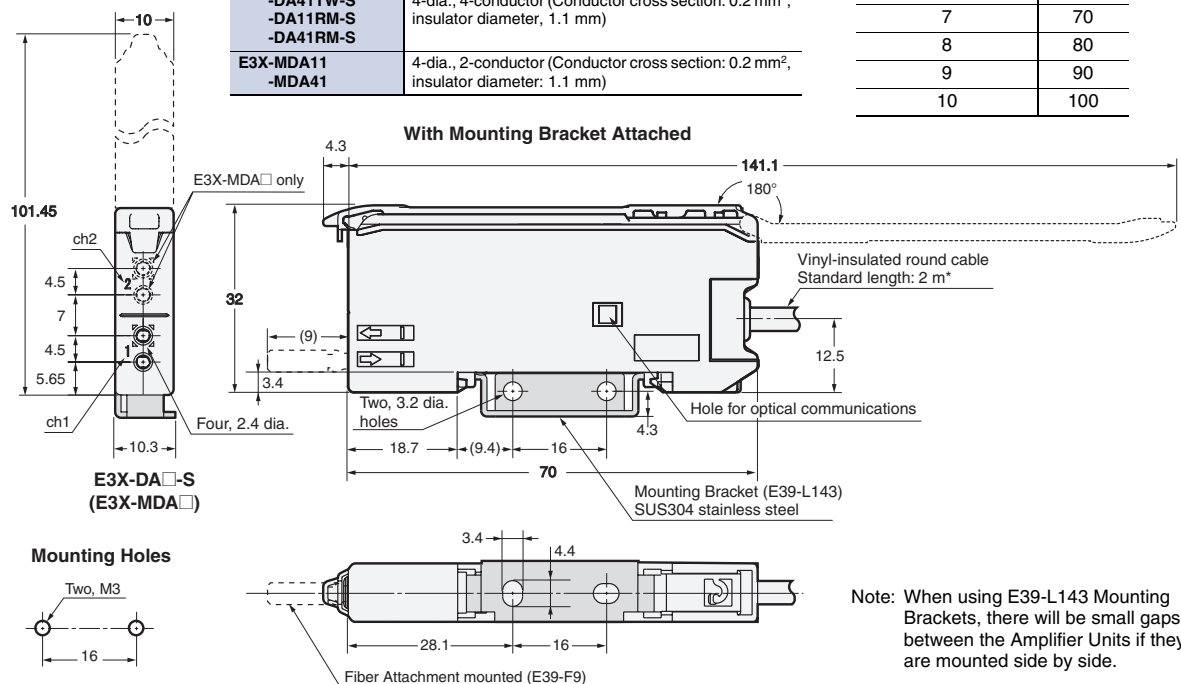

Note: When using E39-L143 Mounting Brackets, there will be small gaps between the Amplifier Units if they are mounted side by side.

Amplifier Units with Connectors


E3X-DA6-S
E3X-DA8-S
E3X-DAG6-S
E3X-DAG8-S
E3X-DAB6-S
E3X-DAB8-S
E3X-DA6RM-S
E3X-DA8RM-S
E3X-DA6TW-S
E3X-DA8TW-S
E3X-DA6SE-S
E3X-DA8SE-S
E3X-DA6AT-S
E3X-DA8AT-S
E3X-MDA6
E3X-MDA8

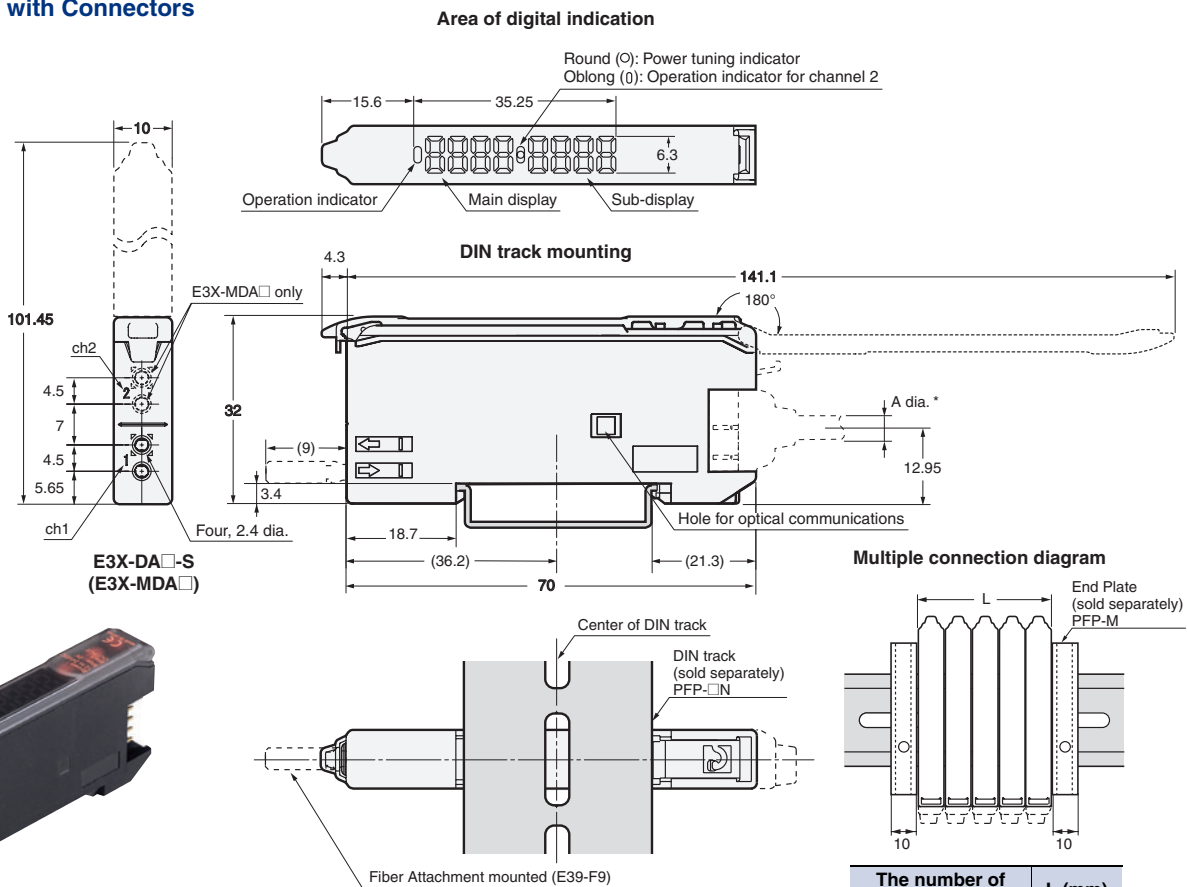

* Cable Diameters

| | |
|--------------------------------|-------------|
| E3X-CN22 (2 conductors) | 4.0-mm dia. |
| E3X-CN21 (4 conductors) | |
| E3X-CN11 (3 conductors) | |
| E3X-CN12 (1 conductor) | 2.6-mm dia. |


| The number of expansion | L (mm) |
|-------------------------|--------|
| 1 | 10 |
| 2 | 20 |
| 3 | 30 |
| 4 | 40 |
| 5 | 50 |
| 6 | 60 |
| 7 | 70 |
| 8 | 80 |
| 9 | 90 |
| 10 | 100 |

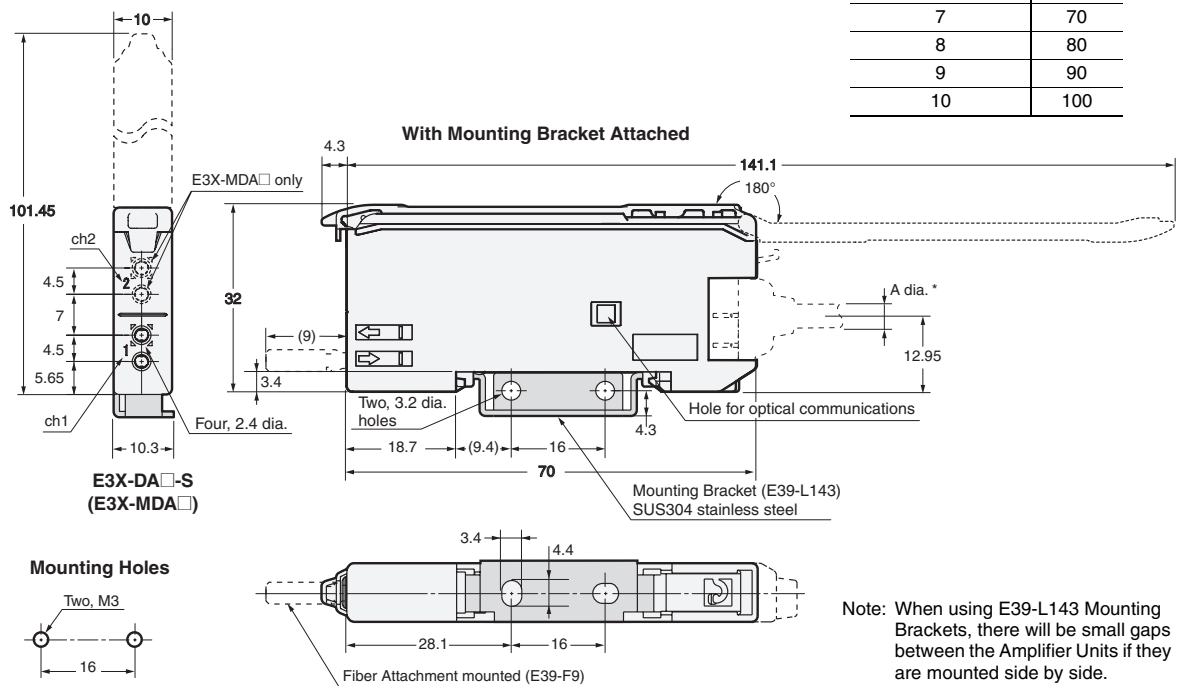

Amplifier Unit Connectors

Master Connectors


E3X-CN11
E3X-CN21

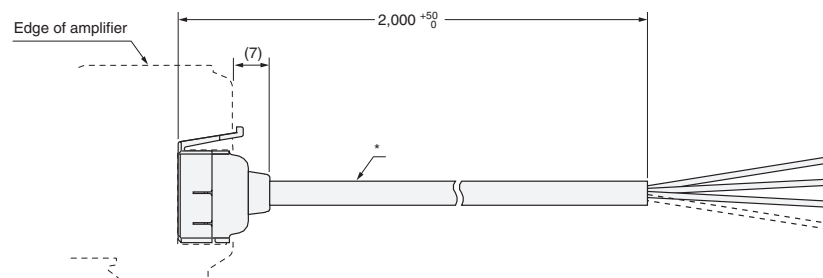

* E3X-CN11: **4 dia. cable / 3 conductors** / Standard length: 2 m (Conductor cross section: 0.2 mm² (AWG24), Insulator diameter: 1.1 mm)
E3X-CN21: **4 dia. cable / 4 conductors** / Standard length: 2 m (Conductor cross section: 0.2 mm² (AWG24), Insulator diameter: 1.1 mm)

Slave Connectors

E3X-CN12
E3X-CN22

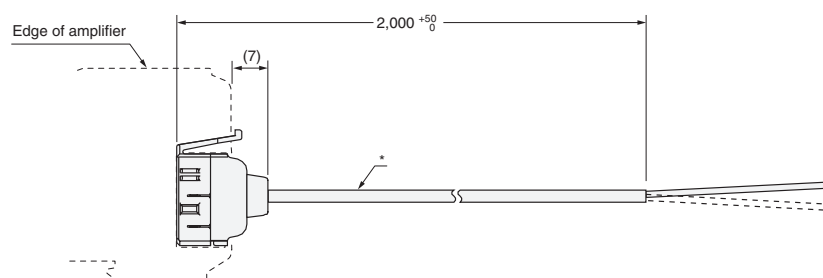


* E3X-CN12: **2.6 dia. cable / 1 conductor** / Standard length: 2 m (Conductor cross section: 0.2 mm² (AWG24), Insulator diameter: 1.1 mm)
E3X-CN22: **4 dia. cable / 2 conductors** / Standard length: 2 m (Conductor cross section: 0.2 mm² (AWG24), Insulator diameter: 1.1 mm)

Mobile Console

E3X-MC11-SV2

Mobile Console

Mobile Console Head

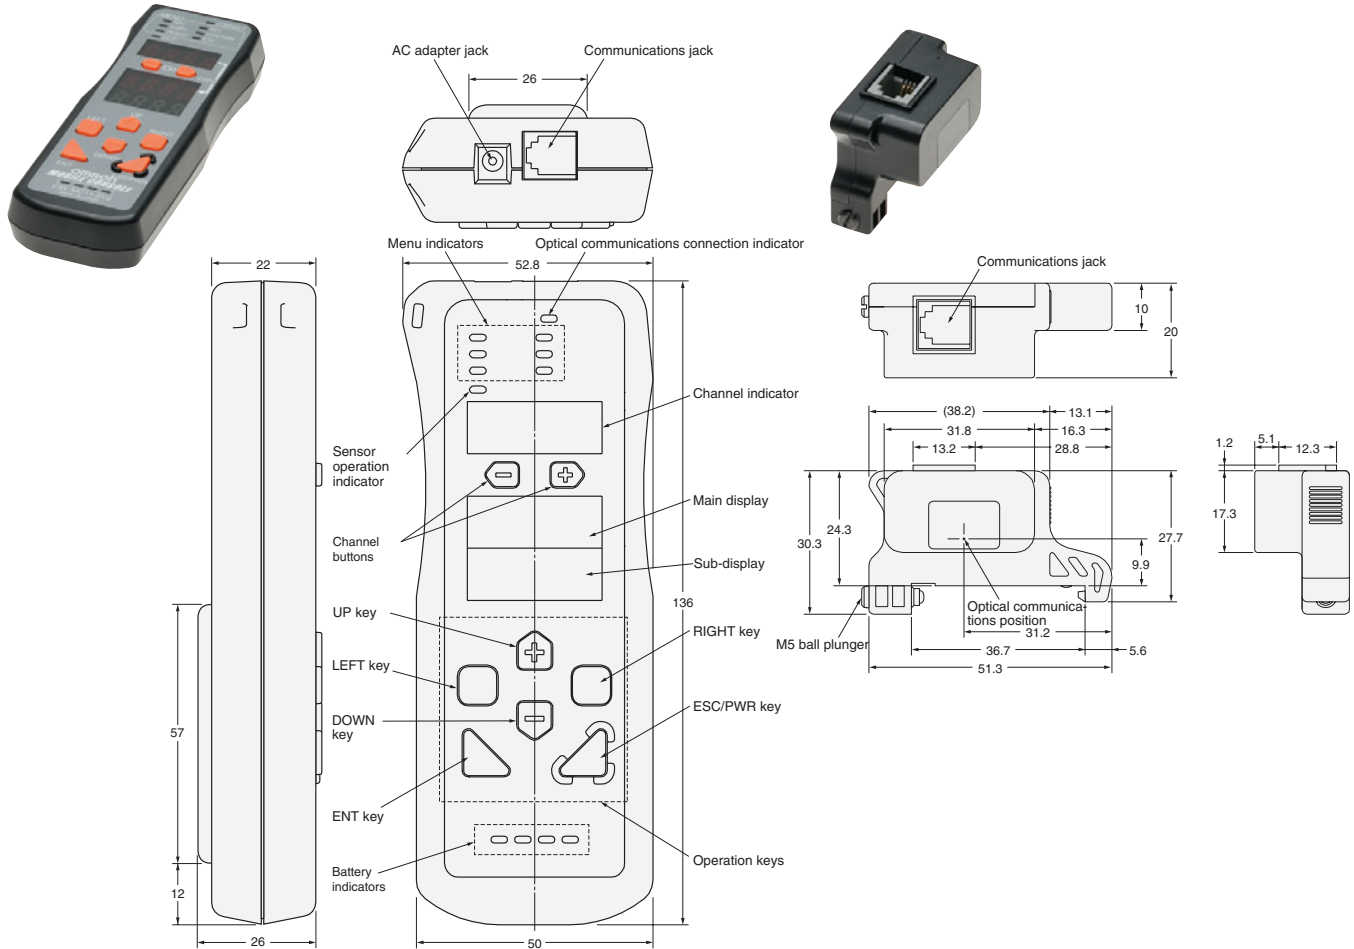

Refer to *E32 Series* for details on Fiber Units.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

E3X-MDA41