


DO NOT
SCALE FROM
THIS PRINT

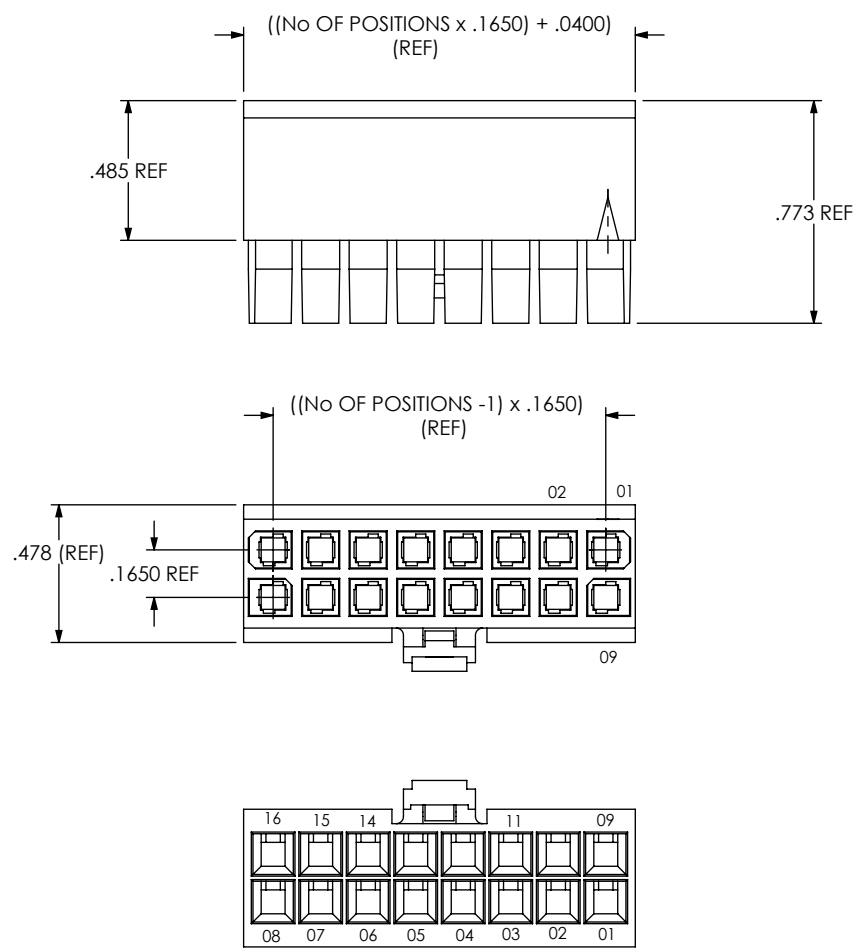



IPBD-XX-D-X

No OF POSITIONS
-02 THRU -15
(PER ROW)

OPTION
-R: RETENTION LATCH
-K: KEYED POLARIZATION

ROW SPECIFICATION
-D: DOUBLE



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ANGLES	PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.	 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code 55322		
		DESCRIPTION: .165 SHROUDED CONTACT BODY		
		DWG. NO. IPBD-XX-D-X		
DO NOT SCALE DRAWING SHEET SCALE: 1.5:1		BY: DEAN P	10-24-2001	SHEET 1 OF 1

F:\DWG\MISC\Mktg\IPBD-XX-D-X-MKT.SLDDRW