

**LM4879 Boomer® Audio Power Amplifier Series 1.1 Watt Audio Power Amplifier**Check for Samples: [LM4879](#), [LM4879MMBD](#), [LM4879SDBD](#)**FEATURES**

- No Output Coupling Capacitors, Snubber Networks or Bootstrap Capacitors Required
- Unity Gain Stable
- Ultra Low Current Shutdown Mode
- Fast Turn On: 80ms (typ), 110ms (max) with 1.0µF Capacitor
- BTL Output Can Drive Capacitive Loads up to 100pF
- Advanced Pop and Click Circuitry Eliminates Noises During Turn-On and Turn-Off Transitions
- 2.2V - 5.0V Operation
- Available in Space-Saving DSBGA, WSON, and VSSOP Packages

**APPLICATIONS**

- Mobile Phones
- PDAs
- Portable electronic devices

**KEY SPECIFICATIONS**

- PSRR: 5V, 3V at 217Hz: 62dB (typ)
- Power Output at 5V, 1%THD+N: 1.1W (typ)
- Power Output at 3V, 1%THD+N: 350mW (typ)
- Shutdown Current: 0.1µA (typ)

**DESCRIPTION**

The LM4879 is an audio power amplifier primarily designed for demanding applications in mobile phones and other portable communication device applications. It is capable of delivering 1.1 watt of continuous average power to an 8Ω BTL load with less than 1% distortion (THD+N) from a 5V<sub>DC</sub> power supply.

Boomer™ audio power amplifiers were designed specifically to provide high quality output power with a minimal amount of external components. The LM4879 does not require output coupling capacitors or bootstrap capacitors, and therefore is ideally suited for lower-power portable applications where minimal space and power consumption are primary requirements.

The LM4879 features a low-power consumption global shutdown mode, which is achieved by driving the shutdown pin with logic low. Additionally, the LM4879 features an internal thermal shutdown protection mechanism.

The LM4879 contains advanced pop and click circuitry which eliminates noises which would otherwise occur during turn-on and turn-off transitions.

The LM4879 is unity-gain stable and can be configured by external gain-setting resistors.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Boomer is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2001–2013, Texas Instruments Incorporated

## TYPICAL APPLICATION



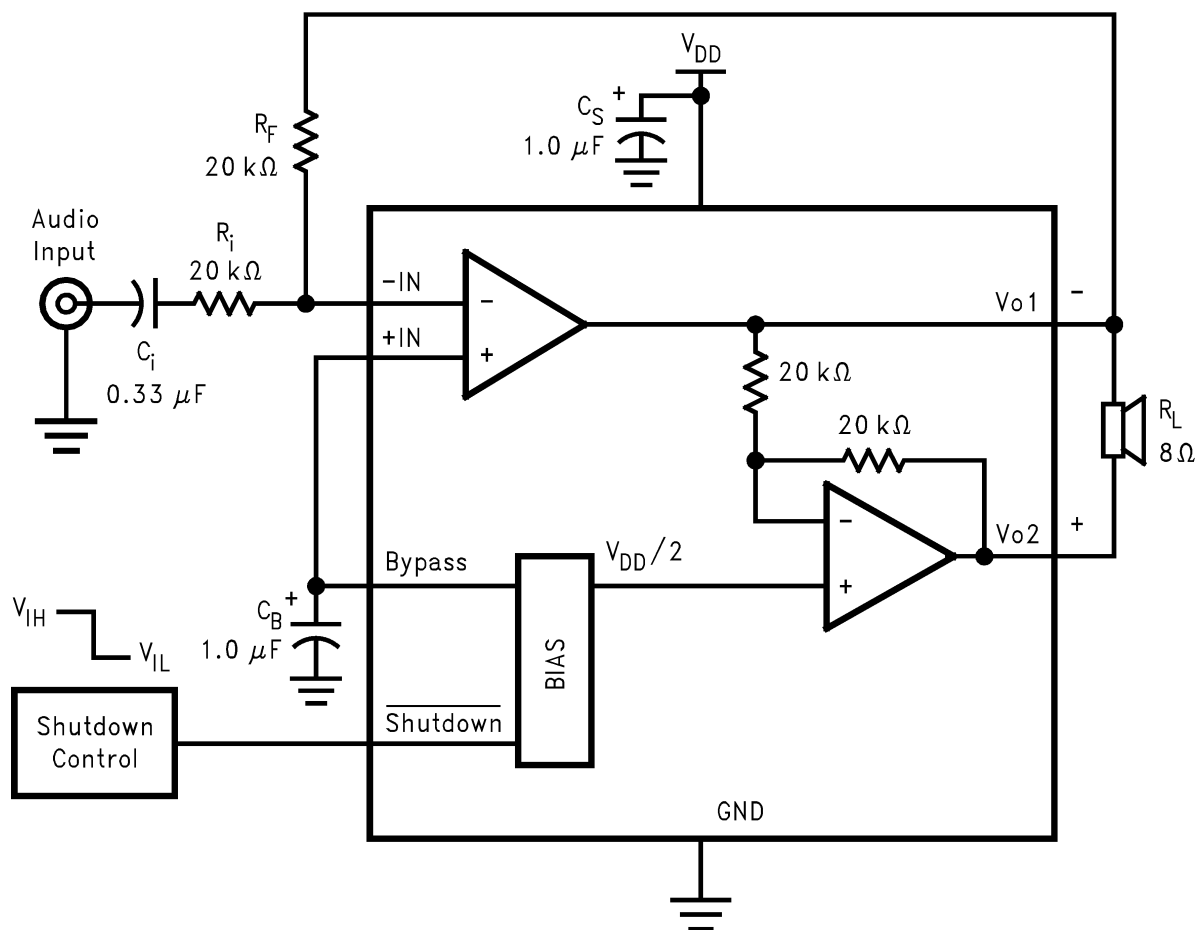


Figure 1. Typical Audio Amplifier Application Circuit


## CONNECTION DIAGRAMS

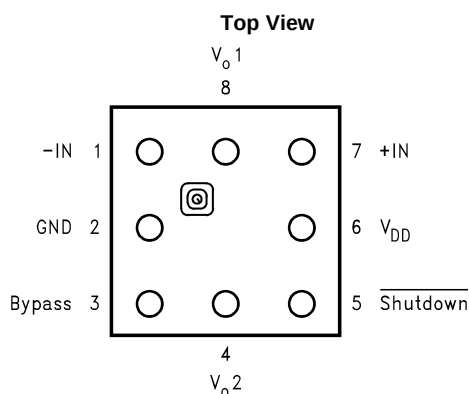


**Figure 2. 8 Bump DSBGA Package**  
See Package Number YPB0008

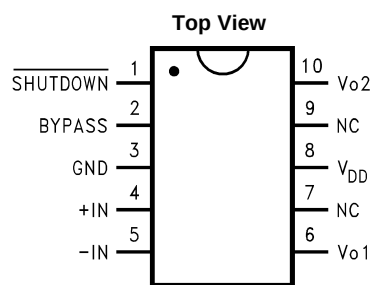


**Figure 3. VSSOP Package**  
See Package Number DGS0010A  
NC = No Connect

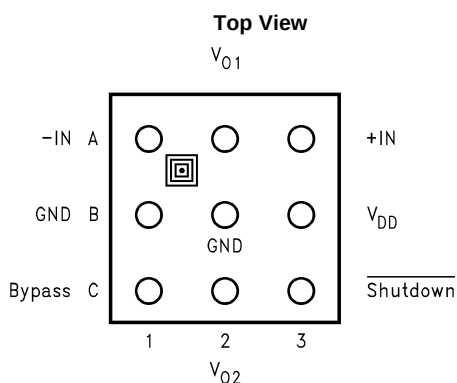

**Figure 4. 9 Bump DSBGA Package**  
See package Number BLA09AAB

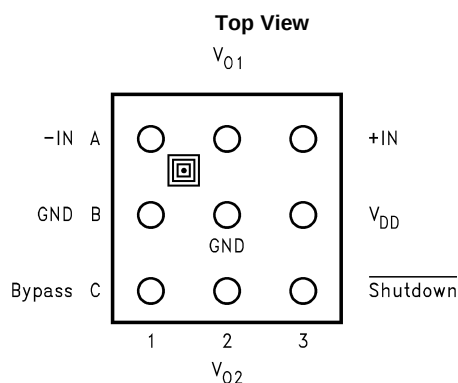

**Figure 5. 9 Bump DSBGA Package**  
See package Number YZR0009AAA

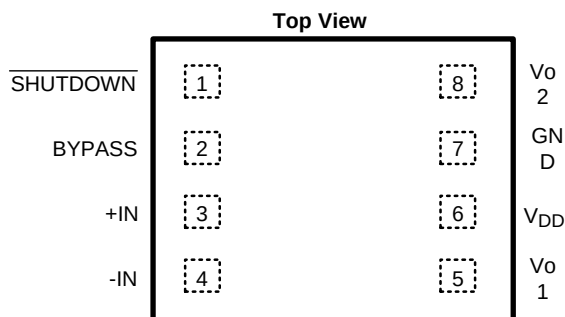

**Figure 6. WSON Package**  
See Package Number NGT0008A



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)(2)</sup>

|                                     |                            |                          |
|-------------------------------------|----------------------------|--------------------------|
| Supply Voltage <sup>(3)</sup>       |                            | 6.0V                     |
| Storage Temperature                 |                            | –65°C to +150°C          |
| Input Voltage                       |                            | –0.3V to $V_{DD} + 0.3V$ |
| Power Dissipation <sup>(4)(5)</sup> |                            | Internally Limited       |
| ESD Susceptibility <sup>(6)</sup>   |                            | 2000V                    |
| ESD Susceptibility <sup>(7)</sup>   |                            | 200V                     |
| Junction Temperature                |                            | 150°C                    |
| Thermal Resistance                  | $\theta_{JA}$ (YPB0008)    | 220°C/W <sup>(8)</sup>   |
|                                     | $\theta_{JA}$ (NGT0008A)   | 64°C/W <sup>(9)</sup>    |
|                                     | $\theta_{JA}$ (YZR0009AAA) | 180°C/W <sup>(8)</sup>   |
|                                     | $\theta_{JA}$ (BLA09AAB)   | 180°C/W <sup>(8)</sup>   |
|                                     | $\theta_{JC}$ (DGS0010A)   | 56°C/W                   |
|                                     | $\theta_{JA}$ (DGS0010A)   | 190°C/W                  |

- (1) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (3) If the product is in shutdown mode, and  $V_{DD}$  exceeds 6V (to a max of 8V  $V_{DD}$ ), then most of the excess current will flow through the ESD protection circuits. If the source impedance limits the current to a max of 10ma, then the part will be protected. If the part is enabled when  $V_{DD}$  is above 6V, circuit performance will be curtailed or the part may be permanently damaged.
- (4) The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{JMAX}$ ,  $\theta_{JA}$ , and the ambient temperature  $T_A$ . The maximum allowable power dissipation is  $P_{DMAX} = (T_{JMAX} - T_A) / \theta_{JA}$  or the number given in Absolute Maximum Ratings, whichever is lower. For the LM4879, see [power derating](#) curves for additional information.
- (5) Maximum power dissipation ( $P_{DMAX}$ ) in the device occurs at an output power level significantly below full output power.  $P_{DMAX}$  can be calculated using [Equation 2](#) shown in the [APPLICATION INFORMATION](#) section. It may also be obtained from the power dissipation graphs.
- (6) Human body model, 100pF discharged through a 1.5k $\Omega$  resistor.
- (7) Machine Model, 220pF–240pF discharged through all pins.
- (8) All bumps have the same thermal resistance and contribute equally when used to lower thermal resistance.
- (9) The stated  $\theta_{JA}$  is achieved when the WSON package's DAP is soldered to a 4in<sup>2</sup> copper heatsink plain.

## OPERATING RATINGS

|                                                   |                                                    |
|---------------------------------------------------|----------------------------------------------------|
| Temperature Range $T_{MIN} \leq T_A \leq T_{MAX}$ | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ |
| Supply Voltage                                    | $2.2V \leq V_{DD} \leq 5.5V$                       |

## ELECTRICAL CHARACTERISTICS $V_{DD} = 5V^{(1)(2)}$

The following specifications apply for the circuit shown in [Figure 1](#) unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .

| Parameter  |                                 | Test Conditions                                                                          | LM4879                          |                         | Units<br>(Limits) |
|------------|---------------------------------|------------------------------------------------------------------------------------------|---------------------------------|-------------------------|-------------------|
|            |                                 |                                                                                          | Typ <sup>(3)</sup>              | Limit <sup>(4)(5)</sup> |                   |
| $I_{DD}$   | Quiescent Power Supply Current  | $V_{IN} = 0V$ , 8Ω BTL                                                                   | 5                               | 10                      | mA (max)          |
| $I_{SD}$   | Shutdown Current                | $V_{shutdown} = GND$                                                                     | 0.1                             | 2.0                     | μA (max)          |
| $V_{OS}$   | Output Offset Voltage           |                                                                                          | 5                               | 40                      | mV (max)          |
| $P_o$      | Output Power                    | THD+N = 1% (max); f = 1kHz                                                               | 1.1                             | 0.9                     | W (min)           |
| THD+N      | Total Harmonic Distortion+Noise | $P_o = 0.4W_{rms}$ ; f = 1kHz                                                            | 0.1                             |                         | %                 |
| PSRR       | Power Supply Rejection Ratio    | $V_{ripple} = 200mV_{sine}$ p-p, $C_B = 1.0\mu F$<br>Input terminated with 10Ω to ground | 68 (f = 1kHz)<br>62 (f = 217Hz) | 55                      | dB (min)          |
| $V_{SDIH}$ | Shutdown High Input Voltage     |                                                                                          |                                 | 1.4                     | V (min)           |
| $V_{SDIL}$ | Shutdown Low Input Voltage      |                                                                                          |                                 | 0.4                     | V (max)           |
| $T_{WU}$   | Wake-up Time                    | $C_B = 1.0\mu F$                                                                         | 80                              | 110                     | ms (max)          |
| $N_{OUT}$  | Output Noise                    | A-Weighted; Measured across 8Ω BTL<br>Input terminated with 10Ω to ground                | 26                              |                         | μV <sub>RMS</sub> |

- (1) All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at 25°C and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level).
- (5) For DSBGA only, shutdown current is measured in a Normal Room Environment. Exposure to direct sunlight will increase  $I_{SD}$  by a maximum of 2μA.

## ELECTRICAL CHARACTERISTICS $V_{DD} = 3.0V^{(1)(2)}$

The following specifications apply for the circuit shown in [Figure 1](#) unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .

| Parameter  |                                 | Test Conditions                                                                          | LM4879                          |                         | Units<br>(Limits) |
|------------|---------------------------------|------------------------------------------------------------------------------------------|---------------------------------|-------------------------|-------------------|
|            |                                 |                                                                                          | Typ <sup>(3)</sup>              | Limit <sup>(4)(5)</sup> |                   |
| $I_{DD}$   | Quiescent Power Supply Current  | $V_{IN} = 0V$ , 8Ω BTL                                                                   | 4.5                             | 9                       | mA (max)          |
| $I_{SD}$   | Shutdown Current                | $V_{shutdown} = GND$                                                                     | 0.1                             | 2.0                     | μA (max)          |
| $V_{OS}$   | Output Offset Voltage           |                                                                                          | 5                               | 40                      | mV (max)          |
| $P_o$      | Output Power                    | THD+N = 1% (max); f = 1kHz                                                               | 350                             | 320                     | mW                |
| THD+N      | Total Harmonic Distortion+Noise | $P_o = 0.15W_{rms}$ ; f = 1kHz                                                           | 0.1                             |                         | %                 |
| PSRR       | Power Supply Rejection Ratio    | $V_{ripple} = 200mV_{sine}$ p-p, $C_B = 1.0\mu F$<br>Input terminated with 10Ω to ground | 68 (f = 1kHz)<br>62 (f = 217Hz) | 55                      | dB (min)          |
| $V_{SDIH}$ | Shutdown High Input Voltage     |                                                                                          |                                 | 1.4                     | V (min)           |
| $V_{SDIL}$ | Shutdown Low Input Voltage      |                                                                                          |                                 | 0.4                     | V (max)           |
| $T_{WU}$   | Wake-up Time                    | $C_B = 1.0\mu F$                                                                         | 80                              | 110                     | ms (max)          |
| $N_{OUT}$  | Output Noise                    | A-Weighted; Measured across 8Ω BTL<br>Input terminated with 10Ω to ground                | 26                              |                         | μV <sub>RMS</sub> |

- (1) All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at 25°C and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level).
- (5) For DSBGA only, shutdown current is measured in a Normal Room Environment. Exposure to direct sunlight will increase  $I_{SD}$  by a maximum of 2μA.

**ELECTRICAL CHARACTERISTICS**  $V_{DD} = 2.6V^{(1)(2)}$ 

The following specifications apply for the circuit shown in [Figure 1](#) unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .

| Parameter |                                 | Test Conditions                                                                                 | LM4879                                  |                         | Units<br>(Limits) |
|-----------|---------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------|-------------------|
|           |                                 |                                                                                                 | Typ <sup>(3)</sup>                      | Limit <sup>(4)(5)</sup> |                   |
| $I_{DD}$  | Quiescent Power Supply Current  | $V_{IN} = 0V$ , $8\Omega$ BTL                                                                   | 3.5                                     |                         | mA                |
| $I_{SD}$  | Shutdown Current                | $V_{shutdown} = GND$                                                                            | 0.1                                     |                         | $\mu A$           |
| $V_{OS}$  | Output Offset Voltage           |                                                                                                 | 5                                       |                         | mV                |
| $P_o$     | Output Power                    | THD+N = 1% (max); $f = 1kHz$                                                                    |                                         |                         |                   |
|           |                                 | $R_L = 8\Omega$                                                                                 | 250                                     |                         | mW                |
|           |                                 | $R_L = 4\Omega$                                                                                 | 350                                     |                         |                   |
| THD+N     | Total Harmonic Distortion+Noise | $P_o = 0.1W_{rms}$ ; $f = 1kHz$                                                                 | 0.1                                     |                         | %                 |
| PSRR      | Power Supply Rejection Ratio    | $V_{ripple} = 200mV_{sine}$ p-p, $C_B = 1.0\mu F$<br>Input terminated with $10\Omega$ to ground | 55 ( $f = 1kHz$ )<br>55 ( $f = 217Hz$ ) |                         | dB                |

- (1) All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at  $25^\circ C$  and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level).
- (5) For DSBGA only, shutdown current is measured in a Normal Room Environment. Exposure to direct sunlight will increase  $I_{SD}$  by a maximum of  $2\mu A$ .

**EXTERNAL COMPONENTS DESCRIPTION**

(See [Figure 1](#))

| Components |       | Functional Description                                                                                                                                                                                                                                                                                      |
|------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.         | $R_i$ | Inverting input resistance which sets the closed-loop gain in conjunction with $R_f$ . This resistor also forms a high pass filter with $C_i$ at $f_c = 1/(2\pi R_i C_i)$ .                                                                                                                                 |
| 2.         | $C_i$ | Input coupling capacitor which blocks the DC voltage at the amplifiers input terminals. Also creates a highpass filter with $R_i$ at $f_c = 1/(2\pi R_i C_i)$ . Refer to the section, <a href="#">PROPER SELECTION OF EXTERNAL COMPONENTS</a> , for an explanation of how to determine the value of $C_i$ . |
| 3.         | $R_f$ | Feedback resistance which sets the closed-loop gain in conjunction with $R_i$ .                                                                                                                                                                                                                             |
| 4.         | $C_S$ | Supply bypass capacitor which provides power supply filtering. Refer to the <a href="#">POWER SUPPLY BYPASSING</a> section for information concerning proper placement and selection of the supply bypass capacitor.                                                                                        |
| 5.         | $C_B$ | Bypass pin capacitor which provides half-supply filtering. Refer to the section, <a href="#">PROPER SELECTION OF EXTERNAL COMPONENTS</a> , for information concerning proper placement and selection of $C_B$ .                                                                                             |

## TYPICAL PERFORMANCE CHARACTERISTICS

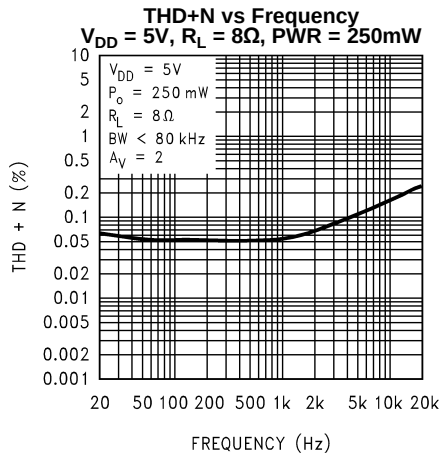


Figure 7.

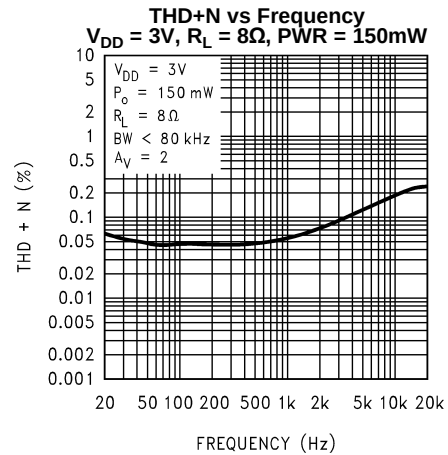


Figure 8.

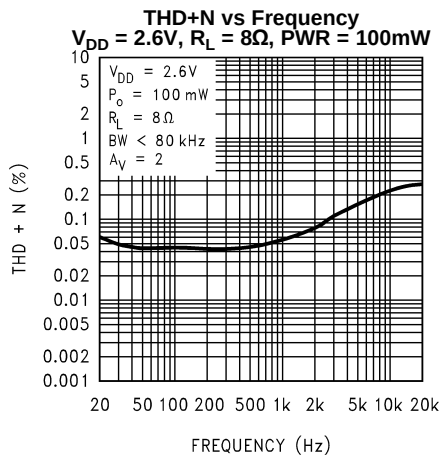


Figure 9.

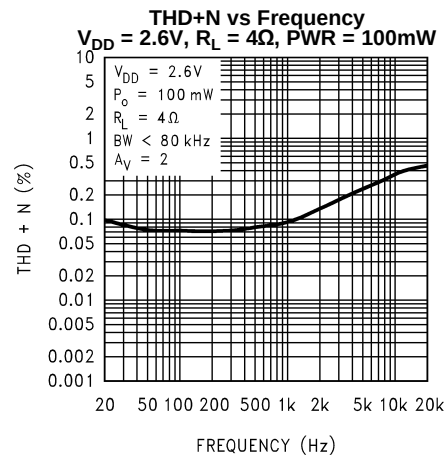


Figure 10.

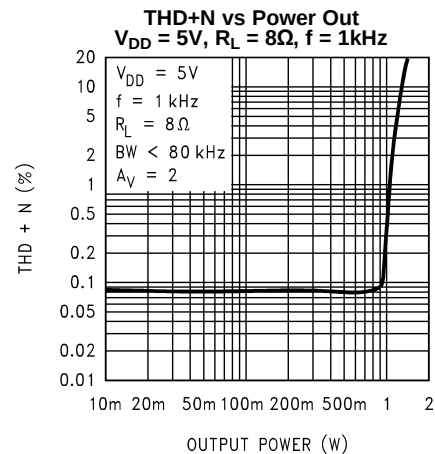


Figure 11.







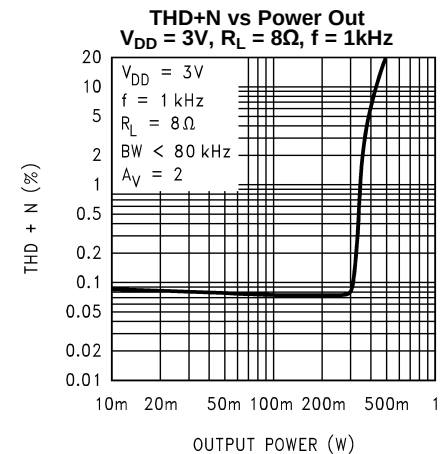



Figure 12.

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)****Figure 13.****Figure 14.****Figure 15.****Figure 16.****Figure 17.****Figure 18.**

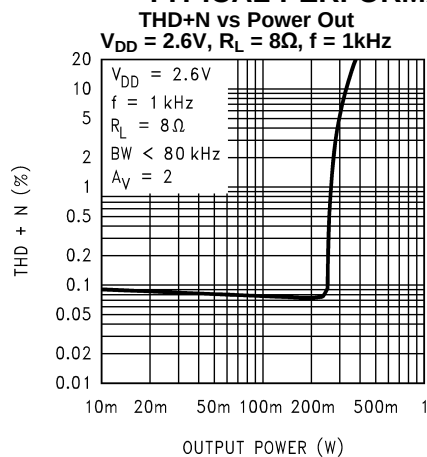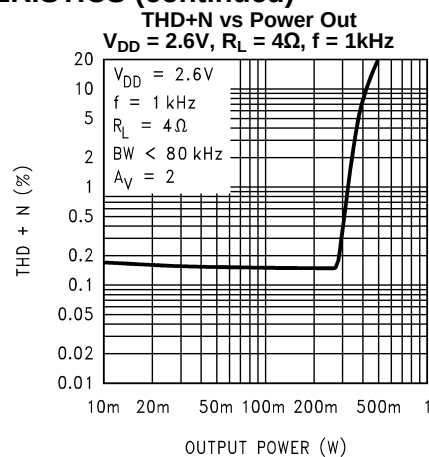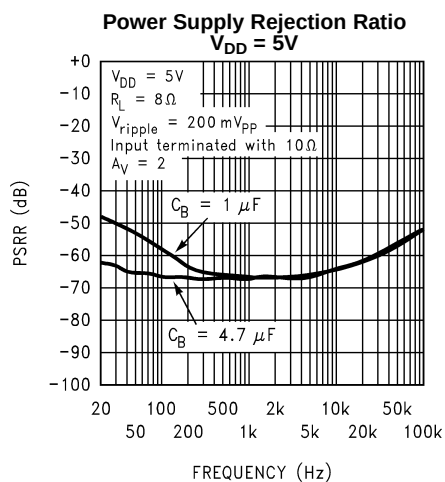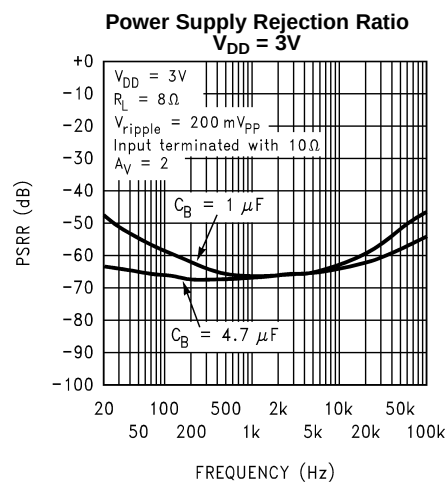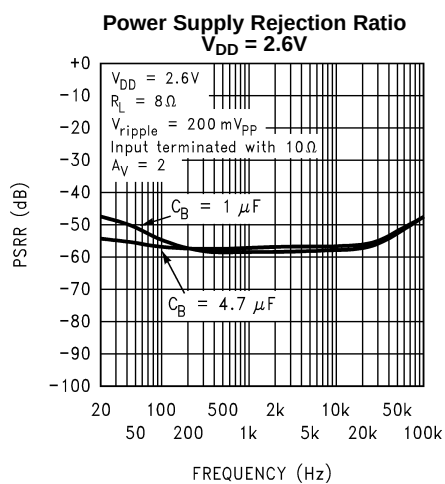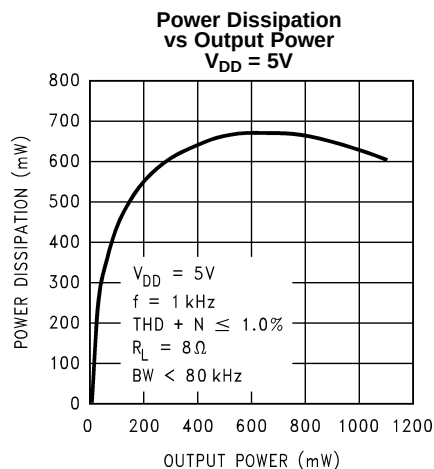


**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

**Power Dissipation  
vs Output Power  
 $V_{DD} = 3V$**

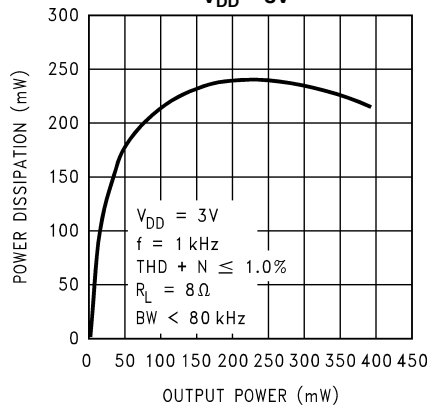


**Figure 19.**

**Power Dissipation  
vs Output Power  
 $V_{DD} = 2.6V$**

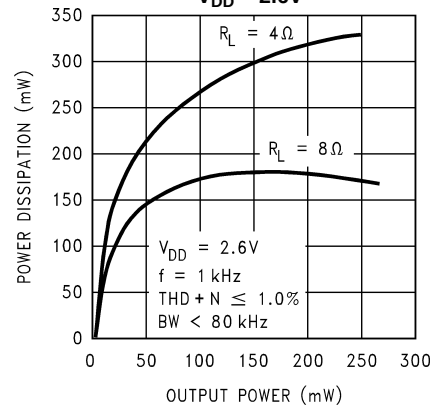


**Figure 20.**

**Power Dissipation  
vs Output Power (LLP Package)  
 $V_{DD} = 5V$**

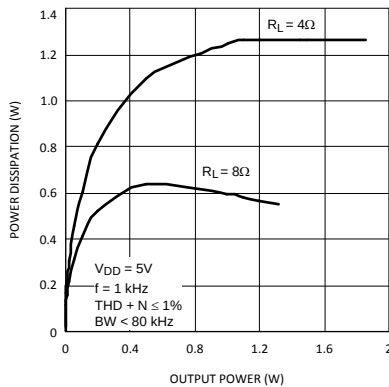


**Figure 21.**

**Power Derating - MSOP  
 $P_{DMAX} = 670mW$   
 $V_{DD} = 5V, R_L = 8Ω$**

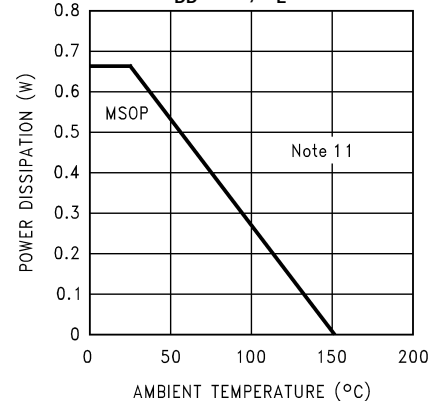


**Figure 22.**

**Power Derating - 8 Bump  $\mu$ SMD  
 $P_{DMAX} = 670mW$   
 $V_{DD} = 5V, R_L = 8Ω$**






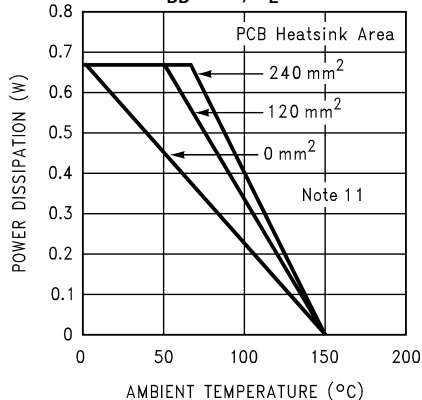


**Figure 23.**

**Power Derating - 9 Bump  $\mu$ SMD  
 $P_{DMAX} = 670mW$   
 $V_{DD} = 5V, R_L = 8Ω$**

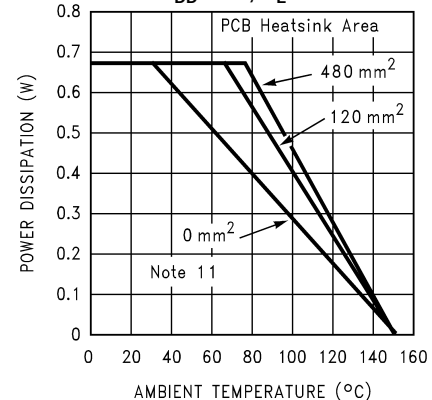

**Figure 24.**

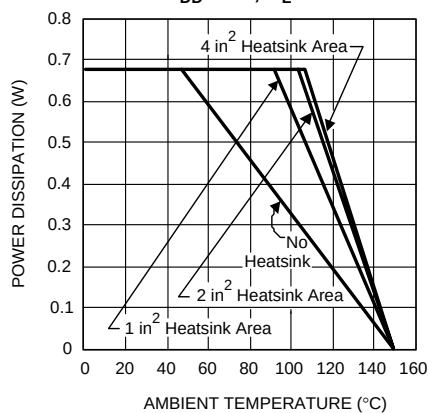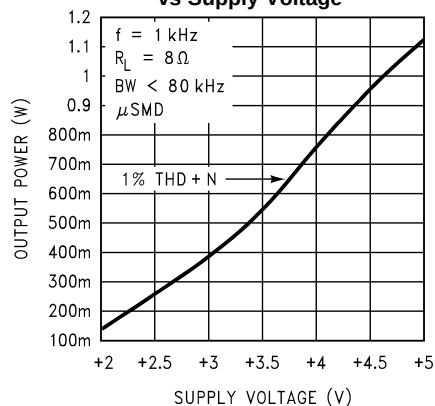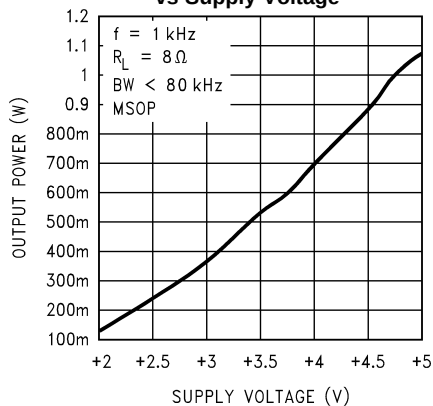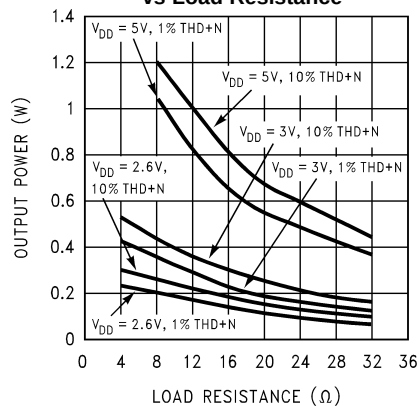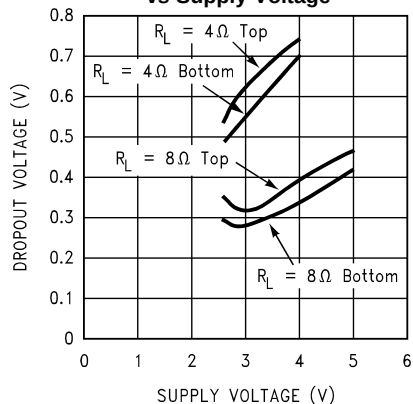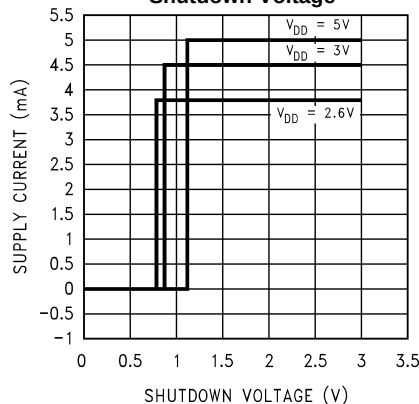**TYPICAL PERFORMANCE CHARACTERISTICS (continued)****Power Derating - LLP** $P_{D\text{MAX}} = 670\text{mW}$  $V_{DD} = 5\text{V}$ ,  $R_L = 8$ **Figure 25.****Output Power  
vs Supply Voltage****Figure 26.****Output Power  
vs Supply Voltage****Figure 27.****Output Power  
vs Load Resistance****Figure 28.****Clipping (Dropout) Voltage  
vs Supply Voltage****Figure 29.****Supply Current  
Shutdown Voltage****Figure 30.**

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

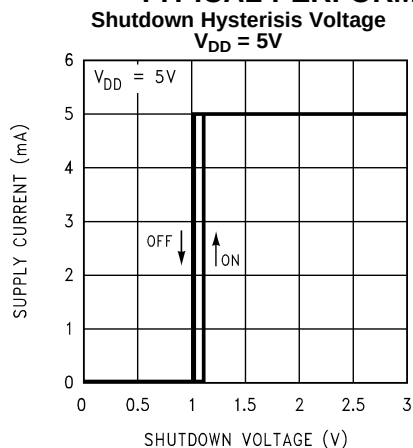


Figure 31.

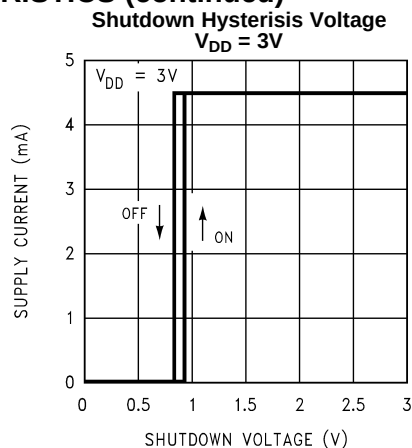


Figure 32.

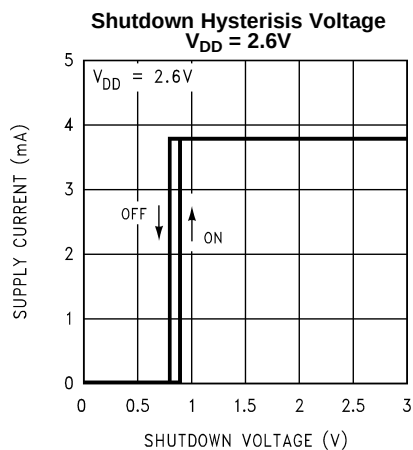


Figure 33.

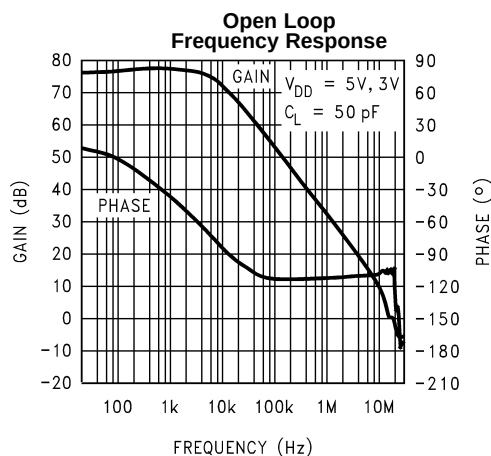


Figure 34.

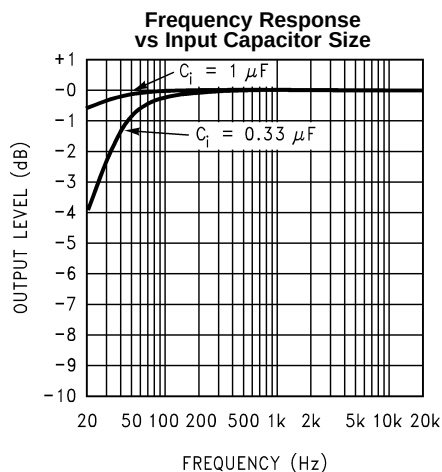


Figure 35.

## APPLICATION INFORMATION

### BRIDGE CONFIGURATION EXPLANATION

As shown in [Figure 1](#), the LM4879 has two operational amplifiers internally, allowing for a few different amplifier configurations. The first amplifier's gain is externally configurable, while the second amplifier is internally fixed in a unity-gain, inverting configuration. The closed-loop gain of the first amplifier is set by selecting the ratio of  $R_f$  to  $R_i$  while the second amplifier's gain is fixed by the two internal 20 kΩ resistors. [Figure 1](#) shows that the output of amplifier one serves as the input to amplifier two which results in both amplifiers producing signals identical in magnitude, but out of phase by 180°. Consequently, the differential gain for the IC is

$$A_{VD} = 2 * (R_f/R_i) \quad (1)$$

By driving the load differentially through outputs Vo1 and Vo2, an amplifier configuration commonly referred to as "bridged mode" is established. Bridged mode operation is different from the classical single-ended amplifier configuration where one side of the load is connected to ground.

A bridge amplifier design has a few distinct advantages over the single-ended configuration, as it provides differential drive to the load, thus doubling output swing for a specified supply voltage. Four times the output power is possible as compared to a single-ended amplifier under the same conditions. This increase in attainable output power assumes that the amplifier is not current limited or clipped. In order to choose an amplifier's closed-loop gain without causing excessive clipping, please refer to the [AUDIO POWER AMPLIFIER DESIGN](#) section.

A bridge configuration, such as the one used in LM4879, also creates a second advantage over single-ended amplifiers. Since the differential outputs, Vo1 and Vo2, are biased at half-supply, no net DC voltage exists across the load. This eliminates the need for an output coupling capacitor which is required in a single supply, single-ended amplifier configuration. Without an output coupling capacitor, the half-supply bias across the load would result in both increased internal IC power dissipation and also possible loudspeaker damage.

### POWER DISSIPATION

Power dissipation is a major concern when designing a successful amplifier, whether the amplifier is bridged or single-ended. A direct consequence of the increased power delivered to the load by a bridge amplifier is an increase in internal power dissipation. Since the LM4879 has two operational amplifiers in one package, the maximum internal power dissipation is 4 times that of a single-ended amplifier. The maximum power dissipation for a given application can be derived from the power dissipation graphs or from [Equation 2](#).

$$P_{DMAX} = 4 * (V_{DD})^2 / (2\pi^2 R_L) \quad (2)$$

It is critical that the maximum junction temperature ( $T_{JMAX}$ ) of 150°C is not exceeded.  $T_{JMAX}$  can be determined from the power derating curves by using  $P_{DMAX}$  and the PC board foil area. By adding additional copper foil, the thermal resistance of the application can be reduced from a free air value of 150°C/W, resulting in higher  $P_{DMAX}$ . Additional copper foil can be added to any of the leads connected to the LM4879. It is especially effective when connected to  $V_{DD}$ , GND, and the output pins. Refer to the application information on the LM4879 reference design board for an example of good heat sinking. If  $T_{JMAX}$  still exceeds 150°C, then additional changes must be made. These changes can include reduced supply voltage, higher load impedance, or reduced ambient temperature. Internal power dissipation is a function of output power. Refer to the [TYPICAL PERFORMANCE CHARACTERISTICS](#) curves for power dissipation information for different output powers and output loading.

### POWER SUPPLY BYPASSING

As with any amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. The capacitor location on both the bypass and power supply pins should be as close to the device as possible. Typical applications employ a 5V regulator with 10 μF tantalum or electrolytic capacitor and a ceramic bypass capacitor which aid in supply stability. This does not eliminate the need for bypassing the supply nodes of the LM4879. The selection of a bypass capacitor, especially  $C_B$ , is dependent upon PSRR requirements, click and pop performance (as explained in the section, [PROPER SELECTION OF EXTERNAL COMPONENTS](#)), system cost, and size constraints.

## SHUTDOWN FUNCTION

In order to reduce power consumption while not in use, the LM4879 contains a shutdown pin to externally turn off the amplifier's bias circuitry. This shutdown feature turns the amplifier off when a logic low is placed on the shutdown pin. By switching the shutdown pin to ground, the LM4879 supply current draw will be minimized in idle mode. While the device will be disabled with shutdown pin voltages less than  $0.4V_{DC}$ , the idle current may be greater than the typical value of  $0.1\mu A$ . (Idle current is measured with the shutdown pin tied to ground).

In many applications, a microcontroller or microprocessor output is used to control the shutdown circuitry to provide a quick, smooth transition into shutdown. Another solution is to use a single-pole, single-throw switch in conjunction with an external pull-up resistor. When the switch is closed, the shutdown pin is connected to ground which disables the amplifier. If the switch is open, then the external pull-up resistor to  $V_{DD}$  will enable the LM4879. This scheme ensures that the shutdown pin will not float thus preventing unwanted state changes.

## PROPER SELECTION OF EXTERNAL COMPONENTS

Proper selection of external components in applications using integrated power amplifiers is critical to optimize device and system performance. While the LM4879 is tolerant of external component combinations, consideration to component values must be used to maximize overall system quality.

The LM4879 is unity-gain stable which gives the designer maximum system flexibility. The LM4879 should be used in low gain configurations to minimize THD+N values, and maximize the signal to noise ratio. Low gain configurations require large input signals to obtain a given output power. Input signals equal to or greater than 1 V<sub>rms</sub> are available from sources such as audio codecs. Please refer to the section, [AUDIO POWER AMPLIFIER DESIGN](#), for a more complete explanation of proper gain selection.

Besides gain, one of the major considerations is the closed-loop bandwidth of the amplifier. To a large extent, the bandwidth is dictated by the choice of external components shown in [Figure 1](#). The input coupling capacitor,  $C_i$ , forms a first order high pass filter which limits low frequency response. This value should be chosen based on needed frequency response for a few distinct reasons.

## SELECTION OF INPUT CAPACITOR SIZE

Large input capacitors are both expensive and space hungry for portable designs. Clearly, a certain sized capacitor is needed to couple in low frequencies without severe attenuation. But in many cases the speakers used in portable systems, whether internal or external, have little ability to reproduce signals below 100 Hz to 150 Hz. Thus, using a large input capacitor may not increase actual system performance.

In addition to system cost and size, click and pop performance is effected by the size of the input coupling capacitor,  $C_i$ . A larger input coupling capacitor requires more charge to reach its quiescent DC voltage (nominally  $1/2 V_{DD}$ ). This charge comes from the output via the feedback and is apt to create pops upon device enable. Thus, by minimizing the capacitor size based on necessary low frequency response, turn-on pops can be minimized.

Besides minimizing the input capacitor size, careful consideration should be paid to the bypass capacitor value. Bypass capacitor,  $C_B$ , is the most critical component to minimize turn-on pops since it determines how fast the LM4879 turns on. The slower the LM4879's outputs ramp to their quiescent DC voltage (nominally  $1/2 V_{DD}$ ), the smaller the turn-on pop. Choosing  $C_B$  equal to  $1.0 \mu F$  along with a small value of  $C_i$  (in the range of  $0.1 \mu F$  to  $0.39 \mu F$ ), should produce a virtually clickless and popless shutdown function. While the device will function properly, (no oscillations or motorboating), with  $C_B$  equal to  $0.1 \mu F$ , the device will be much more susceptible to turn-on clicks and pops. Thus, a value of  $C_B$  equal to  $1.0 \mu F$  is recommended in all but the most cost sensitive designs.

## AUDIO POWER AMPLIFIER DESIGN

### A 1W/8Ω AUDIO AMPLIFIER

Given:

|                 |                         |
|-----------------|-------------------------|
| Power Output    | 1 Wrms                  |
| Load Impedance  | 8Ω                      |
| Input Level     | 1 Vrms                  |
| Input Impedance | 20 kΩ                   |
| Bandwidth       | 100 Hz–20 kHz ± 0.25 dB |

A designer must first determine the minimum supply rail to obtain the specified output power. By extrapolating from the Output Power vs Supply Voltage graphs in the [TYPICAL PERFORMANCE CHARACTERISTICS](#) section, the supply rail can be easily found. A second way to determine the minimum supply rail is to calculate the required  $V_{\text{opeak}}$  using [Equation 3](#) and add the output voltage. Using this method, the minimum supply voltage would be  $(V_{\text{opeak}} + (V_{\text{ODTOP}} + V_{\text{ODBOT}}))$ , where  $V_{\text{ODBOT}}$  and  $V_{\text{ODTOP}}$  are extrapolated from the Dropout Voltage vs Supply Voltage curve in the [TYPICAL PERFORMANCE CHARACTERISTICS](#) section.

$$V_{\text{opeak}} = \sqrt{2R_L P_O} \quad (3)$$

5V is a standard voltage, in most applications, chosen for the supply rail. Extra supply voltage creates headroom that allows the LM4879 to reproduce peaks in excess of 1W without producing audible distortion. At this time, the designer must make sure that the power supply choice along with the output impedance does not violate the conditions explained in the [POWER DISSIPATION](#) section.

Once the power dissipation equations have been addressed, the required differential gain can be determined from [Equation 4](#).

$$A_{VD} \geq \sqrt{(P_O R_L)} / (V_{IN}) = V_{\text{orms}} / V_{\text{inrms}} \quad (4)$$

$$A_{VD} = (R_f / R_i) \quad (5)$$

From [Equation 4](#), the minimum  $A_{VD}$  is 2.83; use  $A_{VD} = 3$ .

Since the desired input impedance was 20 kΩ, and with a  $A_{VD}$  of 3, a ratio of 1.5:1 of  $R_f$  to  $R_i$  results in an allocation of  $R_i = 20$  kΩ and  $R_f = 30$  kΩ. The final design step is to address the bandwidth requirements which must be stated as a pair of –3 dB frequency points. Five times away from a –3 dB point is 0.17 dB down from passband response which is better than the required ±0.25 dB specified.

$$f_L = 100 \text{ Hz} / 5 = 20 \text{ Hz}$$

$$f_H = 20 \text{ kHz} * 5 = 100 \text{ kHz}$$

As stated in the [EXTERNAL COMPONENTS DESCRIPTION](#) section,  $R_i$  in conjunction with  $C_i$  create a high pass filter.

$$C_i \geq 1 / (2\pi * 20 \text{ k}\Omega * 20 \text{ Hz}) = 0.397 \text{ }\mu\text{F}; \text{ use } 0.39 \text{ }\mu\text{F}$$

The high frequency pole is determined by the product of the desired frequency pole,  $f_H$ , and the differential gain,  $A_{VD}$ . With a  $A_{VD} = 3$  and  $f_H = 100$  kHz, the resulting GBWP = 300 kHz which is much smaller than the LM4879 GBWP of 10 MHz. This figure displays that if a designer has a need to design an amplifier with a higher differential gain, the LM4879 can still be used without running into bandwidth limitations.

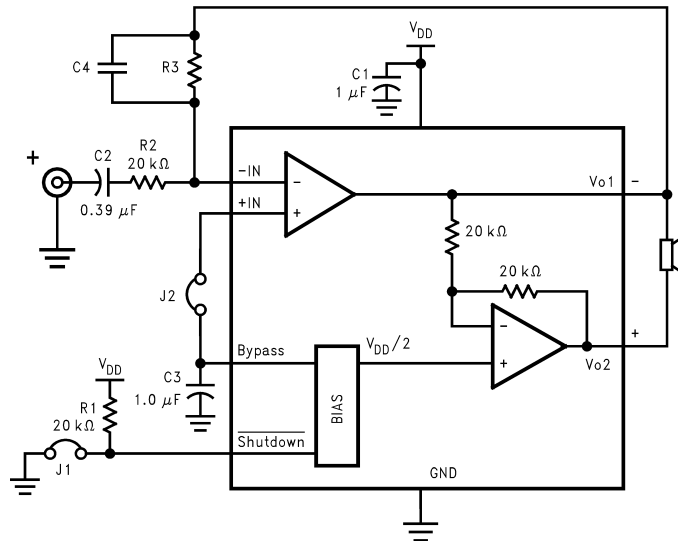


Figure 36. Higher Gain Audio Amplifier

The LM4879 is unity-gain stable and requires no external components besides gain-setting resistors, an input coupling capacitor, and proper supply bypassing in the typical application. However, if a closed-loop differential gain of greater than 10 is required, a feedback capacitor (C4) may be needed as shown in Figure 36 to bandwidth limit the amplifier. This feedback capacitor creates a low pass filter that eliminates possible high frequency oscillations. Care should be taken when calculating the -3dB frequency in that an incorrect combination of  $R_3$  and  $C_4$  will cause rolloff before 20kHz. A typical combination of feedback resistor and capacitor that will not produce audio band high frequency rolloff is  $R_3 = 20\text{k}\Omega$  and  $C_4 = 25\text{pF}$ . These components result in a -3dB point of approximately 320 kHz.

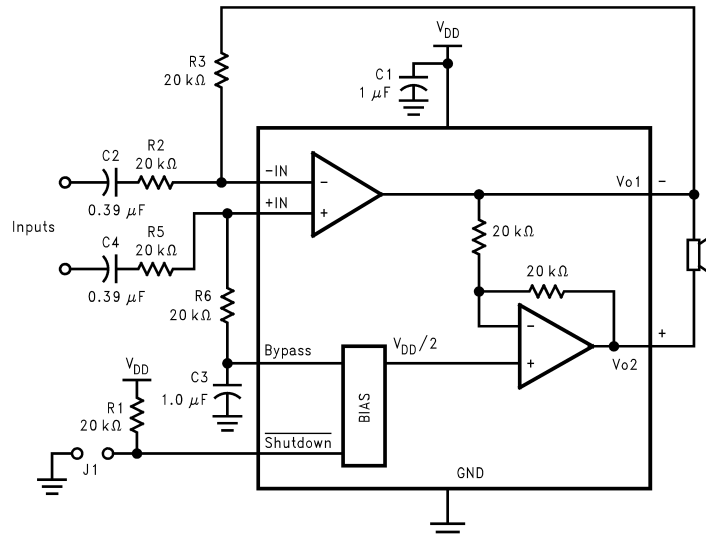


Figure 37. Differential Amplifier Configuration for LM4879

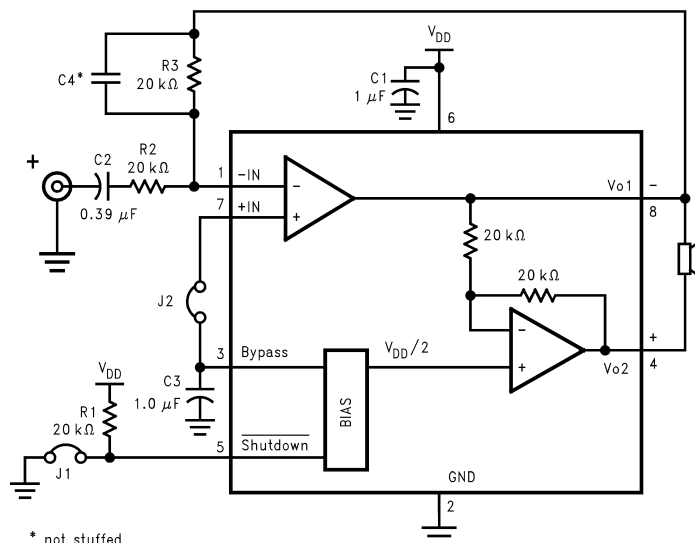


Figure 38. Reference Design Board and Layout - DSBGA

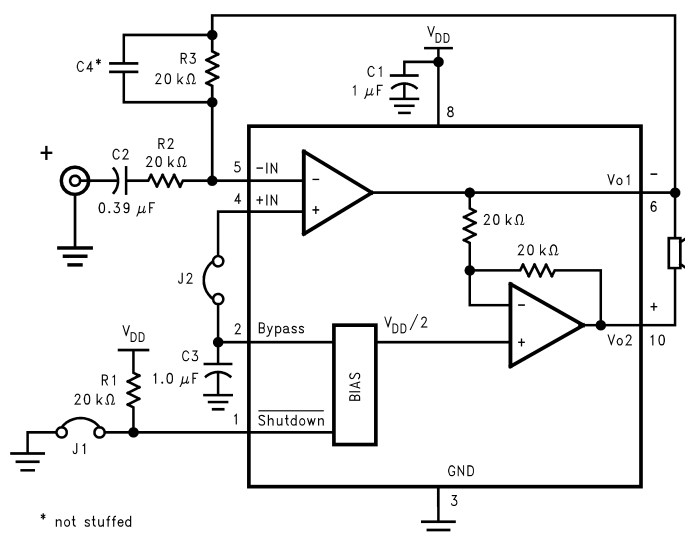


Figure 39. Reference Design Board and PCB Layout Guidelines - VSSOP and SO Boards



LM4879 DSBGA BOARD ARTWORK

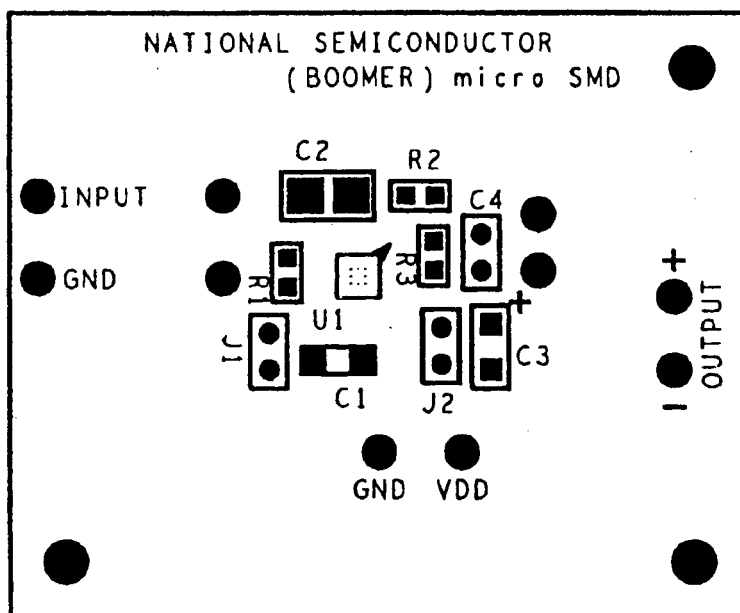


Figure 40. Silk Screen

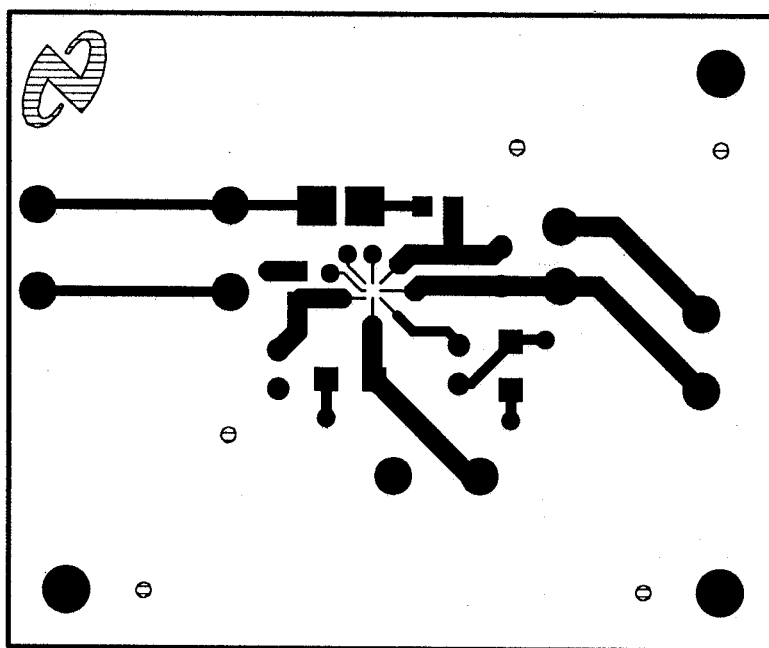


Figure 41. Top Layer

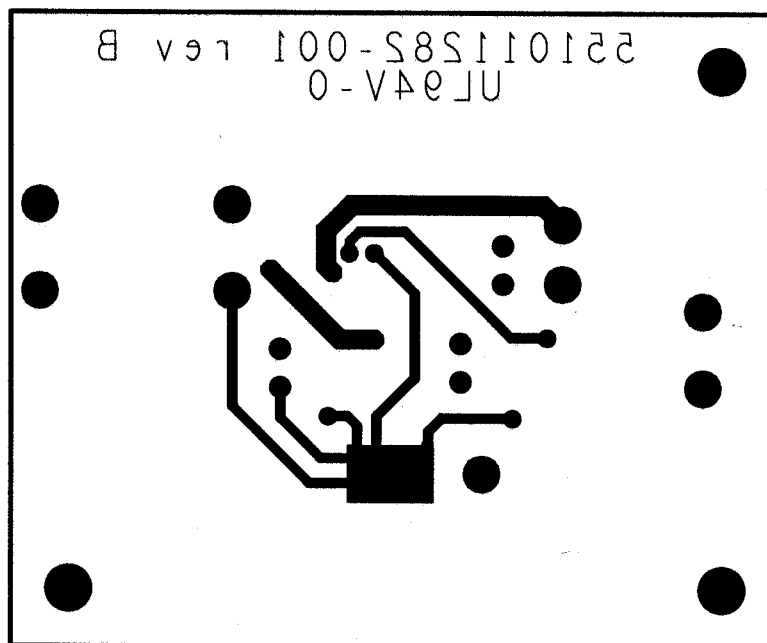


Figure 42. Bottom Layer

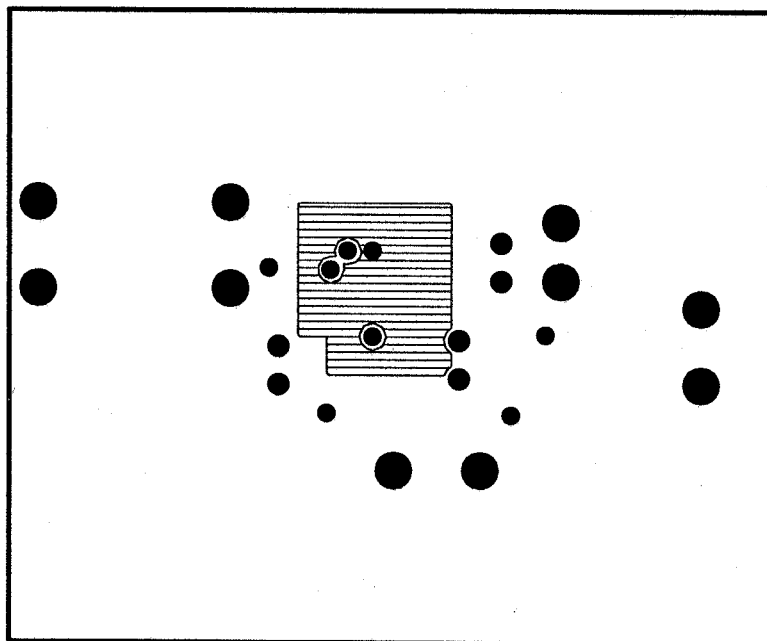


Figure 43. Inner Layer Ground

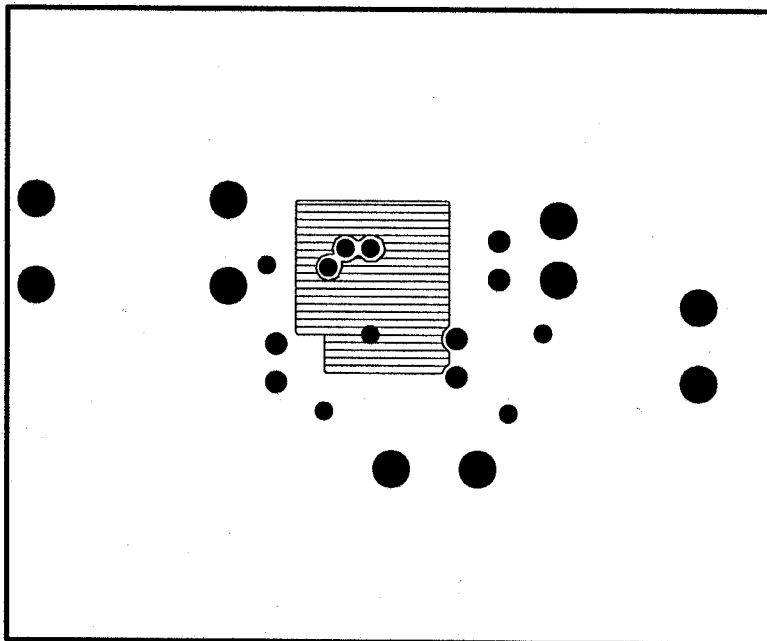


Figure 44. Inner Layer  $V_{DD}$

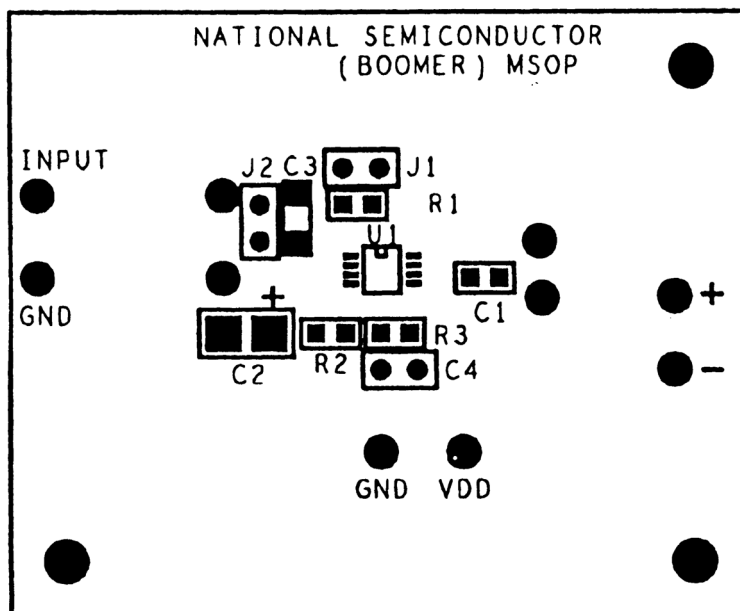
**LM4879 VSSOP DEMO BOARD ARTWORK**

Figure 45. Silk Screen


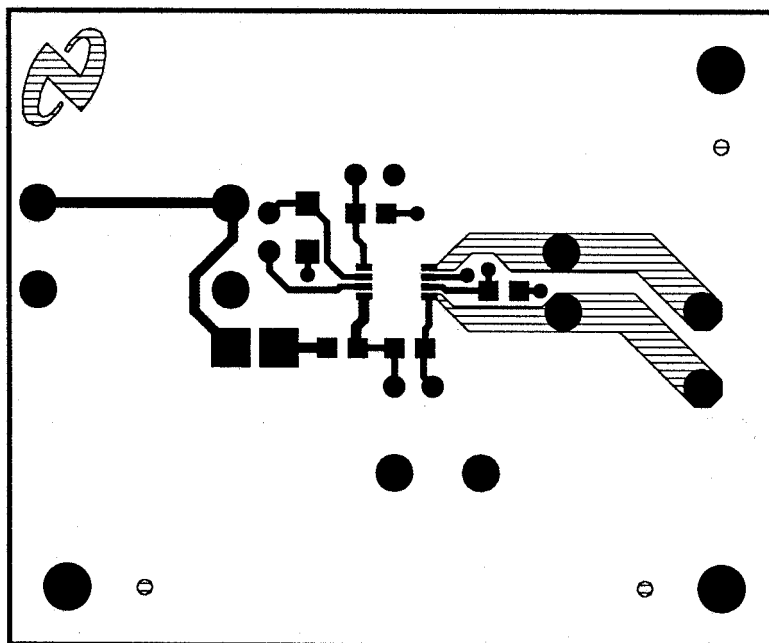




Figure 46. Top Layer

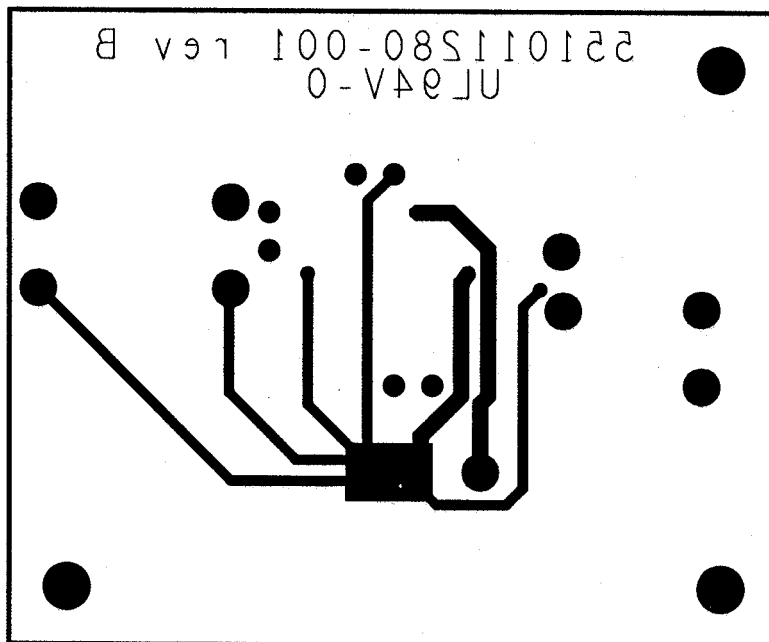


**Figure 47. Bottom Layer**

**Table 1. Mono LM4879 Reference Design Boards Bill of Material for all 3 Demo Boards**

| Item | Part Number   | Part Description                       | Qty | Ref Designator |
|------|---------------|----------------------------------------|-----|----------------|
| 1    | 551011208-001 | LM4879 Mono Reference Design Board     | 1   |                |
| 10   | 482911183-001 | LM4879 Audio AMP                       | 1   | U1             |
| 20   | 151911207-001 | Tant Cap 1uF 16V 10                    | 1   | C1             |
| 21   | 151911207-002 | Cer Cap 0.39uF 50V Z5U 20% 1210        | 1   | C2             |
| 25   | 152911207-001 | Tant Cap 1.0uF 16V 10                  | 1   | C3             |
| 30   | 472911207-001 | Res 20K Ohm 1/10W 5                    | 3   | R1, R2, R3     |
| 35   | 210007039-002 | Jumper Header Vertical Mount 2X1 0.100 | 2   | J1, J2         |

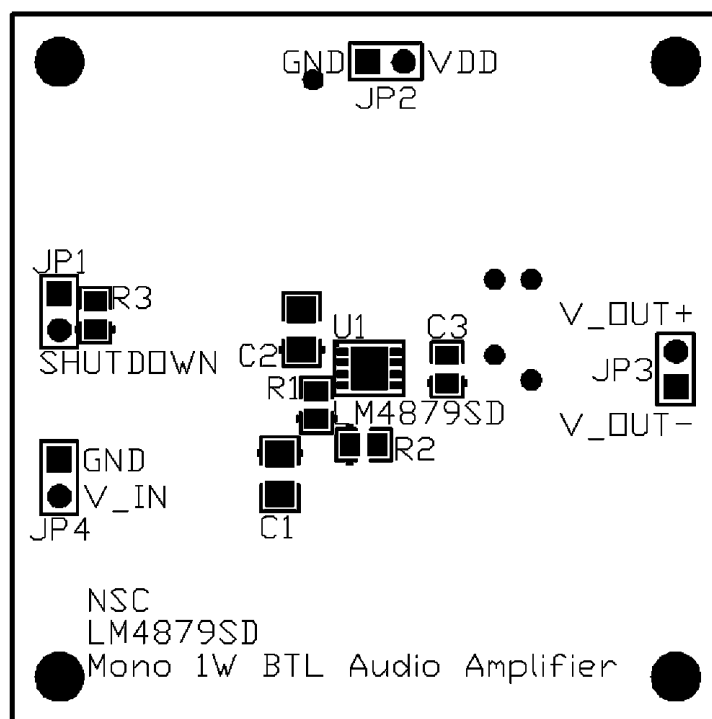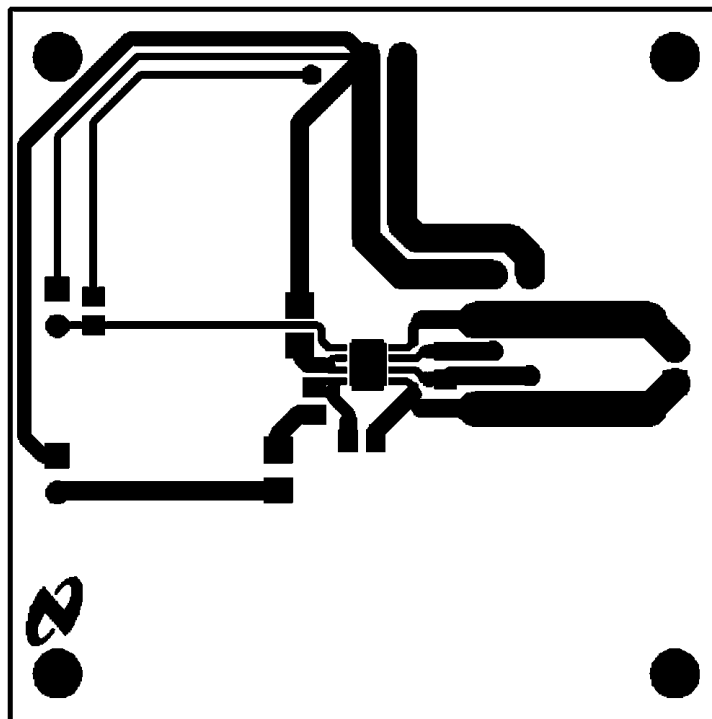**LM4879 WSON DEMO BOARD ARTWORK****Figure 48. Silk Screen****Figure 49. Top Layer**

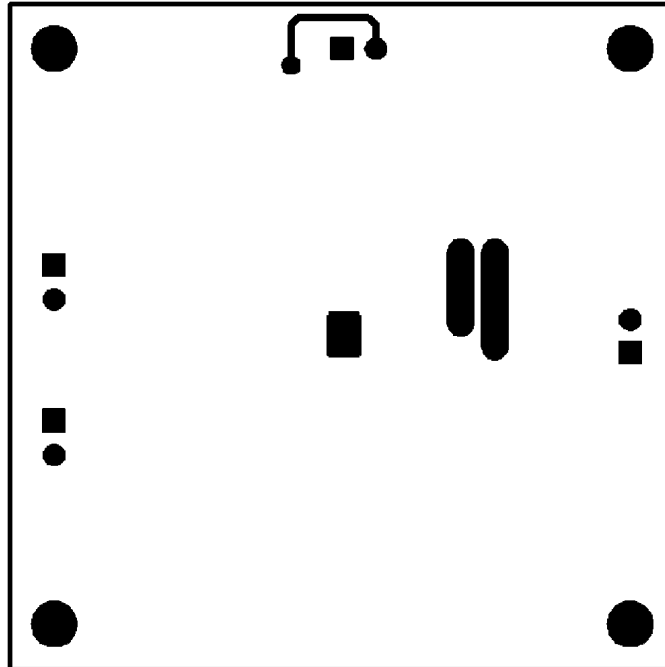

**Figure 50. Bottom Layer**

## **PCB LAYOUT GUIDELINES**

This section provides practical guidelines for mixed signal PCB layout that involves various digital/analog power and ground traces. Designers should note that these are only "rule-of-thumb" recommendations and the actual results will depend heavily on the final layout.

### **GENERAL MIXED SIGNAL LAYOUT RECOMMENDATION**

#### **POWER AND GROUND CIRCUITS**

For 2 layer mixed signal design, it is important to isolate the digital power and ground trace paths from the analog power and ground trace paths. Star trace routing techniques (bringing individual traces back to a central point rather than daisy chaining traces together in a serial manner) can have a major impact on low level signal performance. Star trace routing refers to using individual traces to feed power and ground to each circuit or even device. This technique will take require a greater amount of design time but will not increase the final price of the board. The only extra parts required may be some jumpers.

#### **SINGLE-POINT POWER / GROUND CONNECTIONS**

The analog power traces should be connected to the digital traces through a single point (link). A "Pi-filter" can be helpful in minimizing high frequency noise coupling between the analog and digital sections. It is further recommended to put digital and analog power traces over the corresponding digital and analog ground traces to minimize noise coupling.

#### **PLACEMENT OF DIGITAL AND ANALOG COMPONENTS**

All digital components and high-speed digital signals traces should be located as far away as possible from analog components and circuit traces.

#### **AVOIDING TYPICAL DESIGN / LAYOUT PROBLEMS**

Avoid ground loops or running digital and analog traces parallel to each other (side-by-side) on the same PCB layer. When traces must cross over each other do it at 90 degrees. Running digital and analog traces at 90 degrees to each other from the top to the bottom side as much as possible will minimize capacitive noise coupling and cross talk.

## REVISION HISTORY

| Changes from Revision F (May 2013) to Revision G           | Page               |
|------------------------------------------------------------|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">23</a> |



## PACKAGING INFORMATION

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM4879MMX/NOPB</a> | Active        | Production           | VSSOP (DGS)   10 | 3500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | G79                 |
| LM4879MMX/NOPB.A               | Active        | Production           | VSSOP (DGS)   10 | 3500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | G79                 |
| <a href="#">LM4879SD/NOPB</a>  | Active        | Production           | WSOP (NGT)   8   | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | L4879SD             |
| LM4879SD/NOPB.A                | Active        | Production           | WSOP (NGT)   8   | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | L4879SD             |
| <a href="#">LM4879SDX/NOPB</a> | Active        | Production           | WSOP (NGT)   8   | 4500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | L4879SD             |
| LM4879SDX/NOPB.A               | Active        | Production           | WSOP (NGT)   8   | 4500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | L4879SD             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




## TAPE AND REEL INFORMATION

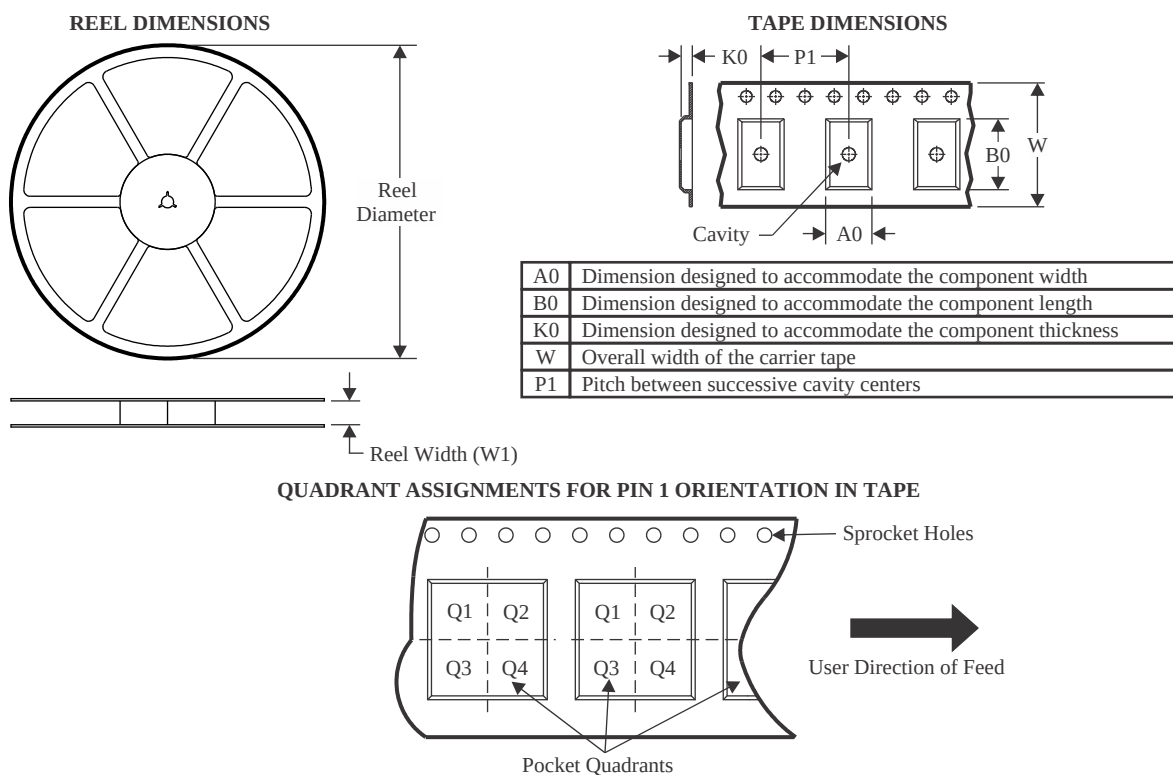

\*All dimensions are nominal


| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM4879MMX/NOPB | VSSOP        | DGS             | 10   | 3500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM4879SD/NOPB  | WSOP         | NGT             | 8    | 1000 | 177.8              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LM4879SDX/NOPB | WSOP         | NGT             | 8    | 4500 | 330.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

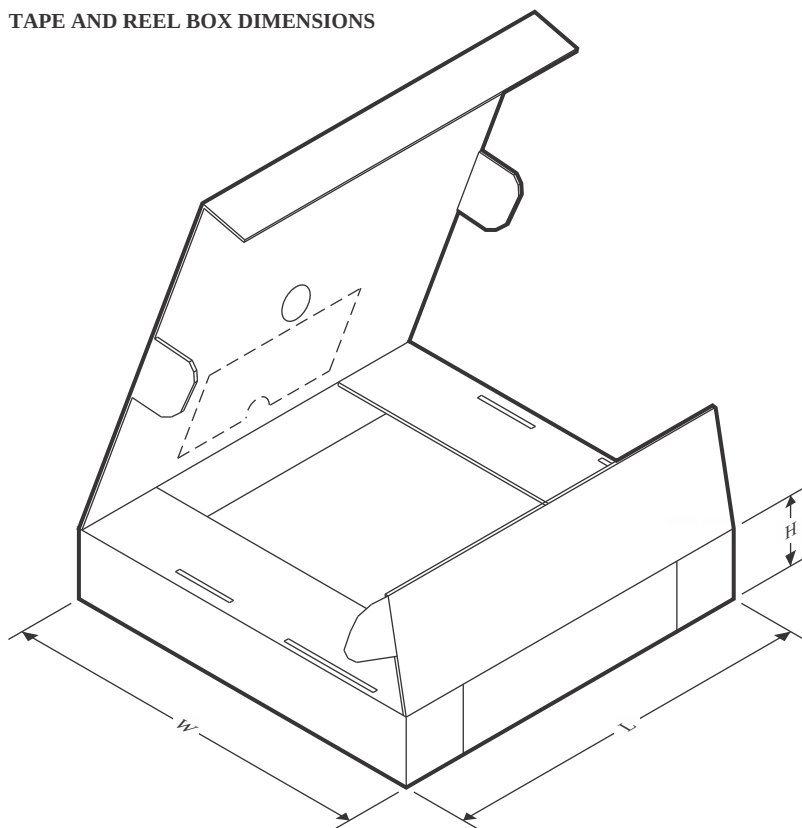

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM4879MMX/NOPB | VSSOP        | DGS             | 10   | 3500 | 367.0       | 367.0      | 35.0        |
| LM4879SD/NOPB  | WSO          | NGT             | 8    | 1000 | 208.0       | 191.0      | 35.0        |
| LM4879SDX/NOPB | WSO          | NGT             | 8    | 4500 | 367.0       | 367.0      | 35.0        |

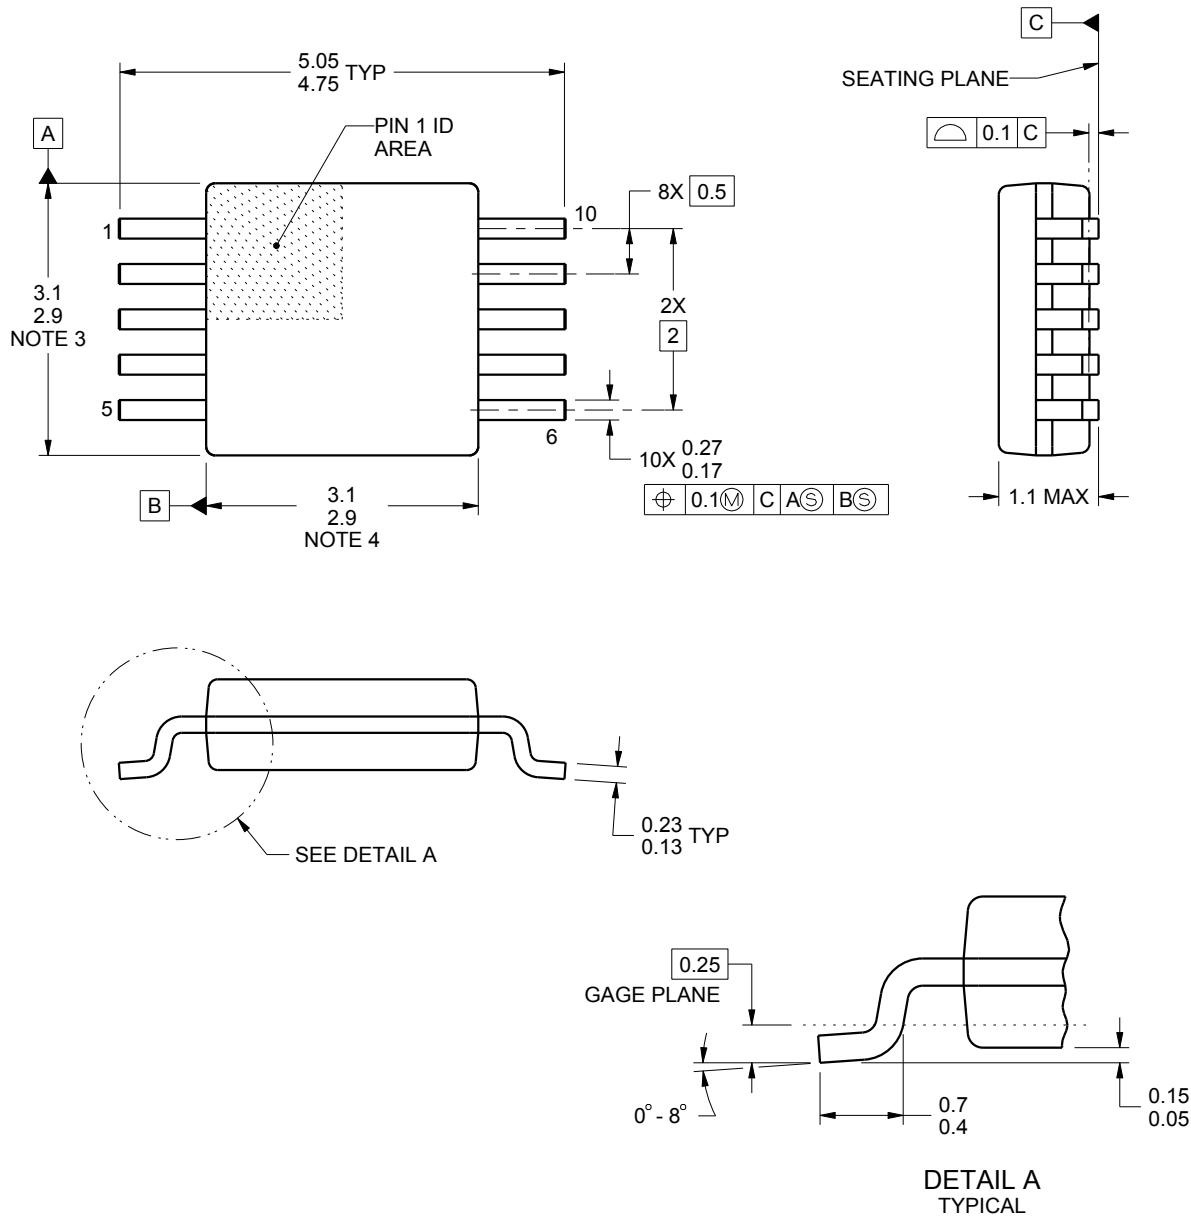

4221984/A 05/2015

**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187, variation BA.

# EXAMPLE BOARD LAYOUT



DGS0010A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

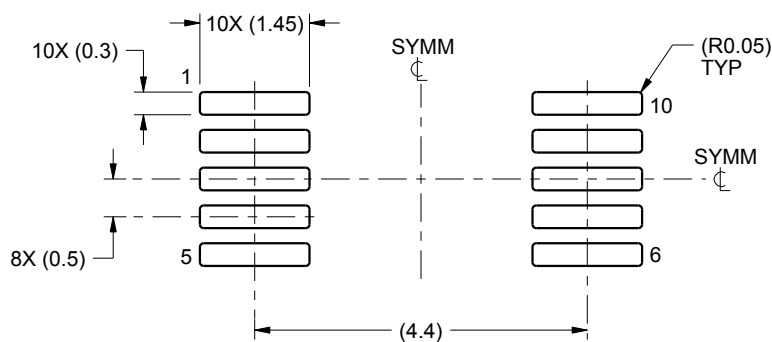

LAND PATTERN EXAMPLE  
SCALE:10X

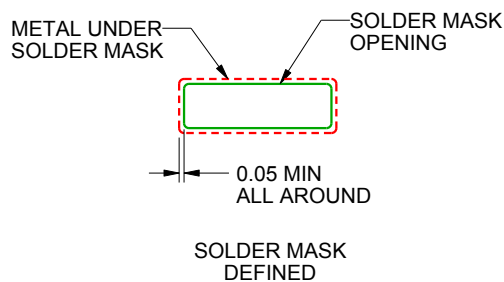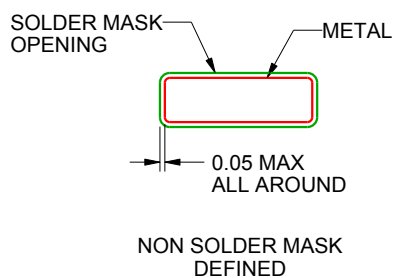

SOLDER MASK DETAILS  
NOT TO SCALE

4221984/A 05/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DGS0010A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

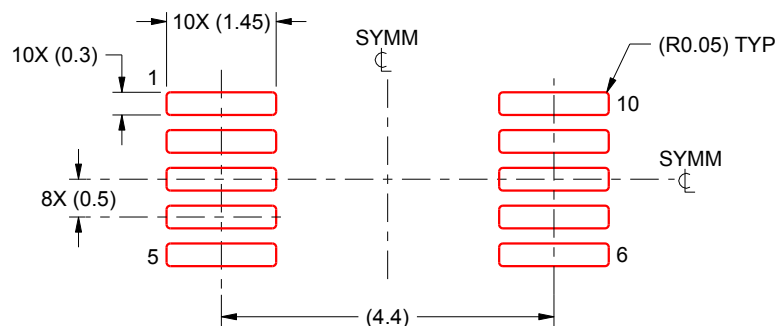

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:10X

4221984/A 05/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.







**NGT0008A**

**WSON - 0.8 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

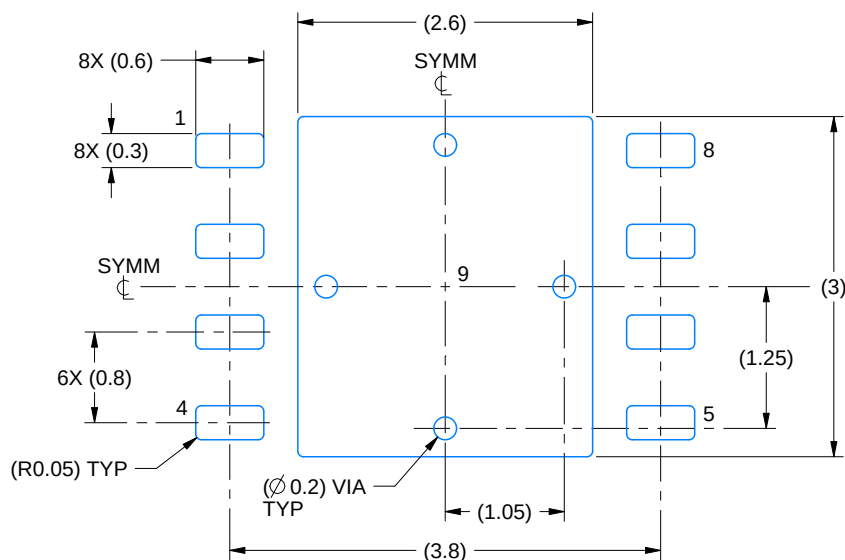

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

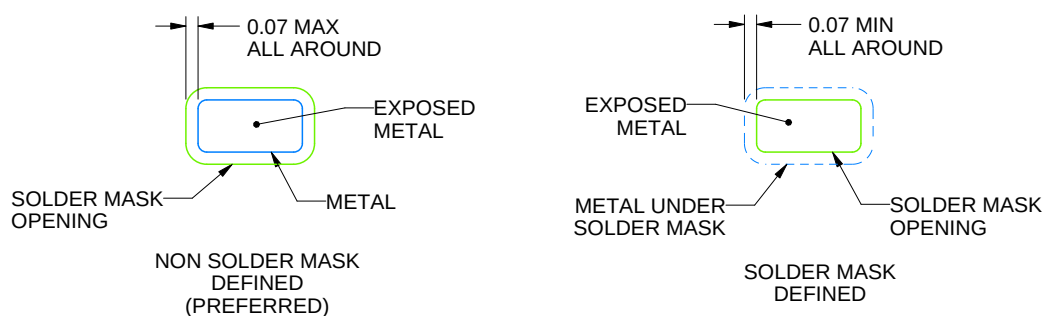

## SOLDER MASK DETAILS

4214935/A 08/2020

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

NGT0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

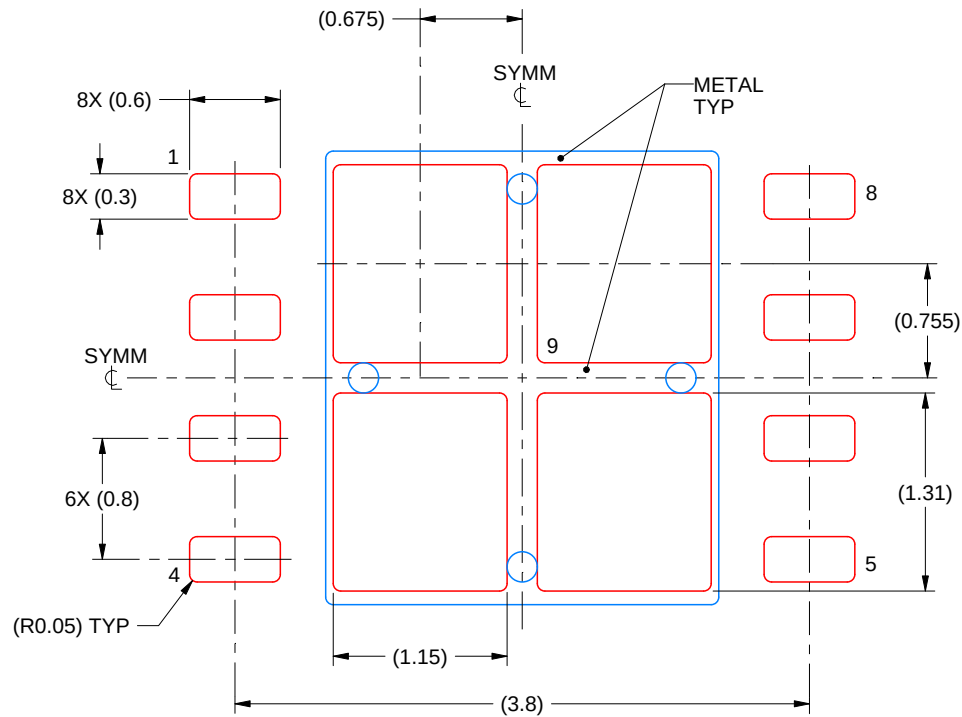

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:  
77% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4214935/A 08/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025