

High Energy Series

Nickel-Cadmium

VSE AA

Saft has upgraded its Ni-Cd product offer and has launched the VSE AA cell to meet the needs of increasingly light and compact applications.

Foam electrode technology has especially been developed for the VSE series. The result is an "ultra-high energy" battery, fully recommended for the whole range of professional appliances.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Professional appliances
- Radio control models
- Home appliances
- Hand held terminals

Main advantages

- Cycling application
- Quick and fast charge
- Super high energy series giving a higher operating time
- Good storage retention

Technology

- Foam positive electrode
- Plastic bonded negative electrode

Temperature range in discharge

- 20°C to + 60°C

Storage

Recommended: + 5°C to + 25°C
Relative humidity: 65 ± 5 %



Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	980
IEC minimum capacity (mAh)*	940
IEC designation	KRMR 15/51
Impedance at 1000 Hz (m Ω)	16

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	13.9 ± 0.1
Height (mm)	48.9 ± 0.3
Top projection (mm)	0.8 ± 0.2
Top flat area diameter (mm)	4 ± 0.2
Weight (g)	22

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast	~1	+ 10 to + 40	940
Standard	16	0 to + 50	94
Trickle*			23 to 47

End of charge cut-off is requested: -dV or dT°C/dt.

* Trickle charge follows fast charge.

Maximum discharge current

Continuous (A) at + 20°C	2.9
Peak (A) at + 20°C*	41

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.




saft


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions are in mm.

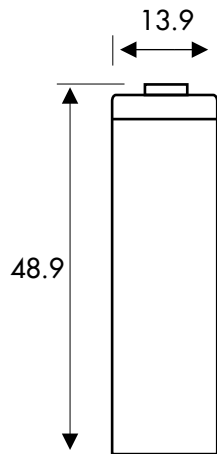


Voltage in slow charge (current 0.1 C)

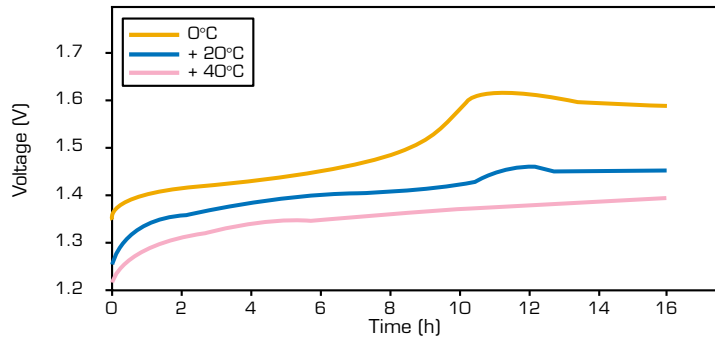


Voltage in fast charge (current C)

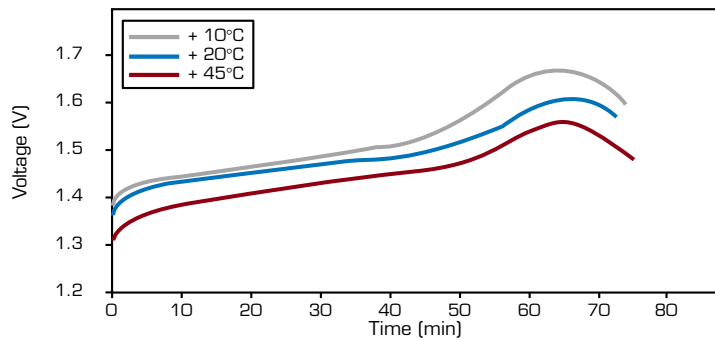

Voltage in discharge at + 20°C (after slow charge 0.1 C x 16 hours at + 20°C)

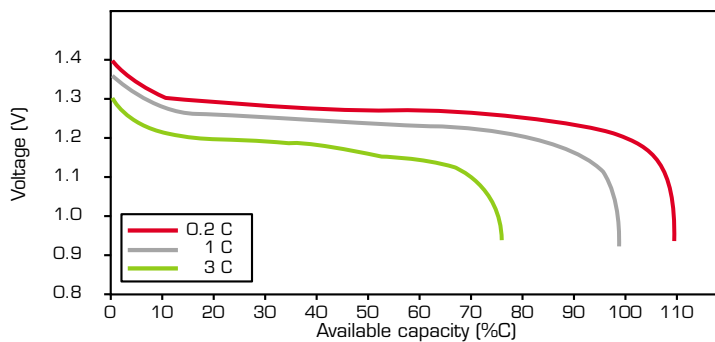

Voltage in discharge at + 20°C (after fast charge 0.1 C x 1.2 hours at + 20°C)

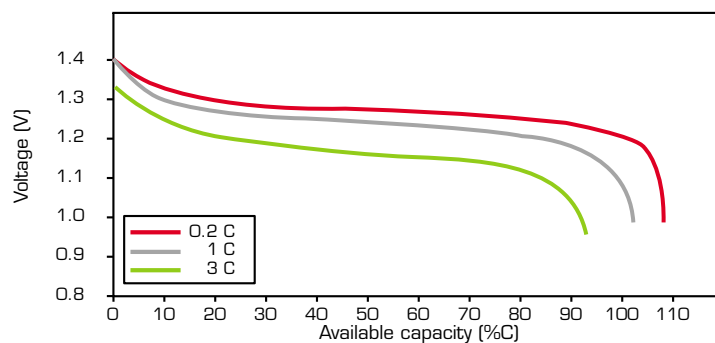

Data are given for single cells.
Please consult Saft for utilization
of cell outside this datasheet.

Data in this document are subject to change
without notice and become contractual only
after written confirmation by Saft.

Saft Rechargeable Battery Systems

12, rue Sadi Carnot
93170 Bagnolet - France
Tel.: +33 1 49 93 19 18
Fax: +33 1 49 93 19 68
Email: rbs.info@saftbatteries.com

www.saftbatteries.com

