

MOD54415

Ethernet Core Module

100 Version with RJ-45 | 200 Version with 10-pin header



DATASHEET

Key Points

- Use as a high-performance single board computer or add Ethernet connectivity to a new or existing design
- Industrial temperature range (-40°C to 85°C)
- Customize with development kit

Device Connectivity

- 10/100Mbps Ethernet
- 8 UARTs, 4 I²C, 2 CAN, 3 SPI, and 1-Wire® support
- SD/MMC and MicroSD flash card ready
- 42 digital I/Os and 2 additional digital inputs
- 16-bit address and data bus with 5 chip selects
- Eight 12-bit analog-to-digital converters (ADC)
- Two 12-bit digital-to-analog converters (DAC)
- Five pulse width modulators (PWM)

Performance and memory

- 32-bit 250 MHz Processor
- 64MB DDR2 RAM and 32MB Flash



Companion development kit

The following is available with the development kit:

- Customize any aspect of operation including web pages, data filtering, or custom network applications
- Development software: NB Eclipse IDE, Graphical debugger, deployment tools, and examples
- Communication software: TCP/IP stack, HTTP web server, FTP, E-mail, and flash file system
- System software: uC/OS RTOS, ANSI C/C++ compiler and linker

The following optional software modules are not included with kit and are sold separately:

- Embedded SSL & SSH Security Suite (Module License Version)
- SNMP

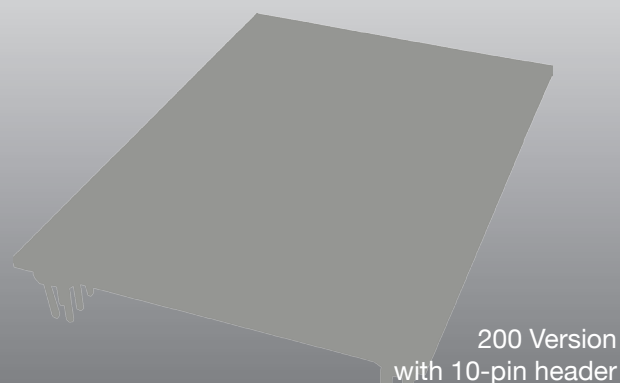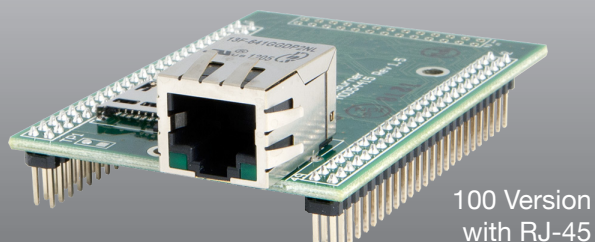

Specifications

Processor and Memory

32-bit Freescale ColdFire 54415 running at 250MHz with 64MB DDR2 RAM and 32MB Flash

Network Interface

10/100 BaseT with RJ-45 connector (100 Version)

10-pin header (200 Version)

Data I/O Interface (J1)

- Up to 8 UARTs
- Up to 4 I²C
- Up to 2 CAN 2.0b controllers
- Up to 3 SPI
- Up to 42 digital I/O + 2 digital inputs
- Up to eight 12-bit analog-to-digital converters (ADC)
- Up to two 12-bit digital-to-analog converters (DAC)
- Up to 5 pulse width modulators (PWM)
- Up to 4 external timer in or outputs
- MicroSD flash card ready
- 1-Wire® interface

Flash Card Support

FAT32 support for SD Cards up to 32GB (requires exclusive use of SPI signals).

Serial Configurations

The UARTs can be configured in the following way:

- 8 TTL ports
- Add external level shifter for RS-232
- Add external level shifter for RS-422/485 (up to two ports)

Note: UART 0/1 also provides RTS/CTS hardware handshaking signals.

LEDs

Link and Speed (100 Version only, on RJ-45)

Physical Characteristics

Dimensions (inches): 2.95" x 2.00"

Weight: 1 oz.

Mounting Holes: 3 x 0.125" dia.

Power

MOD54415 module

3.3VDC @ 410 mA with Ethernet | 3.3VDC @ 360 mA without Ethernet

MOD54415 module mounted on MOD-DEV-70

3.3VDC @ 450 mA with Ethernet | 3.3VDC @ 400 mA without Ethernet

Environmental Operating Temperature

-40° to 85° C

RoHS Compliance

The Restriction of Hazardous Substances guidelines ensure that electronics are manufactured with fewer environment harming materials.

Part Numbers

MOD54415 Ethernet Core Module (100 Version, with RJ-45)

Part Number: MOD54415-100IR

MOD54415 Ethernet Core Module (200 Version, with 10-pin header)

Part Number: MOD54415-200IR

MOD54415 Development Kit

Part Number: NNDK-MOD54415-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents.

Embedded SSL & SSH Security Suite (Module License Version)

Part Number: NBLIC-SSL-MODULE

Only required if you are using a development kit.

SNMP V1 (Module License Version)

Part Number: NBLIC-SNMP

Available as an option if you are using a development kit.

Ordering Information

E-mail: sales@netburner.com

Online Store: www.NetBurner.com

Telephone: 1-800-695-6828

Pinout and Signal Description

The 200 version board has a 10-pin header instead of an RJ-45 jack. This header enables you to relocate the jack to another location or to add a different jack with power over ethernet (PoE) capabilities to your module. Table 1 provides descriptions of pin function of the 10-pin header.

Table 1: Pinout and Signal Descriptions for JP1 Header ⁽¹⁾

Pin	Signal	Description
1	TX-	Transmit -
2	TX+	Transmit +
3	N/C	Not Connected
4	RX+	Recieve +
5	RX-	Recieve -
6	VCC ¹	3.3V
7	GND	Ground
8	N/C	Not Connected
9	LED	Link LED
10	LED	Speed LED

Note:

1. Ethernet magnetics center tap voltage provided by NetBurner device

Alternate Monitor Boot Jumper

The boot jumper is the unpopulated header 'TP1', located near the ethernet jack. It can be used to recover from a software or configuration fault.

MOD54415

The module has two dual in-line 50 pin headers which enable you to connect to one of our standard NetBurner Carrier Boards, or a board you create on your own. Table 1 provides descriptions of pin function of the module header.

Table 2: Pinout and Signal Descriptions for J1 Connector ⁽¹⁾

J1 Connector							
Pin	CPU Pin	Function 1	Function 2	Function 3	General Purpose I/O	Description	Max Voltage
1		GND				Ground	-
2		GND				Ground	-
3	E16	VSTBY				Input power 3.3 VDC	3.3VDC
4	G2	R/W				Data Bus - Read / NOT Write	3.3VDC
5	E1	CS1		NFC_OE	PB4	Data Bus - Chip Select 1 or NAND Flash Controller Chip Enable	3.3VDC
6	B1	CS4	DREQ1		PB5	Data Bus - Chip Select 4 or External DMA Request 1	3.3VDC
7	F2	CS5	DACK1		PB6	Data Bus - Chip Select 5 or External DMA Acknowledge 1	3.3VDC
8	F1	OE/RE				Data Bus - Output Enable / Read Enable or Burst Transfer Indicator / Read Enable	3.3VDC
9	F4	BE0	FB_TSIZE0		PA0	Byte Enable 2 for D16 to D23 (8 bits) or FlexBus Transfer Size 0	3.3VDC
10	D1	BE1	FB_TSIZE1		PA1	Byte Enable 3 for D24 to D31 (8 bits) or FlexBus Transfer Size 1	3.3VDC
11		TIP Generated				Data Bus - Transfer in Progress ²	3.3VDC
12	A5	D16				Data Bus - Data 16	3.3VDC
13	H3	TA		NFC_R/B	PA4	Data Bus - Transfer Acknowledge or NAND Flash Controller Flash Ready / NOT Busy	3.3VDC
14	D5	D18				Data Bus - Data 18	3.3VDC
15	C6	D17				Data Bus - Data 17	3.3VDC
16	A6	D20				Data Bus - Data 20	3.3VDC
17	B6	D19				Data Bus - Data 19	3.3VDC
18	A7	D22				Data Bus - Data 22	3.3VDC
19	D6	D21				Data Bus - Data 21	3.3VDC
20	B7	D24				Data Bus - Data 24	3.3VDC

Note:

- Active low signals, such as $\overline{\text{RESET}}$, are indicated with an overbar.
- The TIP signal is the logical AND of *CS1, *CS4 and *CS5. TIP can be used to control an external data bus buffer for the data bus signals. An example circuit design can be found on the Module Development Board schematic. An external data bus buffer is recommended for any designs that use data bus signals D16-D31.

MOD54415

J1 Connector (continued)						
Pin	CPU Pin	Function 1	Function 2	Function 3	General Purpose I/O	Description
21	C7	D23				Data Bus - Data 23
22	A8	D26				Data Bus - Data 26
23	D7	D25				Data Bus - Data 25
24	B7	D28				Data Bus - Data 28
25	D8	D27				Data Bus - Data 27
26	C8	D30				Data Bus - Data 30
27	A8	D29				Data Bus - Data 29
28	K15	$\overline{\text{RESET}}$				Processor Reset Input
29	B9	D31				Data Bus - Data 31
30	L16	$\overline{\text{RSTOUT}}$				Processor Reset Output
31	G1	CLK			PB7	Internal Bus Clock ²
32	F3	A0				Data Bus - Address 0
33	C2	A1				Data Bus - Address 1
34	B2	A2				Data Bus - Address 2
35	A2	A3				Data Bus - Address 3
36	E3	A4				Data Bus - Address 4
37	D3	A5				Data Bus - Address 5
38	E4	A6				Data Bus - Address 6
39	C3	A7				Data Bus - Address 7
40	B3	A8				Data Bus - Address 8
41	C4	A9				Data Bus - Address 9
42	C5	A10				Data Bus - Address 10
43	B4	A11				Data Bus - Address 11
44	D4	A12				Data Bus - Address 12
45	A3	A13				Data Bus - Address 13
46	A4	A14				Data Bus - Address 14
47	B5	A15				Data Bus - Address 15
48		VCC3V				Input power 3.3 VDC
49		GND				Ground
50		GND				Ground

Note:

- Active low signals, such as $\overline{\text{RESET}}$, are indicated with an overbar.
- Internal bus clock is one-half the core/system clock $f_{\text{sys}/2}$

Table 3: Pinout and Signal Descriptions for J2 Connector ⁽¹⁾

J2 Connector							Max Voltage
Pin	CPU Pin	Rev	Function 1	Function 2	Function 3	General Purpose I/O	
1			GND				-
2			VCC3V				3.3VDC
3	B10		UART0_RX	I2C4_SDA	SPI2_SIN	PF4	3.3VDC
4	D11		UART0_TX	I2C4_SCL	SPI2_SOUT	PF3	3.3VDC
5	J4		VDDA_DAC_ADC				3.3VDC
6	H1		ADC_IN0				3.3VDC
7	J1		ADC_IN1				3.3VDC
8	J2		ADC_IN2				3.3VDC
9	K4		ADC_IN3	DAC0_OUT			3.3VDC
10	G4		ADC_IN4				3.3VDC
11	J3		ADC_IN5				3.3VDC
12	H2		ADC_IN6				3.3VDC
13	K3		ADC_IN7	DAC1_OUT			3.3VDC
14	H5 J5		VSSA_ADC VSSA_DAC_ADC				-
15	A12		SSI0_MCLK	SSI_CLKIN	SIM1_CLK	PH4	3.3VDC
16	A13		SSI0_BCLK	UART7_RX	SIM1_PD	PH3	3.3VDC
17	A14 A15	1.7+	USBO_DM USBH_DM			Input only	3.3VDC
	C12	1.6	SSI0_RX	I2C2_SDA	SIM1_VEN	PH7	3.3VDC
18	B14 B15	1.7+	USBO_DP USBH_DP			Input only	3.3VDC
	C13	1.6	SSI0_TX	I2C2_SCL	SIM1_DATA	PH6	3.3VDC
19	N2		UART2_TX	PWM_B3	SSI1_TX	PE3	3.3VDC
20	E15		SSI0_FS	UART7_TX	SIM1_RST	PH5	3.3VDC
21	C9		UART1_RX	I2C5_SDA	SPI3_SIN	PE0	3.3VDC
22	D9		UART1_TX	I2C5_SCL	SPI3_SOUT	PF7	3.3VDC
23	D10		UART1_RTS	UART5_RX	SPI3_PCS0	PE1/RGPIIO	3.3VDC
24	C10		UART1_CTS	UART5_TX	SPI3_SCK	PE2/RGPIIO	3.3VDC
25	A10		SDHC_CLK	PWM_A0	SPI1_SCK	PG5	3.3VDC

MOD54415

J2 Connector (continued)							
Pin	CPU Pin	Function 1	Function 2	Function 3	General Purpose I/O	Description	Max Voltage
26	M1	IRQ3	SPI0_PCS3	USBH_VBUS_EN	PC3	External Interrupt 3 or SPI 0 Chip Select 3 or USB Host VBUS Enable	3.3VDC
27	C11	SDHC_CMD	PWM_B0	SPI1_SIN	PG6	SDHC Command Line or PWM B0 Output Signal/Input Capture or SPI 1 Serial Data In	3.3VDC
28	B12	SDHC_DAT0	PWM_B2	SPI1_SOUT	G7	SDHC DAT0 Line or PWM B2 Output Signal/Input or Serial Data Out	3.3VDC
29	E13	UART0_CTS	UART4_TX	SPI2_SCK	PF6/RGPIO	UART 0 Clear To Send or UART 4 Transmit or SPI 2 Serial Clock ²	3.3VDC
30	B13	SDHC_DAT3	PWM_A1	SPI1_PCS0	PF2	SDHC DAT3 Line / Card Detection or PWM A1 Output Signal/Input Capture or SPI 1 Chip Select 0	3.3VDC
31	P1	UART2_RX	PWM_A3	SSI1_RX	PE4	UART 2 Receive or PWM A3 Output Signal/Input Capture or SSI 1 Serial Receive ²	3.3VDC
32	G13	T3IN/PWM_EXT_A3	T3OUT	USBO_VBUS_EN	PD2/RGPIO	Timer Input 3 / Alternate PWM control signal 3 or Timer Output 3 or USB On-The-Go VBUS Enable	3.3VDC
33	H14	T2IN/PWM_EXT_A2	T2OUT	SDHC_DAT2	PD1/RGPIO	Timer Input 2 / Alternate PWM control signal 2 or Timer Output 2 or SDHC DAT2 Line / Read / Wait	3.3VDC
34	H13	T1IN/PWM_EXT_A1	T1OUT	SDHC_DAT1	PD0/RGPIO	Timer Input 1 / Alternate PWM control signal 1 or Timer Output 1 or SDHC DAT1 Line / Interrupt Detect	3.3VDC
35	D12	SDHC_DAT1	PWM_A2	SPI1_PCS1	PF0	SDHC DAT1 Line or PWM A2 Output Signal/Input Capture or SPI Chip Select 1	3.3VDC
36	H15	T0IN/PWM_EXT_A0	T0OUT	USBO_VBUS_OC	PE7/RGPIO	Timer Input 0 / Alternate PWM control signal 0 or Timer Output 0 or USB On-The-Go VBUS Over-Current	3.3VDC
37	N11	OW-DAT	DACK0		PD3/RGPIO	1-Wire Data Signal or DMA Acknowledge 0	3.3VDC
38	B11	UART0_RTS	UART4_RX	SPI2_PCS0	PF5/RGPIO	UART 0 Request To Send or UART 4 Receive or SPI 2 Chip Select 0 ¹	3.3VDC
39	G14	I2C0_SDA	UART8_RX	CAN0_RX	PB1	I ² C 0 Serial Data or UART 8 Receive or CAN 0 Receive ^{2,3}	3.3VDC
40	E14	SDHC_DAT2	PWM_B1	SPI1_PCS2	PF1	SDHC DAT2 Line / Read Wait or PWM B1 Output Signal/Input Capture or SPI 1 Chip Select 2	3.3VDC
41	D15	CAN1_RX	UART9_RX	I2C1_SDA	PC7	CAN 1 Receive or UART 9 Receive or I ² C 1 Serial Data ^{2,3}	3.3VDC
42	G15	I2C0_SCL	UART8_TX	CAN0_TX	PB2	I ² C 0 Serial Clock or UART 8 Transmit or CAN 0 Transmit ^{2,3}	3.3VDC
43	M2	IRQ2	SPI0_PCS2	USBH_VBUS_OC	PC2	External Interrupt 2 or SPI 0 Chip Select 2 or USB Host VBUS Over-Current	3.3VDC
44	D14	CAN1_TX	UART9_TX	I2C1_SCL	PB0	CAN 1 Transmit or UART 9 Transmit or I ² C 1 Serial Clock ^{2,3}	3.3VDC
45	F13	IRQ1			PC1	External Interrupt 1	3.3VDC
46		GND				Ground	-
47	N1	IRQ6		USB_CLKIN	PC5	External Interrupt 6 or USB Clock In	3.3VDC
48	F12	IRQ7			PC6	External Interrupt 7	3.3VDC
49		GND				Ground	-
50		VCC3V				Input power 3.3 VDC	3.3VDC

Note:

1. Active low signals, such as RESET, are indicated with an overbar.
2. Each UART can be clocked from an internal or external source. For external clocks, each UARTn can be clocked by the corresponding DTn_IN vnput pin.
3. If using I2C, the module must add pull-up resistors to SDA/SCL.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NetBurner:](#)

[NNDK-MOD54415LC-KIT](#)