

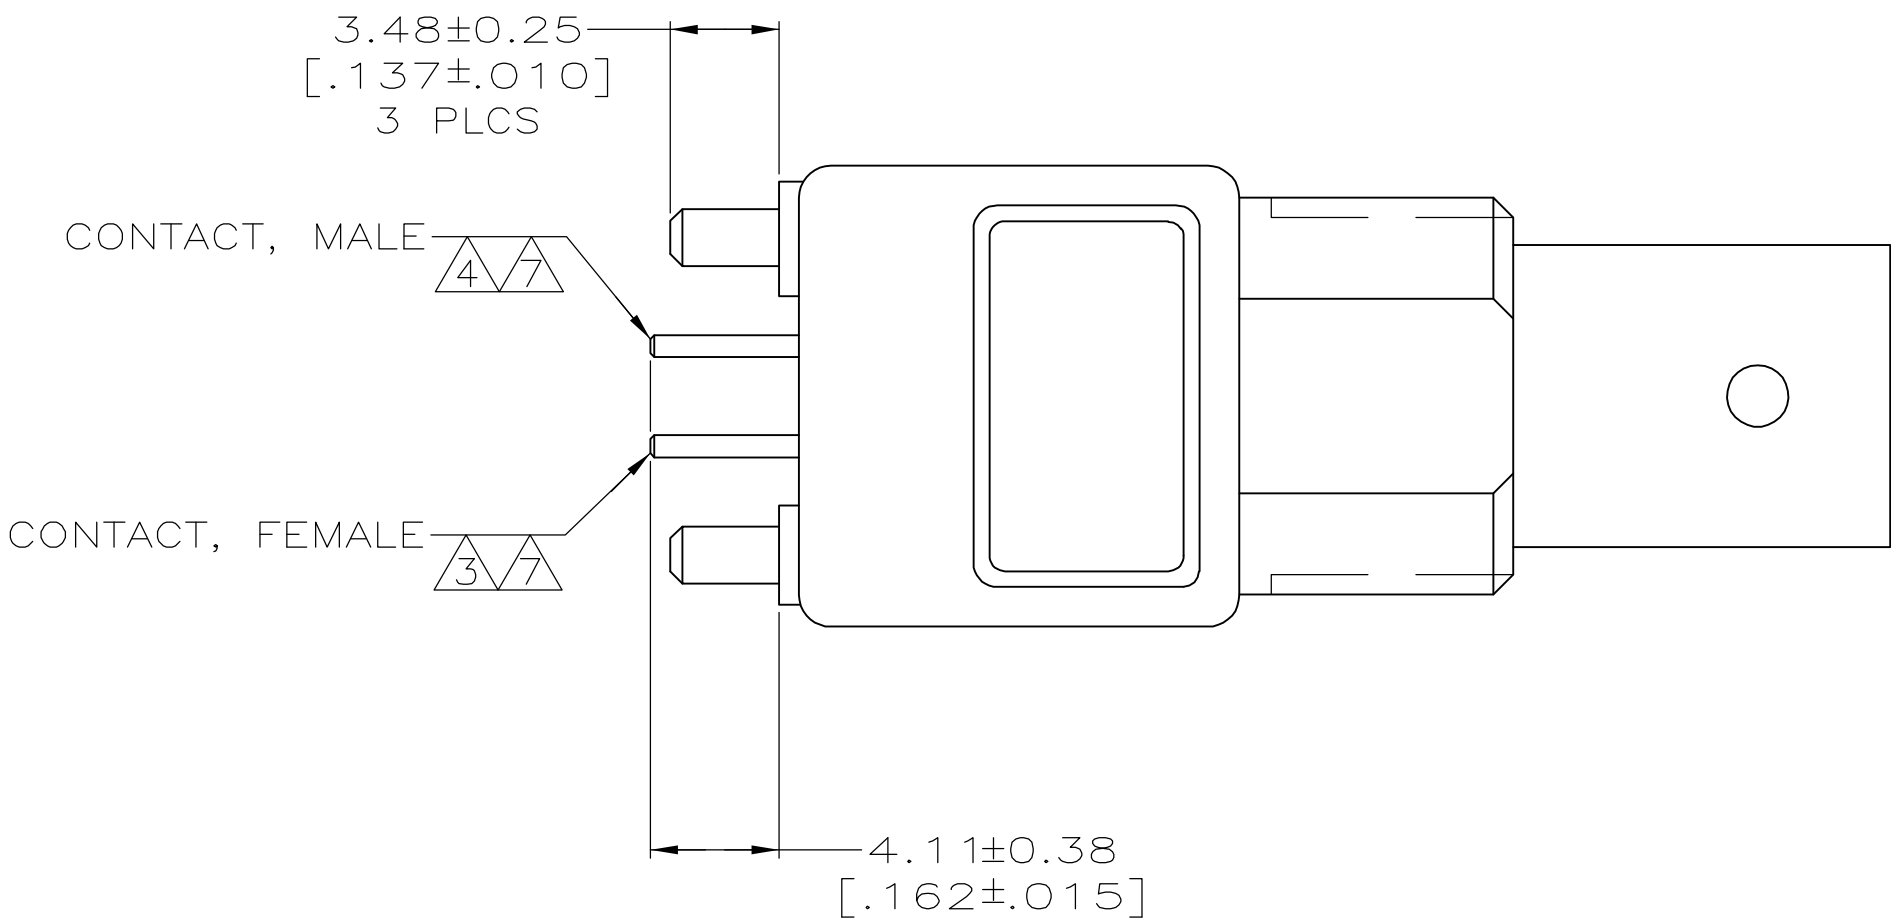



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		0	RELEASED PER 0514-0150-05	19OCT2005	REH	JL

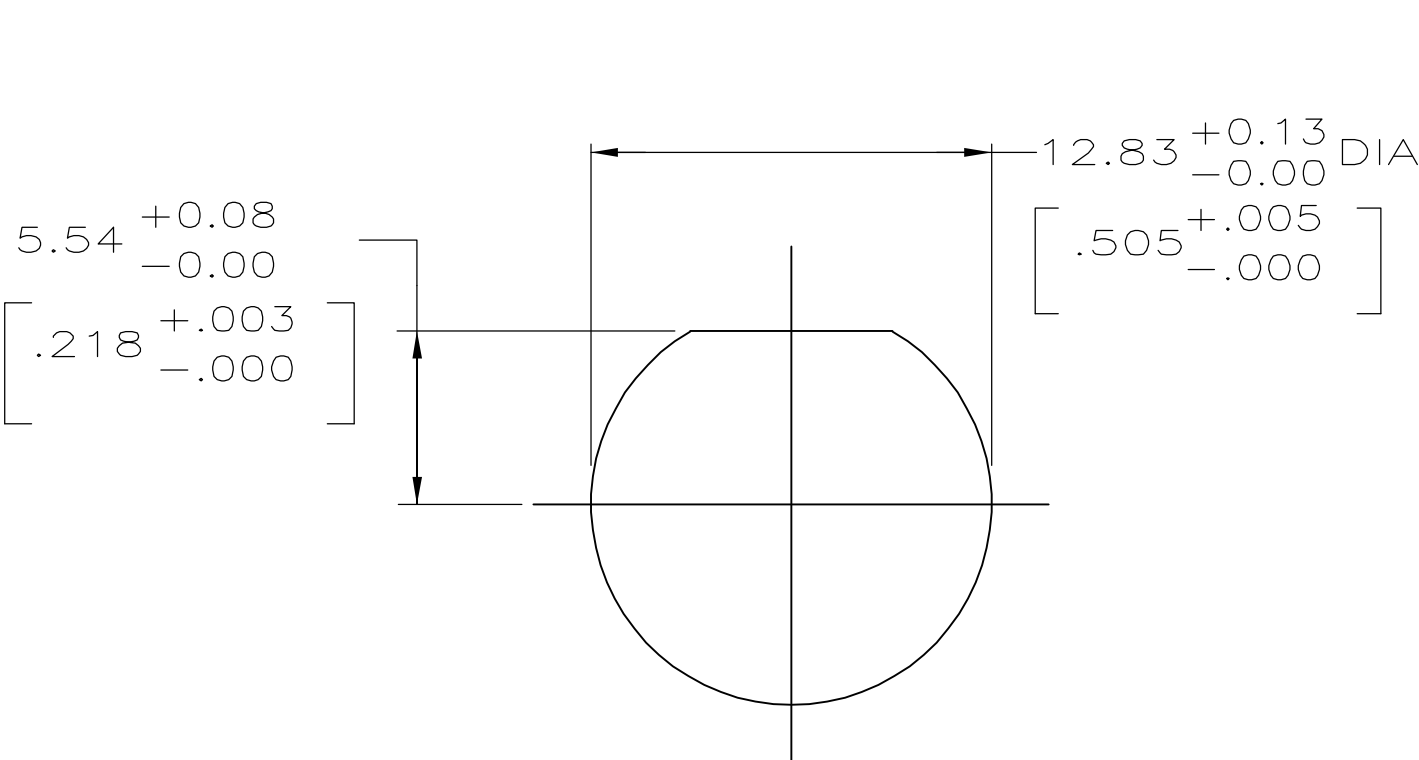

- 1 ZINC PER QQ-Z-363.
- 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3 PHOSPHOR BRONZE PER QQ-B-750.
- 4 BRASS PER ASTM-B-16.
- 5 NICKEL PLATE PER QQ-N-290, 3.81µm [.000150] MINIMUM THICK.
- 6 TIN PLATE PER ASTM-B-545, 3.81µm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER MIL-G-45204, 0.76µm [.000030] MINIMUM THICK.

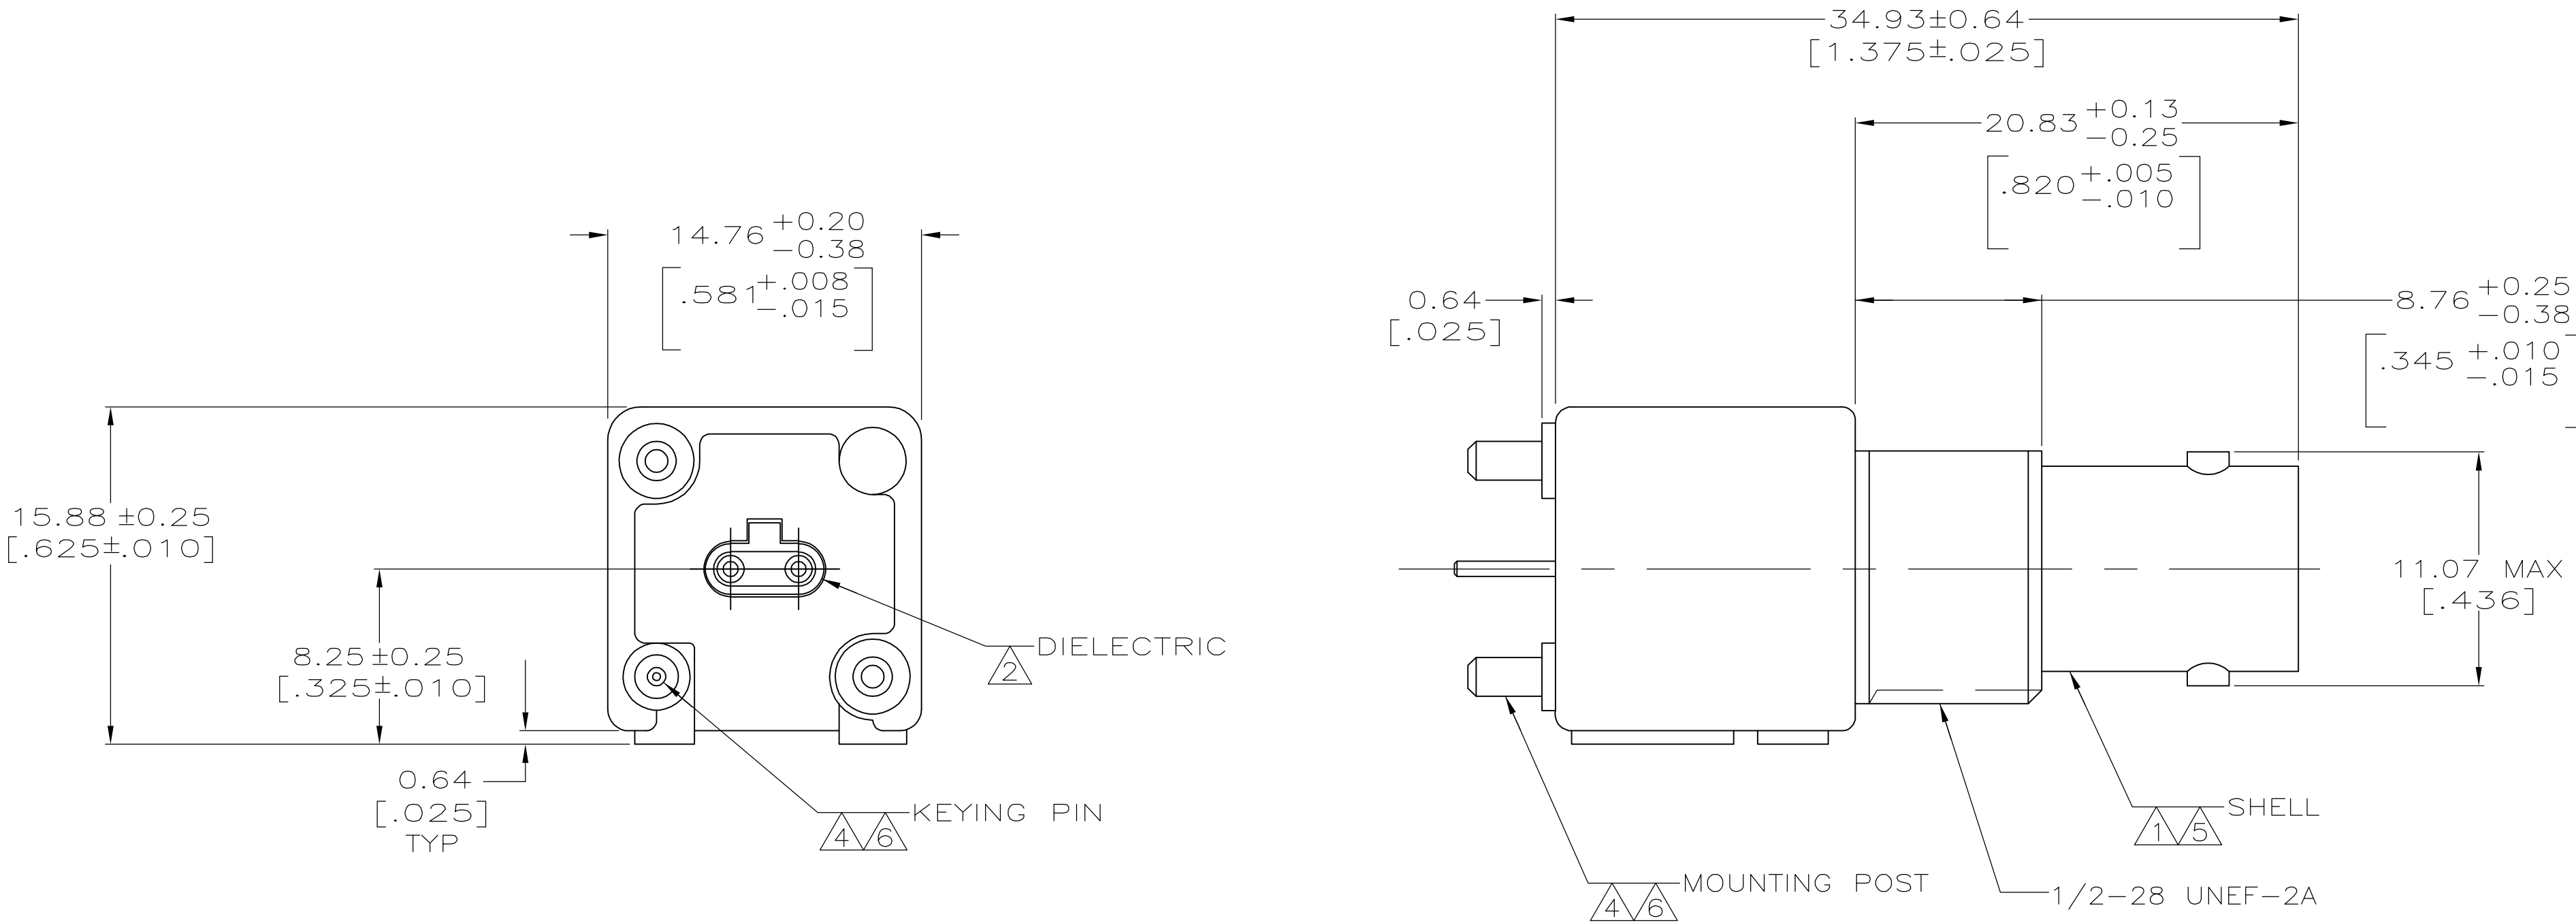

RECOMMENDED PANEL CUTOUT

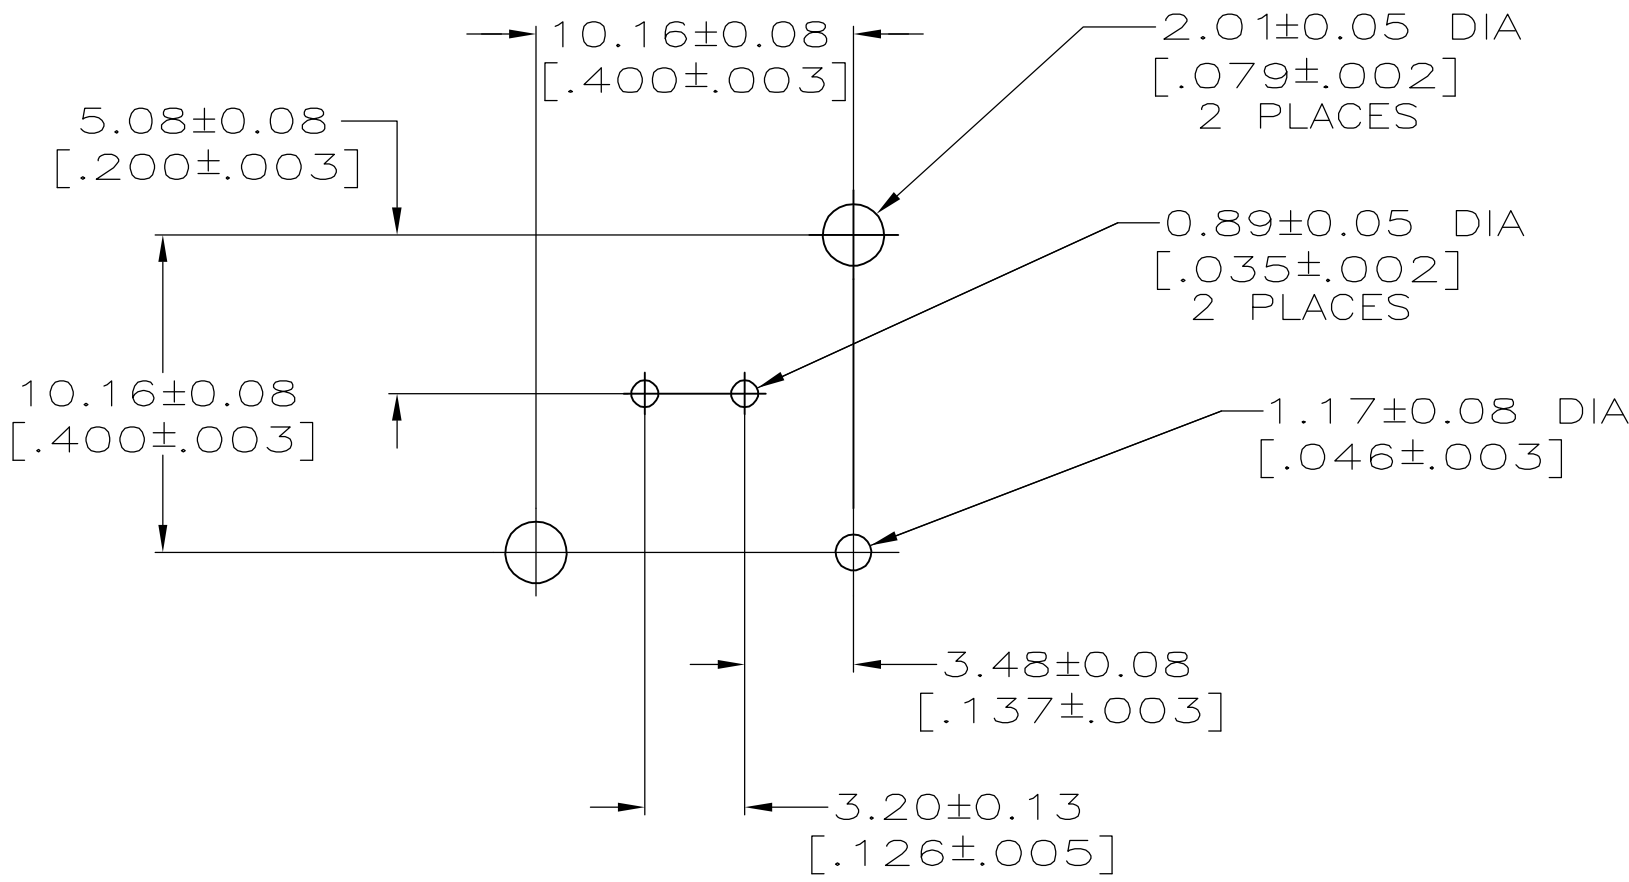

PCB CONFIGURATION

5415832-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. HAMNER OCT192005	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK J. LIPPERT OCT192005	
		APVD J. LIPPERT OCT192005	
		NAME J. LIPPERT	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	JACK, VERTICAL, PCB, TWIN BNC
0 PLC ± -		APPLICATION SPEC	
1 PLC ± -		WEIGHT	-
2 PLC ± 0.20 [.008]		CUSTOMER DRAWING	
3 PLC ± -			
4 PLC ± -			
ANGLES ± -			
FINISH SEE NOTES 5 THRU 7			