


10	9	8	7	6	5	4	3	2	1
CONNECTOR P/N	ØD(mm)	K (KEY)	TYPE OF FIT	CABLE DIAMETER (mm)					
106056-2000	.1255	.083 2.1	STANDARD	3					
106055-2000		.0785 2.0	TIGHT						
106056-4000	.125	.083 2.1	STANDARD						
106055-4000		.0785 2.0	TIGHT						
106056-5000	.126	.083 2.1	STANDARD	2.4					
106055-5000		.0785 2.0	TIGHT						
106056-5300		.083 2.1	STANDARD						

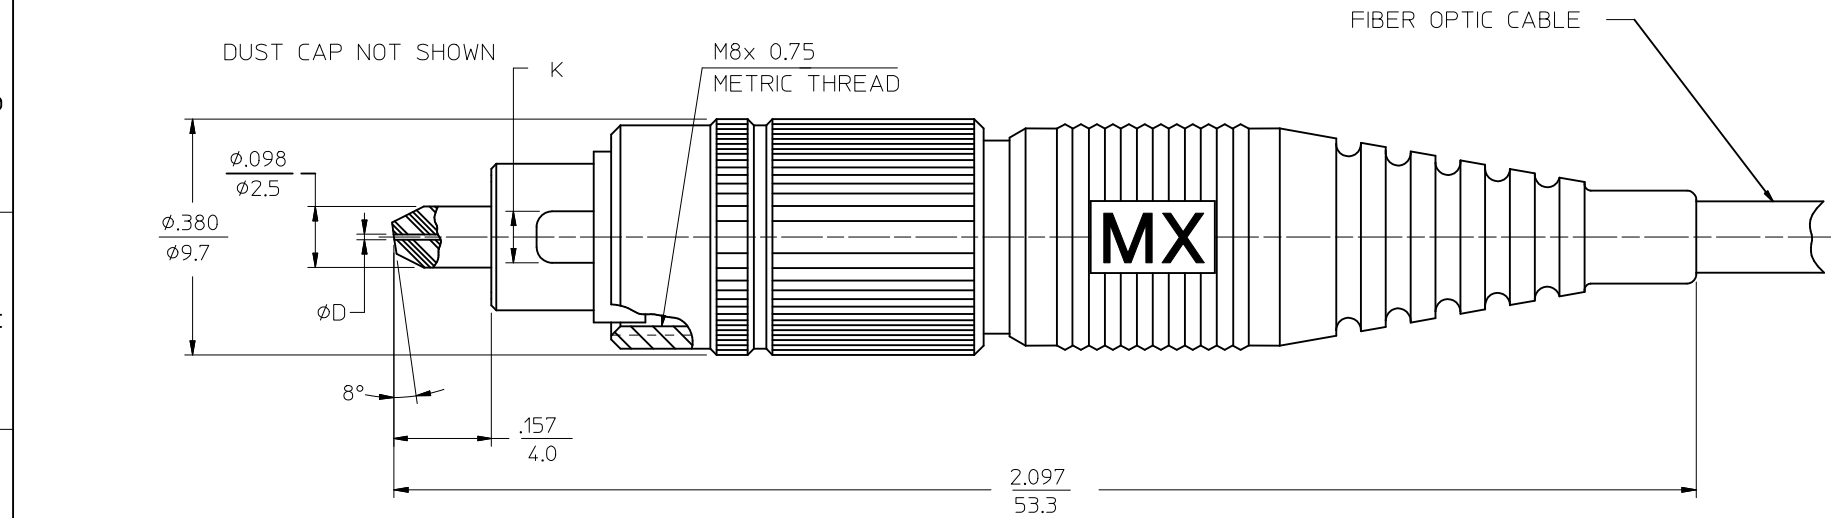

ENTER DESCRIPTION EC NO: MF2010-0066 DRWN:KPEVZNER CHKD: APPR: LGUMIN		2009/08/13 2009/08/13 2009/08/17	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				▽=0 C=0	mmINCH	DRAWN BY PGIBLIN	DATE 2005/10/24	TITLE FCII APC CONNECTOR 3.0MM				
A1			REV	4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± ---		CHECKED BY DATE		MOLEX MOLEX INCORPORATED				
				ANGULAR ±1/2°		APPROVED BY DATE						
A1			REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-10605X-XX00			SHEET NO. 1 OF 01	
						SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				