

# NPN Plastic Silicon Phototransistor

## OP593, OP598, OP793, OP798 Series



### Features:

- Dark blue epoxy package
- Wide receiving angle
- Variety of sensitivity ranges
- TO-18 equivalent package style



### Description:

Each device in this series consists of an NPN silicon phototransistor molded in a dark blue epoxy packages. The wide receiving angle (130°) of the **OP593** and **OP793** series devices provides relatively even reception over a large area. The narrow receiving angle (25°) of the **OP598** and **OP798** series devices provides a relatively small reception area.

*These devices are 100% production tested using infrared light for close correlation with OPTEK's GaAs and GaAlAs emitters.*

*Please refer to Application Bulletins 208 and 210 for additional design information and reliability (degradation) data.*

### Applications:



- Non-contact reflective or slotted sensor
- Assembly line automation
- Machine automation
- Machine Safety
- End of travel sensor
- Door sensor
- Safety Curtain





Pin #	Sensor
1	Collector
2	Emitter

Ordering Information			
Part Number	Sensor	Viewing Angle	Lead Length
OP593A	Transistor	130°	0.75"
OP593B			
OP593C			
OP598A		25°	
OP598B			
OP598C			
OP793A	R <sub>BE</sub> Transistor	130°	
OP793B			
OP793C			
OP793D			
OP798A		25°	
OP798B			
OP798C			
OP798D			

### OP593, OP793

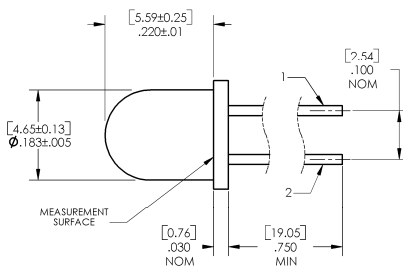

### OP598, OP798

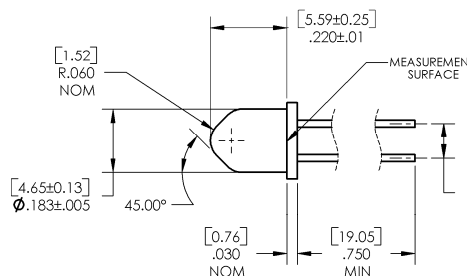

**OP555 - CONTAINS POLYSULFONE**  
To avoid stress cracking, we suggest using ND Industries' **Vibra-Tite** for thread-locking. **Vibra-Tite** evaporates fast without causing structural failure in OPTEK's molded plastics.



RoHS

DIMENSIONS ARE IN: [MILLIMETERS]  
INCHES

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006  
Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com

# NPN Plastic Silicon Phototransistor

OP593, OP598, OP793, OP798 Series



## Electrical Specifications

Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)	
Storage and Operating Temperature Range	$-40^\circ\text{C}$ to $+100^\circ\text{C}$
Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Continuous Collector Current	50 mA
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 seconds with soldering iron]	$260^\circ\text{C}^{(1)}$
Power Dissipation	$250\text{ mW}^{(2)}$

Electrical Characteristics (T <sub>A</sub> = 25° C unless otherwise noted)						
SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
I <sub>C(ON)</sub>	On-State Collector Current					V <sub>CE</sub> = 5 V. Light source is an unfiltered GaAlAs LED with a peak emission wavelength of 890 nm and E <sub>e(APT)</sub> of 1.7 mW/cm <sup>2</sup> average within a .250" diameter aperture.
	OP593A	3.0	-	4	mA	
	OP593B	2.0	-	4		
	OP593C	1.0	-	4		
	OP598A	7.5	-	10		
	OP598B	5.0	-	10		
	OP598C	2.5	-	10		
		2.45				
	OP793A		-	7.50		
	OP793B	1.65	-	4.55		
	OP793C	0.90	-	3.05		
	OP793D	0.90	-	7.50		
	OP798A	4.90	-	15.00		
	OP798B	3.30	-	9.20		
	OP798C	1.90	-	6.10		
	OP798D	1.90	-	15.00		
I <sub>CEO</sub>	Collector-Dark Current	-	-	100	nA	V <sub>CE</sub> = 10 V, E <sub>E</sub> = 0
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	30	-	-	V	I <sub>C</sub> = 100 μA
V <sub>(BR)ECO</sub>	Emitter-Collector Breakdown Voltage	5	-	-	V	I <sub>E</sub> = 100 μA
V <sub>CE(SAT)</sub>	Collector-Emitter Saturation Voltage	-	-	0.40	V	I <sub>C</sub> = 0.4 mA, E <sub>E</sub> = 1.7 mW/cm <sup>2</sup>

# NPN Plastic Silicon Phototransistor


OP593, OP598, OP793, OP798 Series




## Performance

OP593, OP598


Typical Spectral Response

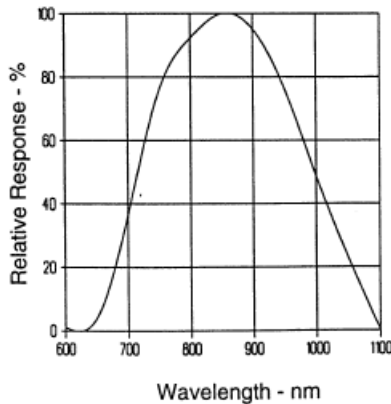

On-State Collector Current vs. Irradiance

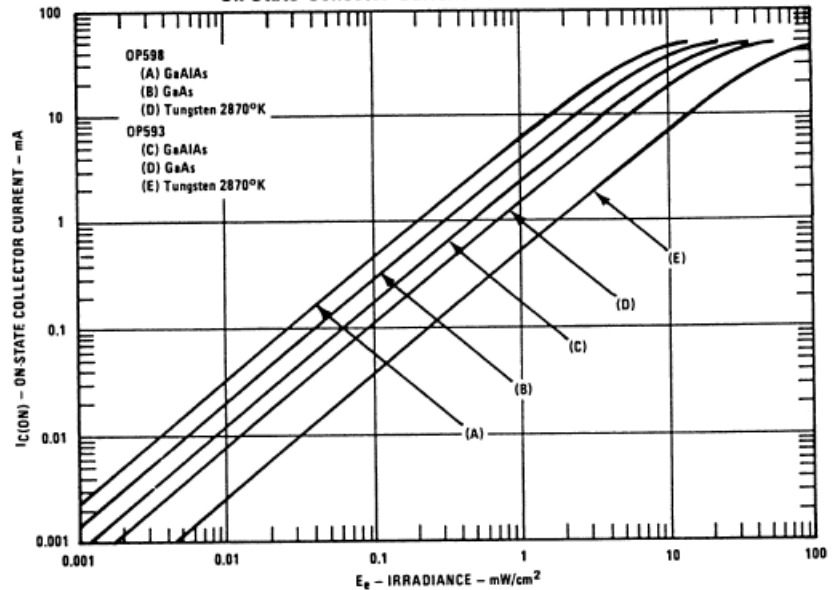

Normalized Collector Current vs. Ambient Temperature

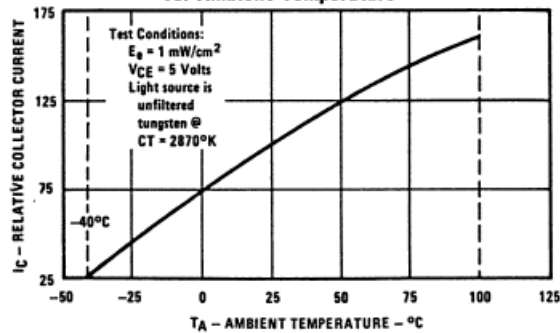

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com







# NPN Plastic Silicon Phototransistor

OP593, OP598, OP793, OP798 Series



## Performance

OP593, OP598

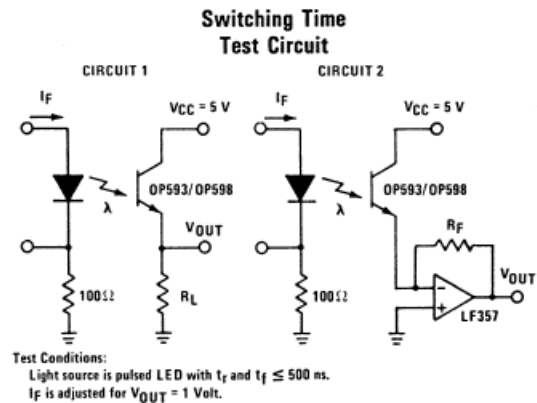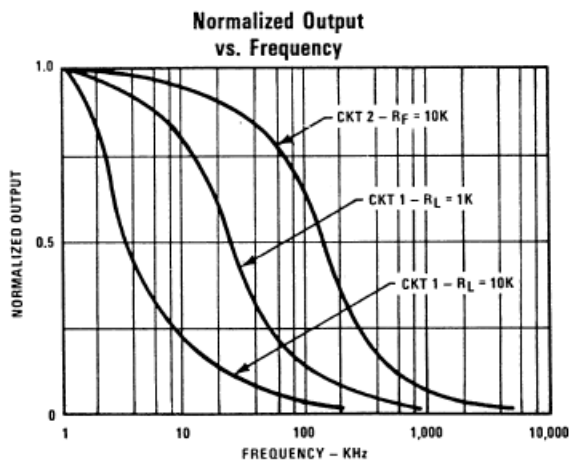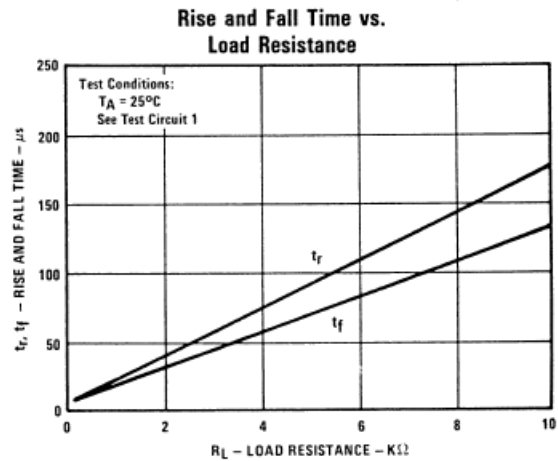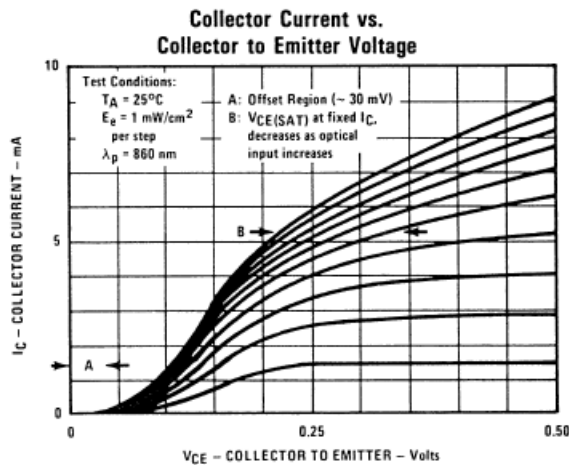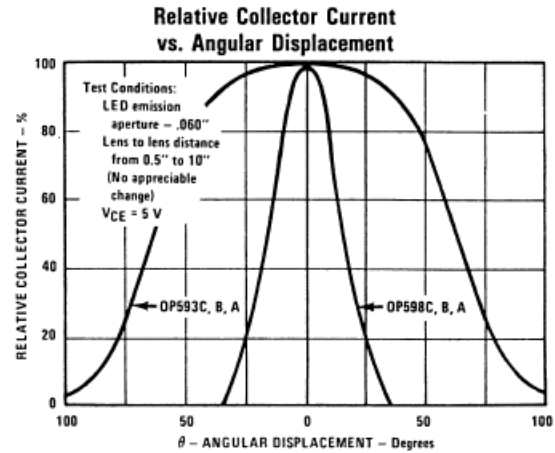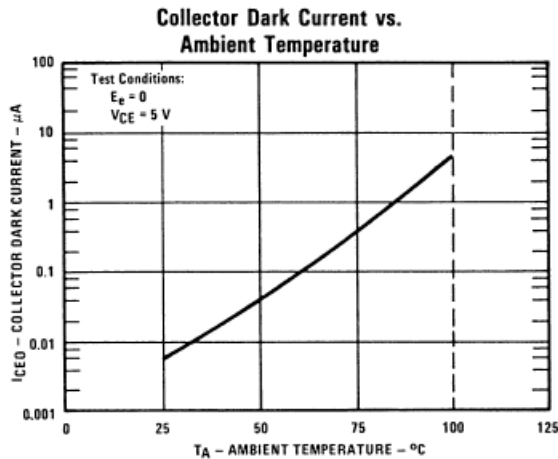

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
 1645 Wallace Drive, Carrollton, TX 75006  
 Tel: +1 972 323 2200  
 www.optekinc.com | www.ttelectronics.com

# NPN Plastic Silicon Phototransistor


OP593, OP598, OP793, OP798 Series




## Performance

OP593, OP598


Spectral Response of OP593/OP598 vs. Tungsten

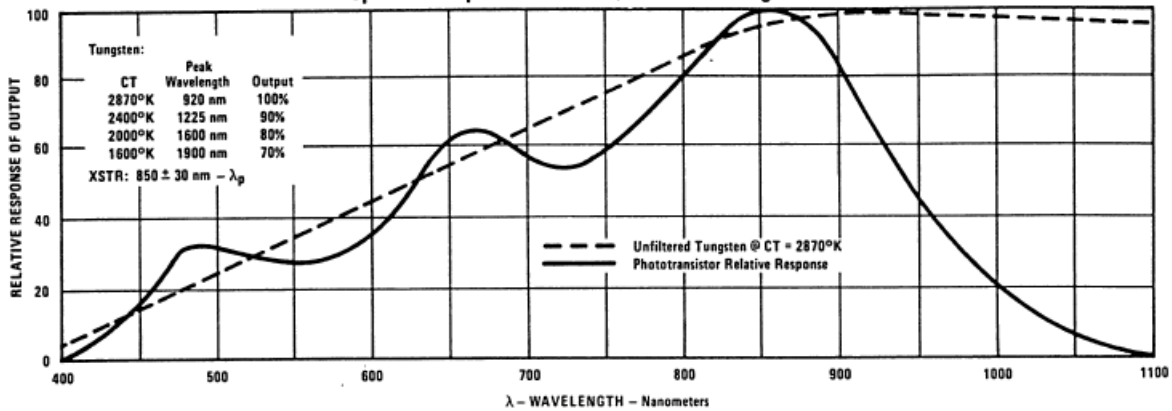

Spectral Response of OP593/OP598 vs. GaAlAs and GaAs

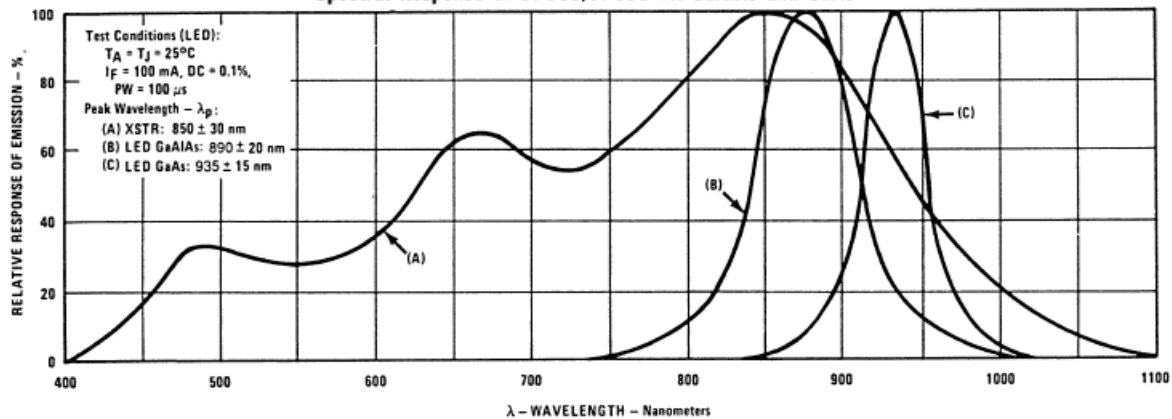

Coupling Characteristics of OP293/OP593 and OP298/OP598

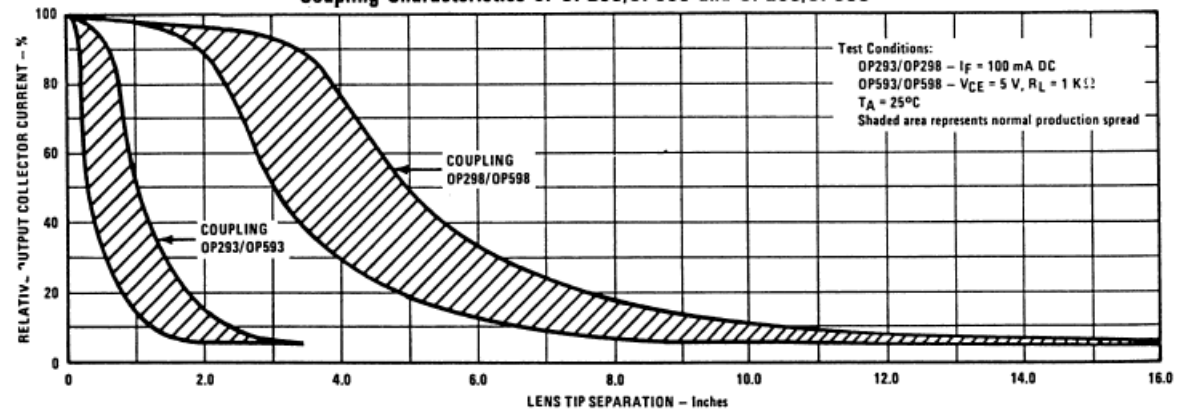

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
 1645 Wallace Drive, Carrollton, TX 75006  
 Ph: +1 972 323 2200  
[www.optekinc.com](http://www.optekinc.com) | [www.ttelectronics.com](http://www.ttelectronics.com)

# NPN Plastic Silicon Phototransistor


OP593, OP598, OP793, OP798 Series




## Performance

OP793, OP798


Typical Spectral Response

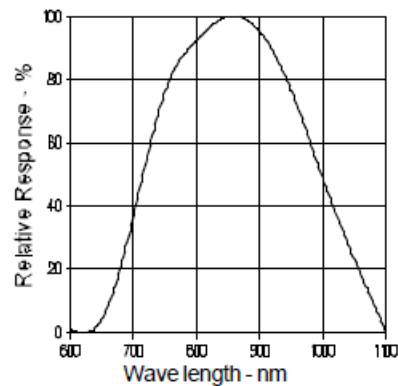


Schematic



On-State Collector Current vs. Irradiance

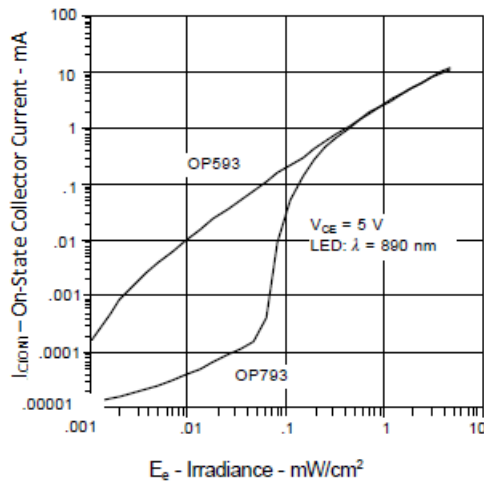

On-State Collector Current vs. Irradiance

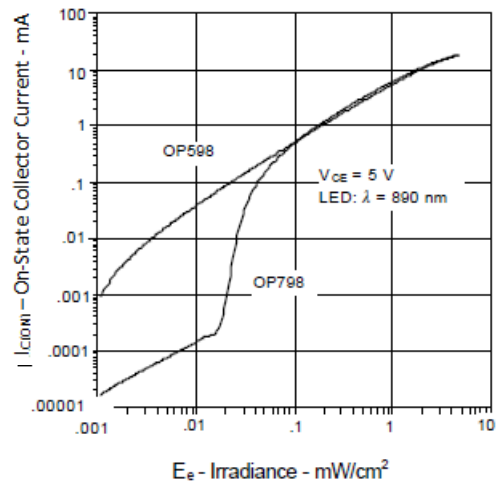

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com




# NPN Plastic Silicon Phototransistor

OP593, OP598, OP793, OP798 Series



## Performance

OP793, OP798

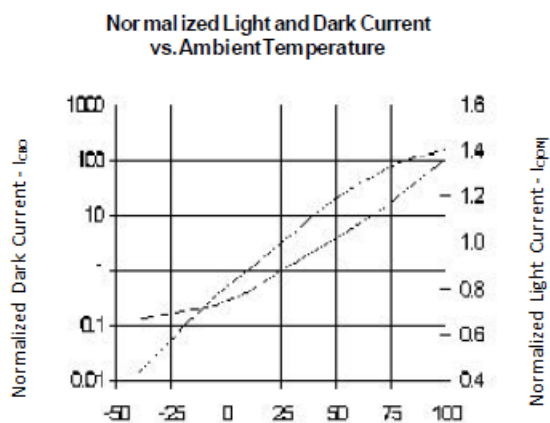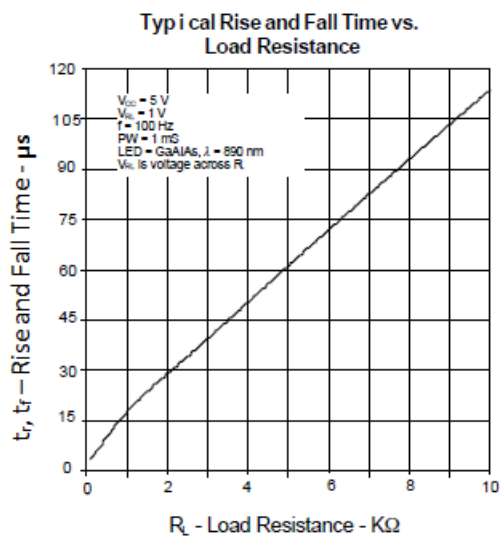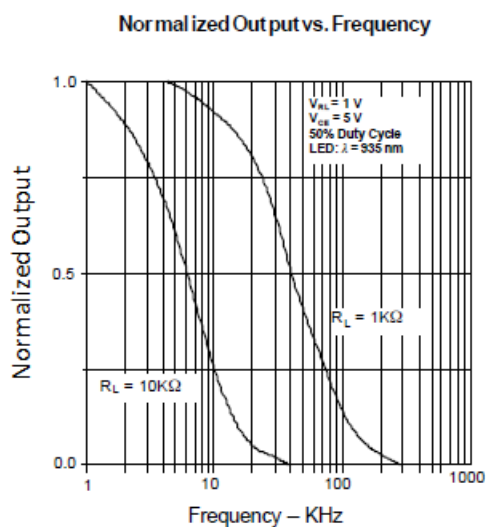

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
[www.optekinc.com](http://www.optekinc.com) | [www.ttelectronics.com](http://www.ttelectronics.com)