

## SERIES REGULATOR WITH RESET FUNCTION

### ■ GENERAL DESCRIPTION

The **NJM78LR05** is a series regulator with reset function.


In case of shut down or output voltage drop, the IC generates reset signal to a microcomputer.

That is suitable for items with microcomputer, such as TV sets, remote controller, refrigerator and others.


### ■ FEATURES

- Output Current  $I_o=150\text{mA max.}$
- Reset Function Including
- Reset Delay Time can be Adjusted  
by an External Capacitance.
- Internal Over Current Protection
- Thermal Shut Down
- Bipolar Technology
- package Outline DIP8, DMP8, SIP8, SOT-89 (5Pin)

### ■ PACKAGE OUTLINE



**NJM78LR05BD / CD / DD**   **NJM78LR05BM / CM / DM**




**NJM78LR05BL / CL / DL**   **NJM78LR05BU / CU / DU**

### ■ RESET THRESHOLD VOLTAGE LINE-UP

| Reset Threshold Voltage | Version | Part Number |
|-------------------------|---------|-------------|
| 4.0V                    | D       | NJM78LR05DX |
| 4.2V                    | C       | NJM78LR05CX |
| 4.3V                    | B       | NJM78LR05BX |



"X" is package suffix.

### ■ BLOCK DIAGRAM

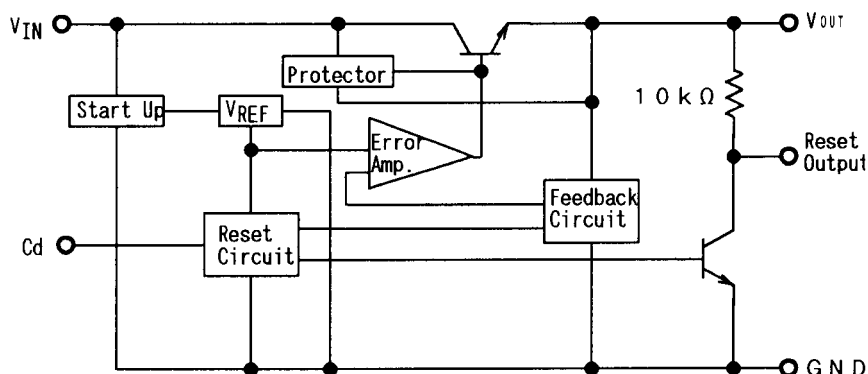


# NJM78LR05

## ■ PIN CONFIGURATION



### PIN FUNCTION

1. INPUT
2. NC
3. Cd
4. NC
5. GND
6. RESET-OUTPUT
7. NC
8. OUTPUT



### PIN FUNCTION

1. Cd
2. GND
3. RESET-OUTPUT
4. OUTPUT
5. INPUT

## ■ ABSOLUTE MAXIMUM RATINGS

(T<sub>a</sub>=25°C)

| PARAMETER                   | SYMBOL           | MAXIMUM RATINGS                                          | UNIT |
|-----------------------------|------------------|----------------------------------------------------------|------|
| Input Voltage               | V <sub>IN</sub>  | +20                                                      | V    |
| Power Dissipation           | P <sub>D</sub>   | (DIP-8) 500<br>(DMP8) 500*<br>(SIP8) 800<br>(SOT-89) 350 | mW   |
| Operating Temperature Range | T <sub>opr</sub> | -40 to +85                                               | °C   |
| Storage Temperature Range   | T <sub>stg</sub> | -50 to +150                                              | °C   |

\*At on PC board.

## ■ RECOMMENDED OPERATING CONDITIONS

(T<sub>a</sub>=25°C)

| PARAMETER      | SYMBOL          | CONDITIONS | UNIT |
|----------------|-----------------|------------|------|
| Input Voltage  | V <sub>IN</sub> | 7.5 to 18  | V    |
| Output Current | I <sub>O</sub>  | 1 to 100   | mA   |

## ■ ELECTRICAL CHARACTERISTICS

( $V_{IN}=10V$ ,  $I_O=40mA$ ,  $C_{IN}=1\mu F$ ,  $C_O=10\mu F$ ,  $T_a=25^\circ C$ )

[Power Supply Block]


| PARAMETER            | SYMBOL                 | CONDITIONS                                        | MIN. | TYP. | MAX. | UNIT    |
|----------------------|------------------------|---------------------------------------------------|------|------|------|---------|
| Output Voltage       | $V_O$                  | $I_O=1mA$                                         | 4.80 | 5.00 | 5.20 | V       |
| Quiescent Current    | $I_Q$                  | $I_O=100mA$                                       | -    | 1.40 | 3.40 | mA      |
| Output Short Current | $I_{OSC}$              | OUTPUT-GND short                                  | 150  | 300  | 450  | mA      |
| Line Regulation 1    | $\Delta V_O / V_{IN1}$ | $7V \leq V_{IN} \leq 18V$                         | -    | 6.0  | 65.0 | mV      |
| Line Regulation 2    | $\Delta V_O / V_{IN2}$ | $8V \leq V_{IN} \leq 18V$                         | -    | 3.0  | 42.0 | mV      |
| Load Regulation 1    | $\Delta V_O / I_{O1}$  | $I_O=1$ to 100mA                                  | -    | 9.0  | 60.0 | mV      |
| Load Regulation 2    | $\Delta V_O / I_{O2}$  | $I_O=1$ to 40mA                                   | -    | 3.0  | 30.0 | mV      |
| Ripple Rejection     | RR                     | $f=120Hz$ , $e_{in}=1V_{P-P}$ , $V_{IN}=8$ to 18V | -    | 79   | -    | dB      |
| Output Noise Voltage | $V_{NO}$               | $10Hz \leq f \leq 100kHz$ , $I_O=1mA$             | -    | 80   | -    | $\mu V$ |
| Dropout Voltage      | $\Delta V_{I-O}$       |                                                   | -    | 1.5  | 2.2  | V       |

[Reset Block]

|                                    |           |                         |      |      |      |    |
|------------------------------------|-----------|-------------------------|------|------|------|----|
| (H) Reset Output Voltage           | $V_{ORH}$ |                         | 4.80 | 5.00 | 5.20 | V  |
| (L) Reset Output Voltage           | $V_{ORL}$ | $V_{IN}=3V$ , $I_O=1mA$ | -    | 10   | 200  | mV |
| Reset Threshold Voltage            | $V_{RT}$  | B Version               | 4.12 | 4.30 | 4.48 | V  |
|                                    |           | C Version               | 4.03 | 4.20 | 4.37 |    |
|                                    |           | D Version               | 3.84 | 4.00 | 4.16 |    |
| Reset Threshold Hysteresis Voltage | $V_{RTH}$ |                         | 50   | 100  | 200  | mV |
| Reset Output Delay Time            | $t_d$     | $C_d=0.1\mu F$          | 7.50 | 10.0 | 12.5 | ms |

# NJM78LR05


## ■ APPLICATION CIRCUIT

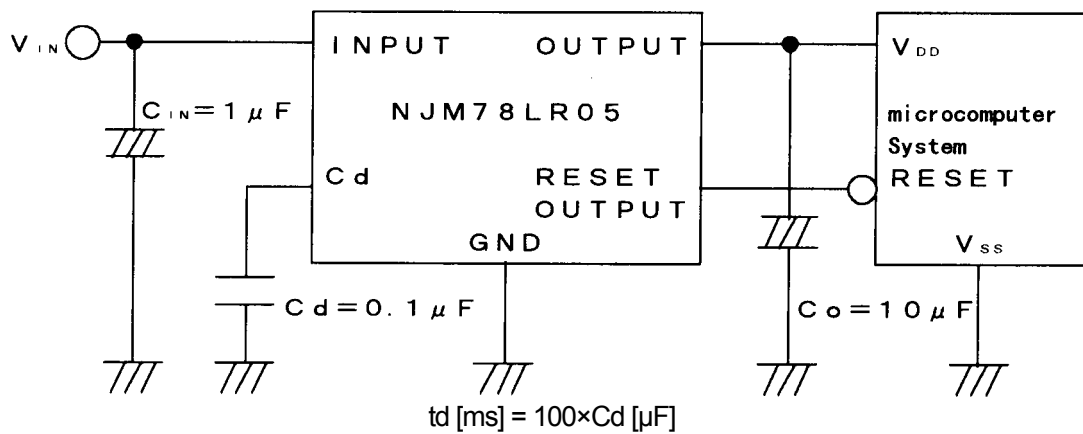


Note 1 : When the capacitance  $C_d$  is too large, the actual delay time is shorter than the calculated result because an electrical charge of  $C_d$  is discharged incompletely.

Solution of above problem :

- (1) Connect SBD between output terminal and  $C_d$  terminal. Please refer to the following circuit.
- (2) Select larger capacitance,  $C_{IN}$  than  $C_d$ .

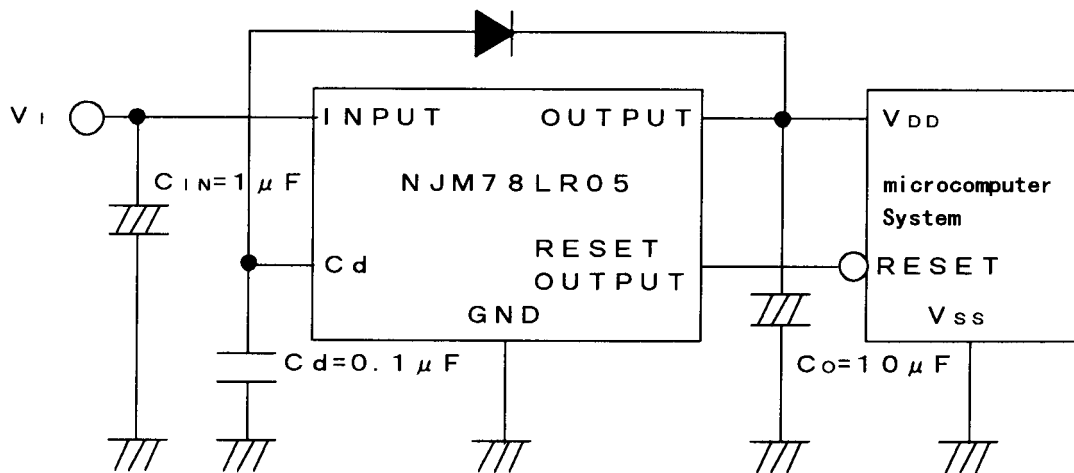


## ■ TIMING CHART

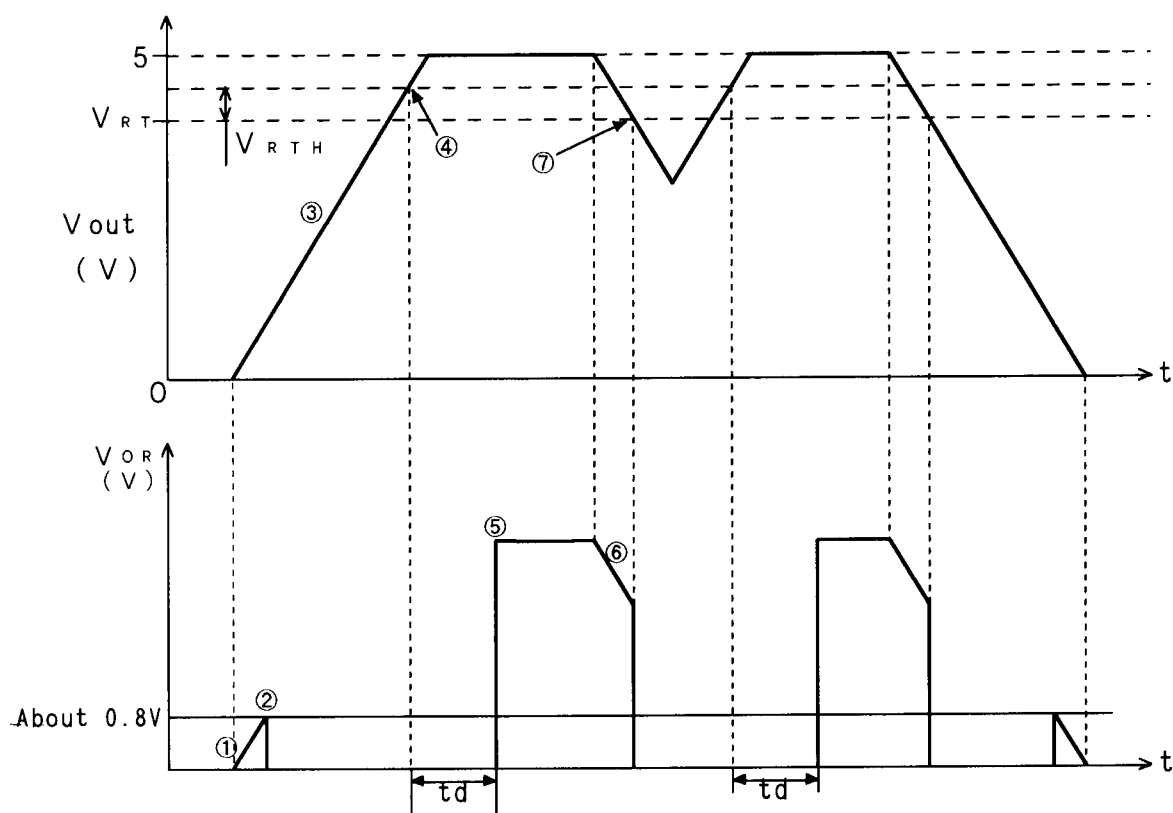


- ① When the input voltage is up to about 0.8V, some voltage is outputted at the reset output because the **NJM78LR05** operation is unstable.
- ② When the input voltage goes over about 0.8V, the reset output becomes "L".
- ③ The output voltage is rising up with the input voltage.
- ④ When the output voltage goes over ( $V_{RT} + V_{RTH}$ ), the delay circuit of reset output activates.  
 $V_{RT}$  : Reset Threshold Voltage  
 $V_{RTH}$  : Reset Threshold Hysteresis Voltage
- ⑤ After the reset output delay time  $t_d$  has passed, the reset output becomes "H".
- ⑥ The output voltage is falling down with the input voltage.
- ⑦ When the output voltage is less than  $V_{RT}$ , the reset output becomes "L".

## ■ TYPICAL CHARACTERISTICS


**Reset Output Voltage vs. Output Voltage**  
( $I_O=40\text{mA}$ ,  $T_a=25^\circ\text{C}$ )

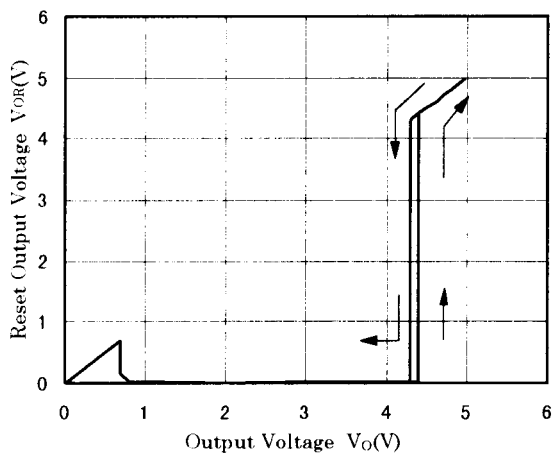


**Line Regulation**  
( $T_a=25^\circ\text{C}$ )

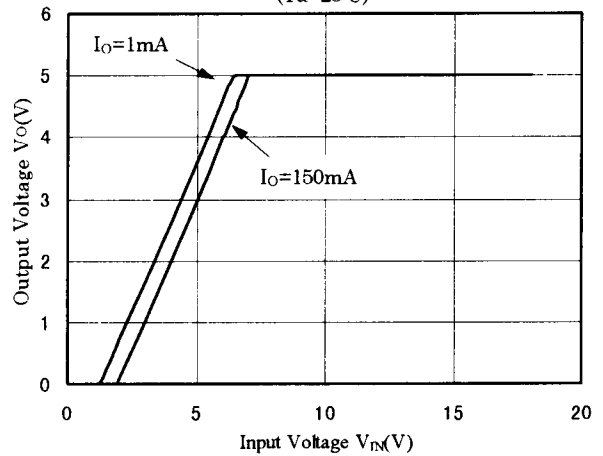


**Load Regulation**  
( $V_{IN}=10\text{V}$ ,  $T_a=25^\circ\text{C}$ )

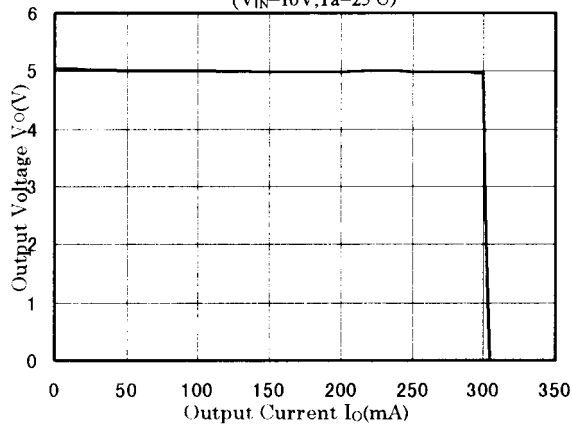


**Dropout Voltage**  
( $T_a=25^\circ\text{C}$ )

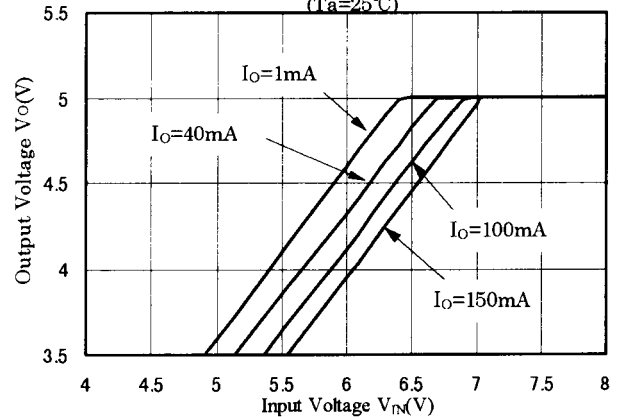



**Quiescent Current vs. Input Voltage**  
( $I_O=0\text{mA}$ ,  $T_a=25^\circ\text{C}$ )

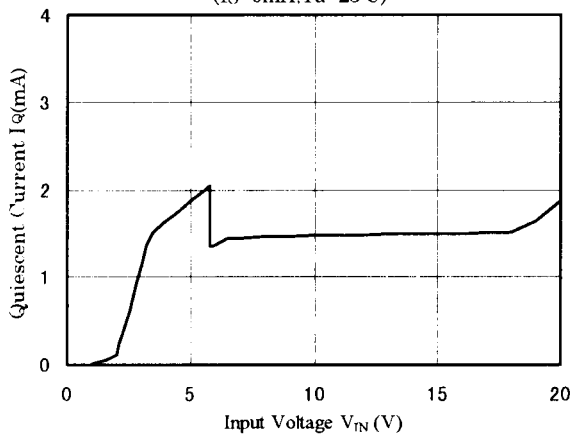

**Output Short Current vs. Input Voltage**



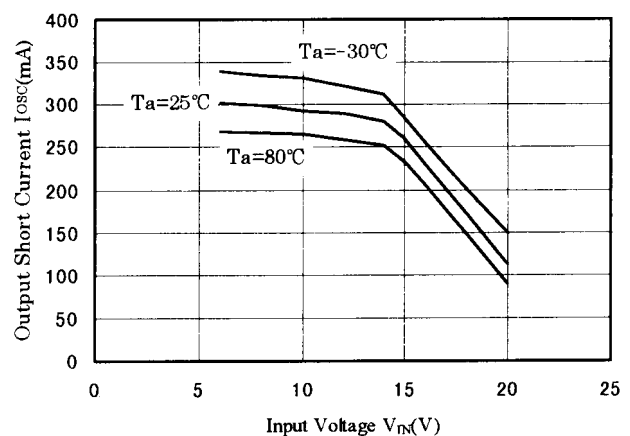


## ■ TYPICAL CHARACTERISTICS

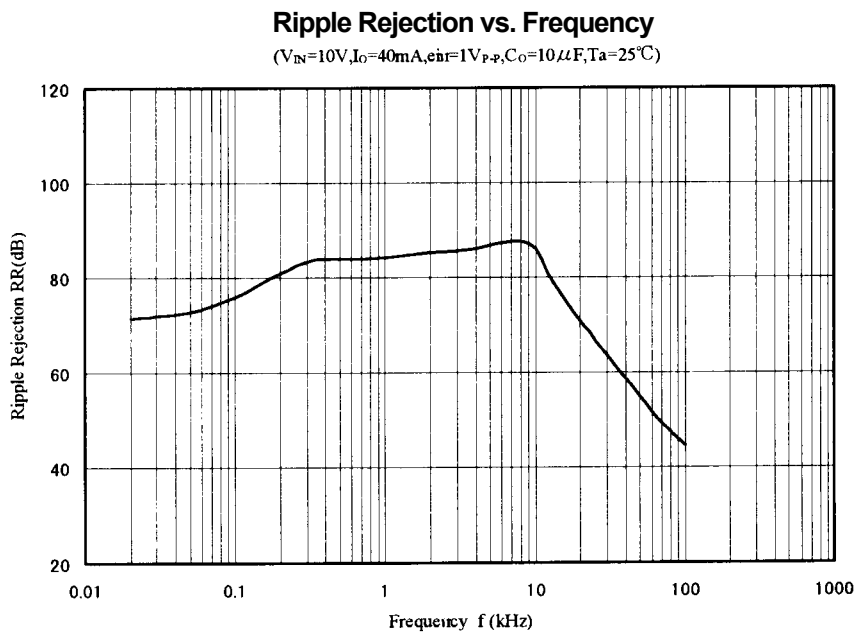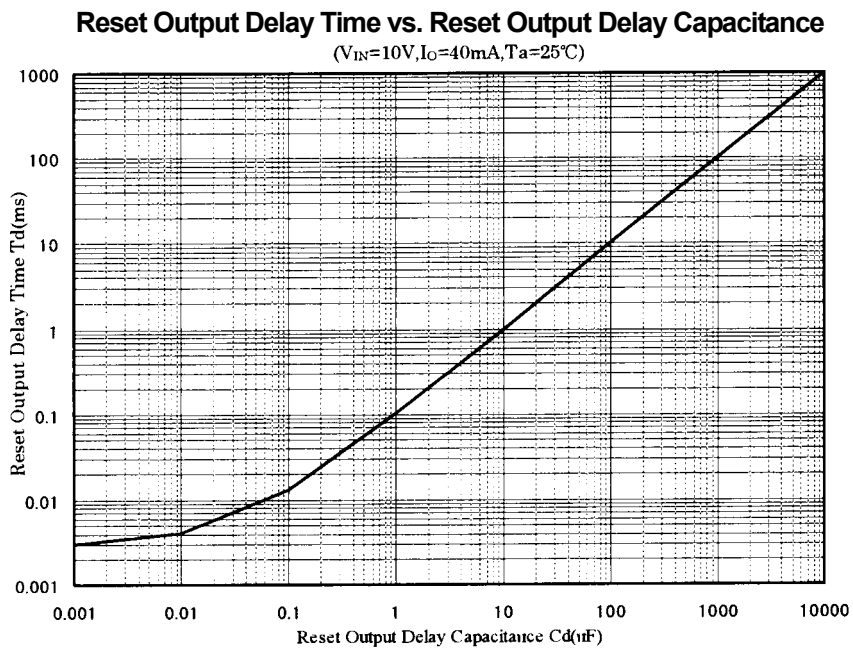

# NJM78LR05

## ■ TYPICAL CHARACTERISTICS

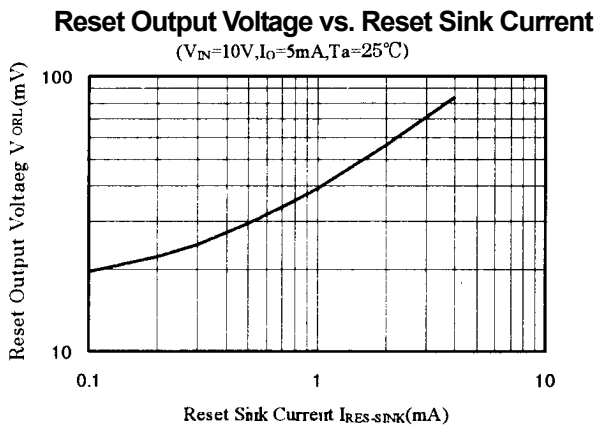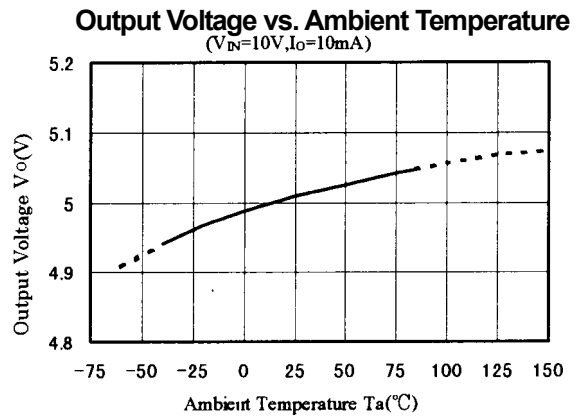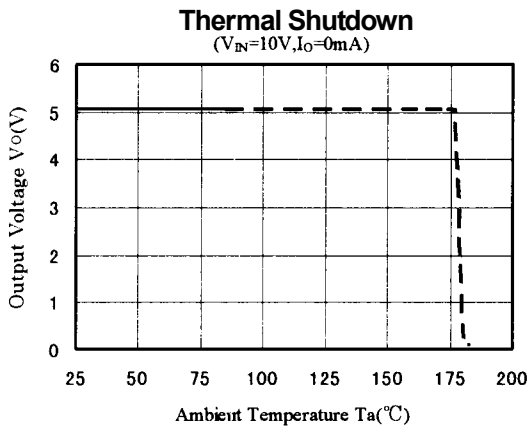

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.