

January 1997

CD74FCT273

BiCMOS FCT Interface Logic, Octal D Flip-Flop with Reset

Features

- Buffered Inputs
- Typical Propagation Delay: 5.3ns at $V_{CC} = 5V$, $T_A = 25^\circ C$, $C_L = 50pF$
- SCR Latchup Resistant BiCMOS Process and

**NOT RECOMMENDED
FOR NEW DESIGNS**
Use CMOS Technology

Circuit Design

- Speed of Bipolar FAST™/AS/S
- 48mA Output Sink Current
- Output Voltage Swing Limited to 3.7V at $V_{CC} = 5V$
- Controlled Output Edge Rates
- Input/Output Isolation to V_{CC}
- BiCMOS Technology with Low Quiescent Power


Ordering Information

PART NUMBER	TEMP. RANGE ($^\circ C$)	PACKAGE	PKG. NO.
CD74FCT273E	0 to 70	20 Ld PDIP	E20.3
CD74FCT273M	0 to 70	20 Ld SOIC	M20.3

NOTE: When ordering the suffix M package, use the entire part number. Add the suffix 96 to obtain the variant in the tape and reel.


Pinout

CD74FCT273
(PDIP, SOIC)
TOP VIEW

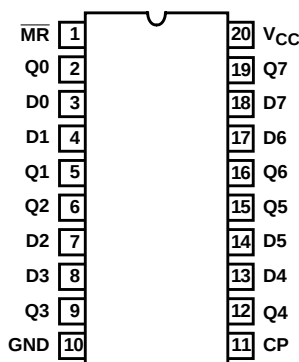

CD74FCT273

Functional Diagram

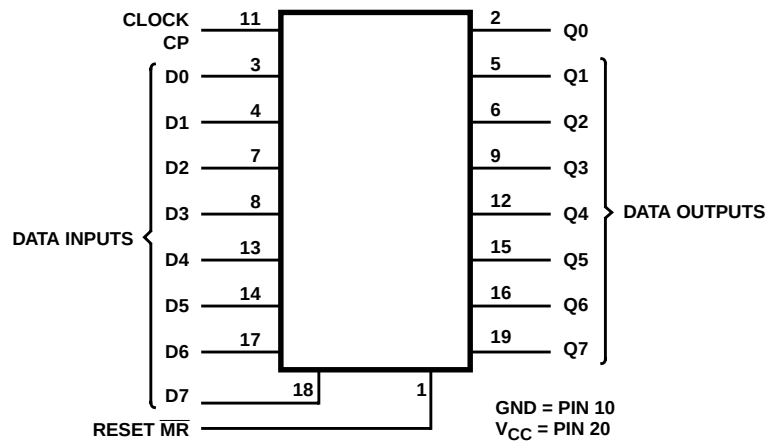


TRUTH TABLE (Note 1)

INPUTS			OUTPUTS
RESET MR	CLOCK CP	DATA Dn	Qn
L	X	X	L
H	↑	H	H
H	↑	L	L
H	L	X	Q0

NOTE:

1. H = HIGH Voltage Level (Steady State)
L = LOW Voltage Level (Steady State)
X = Irrelevant
↑ = Transition from low to high level.
Q0 = The level of Q before the indicated steady state input conditions were established.

IEC Logic Symbol

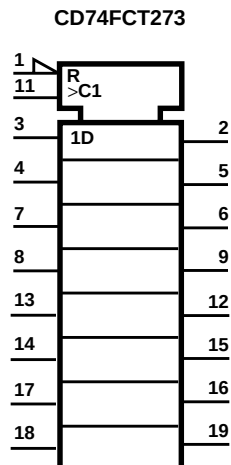

CD74FCT273

Absolute Maximum Ratings

DC Supply Voltage (V_{CC})	-0.5V to 6V
DC Input Diode Current, I_{IK} (For $V_I < -0.5V$)	-20mA
DC Output Diode Current, I_{OK} (for $V_O < -0.5V$)	-50mA
DC Output Sink Current per Output Pin, I_O	70mA
DC Output Source Current per Output Pin, I_O	-30mA
DC V_{CC} Current (I_{CC})	140mA
DC Ground Current (I_{GND})	400mA

Thermal Information

Thermal Resistance (Typical, Note 2)	θ_{JA} ($^{\circ}C/W$)
PDIP Package	135
SOIC Package	125
Maximum Junction Temperature	150 $^{\circ}C$
Maximum Storage Temperature Range	-65 $^{\circ}C$ to 150 $^{\circ}C$
Maximum Lead Temperature (Soldering 10s)	300 $^{\circ}C$ (SOIC-Lead Tips Only)

Operating Conditions

Operating Temperature Range (T_A)	0 $^{\circ}C$ to 70 $^{\circ}C$
Supply Voltage Range, V_{CC}	4.75V to 5.25V
DC Input Voltage, V_I	0 to V_{CC}
DC Output Voltage, V_O	0 to $\leq V_{CC}$
Input Rise and Fall Slew Rate, dt/dv	0 to 10ns/V

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

- θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

Electrical Specifications Commercial Temperature Range 0 $^{\circ}C$ to 70 $^{\circ}C$, V_{CC} Max = 5.25V, V_{CC} Min = 4.75V (Note 5)

PARAMETER	SYMBOL	TEST CONDITIONS		V _{CC} (V)	AMBIENT TEMPERATURE (T _A)				UNITS
					25°C		0°C TO 70°C		
		V _I (V)	I _O (mA)		MIN	MAX	MIN	MAX	
High Level Input Voltage	V _{IH}			4.75 to 5.25	2	-	2	-	V
Low Level Input Voltage	V _{IL}			4.75 to 5.25	-	0.8	-	0.8	V
High Level Output Voltage	V _{OH}	V _{IH} or V _{IL}	-15	Min	2.4	-	2.4	-	V
Low Level Output Voltage	V _{OL}	V _{IH} or V _{IL}	48	Min	-	0.55	-	0.55	V
High Level Input Current	I _{IH}	V _{CC}		Max	-	0.1	-	1	μA
Low Level Input Current	I _{IL}	GND		Max	-	-0.1	-	-1	μA
Three State Leakage Current	I _{OZH}	V _{CC}		Max	-	0.5	-	10	μA
	I _{OZL}	GND		Max	-	-0.5	-	-10	μA
Input Clamp Voltage	V _{IK}	V _{CC} or GND	-18	Min	-	-1.2	-	-1.2	V
Short Circuit Output Current (Note 3)	I _{OS}	V _O = 0 V _{CC} or GND		Max	-60	-	-60	-	mA
Quiescent Supply Current, MSI	I _{CC}	V _{CC} or GND	0	Max	-	8	-	80	μA
Additional Quiescent Supply Current per Input Pin TTL Inputs High, 1 Unit Load	ΔI _{CC}	3.4V (Note 4)		Max	-	1.6	-	1.6	mA

NOTES:

- Not more than one output should be shorted at one time. Test duration should not exceed 100ms.
- Inputs that are not measured are at V_{CC} or GND.
- FCT Input Loading: All inputs are 1 unit load. Unit load is ΔI_{CC} limit specified in Static Characteristics Chart, e.g., 1.6mA Max. at 70 $^{\circ}C$.

CD74FCT273

Switching Specifications Over Operating Range FCT Series $t_r, t_f = 2.5\text{ns}$, $C_L = 50\text{pF}$, R_L (Figure 4) (Note 6)

PARAMETER	SYMBOL	V_{CC} (V)	25°C	0°C TO 70°C		UNITS
			TYP	MIN	MAX	
Propagation Delays						
CP to Qn	t_{PLH}, t_{PHL}	5	7	2	13	ns
$\overline{MR}$ to Qn	t_{PLH}, t_{PHL}	5	8	2	13	ns
Power Dissipation Capacitance	C_{PD} (Note 7)	-	36	-	-	pF
Input Capacitance	C_I	-	-	-	10	pF

NOTES:

6. 5V: Min is at 5.25V for 0°C to 70°C, Max is at 4.75V for 0°C to 70°C, Typ is at 5V.
7. C_{PD} , measured per flip-flop, is used to determine the dynamic power consumption.
 P_D (per package) = $V_{CC} I_{CC} + \Sigma(V_{CC}^2 f_I C_{PD} + V_O^2 f_O C_L + V_{CC} \Delta I_{CC} D)$ where:
 V_{CC} = supply voltage
 ΔI_{CC} = flow through current x unit load
 C_L = output load capacitance
 D = duty cycle of input high
 f_O = output frequency
 f_I = input frequency


Prerequisite for Switching (Note 8)

PARAMETER	SYMBOL	V_{CC} (V)	25°C	0°C TO 70°C		UNITS
			TYP	MIN	MAX	
Data to CP Setup Time	t_{SU}	5	-	3	-	ns
Hold Time	t_H	5	-	2	-	ns
Removal Time, $\overline{MR}$ to CP	t_{REM}	5	-	4	-	ns
$\overline{MR}$ Pulse Width	t_W	5	-	7	-	ns
CP Pulse Width	t_W	5	-	7	-	ns
CP Frequency	f_{MAX}	5	-	70	-	MHz

NOTE:

8. 5V: Minimum is at 4.75V for 0°C to 70°C, Typical is at 5V.

Test Circuits and Waveforms

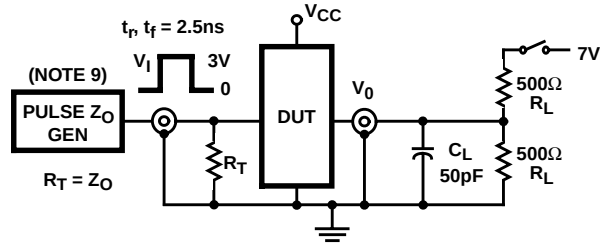

NOTE:

9. Pulse Generator for All Pulses: Rate $\leq 1.0\text{MHz}$; $Z_{\text{OUT}} \leq 50\Omega$;
 $t_r, t_f \leq 2.5\text{ns}$.

FIGURE 1. TEST CIRCUIT

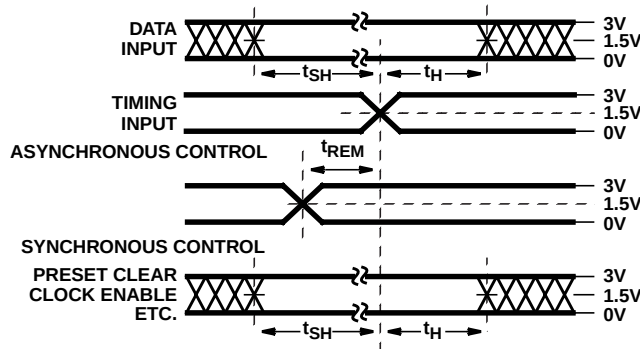


FIGURE 2. SETUP, HOLD, AND RELEASE TIMING

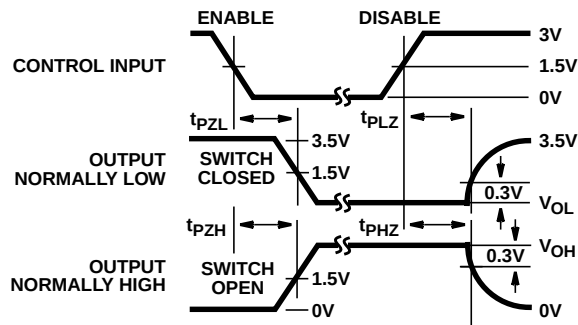


FIGURE 4. ENABLE AND DISABLE TIMING

SWITCH POSITION	
TEST	SWITCH
$t_{\text{PLZ}}, t_{\text{PZL}}, \text{Open Drain}$	Closed
$t_{\text{PHZ}}, t_{\text{PZH}}, t_{\text{PLH}}, t_{\text{PHL}}$	Open

DEFINITIONS:

C_L = Load capacitance, includes jig and probe capacitance.

R_T = Termination resistance, should be equal to Z_{OUT} of the Pulse Generator.

$V_{\text{IN}} = 0\text{V}$ to 3V .

Input: $t_r = t_f = 2.5\text{ns}$ (10% to 90%), unless otherwise specified

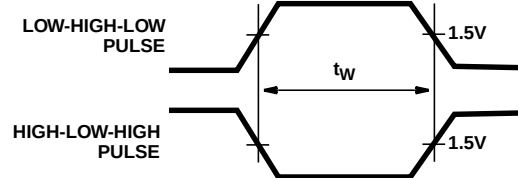


FIGURE 3. PULSE WIDTH


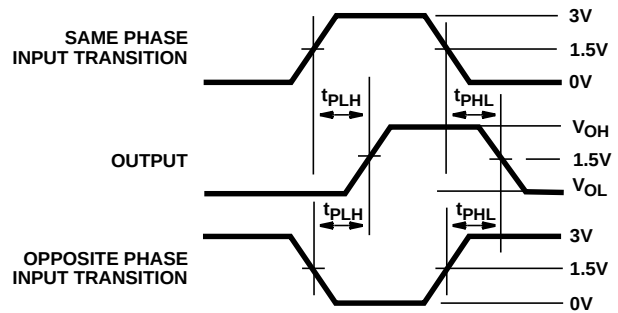


FIGURE 5. PROPAGATION DELAY

Test Circuits and Waveforms (Continued)

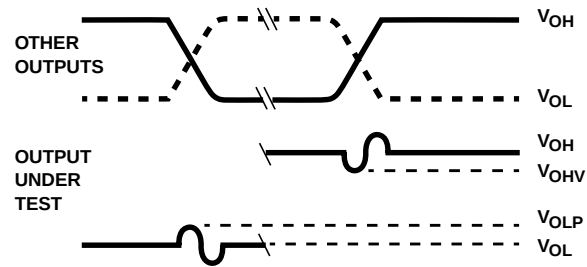

NOTES:

10. V_{OLP} is measured with respect to a ground reference near the output under test. V_{OHV} is measured with respect to V_{OH} .
11. Input pulses have the following characteristics:
 $P_{RR} \leq 1\text{MHz}$, $t_r = 2.5\text{ns}$, $t_f = 2.5\text{ns}$, skew 1ns .
12. R.F. fixture with 700MHz design rules required. IC should be soldered into test board and bypassed with $0.1\mu\text{F}$ capacitor. Scope and probes require 700MHz bandwidth.

FIGURE 6. SIMULTANEOUS SWITCHING TRANSIENT WAVEFORMS

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.