


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|----------|-------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | CN RELEASE | 2/21/08 | D.GRIFFIN |
| B | ECN 3715: REMOVE "UL TYPE CM", NEW FORMAT | 11/18/08 | D.FRISIELLO |
| C | ECN 4289: ADDED .463 MIN. TO P1 AND P2 | 9/25/09 | D.FRISIELLO |

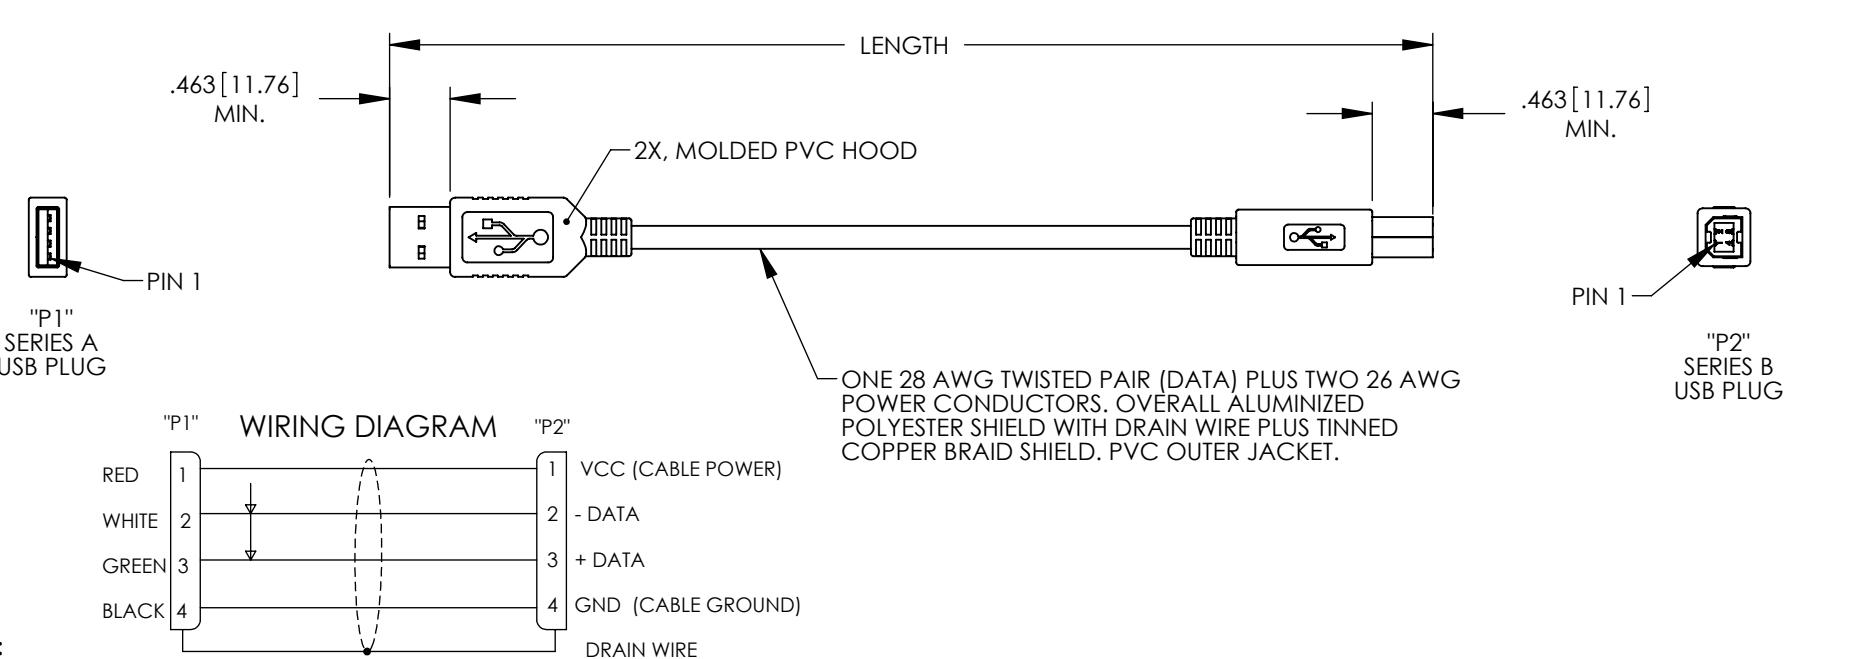

| MODEL P/N | LENGTH: METER [FT] |
|-------------|--------------------|
| ECUSBAB-05M | .5 M [1.64] |
| ECUSBAB-1M | 1 M [3.28] |
| ECUSBAB-2M | 2 M [6.56] |
| ECUSBAB-3M | 3 M [9.84] |
| ECUSBAB-4M | 4 M [13.12] |
| ECUSBAB-5M | 5 M [16.41] |

| | | | | |
|---|----------------------------|-------------------|---|--------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] | APPROVALS | DATE | L-Com [®] Global Connectivity | |
| OVERALL CABLE LENGTH TOLERANCE: <12 [305] ±1 [25] /-0 >12 [305] ±20 [5124] =+2 [51] /-0 >60 [1524] ±120 [3048] =+4 [102] /-0 >120 [3048] ±300 [7620] =+6 [152] /-0 >300 [7620] =+3% /-0% | D.DRIVEN BY D.FRISIELLO | 1/31/08 | CATEGORY USB | |
| ALL OTHER DIMENSIONAL TOLERANCES: $X = \pm .2$ $XX = \pm .02$ $XXX = \pm .005$ | CHECKED BY S.SMITH | 1/31/08 | | |
| CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | APPROVED BY S.SMITH | 1/31/08 | PRODUCT DESCRIPTION CABLE, USB TYPE A/B, | |
| PROJECTION | SIZE A | FSCM NO. 43321 | DWG. NO. ECUSBAB | REV. C |
| | REF | SCALE: NONE | CAD FILE: ECUSBAB.SLDDRW | SHEET 1 OF 1 |