

PFM/PWM Step-Down DC/DC Controller


FEATURES

- Space-Saving 5-Pin SOT-23A Package
- 57 μA (Typ) Supply Current
- 1A Output Current
- 0.5 μA Shutdown Mode
- 300 KHz Switching Frequency for Small Inductor Size
- Programmable Soft-Start
- 92% Typical Efficiency

TYPICAL APPLICATIONS

- Palmtops
- Battery Powered Systems
- Positive LCD Bias Generators
- Portable Communicators
- Hand-Held Scanners
- 5V to 3V Down Converters

TYPICAL APPLICATION

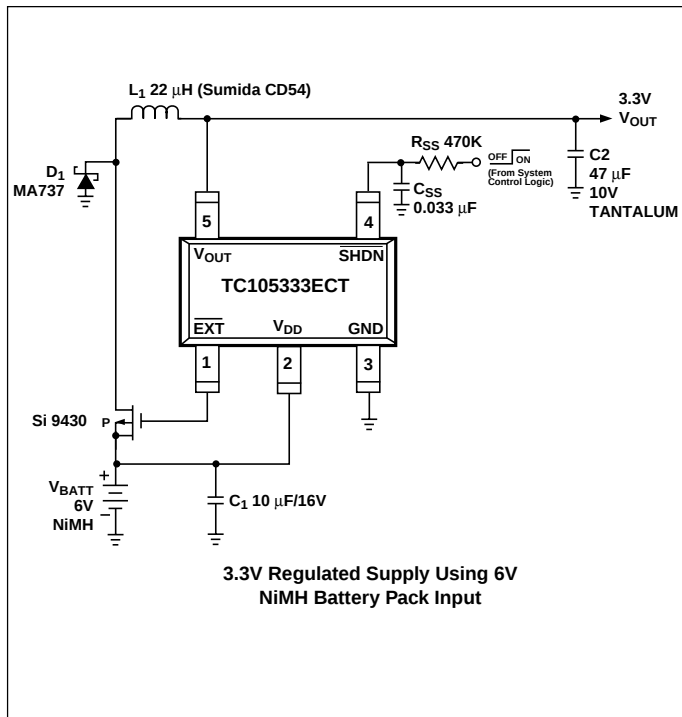

GENERAL DESCRIPTION

The TC105 is a step-down (Buck) switching controller that furnishes output currents of up to 1A (max) while delivering a typical efficiency of 92%. The TC105 normally operates in pulse width modulation mode (PWM), but automatically switches to pulse frequency modulation (PFM) at low output loads for greater efficiency. Oscillator frequency is 300 KHz, allowing use of small (22 μH) inductors. Supply current draw is only 102 μA (max), and is reduced to less than 0.5 μA when the SHDN input is brought low. Regulator operation is suspended during shutdown. The TC105 accepts a maximum input voltage of 10V.


The TC105 is housed in a tiny 5-pin SOT-23A package, occupies minimum board space, and is ideal for a wide range of applications.

ORDERING INFORMATION

Part Number	Output Voltage* (V)	Package	Osc. Freq. (KHz)	Operating Temp. Range
TC105503ECT	5.0	5-Pin SOT-23A	300	-40 to +85°C
TC105333ECT	3.3	5-Pin SOT-23A	300	-40 to +85°C
TC105303ECT	3.0	5-Pin SOT-23A	300	-40 to +85°C

NOTE: *Other output voltages available. Please contact Microchip Technology for details.

PIN CONFIGURATION

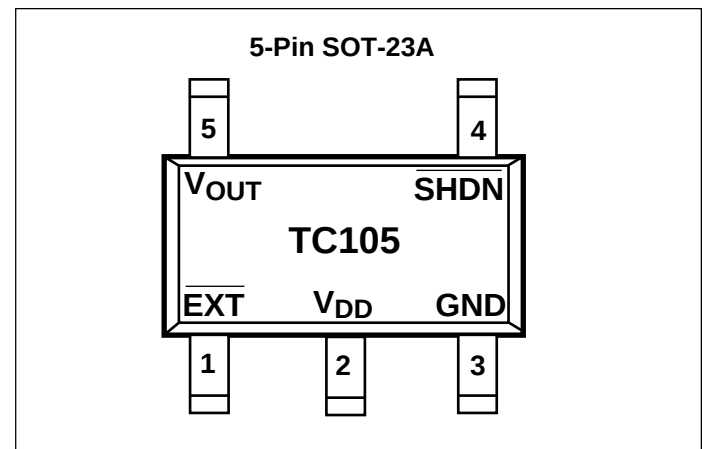

TC105

ABSOLUTE MAXIMUM RATINGS*

Voltage on V_{DD}	–0.3V to +12V
EXT Output Current	±100 mA
Voltage on V_{OUT} , EXT, $\overline{SHDN}$ Pins	–0.3V to V_{DD} +0.3V
Power Dissipation	150 mW
Operating Temperature	–40°C to +85°C
Storage Temperature	–40°C to +125°C

*Static-sensitive device. Unused devices must be stored in conductive material. Protect devices from static discharge and static fields. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to Absolute Maximum Rating Conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: Note 1, $f_{OSC} = 300$ KHz; $T_A = 25^\circ\text{C}$, unless otherwise noted.

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{DD}	Operating Supply Voltage			2.2	—	10.0 V
V_{DDMIN}	Minimum Input Voltage	$\overline{EXT} = \text{High}$; No External Components; $V_{OUT} = 0V$; $\overline{SHDN} = V_{IN}$		0.9	—	2.2 V
I_{DD}	Operating Supply Current	No External Components; $V_{OUT} = 0V$; $\overline{SHDN} = V_{IN}$	$V_R = 3.0V, 3.3V$ $V_R = 5.0V$	— —	57 67	102 122 μA
I_{STBY}	Standby Supply Current	No External Components; $V_{OUT} = \overline{SHDN} =$	$V_R = 3.0V, 3.3V$ $V_{IN}, V_R = 5.0V$	— —	15 16	27 29 μA
I_{SHDN}	Shutdown Supply Current	$\overline{SHDN} = \text{GND}$		—	—	0.5 μA
f_{OSC}	Oscillator Frequency	$V_{IN} = V_{OUT} + 0.3V$		255	300	345 KHz
V_{OUT}	Output Voltage	Note 2		V_R $\times 0.975$	V_R	V_R $\times 1.025$
DTYMAX	Maximum Duty Cycle (PWM Mode)			100	—	— %
DTYPFM	Duty Cycle (PFM Mode)	$I_{OUT} = 0$ mA		15	25	35 %
V_{IH}	$\overline{SHDN}$ Input Logic High	$V_{OUT} = 0V$; No External Components		0.65	—	— V
V_{IL}	$\overline{SHDN}$ Input Logic Low	$V_{OUT} = 0V$; No External Components		—	—	0.20 V
REXTH	EXT ON Resistance to V_{DD}	No External Components; $V_{OUT} = \overline{SHDN} = V_{IN}$; $\overline{V_{EXT}} = (V_{IN} - 0.4V)$	$V_R = 3.0$ $V_R = 3.3$ $V_R = 5.0$	— — —	17 16 12	24 22 17 Ω
REXTL	EXT ON Resistance to GND	No External Components; $V_{OUT} = 0V$; $\overline{SHDN} = V_{IN}$; $\overline{V_{EXT}} = 0.4V$	$V_R = 3.0$ $V_R = 3.3$ $V_R = 5.0$	— — —	15 14 10	20 19 14 Ω
η	Efficiency			—	92	— %

Note: 1. $V_R = 3.0V$ $V_{IN} = 4.5V$, $I_{OUT} = 200\text{mA}$
 $V_R = 3.3V$ $V_{IN} = 5.0V$, $I_{OUT} = 220\text{mA}$
 $V_R = 5.0V$ $V_{IN} = 7.5V$, $I_{OUT} = 320\text{mA}$

2. V_R is the factory output voltage setting.

PIN DESCRIPTION

Pin Number	Name	Description
1	$\overline{\text{EXT}}$	Switch Transistor Control Output. This terminal connects to the gate of an external P-channel MOSFET (or to the base of an external PNP transistor through a current limiting resistor).
2	V_{DD}	Power Supply Voltage Input.
3	GND	Ground Terminal.
4	$\overline{\text{SHDN}}$	Shutdown Input (Active Low). The TC105 enters a low-power shutdown state when this input is brought low. During shutdown, regulator action is suspended, and supply current is reduced to less than 0.5 μA . The TC105 resumes normal operation when $\overline{\text{SHDN}}$ is again brought high.
5	V_{OUT}	Voltage Sense Input. This input senses output voltage for regulation and must be connected to the output voltage node as shown in the application schematics in this data sheet.

DETAILED DESCRIPTION

TC105 is a PFM/PWM step-down DC/DC controller for use in systems operating from two or more cells, or in line-powered applications. It uses PWM as the primary modulation scheme, but automatically converts to PFM at output duty cycles less than approximately 10%. The conversion to PFM provides reduced supply current, and therefore higher operating efficiency at low loads. The TC105 uses an external switching transistor, allowing construction of switching regulators with output currents of up to 1A. The TC105 consumes only 102 μA , max, of supply current when $V_{IN} = 5\text{V}$ and $V_{OUT} = 3.3\text{V}$, and can be placed in a 0.5 μA shutdown mode by bringing the shutdown input ($\overline{\text{SHDN}}$) low. The regulator remains disabled while in shutdown mode, and output voltage discharges to zero through the load. Normal operation resumes when $\overline{\text{SHDN}}$ is brought high. Other features include a built-in undervoltage lockout (UVLO) and externally programmable soft start time. The TC105 is housed in a tiny 5-pin SOT-23A package.

Low Power Shutdown Mode

The TC105 enters a low power shutdown mode when $\overline{\text{SHDN}}$ is brought low. While in shutdown, the oscillator is disabled and the output switch is shut off. Normal regulator operation resumes when $\overline{\text{SHDN}}$ is again brought high. $\overline{\text{SHDN}}$ may be tied to the input supply if not used.

Soft Start

Soft start allows the output voltage to gradually ramp from 0 to rated output value during start-up. This action minimizes (or eliminates) overshoot, and in general, reduces stress on circuit components. Figure 1 shows the circuit required to implement soft start (values of 470K and 0.033 μF for R_{SS} and C_{SS} , respectively, are adequate for most applications).

Undervoltage Lockout (UVLO)

The TC105 is disabled when V_{IN} is below the undervoltage lockout threshold. This threshold is equal to the guaranteed minimum operating voltage for the TC105 (i.e. 2.2V). When UVLO is active, the TC105 is completely disabled.

Input Bypass Capacitors

Using an input bypass capacitor reduces peak current transients drawn from the input supply and reduces the switching noise generated by the regulator. The source impedance of the input supply determines the size of the capacitor that should be used.

Output Capacitor

The effective series resistance of the output capacitor directly affects the amplitude of the output voltage ripple. (The product of the peak inductor current and the ESR determines output ripple amplitude.) Therefore, a capacitor with the lowest possible ESR should be selected. Smaller capacitors are acceptable for light loads or in applications where ripple is not a concern. The Sprague 595D series of tantalum capacitors are among the smallest of all low ESR surface mount capacitors available. Table 1 lists suggested component numbers and manufacturers.

Inductor Selection

Selecting the proper inductor value is a trade-off between physical size and power conversion requirements. Lower value inductors cost less, but result in higher ripple current and core losses. They are also more prone to saturate since the coil current ramps faster and could overshoot the desired peak value. This not only reduces

TC105

efficiency, but could also cause the current rating of the external components to be exceeded. Larger inductor values reduce both ripple current and core losses, but are larger in physical size and tend to increase the start-up time slightly. A 22 μH inductor is recommended as the best overall compromise. For highest efficiency, use inductors with a low DC resistance (less than 20 m Ω). To minimize radiated noise, consider using a toroid, pot core, or shielded-bobbin inductor.

Output Diode

The high operating frequency of the TC105 requires a high-speed diode. Schottky diodes such as the MA737 or 1N5817 through 1N5823 (and the equivalent surface mount versions) are recommended. Select a diode whose average current rating is greater than the peak inductor current and whose voltage rating is higher than $V_{\text{DD(max)}}$.

External Switching Transistor Selection

$\overline{\text{EXT}}$ is a complementary output with a maximum ON resistance of 22 Ω to V_{DD} when high and 19 Ω to ground when low. It is designed to directly drive a P-channel MOSFET or a PNP bipolar transistor through a base current limiting resistor (Figure 2). A PNP transistor is recommended in applications where V_{IN} is less than 2.5V. Otherwise, a P-Channel MOSFET is preferred as it affords the highest efficiency because it does not draw any gate drive current. However, P-Channel MOSFETs are typically more expensive than bipolar transistors.

P-Channel MOSFET selection is determined mainly by the on-resistance, gate-source threshold, and gate charge requirements. Also, the drain-to-source and gate-to-source breakdown voltage ratings must be greater than $V_{\text{DD(max)}}$. The total gate charge specification should be less than 100 nC for best efficiency. The MOSFET must be capable of handling the required peak inductor current, and should have a very low on-resistance at that current. For example, an Si9430 MOSFET has a drain-to-source rating of -20V, and a typical on-resistance $r_{\text{DS(ON)}}$ of 0.07 Ω at 2A, with $V_{\text{GS}} = -4.5\text{V}$. Table 1 lists suppliers of external components recommended for use with the TC105.

Board Layout Guidelines

As with all inductive switching regulators, the TC105 generates fast switching waveforms, which radiate noise. Interconnecting lead lengths should be minimized to keep stray capacitance, trace resistance, and radiated noise as low as possible. In addition, the GND pin, input bypass capacitor, and output filter capacitor ground leads should be connected to a single point. The input capacitor should be placed as close to power and ground pins of the TC105 as

possible. The length of the $\overline{\text{EXT}}$ trace must also be kept as short as possible.

APPLICATIONS

Circuit Examples

Figure 3 shows a TC105 using a PNP switching transistor (Zetex FZT749) that has an h_{FE} of 180 and V_{CESAT} of 100 mV at $I_{\text{C}} = 1\text{A}$. Other high beta transistors can be used, but the values of R_{B} and C_{B} may need adjustment if h_{FE} is significantly different from that of the FZT749.

The circuit of Figure 4 utilizes a P-Channel MOSFET switching transistor (Silconix Si9430). This transistor is a member of the Littlefoot™ family of small outline MOSFETs.

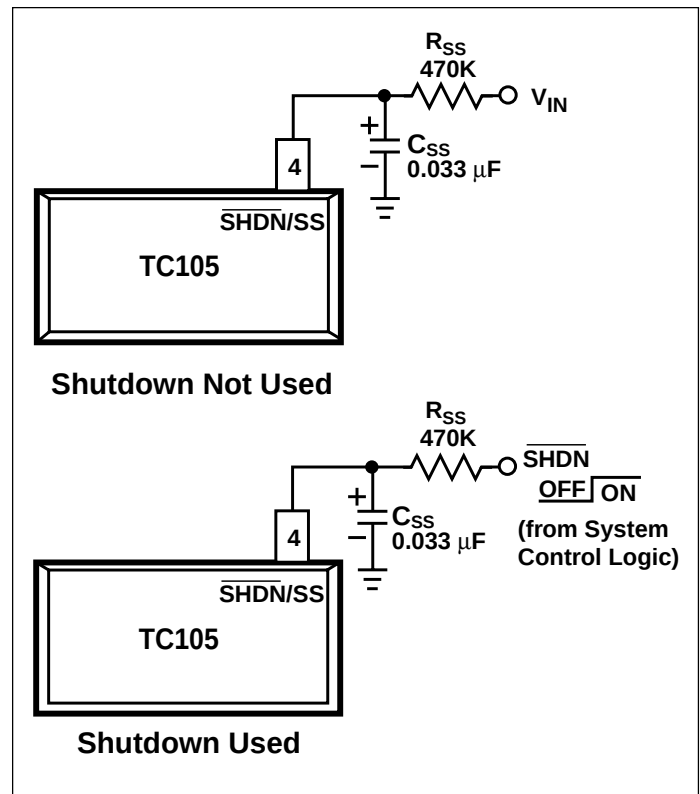


Figure 1. Soft Start Circuit

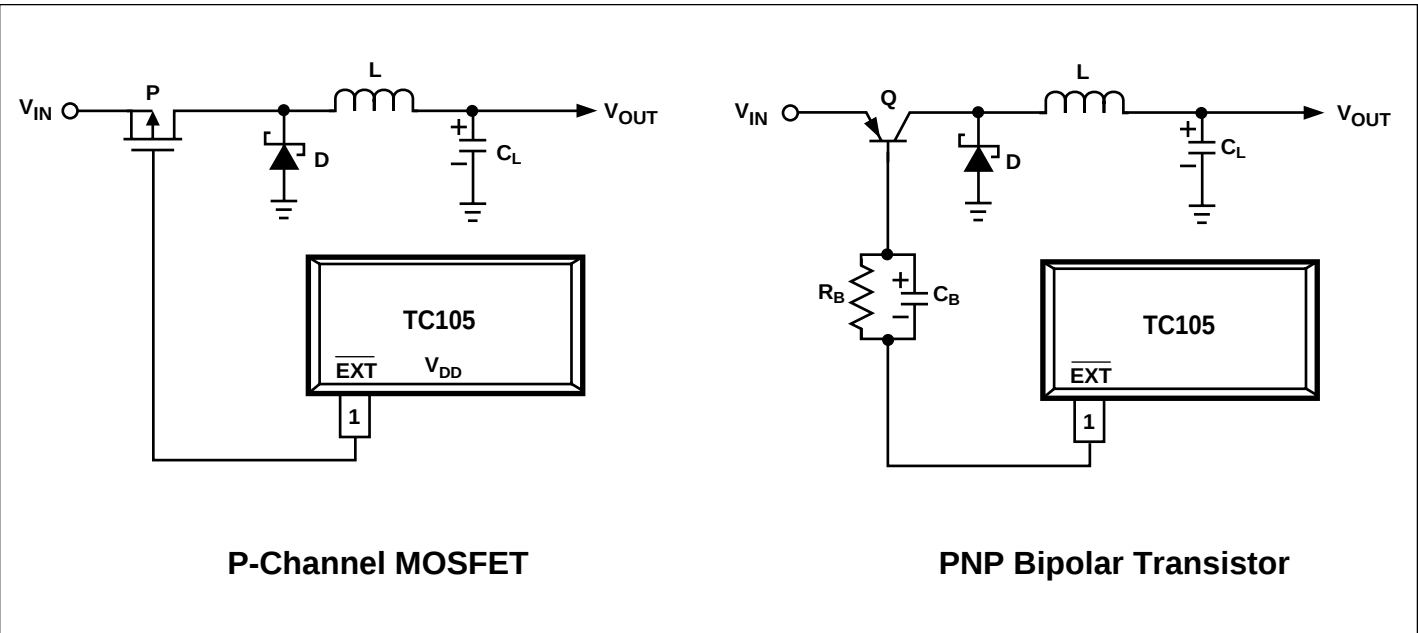


Figure 2. External Transistor Connection

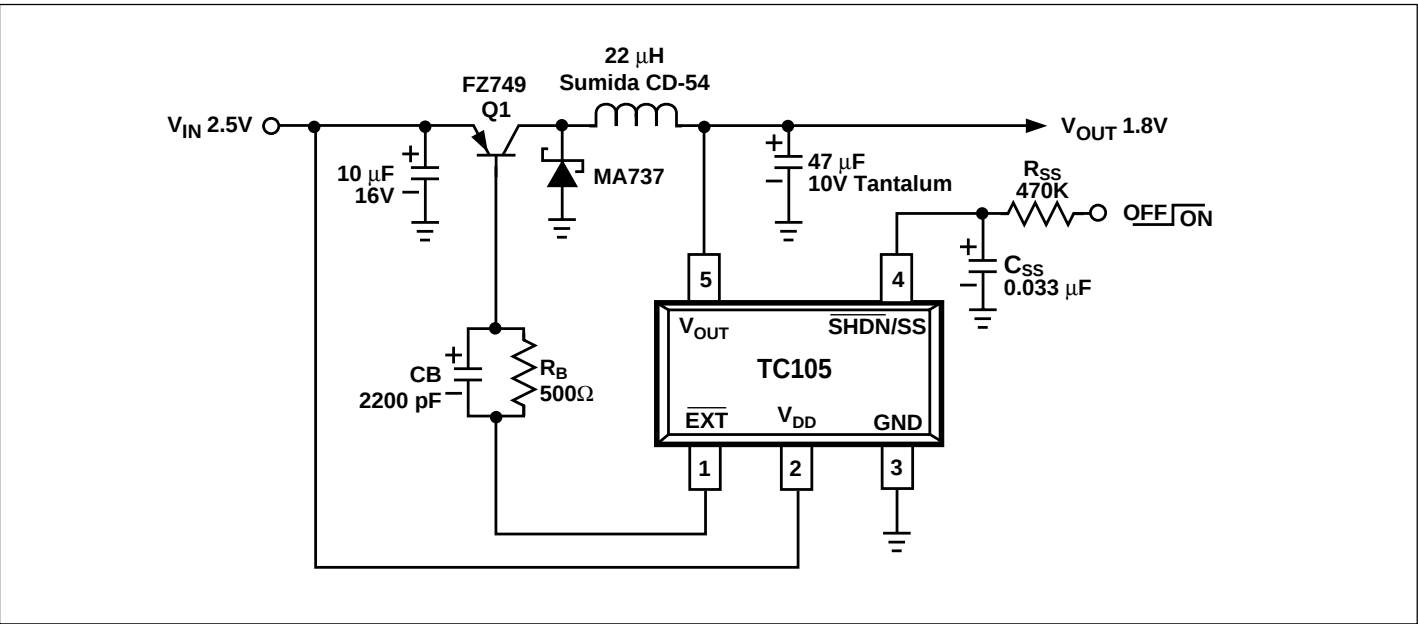


Figure 3. Regulator Using PNP Transistor

TC105

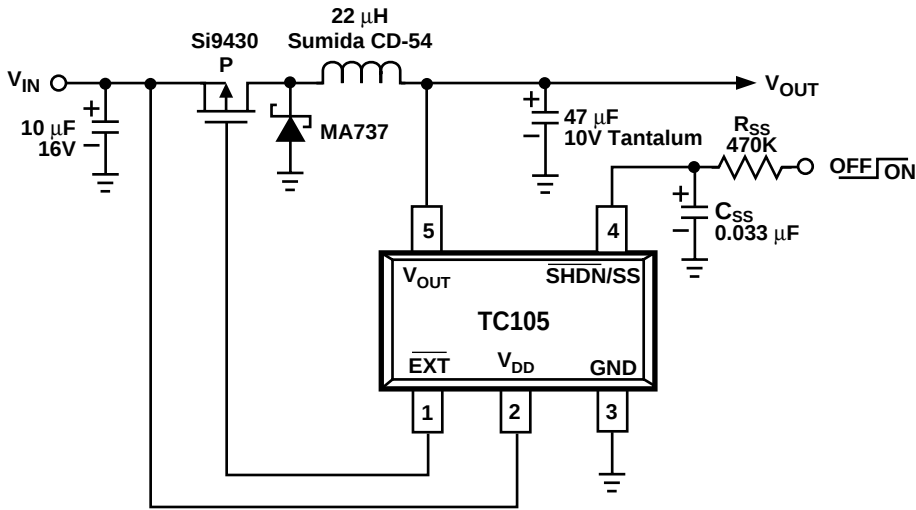


Figure 4. Regulator Using P-Channel MOSFET

Table 1. Suggested Components and Manufacturers

Type	Inductors	Capacitors	Diodes	Transistors
Surface Mount Series	Sumida CD54 Series	AVX TPS Series	Motorola MBRS340T3	Silconix Little Foot MOSFET
	CDRH Series	Sprague 595D Series	NiHon NSQ Series	Zetex FZT749 PNP Bipolar Transistor
	Coilcraft DO Series		Matsushita MA737	Toshiba 2SA1213 PNP Transistor
Miniature Through Hole	Sumida RCH Series	Sanyo OS-CON Series	IRC OAR Series	
Standard Through-Hole	Coilcraft PCH Series Coiltronics CTX Series	Nichicon PL Series United Chemi-Con LXF Series		Motorola TMOS Power MOSFETs (Example: MTP30P06V)

TC105DEMO

The TC105DEMO allows the user to quickly prototype TC105-based circuits. The TC105DEMO consists of a printed circuit board and the TC105. Supporting components (Schottky diode, input capacitor, output capacitor, external P-channel FET switch, soft-start resistor (R_{SS}), soft-start capacitor (C_{SS}), and 22 μH inductor) may be selected by the design engineer, (reference Table 1). The circuit schematic appears in Figure 5.

The board is designed to accept either a 47 μH or 22 μH power inductor. The remaining components install in accordance with the component side layout diagram of Figure 6. Jumper blocks J1 and J2 control shutdown and an optional

device current measurement mode respectively. Shorting J1, terminal X to OFF places the TC105 in shutdown; normal operation is enabled when J1 terminal X is shorted to ON (the TC105's soft-start feature is disabled in this mode). A logic control signal can be connected to terminal X on J1 to provide true soft-start operation using the R_{SS} and C_{SS} components. Shorting J2, terminal CM+ to CM- selects the typical operating mode; if J2 terminal CM+ to CM- is unconnected, a current meter can be placed across these terminals to measure the total device current (including current drawn from the SHDN input in the normal mode of operation).

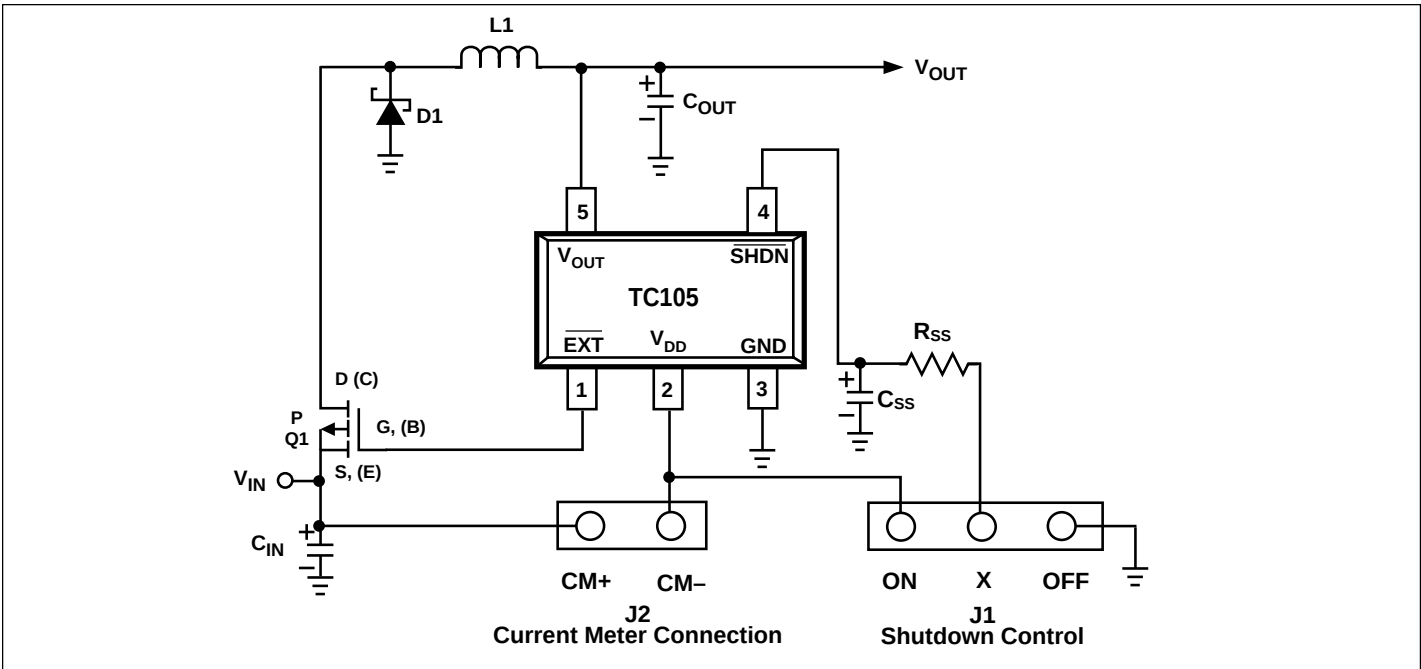


Figure 5. TC105 DEMO Card Schematic


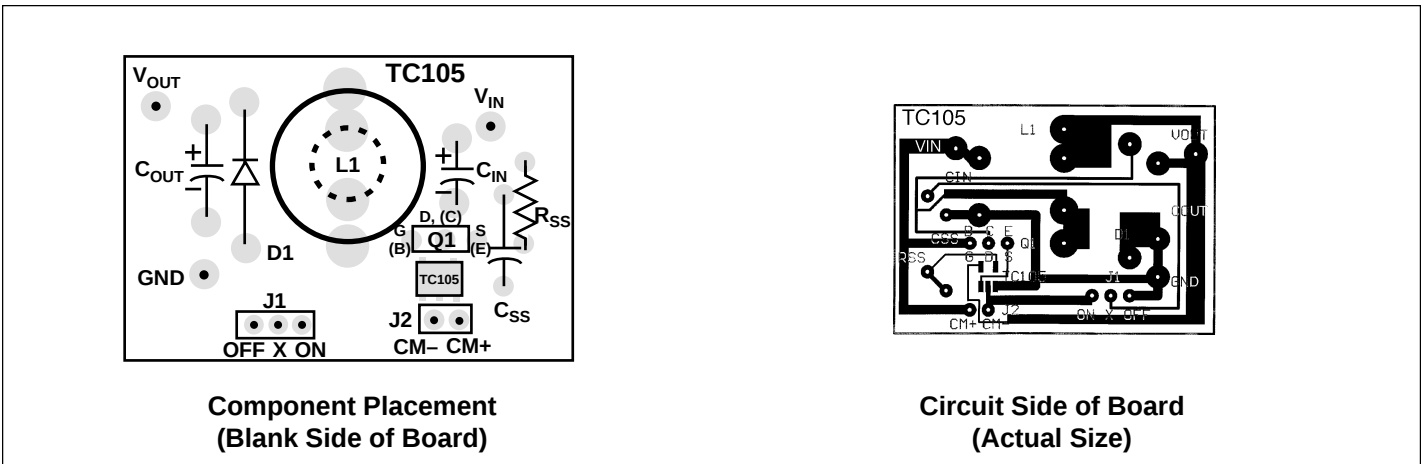


Figure 6. Component Placement

TC105

MARKINGS

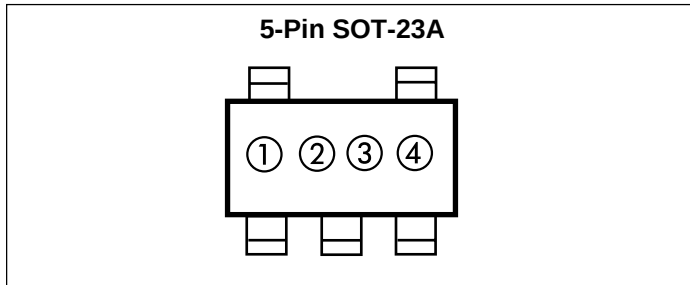

① represents product classification; TC105 = M

② represents 1st integer of voltage and frequency

Symbol	
300KHz	Output Voltage
<u>1</u>	1.
<u>2</u>	2.
<u>3</u>	3.
<u>4</u>	4.
<u>5</u>	5.
<u>6</u>	6.

③ represents 1st decimal of voltage and frequency

Symbol	
300KHz	Output Voltage
A	.0
B	.1
C	.2
D	.3
E	.4
F	.5
H	.6
K	.7
L	.8
M	.9

④ represents production lot ID number

TAPING FORMS

Component Taping Orientation for 5-Pin SOT-23A (EIAJ SC-74A) Devices

Standard Reel Component Orientation
TR Suffix Device
(Mark Right Side Up)

Reverse Reel Component Orientation
RT Suffix Device
(Mark Upside Down)

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
5-Pin SOT-23A	8 mm	4 mm	3000	7 in

PACKAGE DIMENSIONS

3-Pin SOT-23A (EIAJ SC-59)

Dimensions: inches (mm)



WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200 Fax: 480-792-7277
Technical Support: 480-792-7627
Web Address: <http://www.microchip.com>

Rocky Mountain

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7966 Fax: 480-792-7456

Atlanta

500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Austin

Analog Product Sales
8303 MoPac Expressway North
Suite A-201
Austin, TX 78759
Tel: 512-345-2030 Fax: 512-345-6085

Boston

2 Lan Drive, Suite 120
Westford, MA 01886
Tel: 978-692-3848 Fax: 978-692-3821

Boston

Analog Product Sales
Unit A-8-1 Millbrook Tarry Condominium
97 Lowell Road
Concord, MA 01742
Tel: 978-371-6400 Fax: 978-371-0050

Chicago

333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

4570 Westgrove Drive, Suite 160
Addison, TX 75001
Tel: 972-818-7423 Fax: 972-818-2924

Dayton

Two Prestige Place, Suite 130
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Detroit

Tri-Atria Office Building
32255 Northwestern Highway, Suite 190
Farmington Hills, MI 48334
Tel: 248-538-2250 Fax: 248-538-2260

Los Angeles

18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 949-263-1888 Fax: 949-263-1338

Mountain View

Analog Product Sales
1300 Terra Bella Avenue
Mountain View, CA 94043-1836
Tel: 650-968-9241 Fax: 650-967-1590

New York

150 Motor Parkway, Suite 202
Hauppauge, NY 11788
Tel: 631-273-5305 Fax: 631-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

Toronto

6285 Northam Drive, Suite 108
Mississauga, Ontario L4V 1X5, Canada
Tel: 905-673-0699 Fax: 905-673-6509

ASIA/PACIFIC

China - Beijing

Microchip Technology Beijing Office
Unit 915
New China Hong Kong Manhattan Bldg.
No. 6 Chaoyangmen Beidajie
Beijing, 100027, No. China
Tel: 86-10-85282100 Fax: 86-10-85282104

China - Shanghai

Microchip Technology Shanghai Office
Room 701, Bldg. B
Far East International Plaza
No. 317 Xian Xia Road
Shanghai, 200051
Tel: 86-21-6275-5700 Fax: 86-21-6275-5060

Hong Kong

Microchip Asia Pacific
RM 2101, Tower 2, Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2401-1200 Fax: 852-2401-3431

India

Microchip Technology Inc.
India Liaison Office
Divyasree Chambers
1 Floor, Wing A (A3/A4)
No. 11, O'Shaughnessy Road
Bangalore, 560 025, India
Tel: 91-80-2290061 Fax: 91-80-2290062

Japan

Microchip Technology Intl. Inc.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa, 222-0033, Japan
Tel: 81-45-471- 6166 Fax: 81-45-471-6122

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea
Tel: 82-2-554-7200 Fax: 82-2-558-5934

ASIA/PACIFIC (continued)

Singapore

Microchip Technology Singapore Pte Ltd.
200 Middle Road
#07-02 Prime Centre
Singapore, 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan

Microchip Technology Taiwan
11F-3, No. 207
Tung Hua North Road
Taipei, 105, Taiwan
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Australia

Microchip Technology Australia Pty Ltd
Suite 22, 41 Rawson Street
Epping 2121, NSW
Australia
Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

Denmark

Microchip Technology Denmark ApS
Regus Business Centre
Lautrup høj 1-3
Ballerup DK-2750 Denmark
Tel: 45 4420 9895 Fax: 45 4420 9910

France

Arizona Microchip Technology SARL
Parc d'Activité du Moulin de Massy
43 Rue du Saule Trappu
Batiment A - 1er Etage
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann Ring 125
D-81739 Munich, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Germany

Analog Product Sales
Lochamer Strasse 13
D-82152 Martinsried, Germany
Tel: 49-89-895650-0 Fax: 49-89-895650-22

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-039-65791-1 Fax: 39-039-6899883

United Kingdom

Arizona Microchip Technology Ltd.
505 Eskdale Road
Winnersh Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44 118 921 5869 Fax: 44-118 921-5820

All rights reserved. © 2001 Microchip Technology Incorporated. Printed in the USA. 1/01  Printed on recycled paper.

01/09/01

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, except as maybe explicitly expressed herein, under any intellectual property rights. The Microchip logo and name are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All rights reserved. All other trademarks mentioned herein are the property of their respective companies.