

Contents

Features.....	1
Applications	1
Block Diagram	2
Selection Guide.....	2
Pin Assignment	3
Absolute Maximum Ratings.....	3
Electrical Characteristics	4
Test Circuits	5
Standard Circuit	5
Technical Terms	5
Operation	7
Selection of Output Capacitor (CL).....	8
Design Considerations	8
Typical Performance Curves	9
Transient Response Characteristics	13
Dimensions, Taping	19
Frequently Asked Questions.....	22

LOW DROPOUT CMOS VOLTAGE REGULATOR

S-814 Series

The S-814 Series is a low dropout voltage, high output voltage accuracy and low current consumption positive voltage regulator developed utilizing CMOS technology. Built-in low ON-resistance transistors provide low dropout voltage and large output current.

A power-OFF circuit ensures long battery life.

Various types of output capacitors can be used in the S-814 Series compared with the past CMOS voltage regulators. (i.e., small ceramic capacitors can also be used in the S-814 Series).

The SOT-23-5 miniaturized package and the SOT-89-5 package are recommended to be used for configuring portable devices and large output current applications, respectively.

■ Features

- Low current consumption
 - During operation: Typ. 30 μ A, Max. 40 μ A
 - During power off: Typ. 100 nA, Max. 500 nA
- Output voltage: 0.1 V steps between 2.0 and 6.0 V
- High accuracy output voltage: $\pm 2.0\%$
- Output current;
 - 110 mA capable (3.0 V output product, $V_{IN}=4$ V) ^{Note*}
 - 180 mA capable (5.0 V output product, $V_{IN}=6$ V) ^{Note*}
- Low dropout voltage
 - Typ. 170 mV (5.0 V output product, $I_{OUT} = 60$ mA)
- Built-in power-off circuit
- Built-in short current limit circuit
- Low ESR capacitor (e.g., a ceramic capacitor of 0.47 μ F or more) can be used as the output capacitor.
- Compact package: SOT-23-5, SOT-89-5

Note*

Check power dissipation of the package when you use large output current.

■ Applications

- Power source for battery-powered devices
- Power source for personal communication devices
- Power source for home electric/electronic appliances

■ Block Diagram

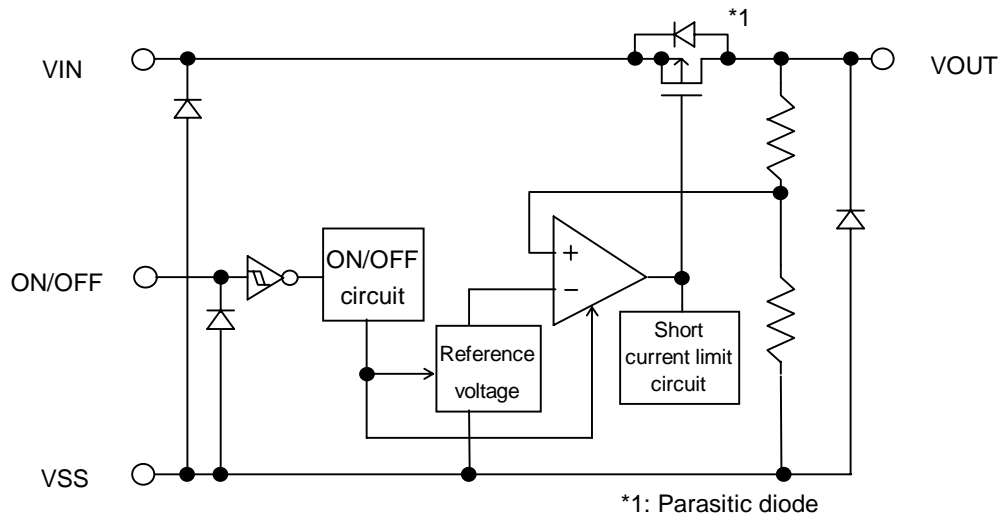


Figure 1 Block Diagram

■ Selection Guide

1. Product Name

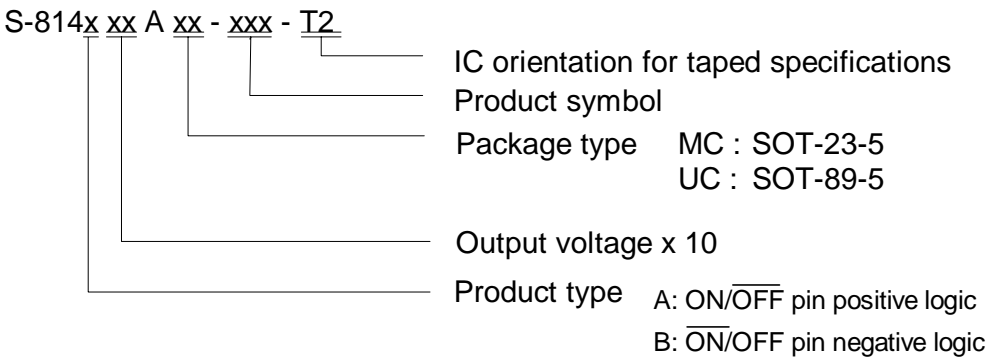


Table 1 Selection Guide

Output Voltage	SOT-23-5	SOT-89-5
2.0 V \pm 2.0%	S-814A20AMC-BCK-T2	S-814A20AUC-BCK-T2
2.2 V \pm 2.0%	—	S-814A22AUC-BCM-T2
2.4 V \pm 2.0%	—	S-814A24AUC-BCO-T2
2.5 V \pm 2.0%	S-814A25AMC-BCP-T2	S-814A25AUC-BCP-T2
2.7 V \pm 2.0%	S-814A27AMC-BCR-T2	—
2.8 V \pm 2.0%	S-814A28AMC-BCS-T2	S-814A28AUC-BCS-T2
3.0 V \pm 2.0%	S-814A30AMC-BCU-T2	S-814A30AUC-BCU-T2
3.3 V \pm 2.0%	S-814A33AMC-BCX-T2	S-814A33AUC-BCX-T2
3.8 V \pm 2.0%	S-814A38AMC-BDC-T2	S-814A38AUC-BDC-T2
4.0 V \pm 2.0%	S-814A40AMC-BDE-T2	S-814A40AUC-BDE-T2
5.0 V \pm 2.0%	S-814A50AMC-BDO-T2	S-814A50AUC-BDO-T2

Note:

Contact our sales person for products with an output voltage other than those specified above or product type B.

■ Pin Configuration




Figure 2 SOT-23-5




Figure 3 SOT-89-5

Table 2-1 Pin Assignment (1)

Pin No.	Symbol	Description
1	VIN	Voltage input pin
2	VSS	GND pin
3	ON/OFF	Power off pin
4	NC ^{Note*}	No connection
5	VOUT	Voltage output pin

Table 2-2 Pin Assignment (2)

Pin No.	Symbol	Description
1	VOUT	Voltage output pin
2	VSS	GND pin
3	NC ^{Note*}	No connection
4	ON/OFF	Power off pin
5	VIN	Voltage input pin

^{Note*}: Electrically open - - there is no problem even when connecting pin NC to VIN or VSS.

■ Absolute Maximum Ratings

Table 3 Absolute Maximum Ratings (25°C unless otherwise specified)

Item	Symbol	Absolute Maximum Rating	Unit
Input voltage	VIN	12	V
	VON / OFF	VSS-0.3 to 12	V
Output voltage	VOUT	VSS-0.3 to VIN+0.3	V
Power dissipation	PD	250 (SOT-23-5) 500 (SOT-89-5)	mW
Operating temperature range	Tope	-40 to +85	°C
Storage temperature range	Tstg	-40 to +125	°C

Note:

This IC has a protection circuit against static electricity. DO NOT apply high static electricity or high voltage that exceeds the performance of the protection circuit to the IC.

■ Electrical Characteristics

S-814AXXAMC/UC, S-814BXXAMC/UC

Table 4 Electrical Characteristics

(25°C unless otherwise specified)

Item	Symbol	Conditions	Min.	Typ.	Max.	Units	Test circuits
Output voltage *1)	$V_{OUT(E)}$	$V_{IN}=V_{OUT(S)}+1V, I_{OUT}=30mA$	$V_{OUT(S)} \times 0.98$	$V_{OUT(S)}$	$V_{OUT(S)} \times 1.02$	V	1
Output current *2)	I_{OUT}	$V_{OUT(S)}+1V \leq V_{IN} \leq 10V$	$2.0V \leq V_{OUT(S)} \leq 2.9V$	100 *5)	—	mA	3
			$3.0V \leq V_{OUT(S)} \leq 3.9V$	110 *5)	—	mA	3
			$4.0V \leq V_{OUT(S)} \leq 4.9V$	135 *5)	—	mA	3
			$5.0V \leq V_{OUT(S)} \leq 6.0V$	180 *5)	—	mA	3
Dropout voltage *3)	V_{drop}	$I_{OUT} = 60mA$	$2.0V \leq V_{OUT(S)} \leq 2.4V$	—	0.51	V	1
			$2.5V \leq V_{OUT(S)} \leq 2.9V$	—	0.38	V	1
			$3.0V \leq V_{OUT(S)} \leq 3.4V$	—	0.30	V	1
			$3.5V \leq V_{OUT(S)} \leq 3.9V$	—	0.24	V	1
			$4.0V \leq V_{OUT(S)} \leq 4.4V$	—	0.20	V	1
			$4.5V \leq V_{OUT(S)} \leq 4.9V$	—	0.18	V	1
			$5.0V \leq V_{OUT(S)} \leq 5.4V$	—	0.17	V	1
Line regulation 1	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{OUT(S)} + 0.5V \leq V_{IN} \leq 10V, I_{OUT} = 30mA$	—	0.05	0.2	%/V	1
			—	0.05	0.2	%/V	1
Line regulation 2	$\frac{\Delta V_{OUT2}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{OUT(S)} + 0.5V \leq V_{IN} \leq 10V, I_{OUT} = 10\mu A$	—	0.05	0.2	%/V	1
			—	0.05	0.2	%/V	1
Load regulation	ΔV_{OUT3}	$V_{IN} = V_{OUT(S)} + 1V, 10\mu A \leq I_{OUT} \leq 80mA$	—	30	50	mV	1
Output voltage temperature coefficient *4)	$\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$	$V_{IN} = V_{OUT(S)} + 1V, I_{OUT} = 30mA, -40^\circ C \leq T_a \leq 85^\circ C$	—	± 100	—	ppm/ $^\circ C$	1
Current consumption during operation	I_{SS1}	$V_{IN} = V_{OUT(S)} + 1V, ON/OFF \text{ pin} = ON, \text{ no load}$	—	30	40	μA	2
Current consumption when power off	I_{SS2}	$V_{IN} = V_{OUT(S)} + 1V, ON/OFF \text{ pin} = OFF, \text{ no load}$	—	0.1	0.5	μA	2
Input voltage	V_{IN}		—	—	10	V	1
Power-off pin input voltage "H"	V_{SH}	$V_{IN} = V_{OUT(S)} + 1V, R_L = 1k\Omega, \text{ Check it at } V_{OUT} \text{ level.}$	1.5	—	—	V	4
Power-off pin input voltage "L"	V_{SL}	$V_{IN} = V_{OUT(S)} + 1V, R_L = 1k\Omega, \text{ Check it at } V_{OUT} \text{ level.}$	—	—	0.3	V	4
Power-off pin input current "H"	I_{SH}	$V_{IN} = V_{OUT(S)} + 1V, ON/OFF = 7V$	—	—	0.1	μA	4
Power-off pin input current "L"	I_{SL}	$V_{IN} = V_{OUT(S)} + 1V, ON/OFF = 0V$	—	—	-0.1	μA	4
Short current limit	I_{OS}	$V_{IN} = V_{OUT(S)} + 1V, V_{OUT} \text{ pin} = 0V$	—	70	—	mA	3
Ripple rejection	$ RR $	$V_{IN} = V_{OUT(S)} + 1V, f = 100Hz, \Delta V_{rip} = 0.5V_{rms}, I_{OUT}=30mA$	—	45	—	dB	5

*1) $V_{OUT(S)}$ =Specified output voltage

$V_{OUT(E)}$ =Effective output voltage, i.e., the output voltage when fixing $I_{OUT}(=30mA)$ and inputting $V_{OUT(S)}+1.0V$.

*2) Output amperage when output voltage goes below 95% of $V_{OUT(E)}$ after gradually increasing output current.

*3) $V_{drop} = V_{IN1} - (V_{OUT(E)} \times 0.98)$

V_{IN1} = Input voltage when output voltage falls 98% of $V_{OUT(E)}$ after gradually decreasing input voltage.

*4) A change in temperatures [mV/ $^\circ C$] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_a} [mV/^\circ C] = V_{OUT(S)} [V] \times \frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}} [ppm/^\circ C] \div 1000$$

\uparrow

Change in temperature of output voltage

\uparrow

Specified output voltage


\uparrow

Output voltage temperature coefficient


*5) Use load amperage not exceeding this value.

■ Test Circuits


1.

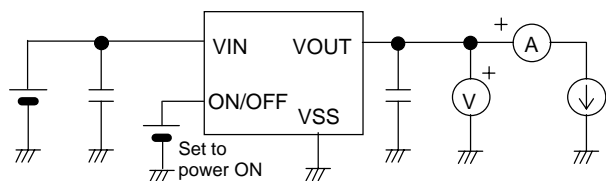


2.

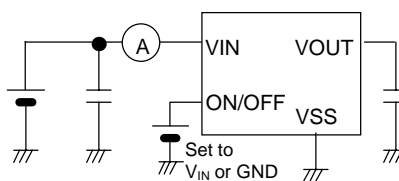

3.

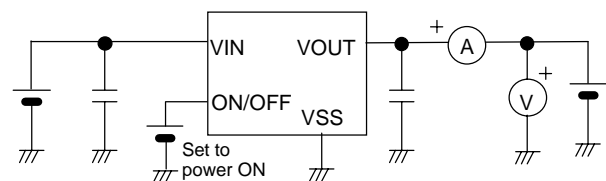

4.

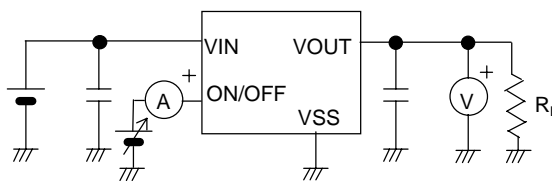

5.


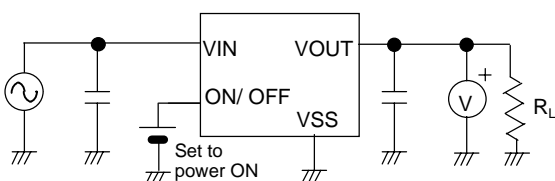


Figure 4 Test Circuits

■ Standard Circuit

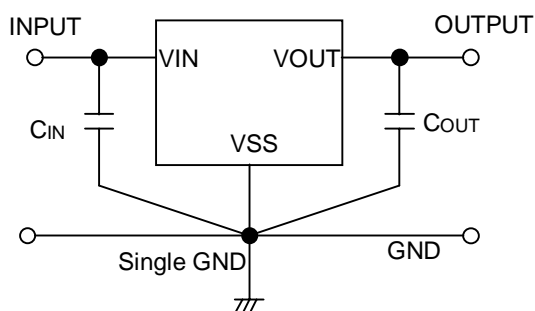

In addition to a tantalum capacitor, a ceramic capacitor of 0.47 μF or more can be used in CL. C_{IN} is a capacitor used to stabilize input.

Figure 5 Standard Circuit

■ Technical Terms

1. Low dropout voltage regulator

The low dropout voltage regulator is a voltage regulator featuring a low dropout voltage characteristic due to its internal low ON-resistance characteristic transistors.

2. Low ESR

ESR is the abbreviation for Equivalent Series Resistance.

The low ESR output capacitor (CL) can be used in the S-814 Series.

3. Output voltage (V_{OUT})

The accuracy of the output voltage is ensured at $\pm 2.0\%$ under the specified conditions of input voltage, output current, and temperature, which differ depending upon the product items.

Note:

If you change the above conditions, the output voltage value may vary out of the accuracy range of the output voltage. See the electrical characteristics and characteristics data for details.

4. Line regulations 1 and 2 (ΔV_{OUT1} , ΔV_{OUT2})

Indicate the input voltage dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the input voltage with the output current remained unchanged.

5. Load regulation (ΔV_{OUT3})

Indicates the output current dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the output current with the input voltage remained unchanged.

6. Dropout voltage (V_{drop})

Indicates a difference between input voltage (V_{IN1}) and output voltage when output voltage falls by 98 % of V_{OUT} (E) by gradually decreasing the input voltage.

$$V_{drop} = V_{IN1} - [V_{OUT}(E) \times 0.98]$$

7. Temperature coefficient of output voltage [$\Delta V_{OUT}/(\Delta T_a \cdot V_{OUT})$]

The shadowed area in Figure 6 is the range where V_{OUT} varies in the operating temperature range when the temperature coefficient of the output voltage is ± 100 ppm/°C.

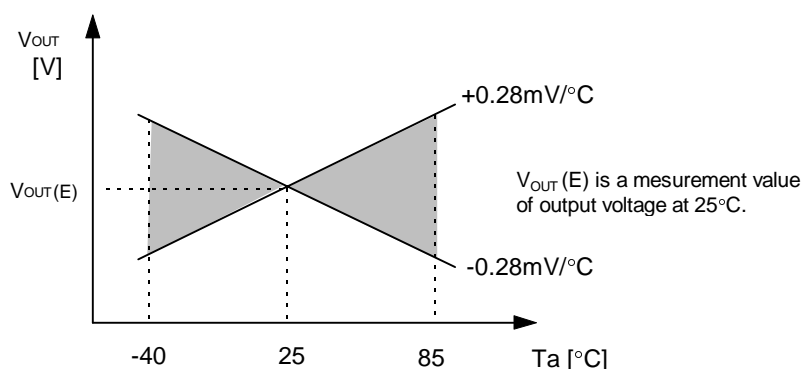


Figure 6 Typical Example of the S-814A28A

A change in temperatures of output voltage [mV/°C] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_a} [\text{mV}/^\circ\text{C}] = V_{OUT(S)} [\text{V}] \times \frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}} [\text{ppm}/^\circ\text{C}] \div 1000$$

\uparrow

Change in temperatures of output voltage

\uparrow

Specified output voltage

\uparrow

Output voltage temperature coefficient

■ Operation

1. Basic operation

Figure 7 shows the block diagram of the S-814 Series.

The error amplifier compares a reference voltage V_{REF} with part of the output voltage divided by the feedback resistors R_s and R_f . It supplies the output transistor with the gate voltage, necessary to ensure certain output voltage free of any fluctuations of input voltage and temperature.

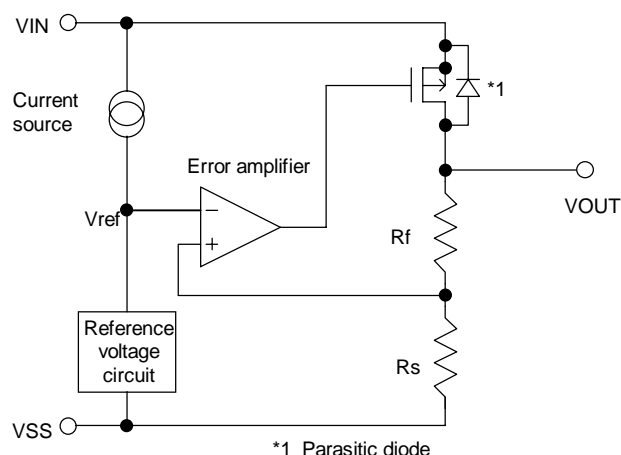


Figure 7 Typical Circuit Block Diagram

2. Output transistor

The S-814 Series uses a low on-resistance Pch MOS FET as the output transistor.

Be sure that V_{OUT} does not exceed $V_{IN} + 0.3$ V to prevent the voltage regulator from being broken due to inverse current flowing from V_{OUT} pin through a parasitic diode to V_{IN} pin.

3. Power Off Pin (ON/OFF Pin)

This pin starts and stops the regulator.

When the ON/OFF pin is switched to the power off level, the operation of all internal circuits stops, the built-in Pch MOSFET output transistor between pins V_{IN} and V_{OUT} is switched off, allowing current consumption to be drastically reduced. The V_{OUT} pin enters the V_{SS} level due to internally divided resistance of several $M\Omega$ between pins V_{OUT} and V_{SS} .

Furthermore, the structure of the ON/OFF pin is as shown in Figure 8. Since the ON/OFF pin is neither pulled down nor pulled up internally, do not use it in the floating state. In addition, please note that current consumption increases if a voltage of 0.3 V to $V_{IN} - 0.3$ V is applied to the ON/OFF pin. Connect the power off pin to the V_{IN} pin when not in use.

Product type	ON/OFF pin	Internal circuit	V_{OUT} pin voltage	Current consumption
A	"H" : Power on	Operating	Set value	I_{ss1}
A	"L" : Power off	Stop	V_{SS} level	I_{ss2}
B	"H" : Power off	Stop	V_{SS} level	I_{ss2}
B	"L" : Power on	Operating	Set value	I_{ss1}




Figure 8 ON/OFF Pin

4. Short Current Limit Circuit

The S-814 Series incorporates a short current limit circuit to protect the output transistor against shortcircuiting between pins V_{OUT} and V_{SS} . The short current limit circuit controls output current as shown in (1) OUTPUT VOLTAGE versus OUTPUT CURRENT curve, and prevents output current of approx. 70 mA or more from flowing even if V_{OUT} and V_{SS} pins are shorted.

However, the short current limit circuit does not protect thermal shutdown.

Be sure that input voltage and load current do not exceed the specified power dissipation level.

When output current is large and a difference between input and output voltages is large even if not shorted, the short current limit circuit may start functioning and the output current may be controlled to the specified amperage.

For details, refer to (3) MAXIMUM OUTPUT CURRENT versus INPUT VOLTAGE curve (page 10).

■ Selection of Output Capacitor (CL)

Mount an output capacitor between VOUT and VSS pins for phase compensation.

The S-814 Series enables customers to use a ceramic capacitor as well as a tantalum or an aluminum electrolytic capacitor.

- A ceramic capacitor or an OS capacitor:
Use a capacitor of 0.47 μ F or more.
- A tantalum or an aluminum electrolytic capacitor:
Use a capacitor of 0.47 μ F or more and ESR of 10 Ω or less.
Pay special attention not to cause an oscillation due to an increase in ESR at low temperatures, when you use the aluminum electrolytic capacitor.

Evaluate the capacitor taking into consideration its performance including temperature characteristics.

Overshoot and undershoot characteristics differ depending upon the type of the output capacitor you select.

Refer to "Output Capacitor Dependencies of Overshoot and Undershoot" in transient response characteristic examples (page 13).


■ Design Considerations

- Design wiring patterns for VIN, VOUT and GND pins to decrease impedance.
When mounting the output capacitor, connect pins VOUT and VSS as close as possible.
- Note that output voltage may be increased at low load current (less than 10 μ A).
- To prevent oscillation, it is recommended to use the external components under the following conditions.
 - * Output capacitor (CL): 0.47 μ F or more
 - * Equivalent Series Resistance (ESR): 10 Ω or less
 - * Input series resistance (RIN): 10 Ω or less
- The voltage regulator may oscillate when power supply impedance is high and input capacitor is low or not connected.
- Be sure that input voltage and load current do not exceed the power dissipation level of the package.
- SII claims no responsibility for any and all disputes arising out of or in connection with any infringement of the products including this IC upon patents owned by a third party.
- Determine necessary output amperage, taking into consideration the minimum value of output current and Note *5) of Table 4 "Electrical Characteristics" (page 4).


■ Typical Performance Curves

(1) OUTPUT VOLTAGE versus OUTPUT CURRENT (When load current increases)


S-814A20A (Ta=25°C)

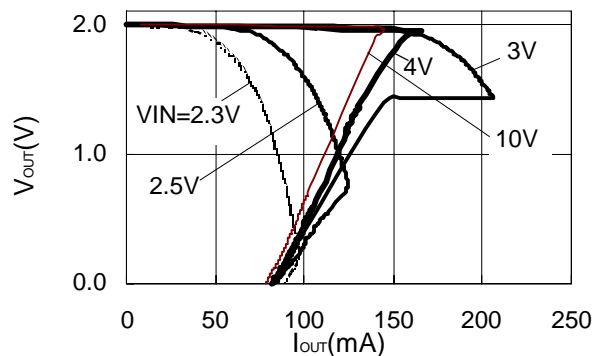

S-814A30A (Ta=25°C)

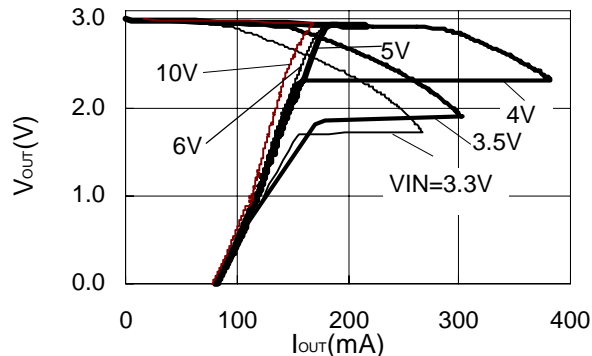

S-814A50A (Ta=25°C)

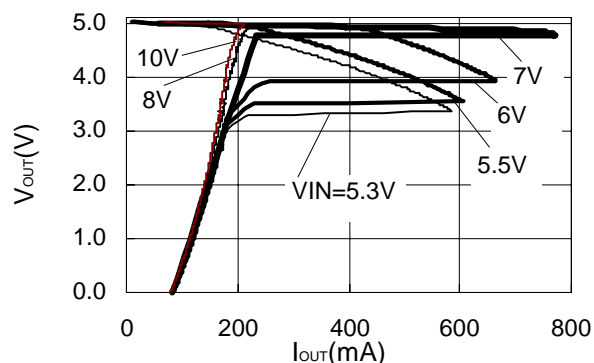


* Determine necessary output amperage, taking into consideration the following parameters:


- Minimum value of output current of Table 4 "Electrical Characteristics" and Note *5) (page 4);
- Power dissipation of the package

(2) OUTPUT VOLTAGE versus INPUT VOLTAGE


S-814A20A (Ta=25°C)

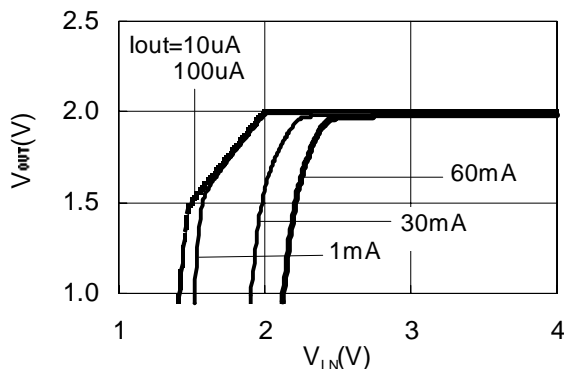

S-814A30A (Ta=25°C)

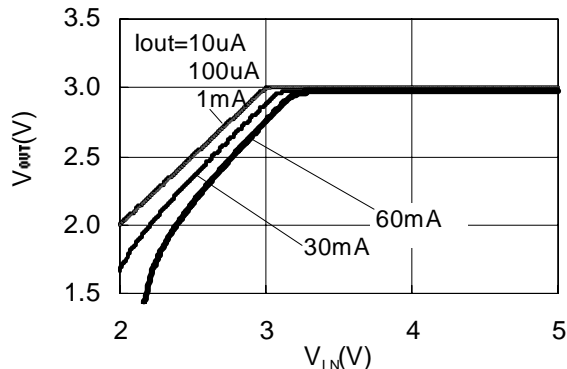


S-814A50A (Ta=25°C)

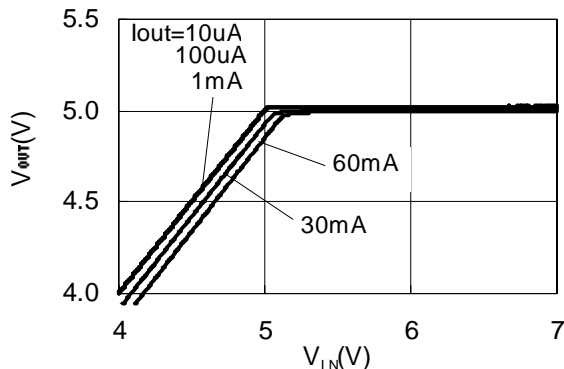


(3) MAXIMUM OUTPUT CURRENT versus INPUT VOLTAGE


S-814A20A

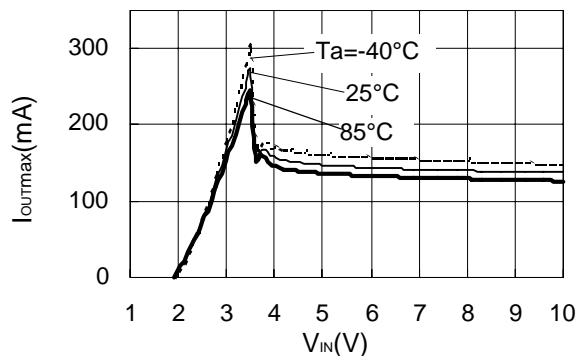

S-814A30A

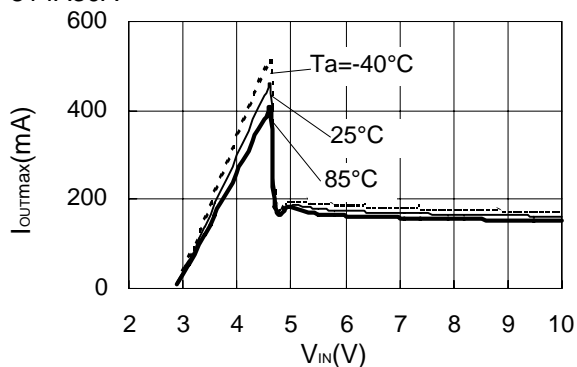

S-814A50A

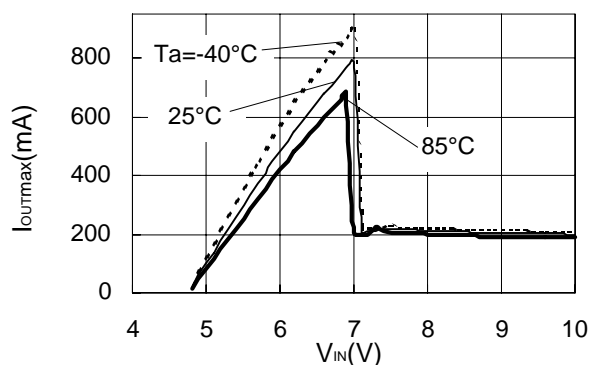


* Determine necessary output amperage, taking into consideration the following parameters:


- Minimum value of output current of Table 4 "Electrical Characteristics" and Note *5) (page 4);
- Power dissipation of the package

(4) OUTPUT CURRENT versus DROPOUT VOLTAGE


S-814A20A

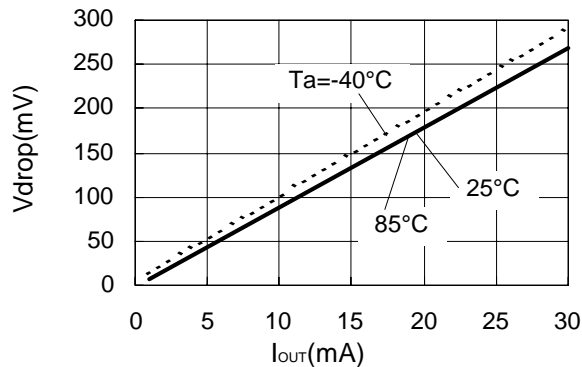




S-814A30A

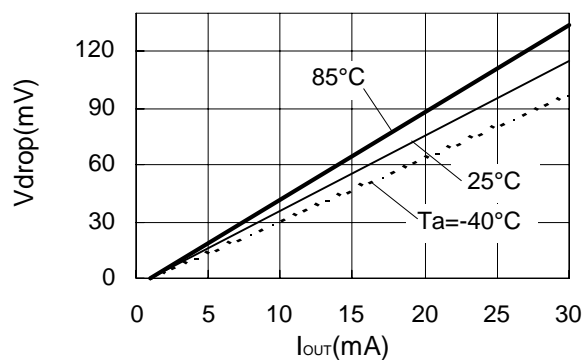


S-814A50A

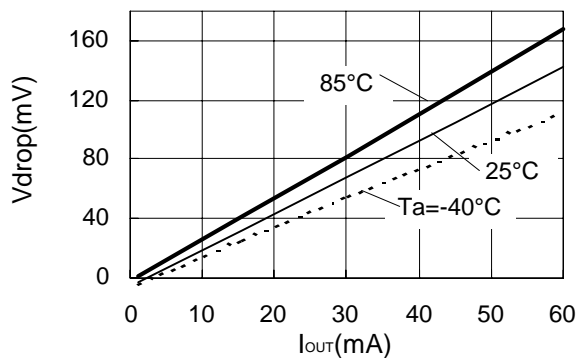


(5) OUTPUT VOLTAGE versus AMBIENT TEMPERATURE

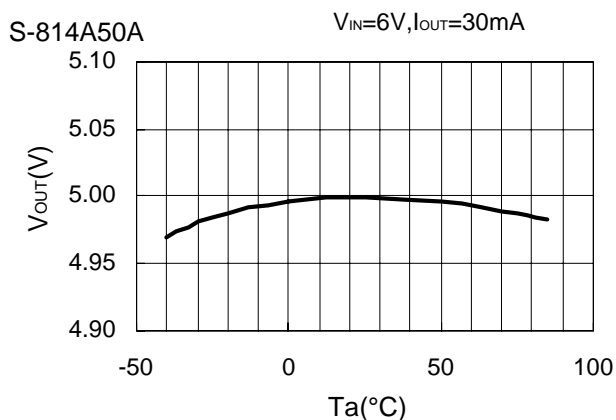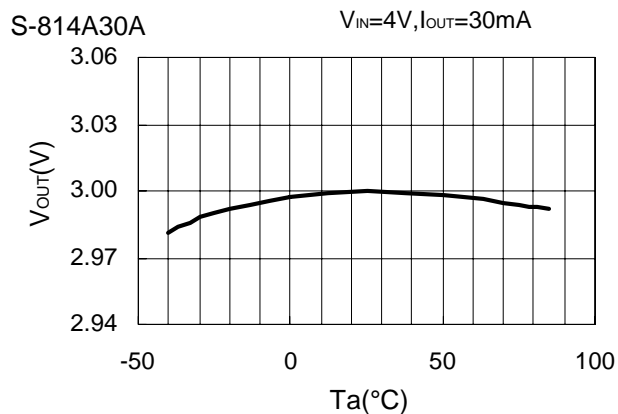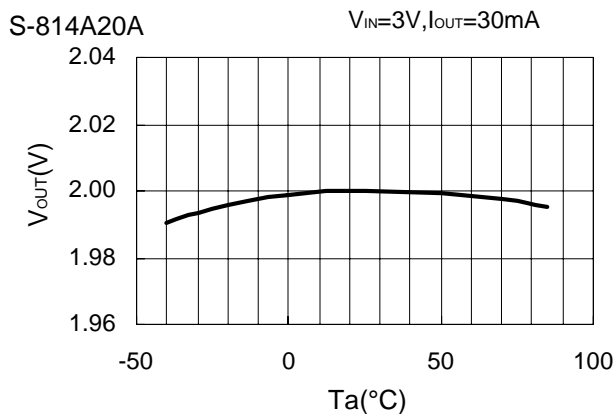

(6) LINE REGULATION versus AMBIENT TEMPERATURE

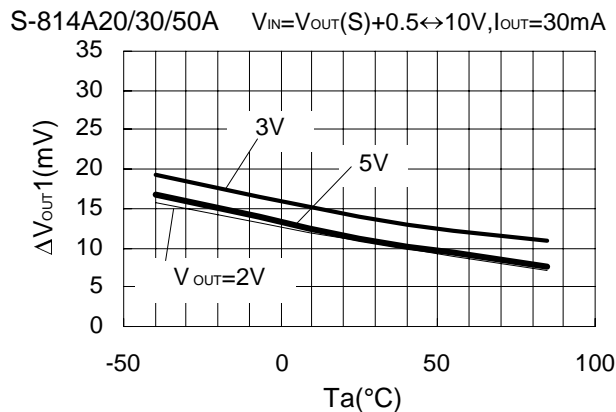


(7) LOAD REGULATION versus AMBIENT TEMPERATURE

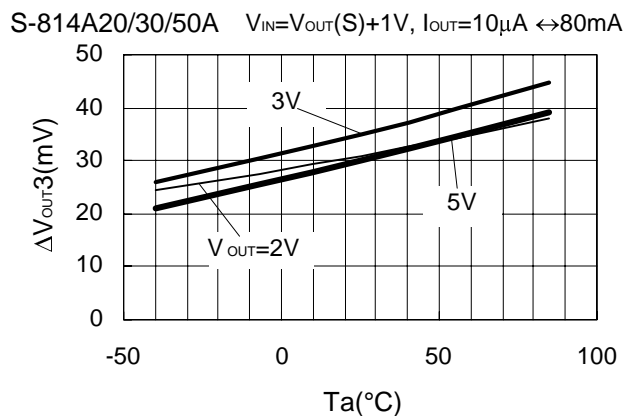


(8) CURRENT CONSUMPTION versus INPUT VOLTAGE


S-814A20A

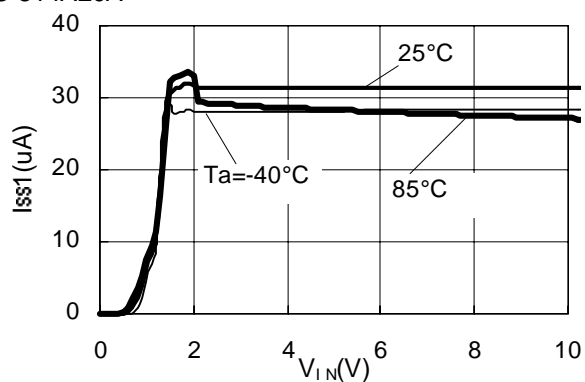

S-814A30A

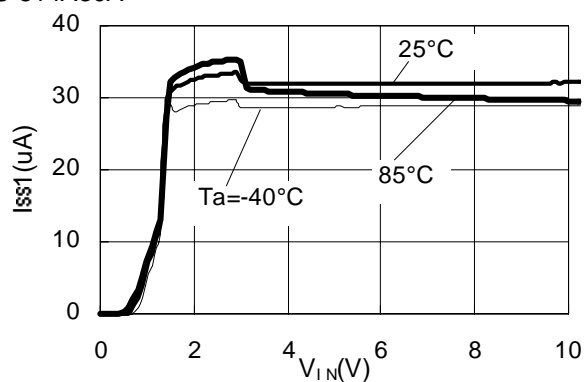


S-814A50A

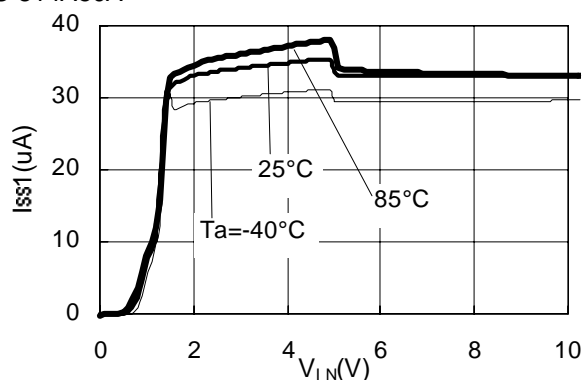


(9) THRESHOLD VOLTAGE OF POWER OFF PIN versus INPUT VOLTAGE


S-814A20A

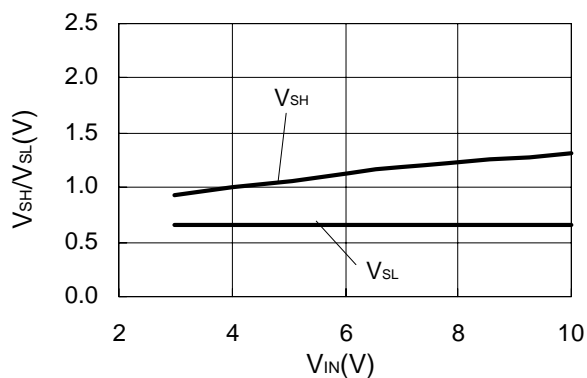


S-814A30A

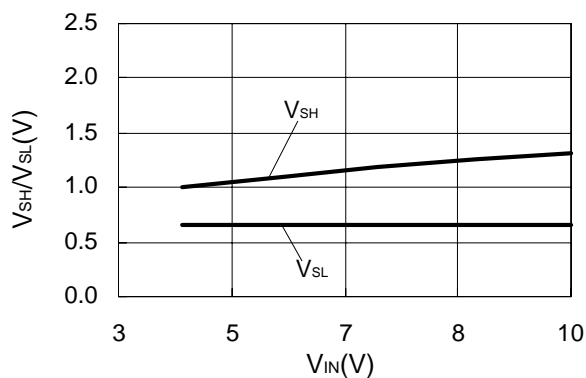


S-814A50A

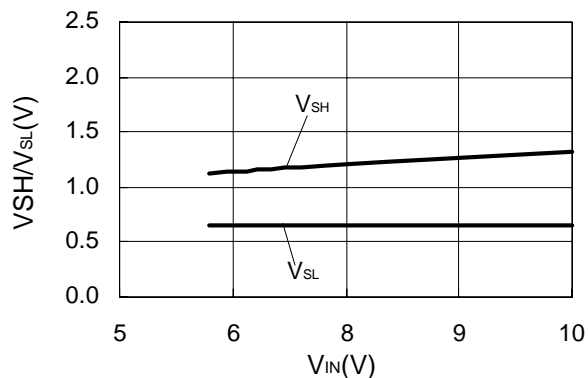


REFERENCE DATA

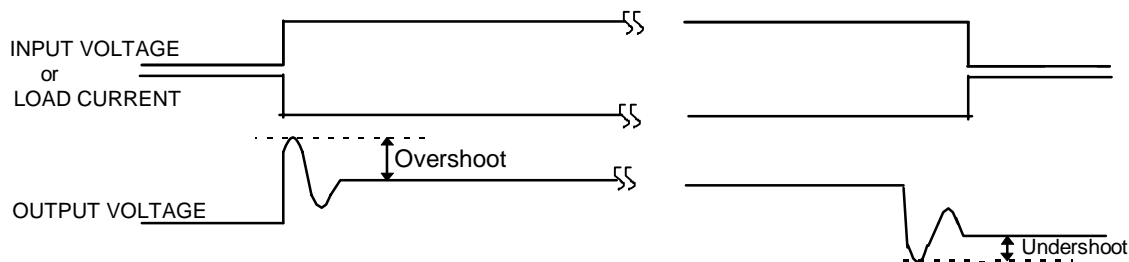■ TRANSIENT RESPONSE CHARACTERISTICS (S-814A30A, Typical data: $T_a=25^\circ\text{C}$)


(1) At power on

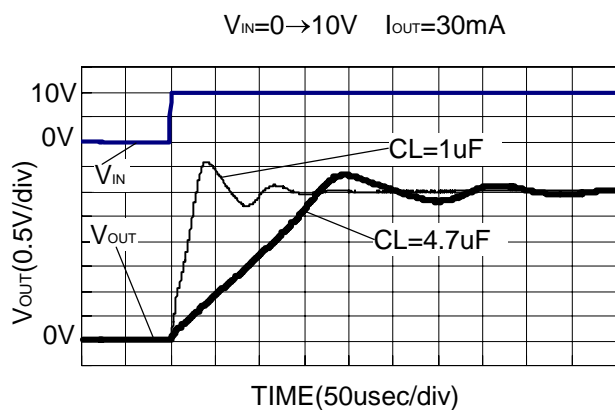


Load dependencies of overshoot

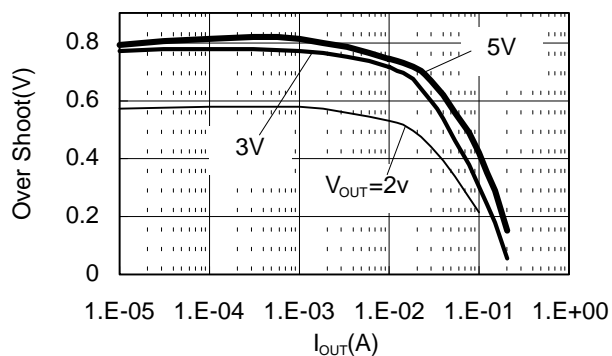 $V_{IN}=0 \rightarrow V_{OUT}(S)+1\text{V}$, $CL=1\mu\text{F}$ 


Output capacitor (CL) dependencies of overshoot

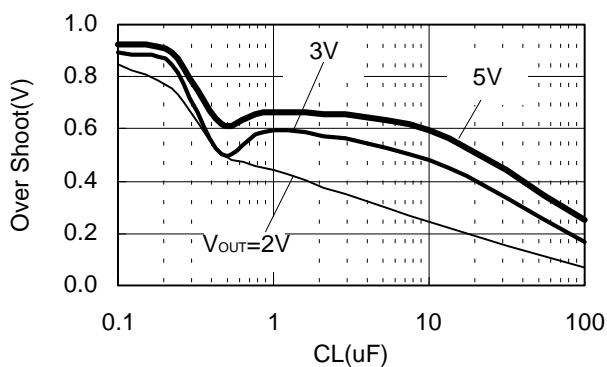 $V_{IN}=0 \rightarrow V_{OUT}(S)+1\text{V}$ $I_{OUT}=30\text{mA}$ 

VDD dependencies of overshoot

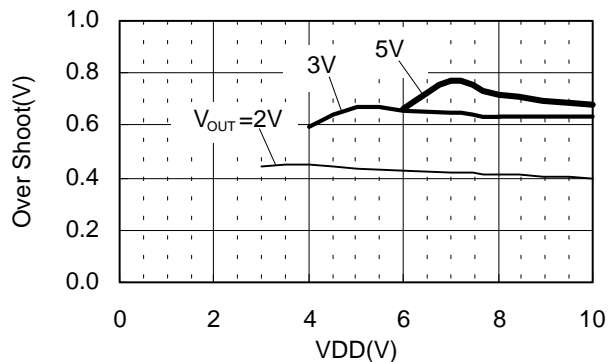
 $V_{IN}=0 \rightarrow V_{DD}$, $I_{OUT}=30\text{mA}$, $CL=1\mu\text{F}$ 

Temperature dependencies of overshoot

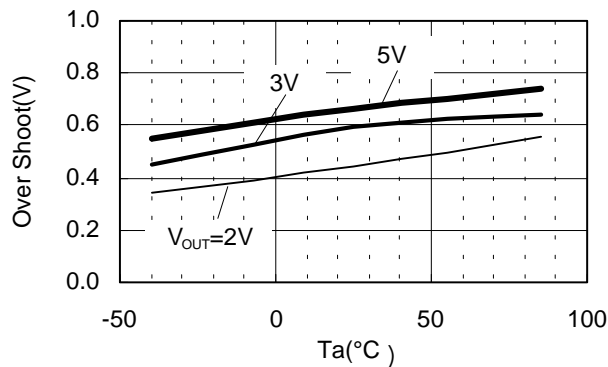 $V_{IN}=0 \rightarrow V_{OUT}(S)+1\text{V}$, $I_{OUT}=30\text{mA}$, $CL=1\mu\text{F}$ 


(2) At power on/off control by the power on/off pin

$V_{IN}=10V$ ON/OFF=0→10V $I_{OUT}=30mA$

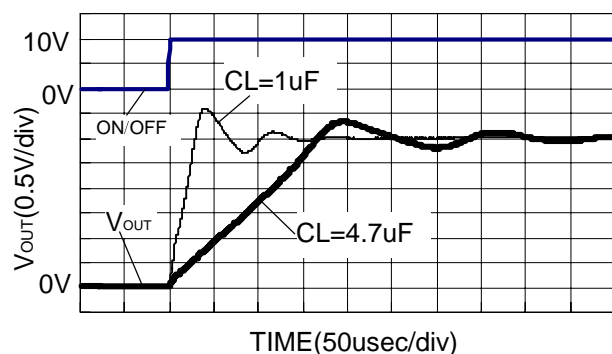


Load dependencies of overshoot

$V_{IN}=V_{OUT}(S)+1V, CL=1\mu F, ON/OFF=0 \rightarrow V_{OUT}(S)+1V$

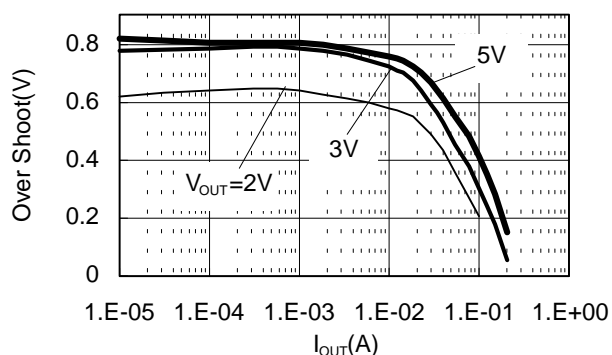


Output capacitor (CL) dependencies of overshoot

$V_{IN}=V_{OUT}(S)+1V, I_{OUT}=30mA, ON/OFF=0 \rightarrow V_{OUT}(S)+1V$

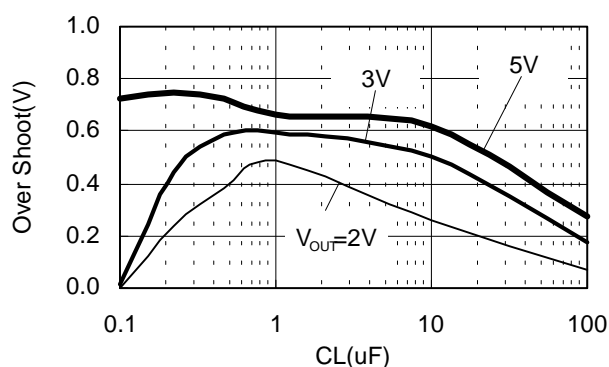


VDD dependencies of overshoot

$V_{IN}=VDD, I_{OUT}=30mA, CL=1\mu F, ON/OFF=0 \rightarrow VDD$


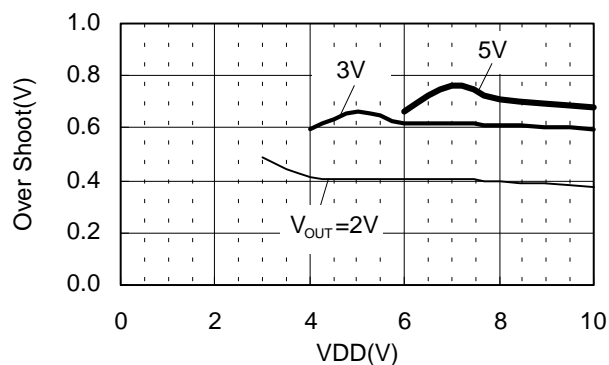


Temperature dependencies of overshoot


$V_{IN}=V_{OUT}(S)+1V, I_{OUT}=30mA, CL=1\mu F, ON/OFF=0 \rightarrow V_{OUT}(S)+1V$

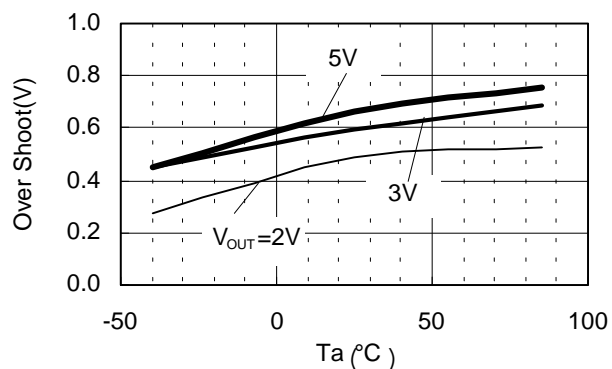


(3) At power fluctuation

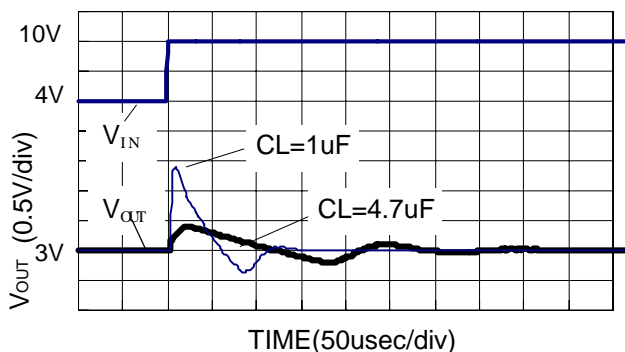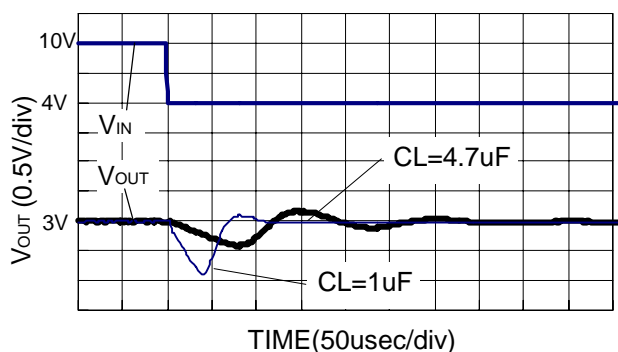 $V_{IN}=4.0 \rightarrow 10V, I_{OUT}=30mA$  $V_{IN}=10 \rightarrow 4.0V, I_{OUT}=30mA$ 


Load dependencies of overshoot

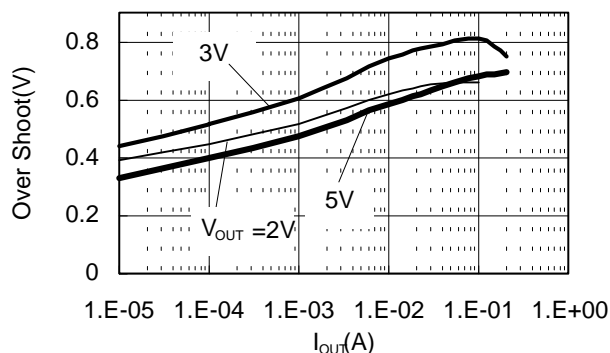 $V_{IN}=V_{OUT}(S)+1V \rightarrow V_{OUT}(S)+2V, CL=1\mu F$ 


Output capacitor (CL) dependencies of overshoot

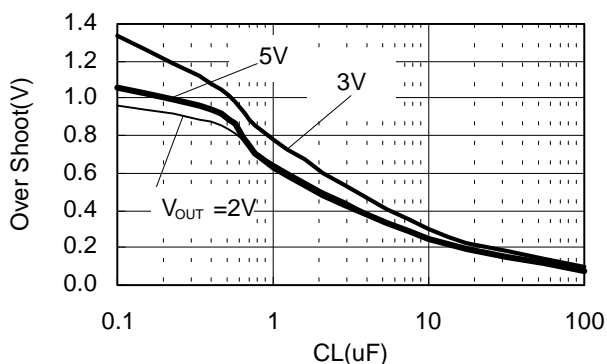 $V_{IN}=V_{OUT}(S)+1V \rightarrow V_{OUT}(S)+2V, I_{OUT}=30mA$ 


VDD dependencies of overshoot

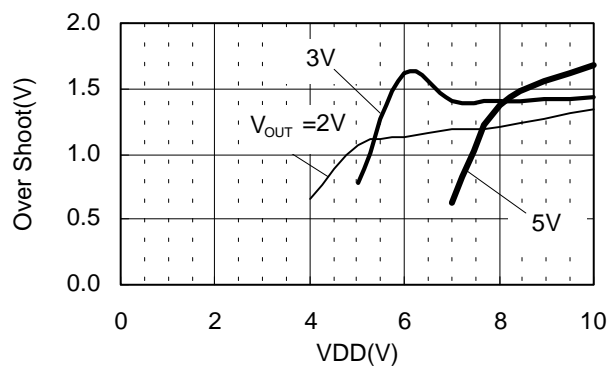 $V_{IN}=V_{OUT}(S)+1V \rightarrow VDD, I_{OUT}=30mA, CL=1\mu F$ 


Temperature dependencies of overshoot

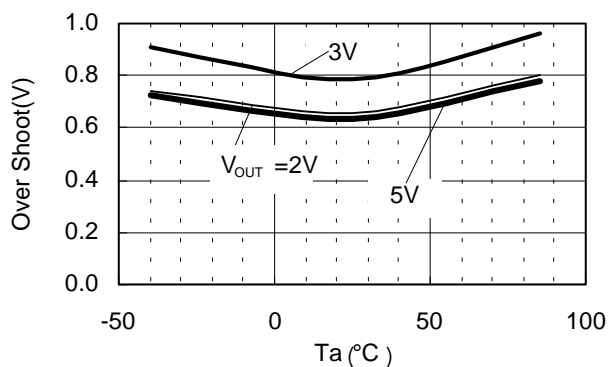 $V_{IN}=V_{OUT}(S)+1V \rightarrow V_{OUT}(S)+2V, I_{OUT}=30mA, CL=1\mu F$ 


Load dependencies of undershoot

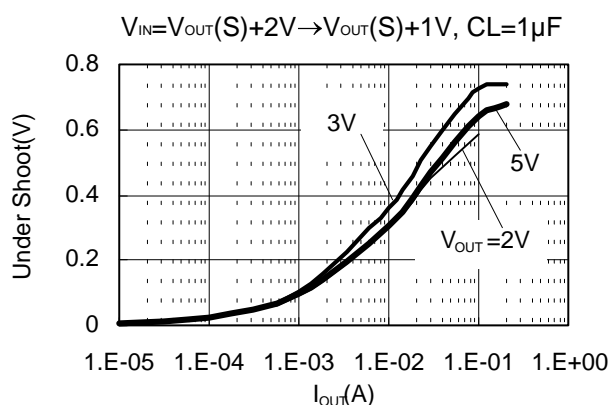


Output capacitor (CL) dependencies of undershoot

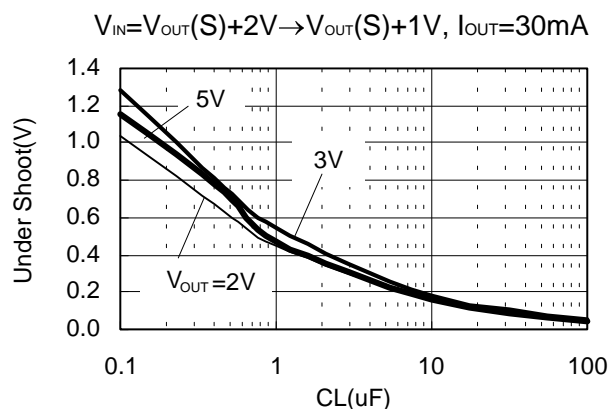



VDD dependencies of undershoot

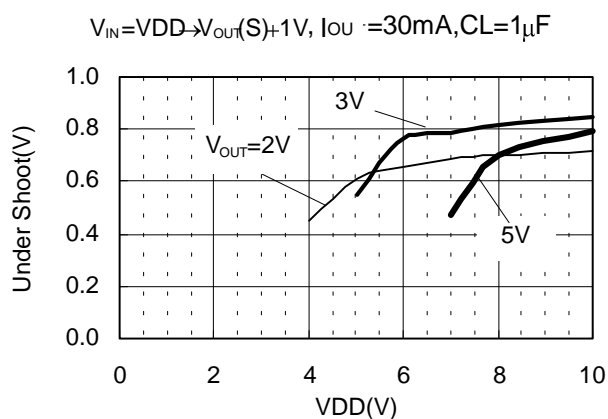

Temperature dependencies of undershoot

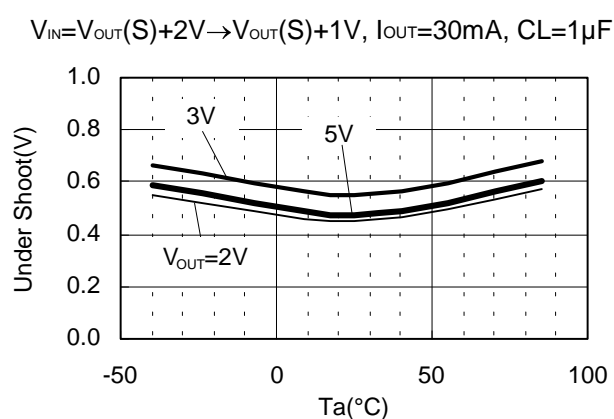


(4) At load fluctuation

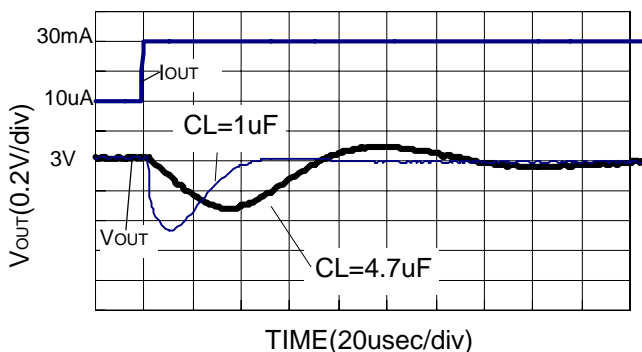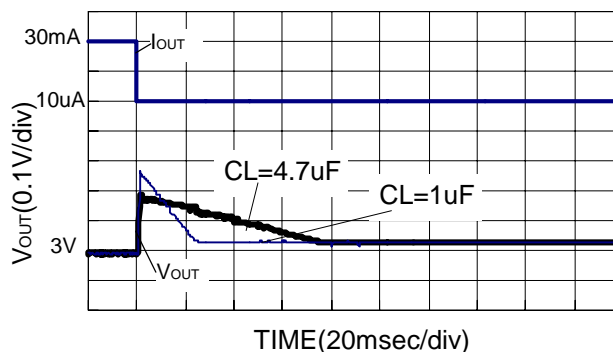 $I_{OUT}=10\mu A \rightarrow 30mA$ $V_{IN}=4V$  $I_{OUT}=30mA \rightarrow 10\mu A$ $V_{IN}=4V$ 


Load current dependencies of overshoot

ΔI_{OUT} shows larger load current at load current fluctuation. Smaller current at load current fluctuation is fixed to $10\mu A$.
(i.e.)


$\Delta I_{OUT}=1.E-02$ (A) means load current fluctuation from 10 mA to 10 μA

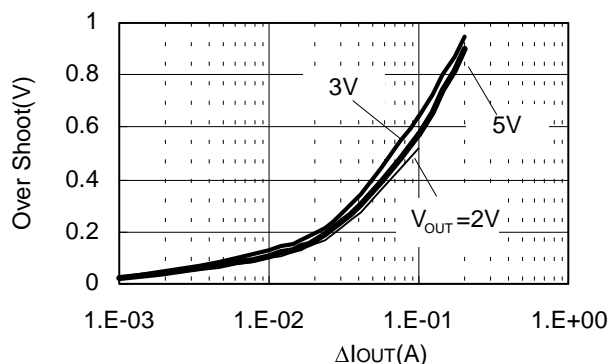 $V_{IN}=V_{OUT}(S)+1V$, $CL=1\mu F$ 


Output capacitor (CL) dependencies of overshoot

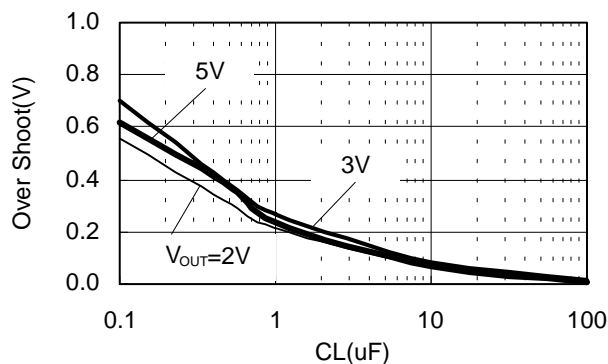 $V_{IN}=V_{OUT}(S)+1V$, $I_{OUT}=30mA \rightarrow 10\mu A$ 

VDD dependencies of overshoot

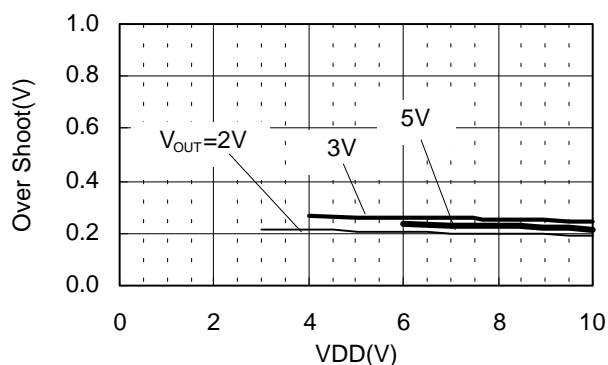 $V_{IN}=VDD$, $I_{OUT}=30mA \rightarrow 10\mu A$, $CL=1\mu F$ 

Temperature dependencies of overshoot

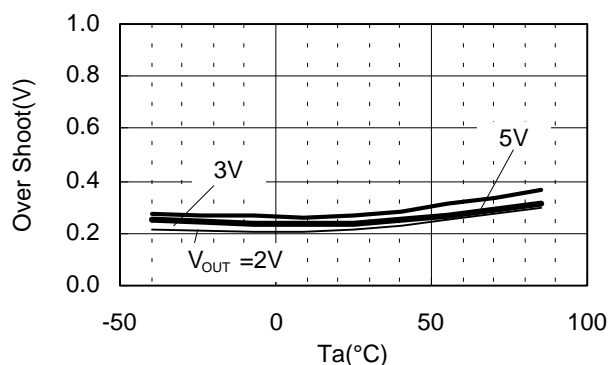
 $V_{IN}=V_{OUT}(S)+1V$, $I_{OUT}=30mA \rightarrow 10\mu A$, $CL=1\mu F$ 

Load current dependencies of undershoot

ΔI_{OUT} shows larger load current at load current fluctuation. Lower current at load current fluctuation is fixed to 10 μA .


(i.e.)

$\Delta I_{OUT}=1.E-02$ (A) means load current fluctuation from 10 μA to 10 mA

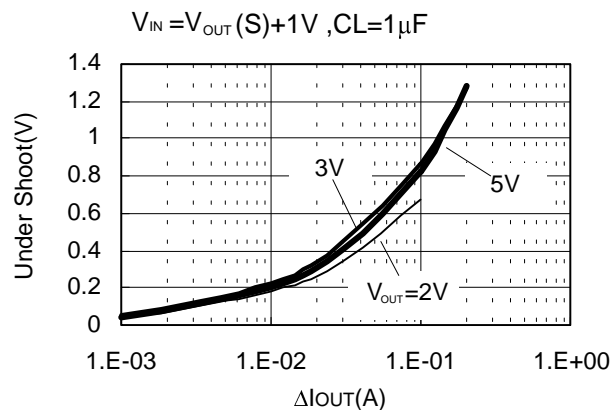


Output capacitor (CL) dependence of undershoot

$V_{IN}=V_{OUT}(S)+1V, I_{OUT}=10\mu A \rightarrow 30mA$

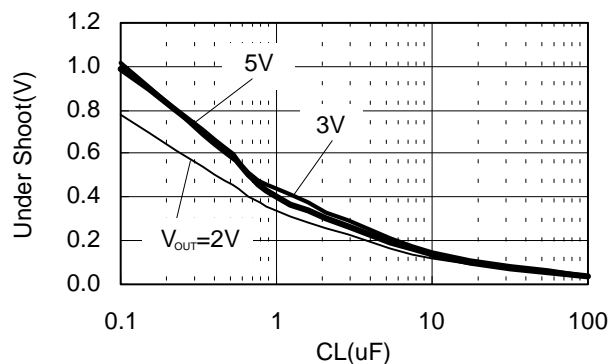


VDD dependencies of undershoot

$V_{IN}=VDD, I_{OUT}=10\mu A \rightarrow 30mA, CL=1\mu F$

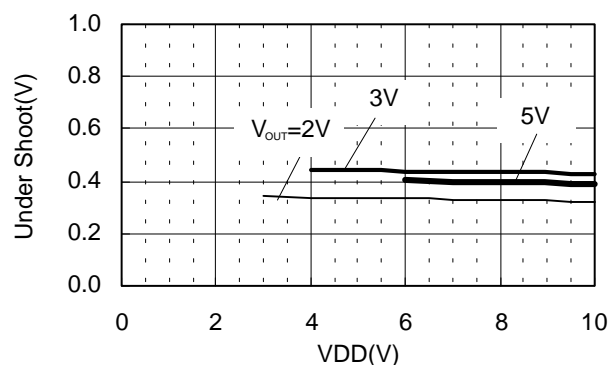

Temperature dependencies of undershoot

$V_{IN}=V_{OUT}(S)+1V, I_{OUT}=10\mu A \rightarrow 30mA, CL=1\mu F$

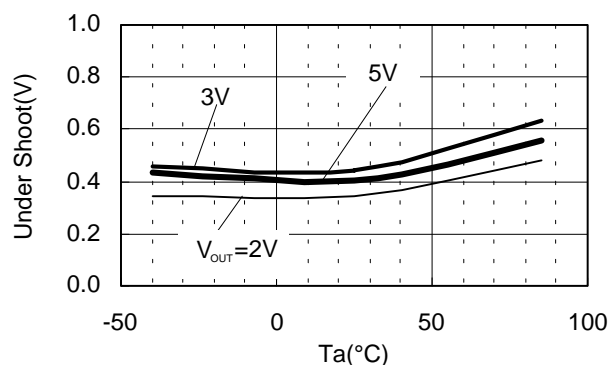


■ SOT-23-5

MP005-A 990531



Unit : mm

● Dimensions

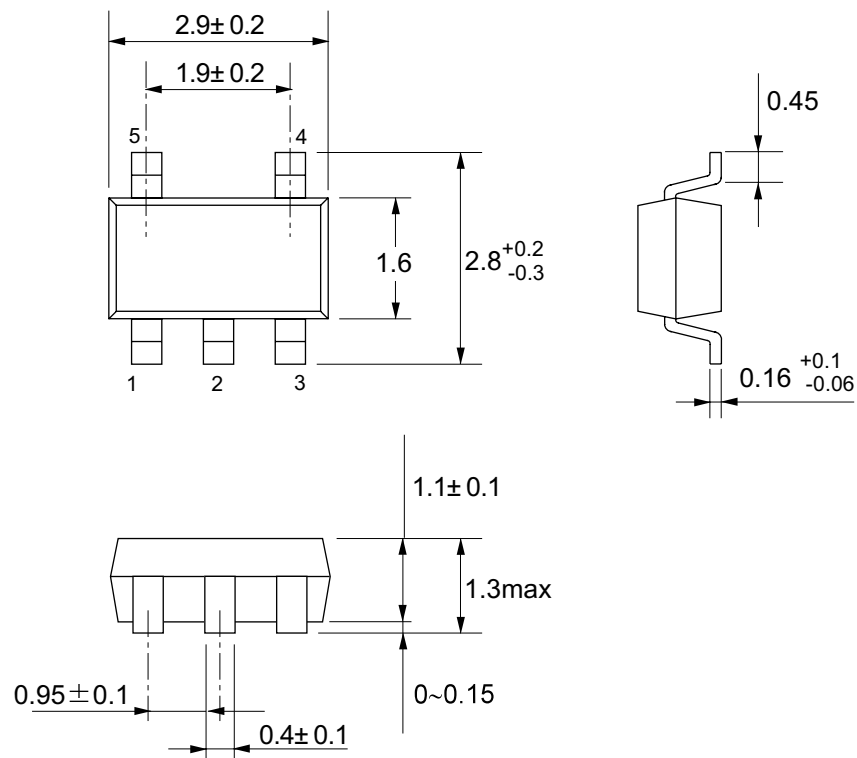

No. : MP 0 0 5 - A - P - S D - 1 . 0


● Taping Specifications

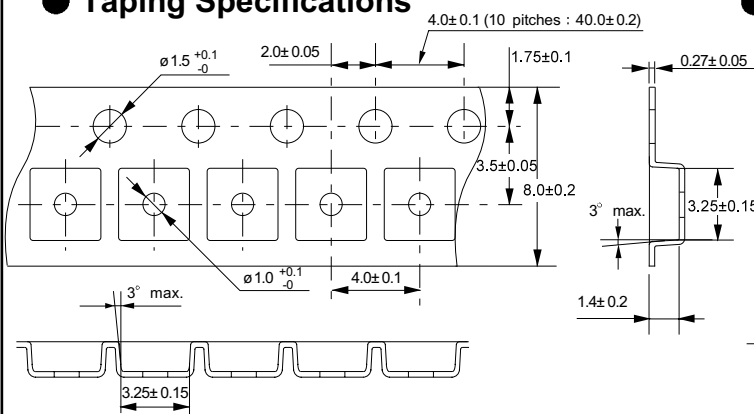


No. : MP 0 0 5 - A - C - S D - 1 . 0

● Reel Specifications

1 reel holds 3000 ICs.

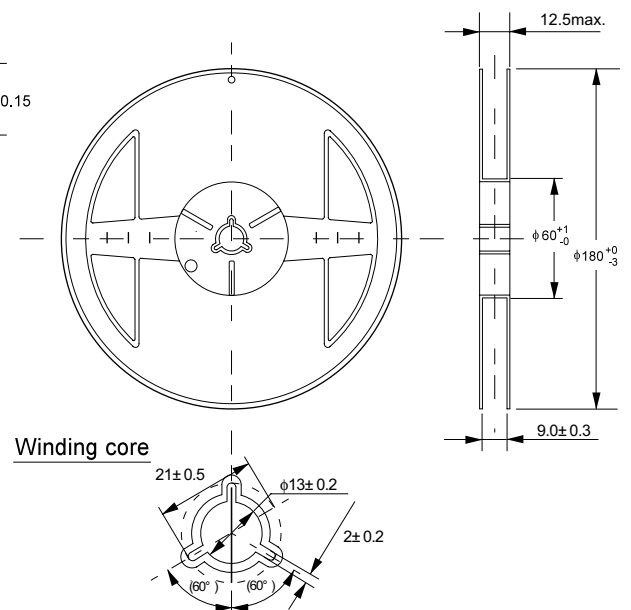


Winding core



No. : MP 0 0 5 - A - R - S D - 1 . 0



Unit : mm

● Dimensions

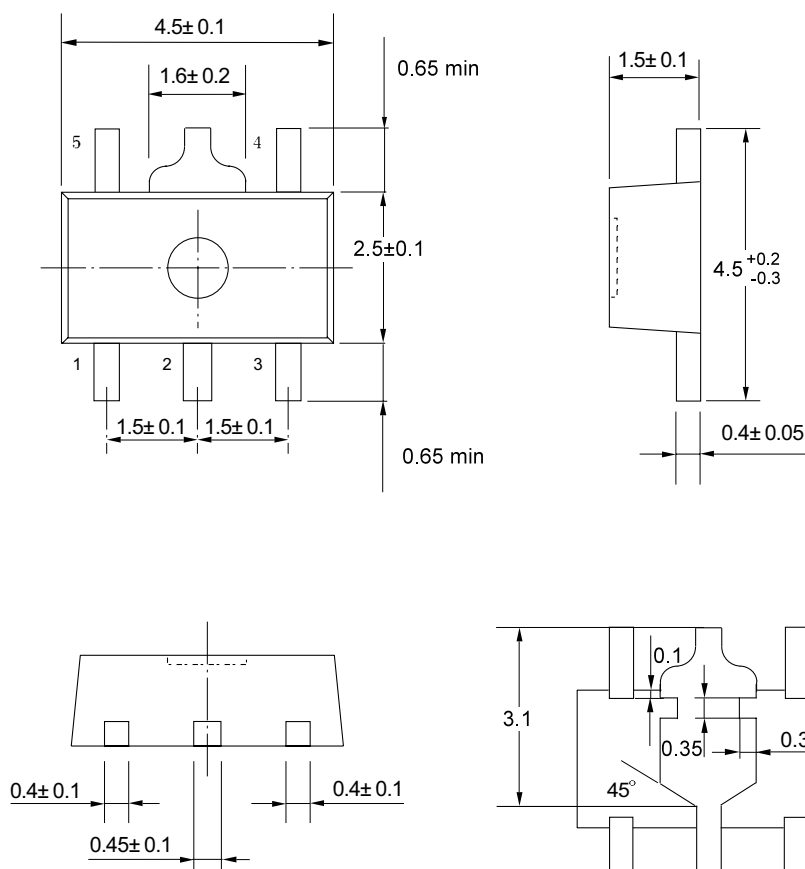

No. : UP 0 0 5 - A - P - S D - 1 . 1

● Taping Specifications

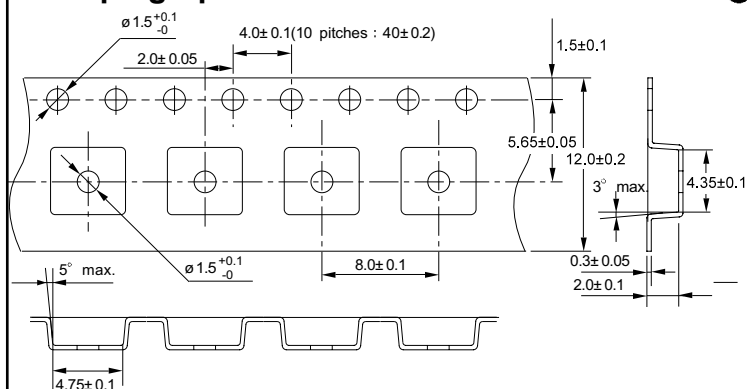


Feed direction

No. : UP 0 0 5 - A - C - S D - 1 . 0

● Reel Specifications

1 reel holds 1000 ICs.

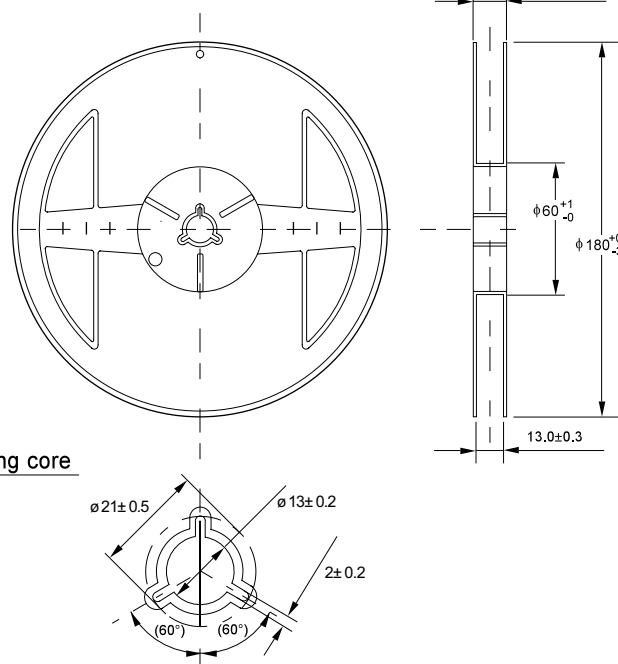

Winding core

No. : UP 0 0 5 - A - R - S D - 1 . 0

- Specifications within these data sheets are subject to change without prior notice. Verify with your local Seiko Instruments Inc. (SII) Sales Office that you have the latest data sheet before finalizing a design.
- SII does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent right nor the rights of others.
- SII claims no responsibility for the OUTSIDE of Japan of the products contained herein in any Strategic Products or Services set forth in the Foreign Exchange and Foreign Trade Control.
- No part of this document may be reproduced or transmitted in any form or by any means for any purpose without the express written consent of SII.
- The products described herein are not designed, intended or authorized for use as components in systems intended for health care or medical related applications or other applications intended to support or sustain life or for any other applications in which the failure of SII's product could create a situation where personal injury or death may occur, including, but not limited to the following:

Exercise equipment; Medical equipment; Security systems; Vehicles, Any type of gas related equipment.

Should the buyer purchase or use SII products for any such unintended or unauthorized application, the buyer shall indemnify and hold SII and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claims of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SII was negligent regarding the design or manufacture of the part.

- SII makes no warranties, expressed or implied, including, but not limited to, any implied warranties of merchantability, fitness for a particular purpose, title, or noninfringement.

Collection of Product FAQs

Author: Imura Yukihiro

Date : 99/05/31 (Monday) 10:35 (Modified:)

<Information level>

A: Public (Printing O.K.)

Index: A: General

<Product>

Division name: 01 IC

Category 1: 11 Power Supply

Category 2: 2. Voltage Regulators

Cal No.: S-814

Related Documents:

Question:

Which are LDOs most representative market players?

Answer:

The first one that occurs to us is the LP2980 manufactured by National Semiconductor Corp. (NS). It comes housed in the SOT-23-5, and its dropout voltage is 120 mV at an output current of 50 mA. The ON resistance can be converted to 2.4 Ω , which is lower than that of the S-814. It also has an excellent ripple rejection of 63 dB at 1 kHz. Other low-dropout-voltage regulators available are Toko's TK111XX, TK112XX, and TK113XX; Ricoh's RN5RZ, RN1111N, and RN1121N; and others.

<Remarks>

FAQ No.: 11S814005

Collection of Product FAQs

Author: Imura Yukihiro

Date: 99/05/31 (Monday) 10:31 (Modified:)

<Information level>

A: Public (Printing O.K.)

Index: A: General

<Product>

Division name: 01 IC

Category 1: 11 Power Supply

Category 2: 2. Voltage Regulators

Cal No.: S-814

Related Documents:

Question:

Which are SII's low-dropout voltage regulators?

Answer:

The S-814 Series comprises products related to low-dropout voltage regulators. The dropout voltage produced when a current of 60 mA is applied is 0.17 V in the 5-V-output products (S-814A50A), and 0.30 V in the 3-V-output products (S-814A30A).

The S-813 Series products can also be treated as low-dropout voltage regulators. The dropout voltage of this Series is 0.12 V in the 5-V-output products (S-81350HG) at a current of 40 mA, and 0.14 V in the 3-V-output products (S-81330HG) at a current of 30 mA.

<Remarks>

FAQ No.: 11S814003

Collection of Product FAQs

Author: Imura Yukihiro

Date: 99/05/31 (Monday) 10:24

<Information level>

A: Public (Printing O.K.)

Index: A: General

<Product>

Division name: 01 IC

Category 1: 11 Power Supply

Category 2: 2. Voltage Regulators

Cal No.: S-814

Related Documents:

Question:

Where would the low-dropout voltage regulators be employed?

Answer:

The low-dropout voltage regulators are employed where the difference between the input voltage and the output voltage is small, and the required current is large. For instance, a low-dropout voltage regulator is adopted when it is desired to fully use a battery. This is due to the fact that a constant current can be supplied even when the battery voltage has fallen to near the output voltage. A lower dropout voltage means longer service life of the battery.

<Remarks>

FAQ No.: 11S814002

Collection of Product FAQs

Author: Imura Yukihiro

Date: 99/5/31 (Monday) 10:21 (Modified:)

<Information level>

A: Public (Printing O.K.)

Index: A:General

<Product>

Division name: 01 IC

Category 1: 11 Power Supply

Category 2: 2. Voltage Regulators

Cal No.: S-814

Related Documents:

Question:

What is the Low-Dropout Voltage Regulator?

Answer:

The low-dropout voltage regulator is a type of voltage regulator with a built-in low-on-resistance transistor that causes extremely little voltage dropout. The S-814 Series consists of low-dropout voltage regulators. The S-81450A with 5-V output produces a dropout voltage of 0.17 V (Typ.) when a current of 60 mA is applied to it.

<Remarks>

FAQ No.: 11S814001

Collection of Product FAQs

Author: Imura Yukihiro

Date: 99/05/31 (Monday) 11:50 (Modified:)

<Information level>

A: Public (Printing O.K.)

Index: A: General

<Product>

Division name: 01 IC

Category 1: 11 Power Supply

Category 2: 2. Voltage Regulators

Cal No.: Overall

Related Documents:

Question:

Why do people dislike using electrolytic capacitors?

Answer:

Because electrolytic capacitors may cause failure due to short-circuit or even burn when subjected to an overcurrent or overvoltage, an increasing number of users are declining to use electrolytic capacitors, as UL and other safety standards require that such products be incombustible. As a result, ceramic capacitors of no short-circuit and made of nonflammable materials attract most users.

<Remarks>

FAQ No.: 11S814005