
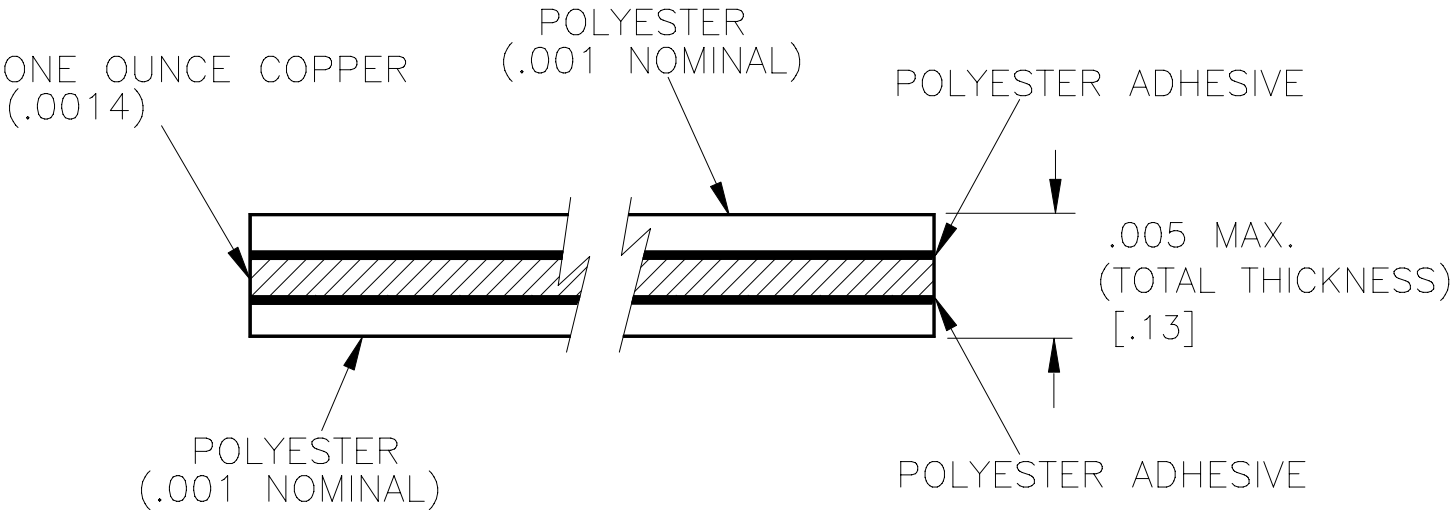


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
D	REVISED AND REDRAWN PER DCR# T-22443	10/23/98	M.HIGGY
E	REVISED PER DCR# T-23888	12/30/99	M.HIGGY


NOTES:

1. PACKAGE IS 500 FEET PER REEL.
2. LENGTH TOLERANCE IS $\pm 2\%$
3. WHEN INSTALLED IN DIRECT CONTACT WITH FLAT CONDUCTOR CABLE, THIS SHIELD MEETS THE REQUIREMENTS OF RAYCHEM SPECIFICATION C-6119, SURFACE TRANSFER IMPEDANCE LEVEL IS APPLICATION DEPENDENT.

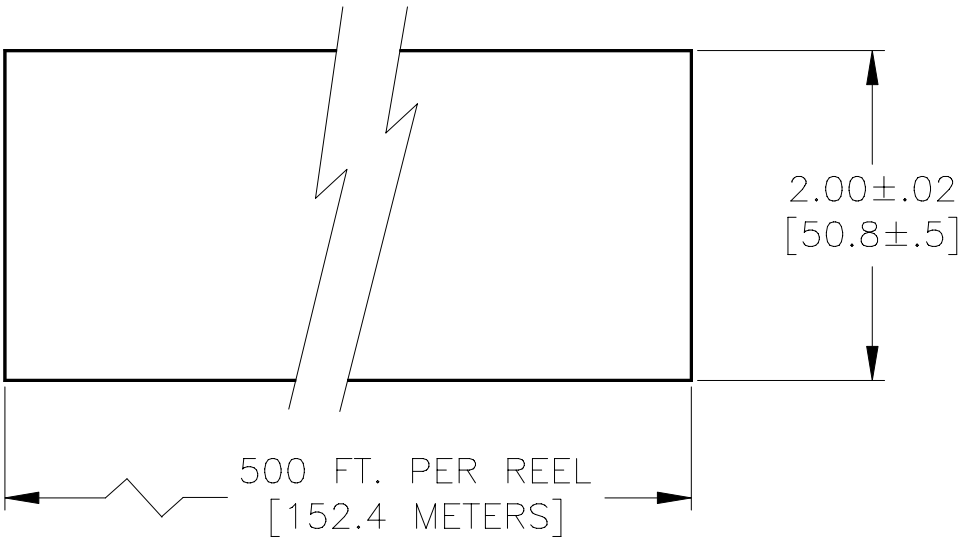

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± .010 [— mm] .XX ± .03 [— mm] ANGLES .X — ± — WEIGHT: 5.74g(0.0127 Lbs) / ft. MAXIMUM	DRAWN	ZS.O.	6/11/97	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025				
	CHECKED			TITLE SHIELD FOR FLAT CABLE, COPPER—POLYESTER LAMINATE, 2 SIDES				
	APPROVED							
	APPROVED	M.HIGGY	6/23/97					
	CAD NAME T23888.DWG			SIZE A	CODE IDENT. NO. 06090	DWG. NO. CHA-0045	REV E	
	THIRD ANGLE PROJECTION 			DO NOT SCALE THIS DRAWING				SHEET 1 OF 1