

3G3MX2 AC Drives

Born to drive machines



» Omron Quality with a capital "Q"

» High programming functionality

» Built-in safety

Harmonized motor and machine control

The 3G3MX2 is specifically designed to drive machines. It has been developed to harmonize advanced motor and machine control.

Thanks to its advanced design and algorithms the 3G3MX2 provides smooth control down to zero speed, plus precise operation for fast cyclic operations and torque control capability in open loop.

The 3G3MX2 also gives you comprehensive functionality for machine control such as positioning, speed synchronization and logic programming. The 3G3MX2 is fully integrated within the Omron smart automation platform. The 3G3MX2 is the child of a true leader in machine automation.

MOTOR CONTROL

200% starting torque

- Near stand-still operation (0.5 Hz)
- Smooth control of high inertia loads
- Control of fast cyclic loads

Torque control in open loop

- Ideal for low to medium torque applications
- Can replace a flux vector or servo drive in suitable systems

Special motors

- Permanent magnet motors
- High speed motors up to 1000 Hz

One parameter auto-tuning

- Just by entering the power rating of the motor the 3G3MX2 gives you smooth and safe operation





MACHINE CONTROL

Safety inside

- Conforms to safety norm ISO-13849 CAT3 performance level PLD
- 2 Safety inputs
- External device monitoring (EDM)

Logic programming

- Flow chart programming
- Intuitive – up to 5 tasks in parallel

Positioning


- Up to 8 pre-set positions with “Homing”
- Speed synchronization

Integrated in the Omron Smart Automation

- CX-Drive programming tool connected via integrated USB port on 3G3MX2.
- Modbus RS485 built-in
- Option units for EtherCAT, Profibus, DeviceNet, ML-II and more...


100% Control...

High starting torque and torque control capability in open loop mode give you full control of your machine dynamics and performance. Options for all of the major fieldbus systems and a 24 VDC external supply keeps you in full control of your machine operation.

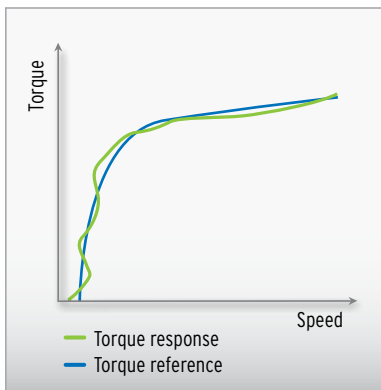


Torque master

The 3G3MX2 delivers 200% starting torque near stand-still (0.5 Hz) and can operate in torque control in open loop mode. This allows the 3G3MX2 to be used in applications where closed loop AC vector drives were previously used.

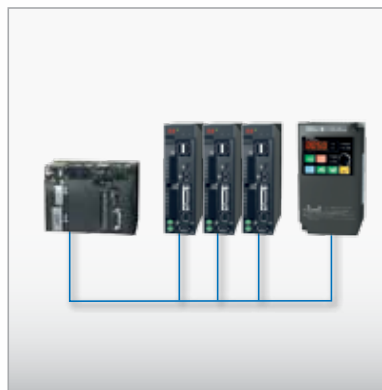

Easy network integration

Built-in RS485 Modbus communications and the possibility for integration in standard industrial networks, such as DeviceNet, Profibus, CANopen, CompoNet, ML-II or EtherCat makes the 3G3MX2 exceptionally easy to integrate.

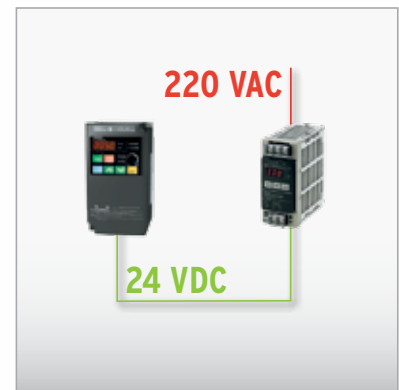


External 24 VDC for continuous operation

With no additional hardware, a 24 VDC connection to the 3G3MX2 ensures the CPU is always in control, even if the main input is removed. This feature is vital in providing a controlled stop in emergency situations and in keeping the network communications operating.

...0% risk!


Safety is embedded in the 3G3MX2, according to ISO 13849-1, Cat 3, with two safety inputs and an External Device Monitoring (EDM) output.

No external contactors on the motor side are required, meaning simpler wiring for the user.

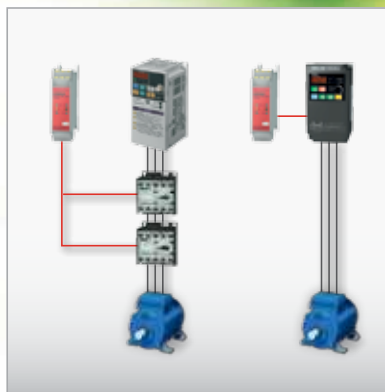


Safety embedded; ISO 13849-1, cat 3

Dual contactors at the output of the inverter are no longer required. Direct connection to a safety controller ensures compliance to ISO 13849-1, cat 3.

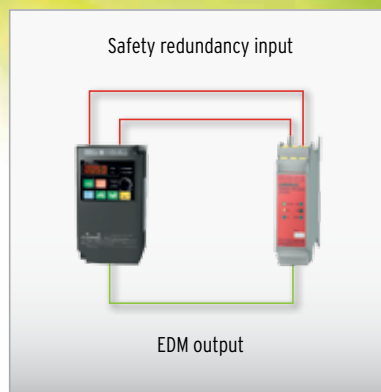

EDM monitoring output

An External Device Monitoring (EDM) output confirms the safety status of the inverter, saving you the cost and wiring of external devices to carry out the same function.

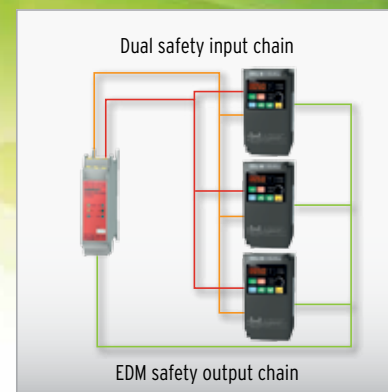

Direct integration into the safety circuit

3G3MX2 inverters can fit easily into the safety circuit. The safety inputs can be linked from one inverter to another without additional safety relays.

Position and run!

The 3G3MX2 is a drive and position controller in one, ideal for modular machines where moderate positional accuracy is required. Speed synchronization is also possible, with no additional programming required.



Speed synchronization

With no external hardware required, and via standard parameter settings, speed synchronization can be achieved. The 3G3MX2 will act as a speed follower to an external pulse generator/ encoder signal up to 32 kHz.





Positioning functionality

Specially developed application functionality enables the 3G3MX2 to solve simple positioning tasks without the need for an external controller. Up to 8 positions, plus home, can be selected by the user, and furthermore, the 3G3MX2 can be switched between speed and position mode.


Program and play!

The 3G3MX2 gives you the power to create smart solutions using PLC functionality, as standard. Via an intuitive flow chart programming tool, you can create programs with up to 1000 lines of code and with 5 tasks running in parallel.

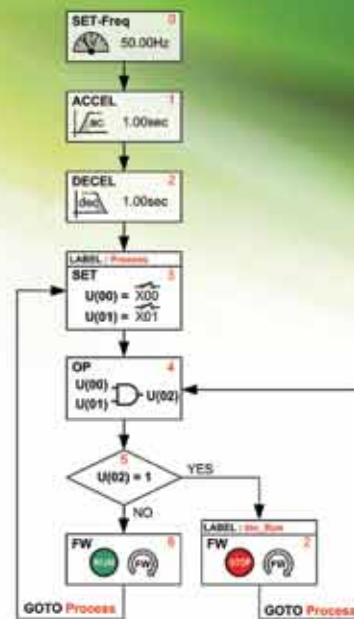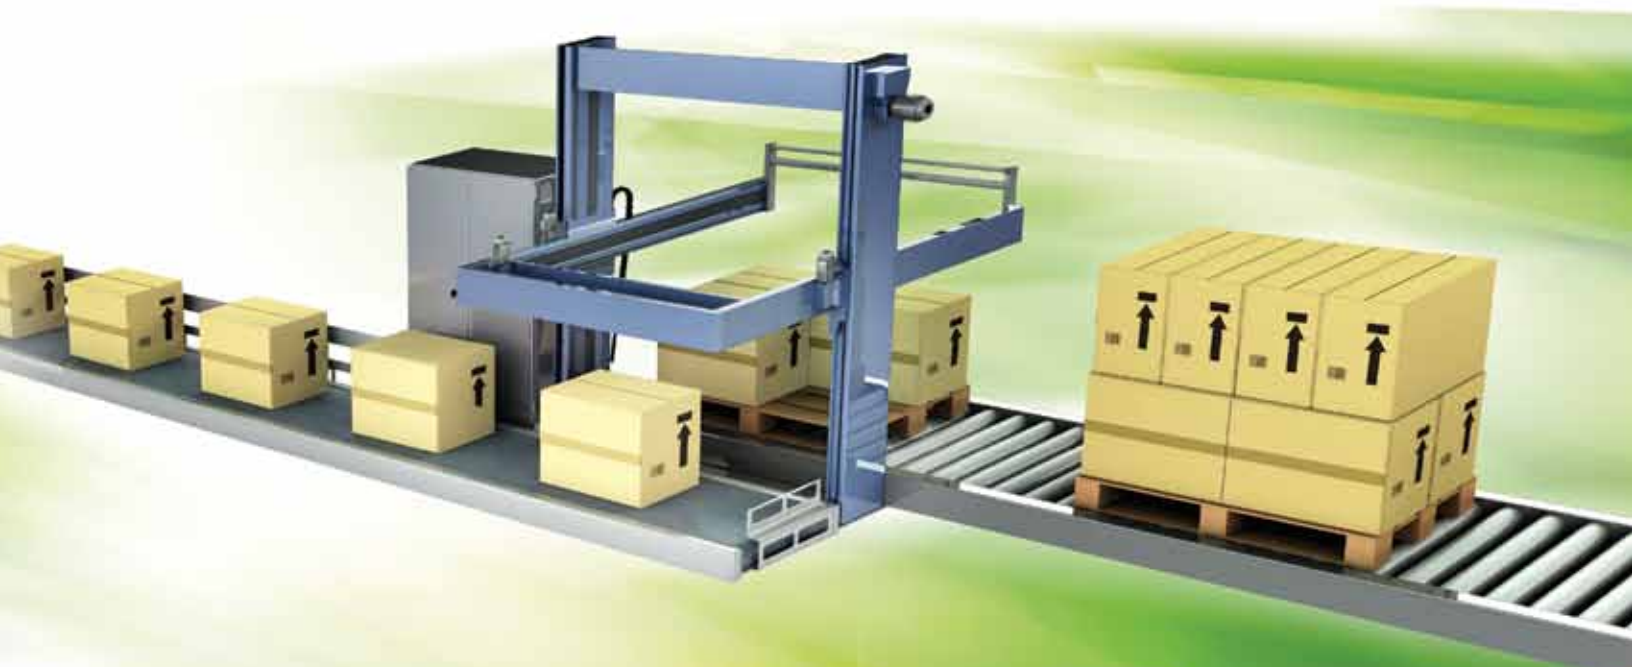

Free to program

- Intuitive and user friendly flow chart programming
- Integrated in CX-Drive
- Up to 1000 lines in a program
- 5 tasks can run in parallel

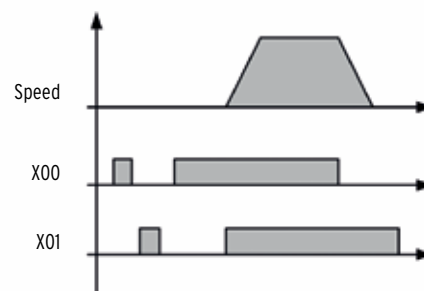

3G3MX2

Born to drive machines


- Current vector control
- High starting torque: 200% at 0.5Hz
- Double rating VT 120%/1min and CT 150%/1min
- Speed range up to 1000 Hz
- IM & PM motor control
- Torque control in open loop vector
- Positioning functionality
- Built-in application functionality (i.e., Brake control)
- User programmable as standard
- Safety embedded compliant with ISO13849-1 (double input circuit and external device monitor EDM)
- USB port for PC programming
- 24 VDC backup supply for control board
- Fieldbus communications: Modbus, DeviceNet, Profibus, Comconet, EtherCAT, ML-II and CanOpen
- PC configuration tool: CX-Drive
- RoHS, CE, cULus

Ratings

- 200 V Class single-phase 0.1 to 2.2 kW (1/8 to 3 HP)
- 200 V Class three-phase 0.1 to 15.0 kW (1/8 to 20 HP)
- 400 V Class three-phase 0.4 to 15.0 kW (1/2 to 20 HP)




System Configuration

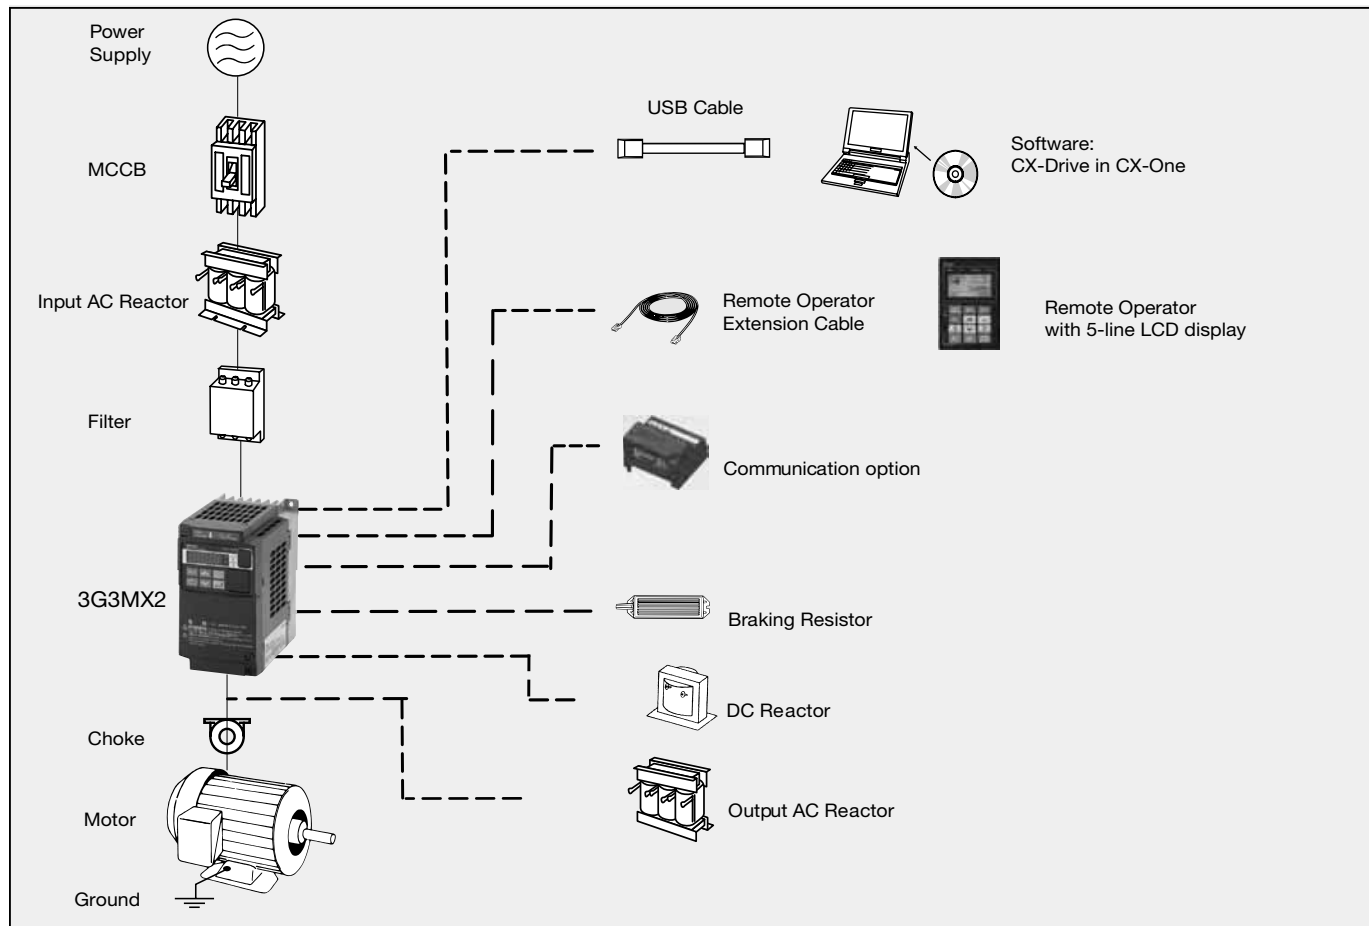

Specifications

Type Designation

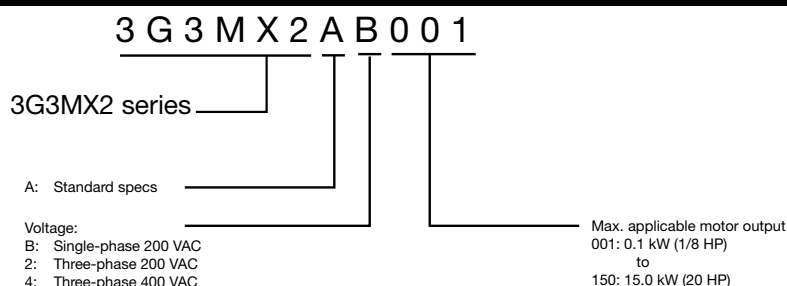

200 V class

Single-phase 3G3MX2-□			AB001	AB002	AB004	AB007¹	AB015	AB022	-	-	-	-	-
Three-phase 3G3MX2-□			A2001	A2002	A2004	A2007	A2015	A2022	A2037	A2055	A2075	A2110	A2150
Applicable motor capacity²	kW	CT	0.1	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11.0	15.0
		VT	0.2	0.4	0.55	1.1	2.2	3.0	5.5	7.5	11.0	15.0	18.5
	HP	CT	1/8	1/4	1/2	1.0	2.0	3.0	5.0	7 1/2	10.0	15.0	20.0
		VT	1/4	1/2	3/4	1 1/2	3.0	4.0	7 1/2	10.0	15.0	20.0	25.0
Output characteristics	Inverter capacity kVA	200 VT	0.4	0.6	1.2	2.0	3.3	4.1	6.7	10.3	13.8	19.3	23.9
		200 CT	0.2	0.5	1.0	1.7	2.7	3.8	6.0	8.6	11.4	16.2	20.7
		240 VT	0.4	0.7	1.4	2.4	3.9	4.9	8.1	12.4	16.6	23.2	28.6
		240 CT	0.3	0.6	1.2	2.0	3.3	4.5	7.2	10.3	13.7	19.5	24.9
	Rated output current (A) at VT		1.2	1.9	3.5	6.0	9.6	12.0	19.6	30.0	40.0	56.0	69.0
	Rated output current (A) at CT		1.0	1.6	3.0	5.0	8.0	11.0	17.5	25.0	33.0	47.0	60.0
	Max. output voltage		Proportional to input voltage: 0 to 240 V										
	Max. output frequency		1000 Hz										
Power supply	Rated input voltage and frequency		Single-phase 200 to 240 V 50/60 Hz 3-phase 200 to 240 V 50/60 Hz										
	Allowable voltage fluctuation		-15% to +10%										
	Allowable frequency fluctuation		5%										
Braking torque	At short-time deceleration At capacitor feedback		100%: <50Hz 50%: <60Hz				70%: <50Hz 50%: <60Hz	Approx. 20%		-			
Cooling method			Self cooling				Forced-air-cooling						

Note: 1. Three phase model use forced-air-cooling but single phase model is self cooling.

2. Based on a standard 3-Phase standard motor.

3. Above 400Hz with some function limitation.

400 V class

Three-phase 3G3MX2-□			A4004	A4007	A4015	A4022	A4030	A4040	A4055	A4075	A4110	A4150
Applicable motor capacity¹	kW	CT	0.4	0.75	1.5	2.2	3.0	4.0	5.5	7.5	11.0	15.0
		VT	0.75	1.5	2.2	3.0	4.0	5.5	7.5	11.0	15.0	18.5
	HP	CT	1/2	1.0	2.0	3.0	4.0	5.0	7 1/2	10.0	15.0	20.0
		VT	1.0	2.0	3.0	4.0	5.0	7 1/2	10.0	15.0	20.0	25.0
Output characteristics	Inverter capacity kVA	380 VT	1.3	2.6	3.5	4.5	5.7	7.3	11.5	15.1	20.4	25.0
		380 CT	1.1	2.2	3.1	3.6	4.7	6.0	9.7	11.8	15.7	20.4
		480 VT	1.7	3.4	4.4	5.7	7.3	9.2	14.5	19.1	25.7	31.5
		480 CT	1.4	2.8	3.9	4.5	5.9	7.6	12.3	14.9	19.9	25.7
	Rated output current (A) at VT		2.1	4.1	5.4	6.9	8.8	11.1	17.5	23.0	31.0	38.0
	Rated output current (A) at CT		1.8	3.4	4.8	5.5	7.2	9.2	14.8	18.0	24.0	31.0
	Max. output voltage		Proportional to input voltage: 0 to 480 V									
	Max. output frequency		1000 Hz									
Power supply	Rated input voltage and frequency		3-phase 380 to 480 V 50/60 Hz									
	Allowable voltage fluctuation		-15% to +10%									
	Allowable frequency fluctuation		5%									
Braking torque	At short-time deceleration At capacitor feedback		100%: <50Hz 50%: <60Hz				70%: <50Hz 50%: <60Hz	-				
Cooling method			Self cooling		Forced-air-cooling							

Note: 1. Based on a standard 3-Phase standard motor.

2. Above 400Hz with some function limitation.

Specifications

Common specifications

Model number 3G3MX2-□		Specifications
Control functions	Control methods	Phase-to-phase sinusoidal pulse with modulation PWM (Sensorless vector control, V/F)
	Output frequency range	0.10 to 1000.00 Hz (with restrictions above 400Hz)
	Frequency precision	Digital set value: $\pm 0.01\%$ of the max. frequency
		Analog set value: $\pm 0.2\%$ of the max. frequency (25 $\pm 10^{\circ}\text{C}$)
	Resolution of frequency set value	Digital set value: 0.01 Hz
		Analog set value: 1/1000 of maximum frequency
	Resolution of output frequency	0.01 Hz
	Starting torque	200% / 0.5 Hz
	Overload capability	Dual rating: Heavy duty (CT): 150% for 1 minute Normal Duty (VT): 120% for 1 minute
Functionality	Frequency set value	0 to 10 VDC (10K Ω), 4 to 20mA (100 Ω), RS485 Modbus, Network options
	V/f Characteristics	Constant/ reduced torque, free V/f
	Inputs signals	FW (forward run command), RV (reverse run command), CF1~CF4 (multi-stage speed setting), JG (jog command), DB (external braking), SET (set second motor), 2CH (2-stage accel./decel. command), FRS (free run stop command), EXT (external trip), USP (startup function), CS (commercial power switchover), SFT (soft lock), AT (analog input selection), RS (reset), PTC (thermistor thermal protection), STA (start), STP (stop), F/R (forward/reverse), PID (PID disable), PIDC (PID reset), UP (remote control up function), DWN (remote control down function), UDC (remote control data clear), OPE (operator control), SF1~SF7 (multi-stage speed setting; bit operation), OLR (overload restriction), TL (torque limit enable), TRQ1 (torque limit changeover1), TRQ2 (torque limit changeover2), BOK (Braking confirmation), LAC (LAD cancellation), PCLR (position deviation clear), ADD (add frequency enable), F-TM (force terminal mode), ATR (permission of torque command input), KHC (Cumulative power clear), MI1~MI7 (general purpose inputs for EzSQ), AHD (analog command hold), CP1~CP3 (multistageposition switches), ORL (limit signal of zero-return), ORC (trigger signal of zero-return), SPD (speed/position changeover), GS1~GS2 (STO inputs, safety related signals), 485 (Starting communication signal), PRG (executing EzSQ program), HLD (retain output frequency), ROK (permission of run command), EB (rotation direction detection of B-phase), DISP (display limitation), OP (option control signal), NO (no function)
	Output signals	RUN (run signal), FA1~FA5 (frequency arrival signal), OL,OL2 (overload advance notice signal), OD (PID deviation error signal), AL (alarm signal), OTQ (over/under torque threshold), UV (under-voltage), TRQ (torque limit signal), RNT (run time expired), ONT (power ON time expired), THM (thermal warning), BRK (brake release), BER (brake error), ZS (0Hz detection), DSE (speed deviation excessive), POK (positioning completion), ODc (analog voltage input disconnection), OIdc (analog current input disconnection), FBV (PID second stage output), NdC (network disconnect detection), LOG1~LOG3 (Logic output signals), WAC (capacitor life warning), WAF (cooling fan warning), FR (starting contact), OHF (heat sink overheat warning), LOC (Low load), MO1~MO3 (general outputs for EzSQ), IRDY (inverter ready), FWR (forward operation), RVR (reverse operation), MJA (major failure), WCO (window comparator O), WCOI (window comparator OI), FREF (frequency command source), REF (run command source), SETM (second motor in operation), EDM (STO (safe torque off) performance monitor), OP (option control signal), NO (no function)
	Standard functions	Free-V/f, manual/automatic torque boost, output voltage gain adjustment, AVR function, reduced voltage start, motor data selection, auto-tuning, motor stabilization control, reverse running protection, simple position control, simple torque control, torque limiting, automatic carrier frequency reduction, energy saving operation, PID function, non-stop operation at instantaneous power failure, brake control, DC injection braking, dynamic braking (BRD), frequency upper and lower limiters, jump frequencies, curve accel and decel (S, U, inverted U,EL-S), 16-stage speed profile, fine adjustment of start frequency, accel and decel stop, process jogging, frequency calculation, frequency addition, 2-stage accel/decel, stop mode selection, start/end freq., analog input filter, window comparators, input terminal response time, output signal delay/hold function, rotation direction restriction, stop key selection, software lock, safe stop function, scaling function, display restriction, password function, user parameter, initialization, initial display selection, cooling fan control, warning, trip retry, frequency pull-in restart, frequency matching, overload restriction, over current restriction, DC bus voltage AVR
	Analog inputs	2 analog inputs 0 to 10 V (10 K Ω), 4 to 20mA (100 Ω)
	Pulse train input terminal	0 to 10 V (up to 24 V), up to 32 KHz
	Accel/Decel times	0.01 to 3600.0 s (line/curve selection), 2nd accel/decel setting available
	Display	Status indicator LED's Run, Program, Power, Alarm, Hz, Amps Digital operator: Available to monitor 32 items: frequency reference, output current, output frequency...
Protection functions	Motor overload protection	Electronic Thermal overload relay and PTC thermistor input
	Instantaneous overcurrent	200% of rated current
	Overload	Dual rating: Heavy duty (CT): 150% for 1 minute Normal Duty (VT): 120% for 1 minute
	Overvoltage	800 V for 400 V type and 400 V for 200 V type
	Undervoltage	345 V for 400 V type and 172.5 V for 200 V type
	Momentary power loss	Following items are selectable: Alarm, decelerates to stop, decelerates to stop with DC bus controlled, restart
	Cooling fin overheat	Temperature monitor and error detection
	Stall prevention level	Stall prevention during acceleration/deceleration and constant speed
	Ground fault	Detection at power-on
Ambient conditions	Power charge indication	On when power is supplied to the control part
	Degree of protection	IP20, Varnish coating on PCB
	Ambient humidity	90% RH or less (without condensation)
	Storage temperature	-20 $^{\circ}\text{C}$ to +65 $^{\circ}\text{C}$ (short-term temperature during transportation)
	Ambient temperature	-10 $^{\circ}\text{C}$ to 40 $^{\circ}\text{C}$
	Installation	Indoor (no corrosive gas, dust, etc.)
	Installation height	Max. 1000 m
	Vibration	5.9 m/s ² (0.6G), 10 to 55 Hz

Dimensions

3G3MX2 AC Drives

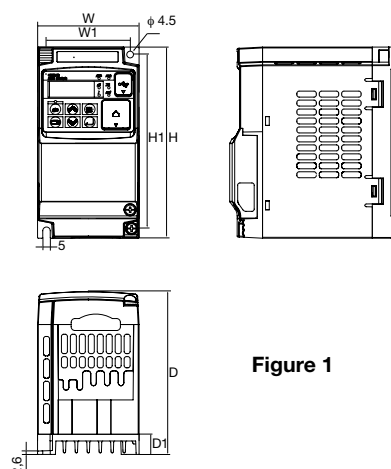


Figure 1

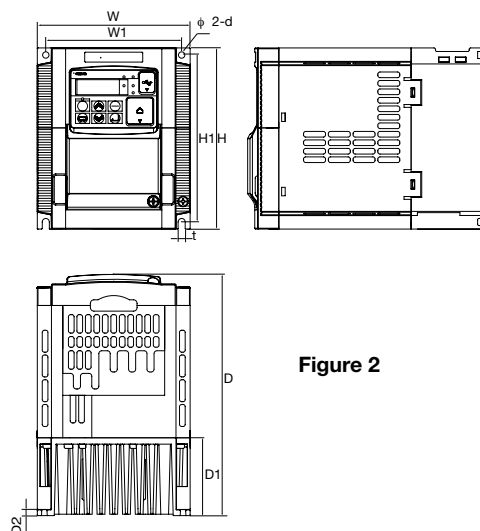


Figure 2


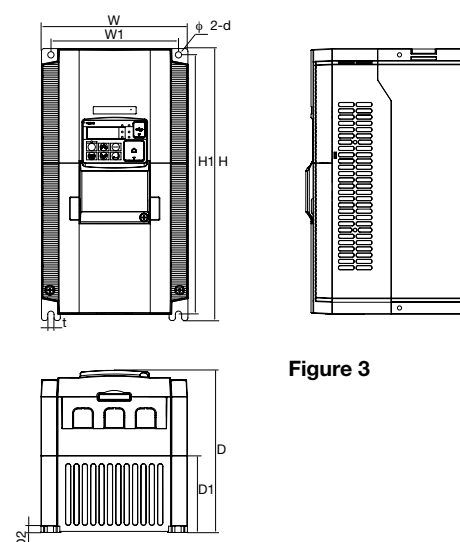


Figure 3

Voltage class	Inverter model 3G3MX2-□	Figure	Dimensions (Unit: mm)									Weight (kg)		
			W	W1	H	H1	t	D	D1	D2	d			
Single-phase 200 V	AB001	1	68	56	128	118	-	109	13.5	-	-	1.0		
	AB002	1										1.0		
	AB004	1						123	27			1.1		
	AB007	2	108	96	128	118		170.5	55	4.4	4.5	1.4		
	AB015	2										1.8		
	AB022	2										1.8		
Three-phase 200 V	A2001	1	68	56	128	118	-	109	13.5	-	-	1.0		
	A2002	1										1.0		
	A2004	1						1134	27			1.1		
	A2007	1						146	50			1.2		
	A2015	2	108	96	128	118	-	170.5	55	4.4	4.5	1.6		
	A2022	2										1.8		
	A2037	3										140	128	128
	A2055	3	140	122	260	248	6	155	73.3	6	6	3.0		
	A2075	3										3.4		
	A2110	3	180	160	296	284	7	175	97	5	7	5.1		
A2150	3	220	192	350	336	7	175	84	5	7	7.4			
Three-phase 400 V	A4004	2	108	96	128	118	-	144	28	-	-	1.5		
	A4007	2										1.6		
	A4015	2						171	55			1.8		
	A4022	2										1.9		
	A4030	2										1.9		
	A4040	3	140	128	128	118	5	171	55	4.4	4.5	2.1		
	A4055	3		122	260	248	6	155	73.3	6	6	3.5		
	A4075	3										3.5		
	A4110	3	180	160	296	284	7	175	97	5	7	4.7		
	A4150	3										5.2		


Line Filters, Footprint Type

Rasmi filter model		Dimensions (Unit: mm)					
		W	H	L	X	Y	M
1x200 V	3G3AX-FIM1010-RE	71	45	169	156	51	M4
	3G3AX-FIM1014-RE	111	50	169	156	91	M4
	3G3AX-FIM1024-RE	111	50	169	156	91	M4
3x200 V	3G3AX-FIM2010-RE	82	50	194	181	62	M4
	3G3AX-FIM2020-RE	111	50	169	156	91	M4
	3G3AX-FIM2030-RE	144	50	174	161	120	M4
	3G3AX-FIM2060-RE	150	52	320	290	122	M5
	3G3AX-FIM2080-RE	188	62	362	330	160	M5
	3G3AX-FIM2100-RE	220	62	415	380	192	M6
3x400 V	3G3AX-FIM3005-RE	111	45	169	156	91	M4
	3G3AX-FIM3010-RE	111	45	169	156	91	M4
	3G3AX-FIM3014-RE	144	50	174	161	120	M4
	3G3AX-FIM3030-RE	150	52	306	290	122	M5
	3G3AX-FIM3050-RE	182	62	357	330	160	M5

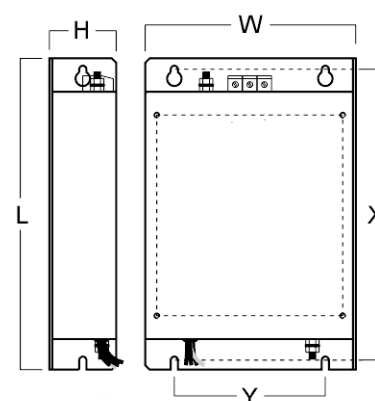


Accessories

Communication Option Boards

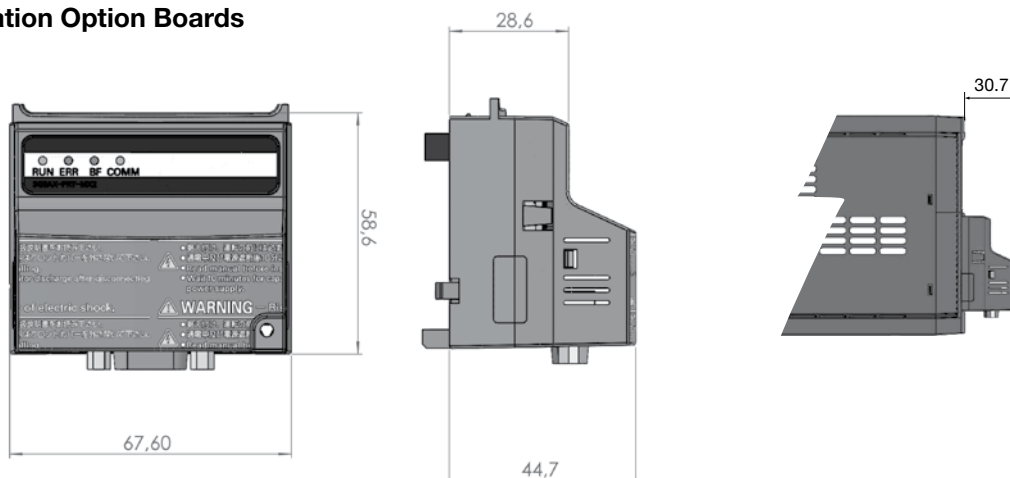


Input AC Reactor

Voltage class	Model 3G3AX-□	Dimensions (Unit: mm)						Weight (kg)
		A	B2	C2	D	E	F	
200 V	RAI02800080-DE	120	70	120	80	52	5.5	1.78
	RAI00880200-DE	120	80	120	80	62	5.5	2.35
	RAI00350335-DE	180	85	190	140	55	6	5.5
	RAI00180670-DE	180	85	190	140	55	6	5.5
400 V	RAI07700050-DE	120	70	120	80	52	5.5	1.78
	RAI03500100-DE	120	80	120	80	62	5.5	2.35
	RAI01300170-DE	120	80	120	80	62	5.5	2.50
	RAI00740335-DE	180	85	190	140	55	6	5.5

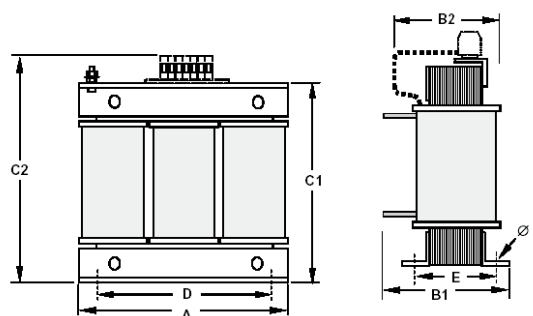


DC Reactor

Voltage class	Model 3G3AX-□	Dimensions (Unit: mm)								Weight (kg)
		A	B	C	D	E	F	G	H	
200 V	RC21400016-DE	84	113	96	101	66	5	7.5	2	1.22
	RC10700032-DE			105						1.60
	RC06750061-DE			116						1.95
	RC03510093-DE			124						3.20
	RC02510138-DE	120	152	136	135	94	7	9.5	-	5.20
	RC01600223-DE			146						6.00
	RC01110309-DE			160						11.4
	RC00840437-DE			182.6						14.3
	RC00590614-DE	150	177	160	160	115	7	2	-	11.4
	RC00440859-DE			182.6						14.3
400 V	RC43000020-DE	84	113	96	101	66	5	7.5	2	1.22
	RC27000030-DE			105						1.60
	RC14000047-DE			116						1.95
	RC10100069-DE			124						3.20
	RC06400116-DE	120	152	136	135	94	7	9.5	-	5.20
	RC04410167-DE			146						6.00
	RC03350219-DE			160						11.4
	RC02330307-DE			182.6						14.3
	RC01750430-DE	150	177	160	160	115	7	2	-	11.4
	RC01750430-DE			182.6						14.3

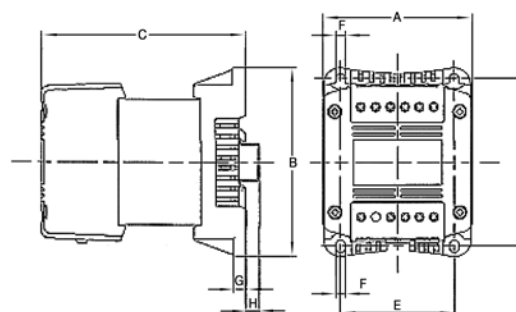

Output AC Reactor


Voltage class	Model 3G3AX-□	Dimensions (Unit: mm)						Weight (kg)
		A	B2	C2	D	E	F	
200 V	RAO11500026-DE	120	70	120	80	52	5.5	1.78
	RAO07600042-DE	120	70	120	80	52	5.5	1.78
	RAO04100075-DE	120	80	120	80	62	5.5	2.35
	RAO03000105-DE	120	80	120	80	62	5.5	2.35
	RAO01830180-DE	180	85	190	140	55	6	5.5
	RAO01150220-DE	180	85	190	140	55	6	5.5
	RAO00950320-DE	180	85	205	140	55	6	6.5
	RAO00630430-DE	180	95	205	140	65	6	9.1
	RAO00490640-DE	180	95	205	140	65	6	9.1
	RAO00490640-DE	180	95	205	140	65	6	9.1

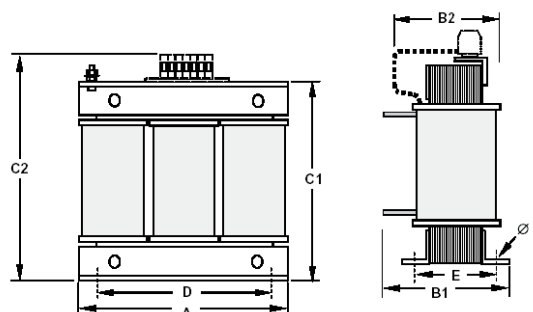

Accessories

Output AC Reactor

Voltage class	Model 3G3AX-□	Dimensions (Unit: mm)						Weight (kg)
		A	B2	C2	D	E	F	
400 V	RAO16300038-DE	120	70	120	80	52	5.5	1.78
	RAO11800053-DE	120	80	120	80	52	5.5	2.35
	RAO07300080-DE	120	80	120	80	62	5.5	2.35
	RAO04600110-DE	180	85	190	140	55	6	5.5
	RAO03600160-DE	180	85	205	140	55	6	6.5
	RAO02500220-DE	180	95	205	140	55	6	9.1
	RAO02000320-DE	180	105	205	140	85	6	11.7



Chokes

Model 3G3AX-□	Diameter	Motor	Dimensions (Unit: mm)						Weight (kg)	
	d	kW	HP	L	W	H	X	Y		m
FEJ2102-RE	21	< 2.2	< 3.0	85	22	46	70	–	5	0.1
FEJ2515-RE	25	< 15	< 20	105	25	62	90	–	5	0.2
FEJ5045-RE	50	< 45	< 60	150	50	110	125	30	5	0.7

Resistor

Model	Figure	Dimensions (Unit: mm)					Weight (kg)
		L	H	M	I	T	
3G3AX-REM00K1400-IE	1	105	27	36	94	–	0.2
3G3AX-REM00K2070-IE							
3G3AX-REM00K2120-IE							
3G3AX-REM00K2200-IE							
3G3AX-REM00K4075-IE							
3G3AX-REM00K4035-IE	2	200	27	36	189	–	0.425
3G3AX-REM00K4030-IE							
3G3AX-REM00K5120-IE							
3G3AX-REM00K6100-IE							
3G3AX-REM00K6035-IE							
3G3AX-REM00K9070-IE	3	200	62	100	74	–	1.41
3G3AX-REM00K9020-IE							
3G3AX-REM00K9017-IE							
3G3AX-REM01K9070-IE							
3G3AX-REM01K9017-IE							
3G3AX-REM02K1070-IE	4	310	100	240	295	210	7
3G3AX-REM02K1017-IE							
3G3AX-REM03K5035-IE							
3G3AX-REM03K5010-IE		365	100	240	350	210	8

3G3AX-REM00K1200




FIGURE 1




FIGURE 2




FIGURE 3






FIGURE 4



Standard Connections

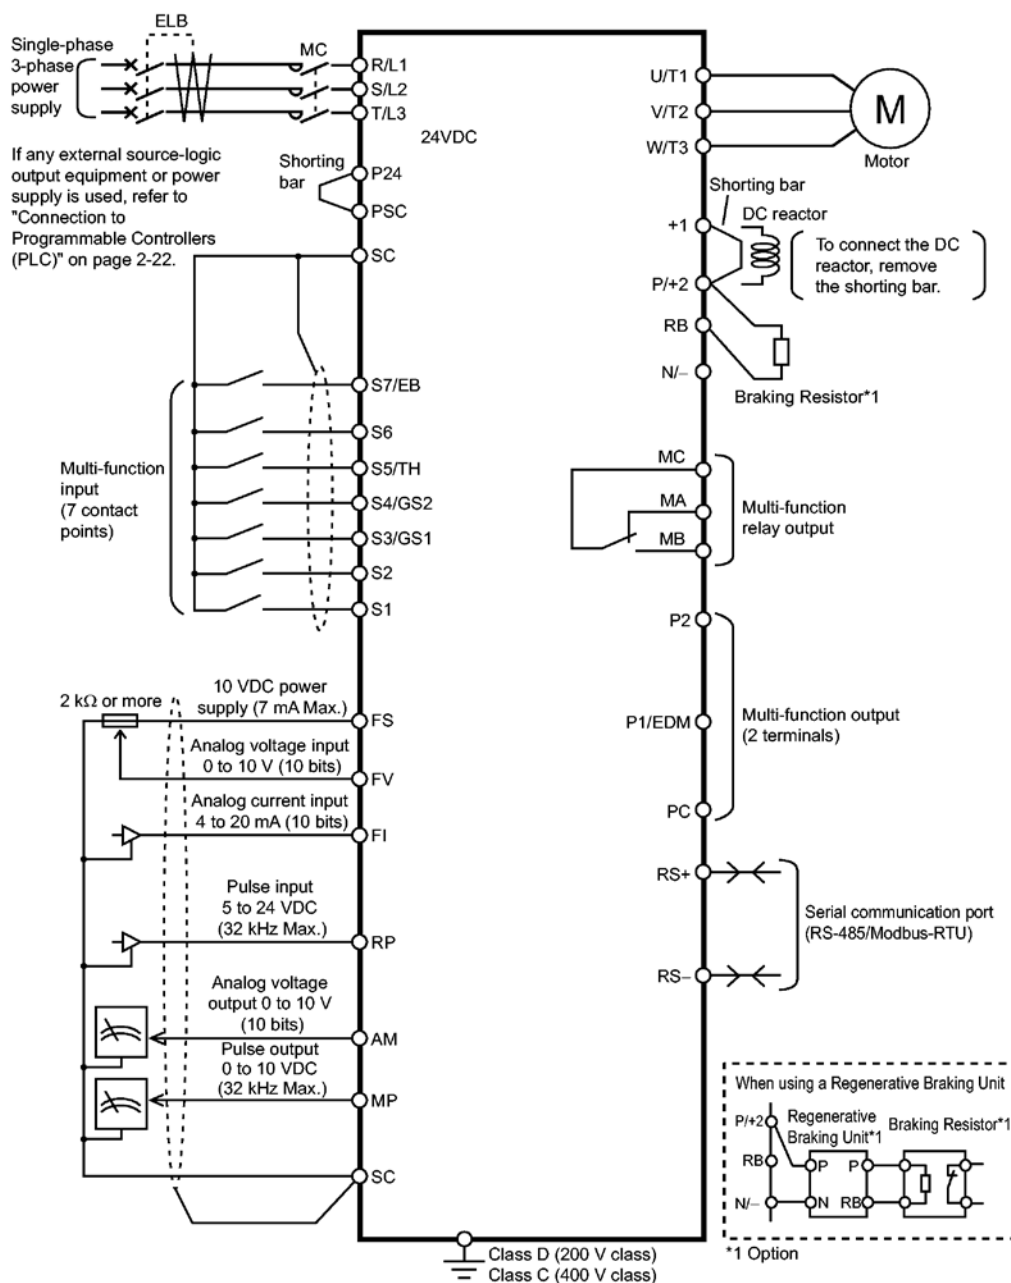

Note 1: Connect a single-phase 200 V AC input to terminals L1 and N.

Note 2: Factory default settings for relay output are NC contact for MA and NO contact for MB.


Main Circuit Terminals

Terminal	Description	Notes
R/L1, S/L2, T/L3	Main power supply input terminal	Connect the input AC power supply. Drives with 1-phase 200 V input power supply use only terminals L1 and N.
U/T1, V/T2, W/T3	Inverter output terminal	Used to connect a 3-phase motor.
+1, P/+2	DC Reactor connection terminal	Remove the shorting bar between terminals +1 and p/+2, and connect the optional DC reactor.
P/+2, RB	Braking Resistor connection terminal	Connect optional braking resistors. (If a braking torque is required.)
P/+2, N/-	Regenerative Braking unit connection terminal	Connect optional regenerative braking units. (When braking torque is required or the built-in braking circuit is not sufficient.)
⊕	Ground terminal	This a ground terminal. Connect this terminal to the ground. Provide Class D grounding for 200 V class models, and class C grounding for 400 V class models. On 200 V class models of 3.7 kW (5 HP) or below and 400 V class models of 4.0 kW (5 HP) or below, the ground terminal is located on the cooling fin.

Control Circuit Terminals

Terminal symbol			Terminal name	Description	Specifications	
Analog	Power supply		SC	Input signal common	This is a common terminal used by the internal power supply, digital input and analog input/output terminals.	
			FS	Frequency reference power supply	10 VDC power supply for the FV terminal. Allowable max. current: 7 mA	
	Frequency setting input		FV	Frequency reference input terminal (analog voltage input)	Use this terminal if the frequency reference is provided by 0 to 10 VDC voltage input. Input impedance Approx. 10 kΩ Allowable input voltage range –0.3 to +12 VDC	
			FI	Frequency reference terminal (analog current input)	Use this terminal if the frequency reference is provided by 4 to 20 mA current input. Input impedance 100 Ω Allowable input range 0 to 24 mA	
	Sensor input		S5/TH	External thermistor input (also used as multi-function input terminal)	Connect an external thermistor between the SCs, to trip the Inverter when a temperature error occurs. (The inverter will trip when the input from thermistor is approx. 3 kΩ or higher.) Since this input is also used as the multifunction input terminal, setting of C005 is required. PTC type	
	Output		AM	Multi-function analog output (voltage)	Specified signals can be output using voltage signals of 0 to 10 VDC. AM	
Digital	Power supply		SC	Input signal common	This is a common terminal used by the internal power supply, digital input and analog input/output terminals.	
			P24	Power supply terminal for input signal	24 VDC power supply for contact input signal.This is used as a common terminal if the source logic is input. Allowable max. current: 100 mA	
			PSC	Power supply terminal for input terminal	Sink logic input: Shorted with P24 Source logic input: Shorted with SC To drive the contact input using an external power supply, remove the shorting bar.	
	Input	Contact	S7/EB S6 S5/TH S4/GS2 S3/GS1 S2 S1	Multi-function input terminal	Select 7 functions from among 59, and allocate them to terminals S1 through S7/EB. Both sink and source logics are supported. Voltage between each input and PSC ON voltage: 18 V min. OFF voltage: 3 V max. Allowable max. voltage: 27 VDC Load current: 5 mA (at 24 V)	
			S4/GS2 S3/GS1	Safety input	Enabled when the safety function selector switch is turned ON.	
	Input	Pulse	RP	Pulse input-A	A pulse input for frequency setting. (Take note that the internal circuit is different from input terminals S7/EB.) Input pulse 32 kHz max. Voltage between input and SC ON voltage: 4 V min. OFF voltage: 1 V max. Allowable max. voltage: 27 VDC	
			S7/EB	Pulse input-B	A pulse input for frequency setting. (Take note that the internal circuit is different from input terminal RP) Input pulse 1.8 kHz max. ON voltage: 18 V min. OFF voltage: 3 V max. Allowable max. voltage: 27 VDC Load current: 5 mA (at 24 V)	
	Output	Open collector	P1/EDM P2	Multi-function output terminal	Select 2 functions from among 43, and allocate them to terminals P1 through P2. Both sink and source logics are supported. Open collector output Between each terminal and PC Allowable max. voltage: 27 V Allowable max. current: 50 mA Voltage drop when ON: 4 V max.	
			P1/EDM	Safety monitor	Enabled when the EDM function selector switch is ON.	
		Relay	MA MB	Relay output terminal	Select the desired functions from among 43 functions, and allocate them to these terminals. SPDT contact. The factory default of Relay Output (MA, MB) Contact Selection (C036) is NC contact between MA-MC, and NO contact between MB-MC.	Max. contact capacity MA-MC: 250 VAC, 2 A (resistance) 0.2 A (induction) MB-MC: 250 VAC, 1 A (resistance) 0.2 A (induction) Contact min. capacity 100 VAC, 10mA 5 VDC, 100 mA
			MC	Relay output common		
		Pulse	MP	Pulse output	Pulses are output. Output pulse: 32 kHz max. Output voltage: 10 VDC Allowable max. current: 2 mA	
Serial communication			RS+ RS–	Modbus port (RS-485)	RS-485 port RS+ RS-485 differential (+) signal RS– RS-485 differential (–) signal Max. speed: 115.2 kbps Built-in Terminal Resistor: 200 Ω Slide switch selection	

Side by side mounting

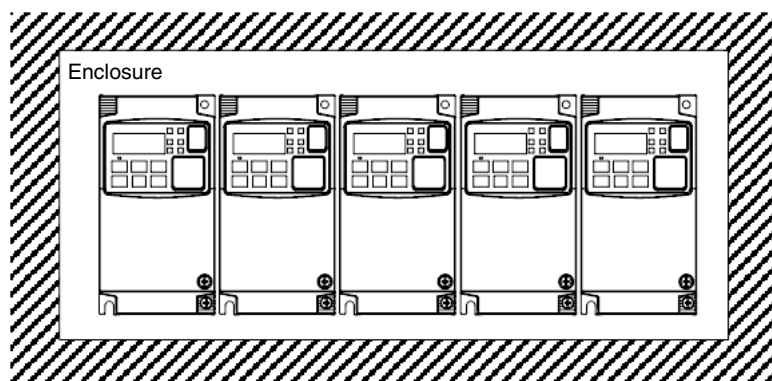

Heat Loss

Three-phase 200 V class

Model 3G3MX2-□		A2001	A2002	A2004	A2007	A2015	A2022	A2037	A2055	A2075	A2110	A2150
Inverter capacity kVA	200 VT	0.4	0.6	1.2	2.0	3.3	4.1	6.7	10.3	13.8	19.3	23.9
	200 CT	0.2	0.5	1.0	1.7	2.7	3.8	6.0	8.6	11.4	16.2	20.7
	240 VT	0.4	0.7	1.4	2.4	3.9	4.9	8.1	12.4	16.6	23.2	28.6
	240 CT	0.3	0.6	1.2	2.0	3.3	4.5	7.2	10.3	13.7	19.5	24.9
Rated current (A) VT		1.2	1.9	3.4	6.0	9.6	12.0	19.6	30.0	40.0	56.0	69.0
Rated current (A) CT		1.0	1.6	3.0	5.0	8.0	11.0	17.5	25.0	33.0	47.0	60.0
Total heat loss		12	22	30	48	79	104	154	229	313	458	625
Efficiency at rated load		89.5	90	93	94	95	95.5	96	96	96	96	96
Cooling method		Self cooling					Forced-air-cooling					

Single-phase 200 V class

Model 3G3MX2-□		AB001	AB002	AB004	AB007	AB015	AB022
Inverter capacity kVA	200V VT	0.4	0.6	1.2	2.0	3.3	4.1
	200V CT	0.2	0.5	1.0	1.7	2.7	3.8
	240V VT	0.4	0.7	1.4	2.4	3.9	4.9
	240V CT	0.3	0.6	1.2	2.0	3.3	4.5
Rated current (A) VT		1.2	1.9	3.4	6.0	9.6	12.0
Rated current (A) CT		1.0	1.6	3.0	5.0	8.0	11.0
Total heat loss		12	22	30	48	79	104
Efficiency at rated load		89.5	90	93	94	95	95.5
Cooling method		Self cooling				Forced-air-cooling	


Three-phase 400 V class

Model 3G3MX2-□		A4004	A4007	A4015	A4022	A4030	A4040	A4055	A4075	A4110	A4150
Inverter capacity kVA	380V VT	1.3	2.6	3.5	4.5	5.7	7.3	11.5	15.1	20.4	25.0
	380V CT	1.1	2.2	3.1	3.6	4.7	6.0	9.7	11.8	15.7	20.4
	480V VT	1.7	3.4	4.4	5.7	7.3	9.2	14.5	19.1	25.7	31.5
	480V CT	1.4	2.8	3.9	4.5	5.9	7.6	12.3	14.9	19.9	25.7
Rated current (A) VT		2.1	4.1	5.4	6.9	8.8	11.1	17.5	23.0	31.0	38.0
Rated current (A) CT		1.8	3.4	4.8	5.5	7.2	9.2	14.8	18.0	24.0	31.0
Total heat loss		35	56	96	116	125	167	229	296	411	528
Efficiency at rated load		92	93	94	95	96	96	96	96.2	96.4	96.6
Cooling method		Self cooling			Forced-air-cooling						

Reactors


Input AC Reactor

3-phase 200 VAC				3-phase 400 VAC			
Max. applicable motor output	Model 3G3AX-□	Current value	Inductance	Max. applicable motor output	Model 3G3AX-□	Current value	Inductance
1.5 kW (2 HP)	RAI02800080-DE	8.0 A	2.8 mH	1.5 kW (2 HP)	RAI07700050-DE	5.0 A	7.7 mH
3.7 kW (5 HP)	RAI00880200-DE	20.0 A	0.88 mH	4.0 kW (5 1/2 HP)	RAI03500100-DE	10.0 A	3.5 mH
7.5 kW (10 HP)	RAI00350335-DE	33.5 A	0.35 mH	7.5 kW (10 HP)	RAI01300170-DE	17.0 A	1.3 mH
15 kW (20 HP)	RAI00180670-DE	67.0 A	0.18 mH	15 kW (20 HP)	RAI00740335-DE	33.5 A	0.74 mH

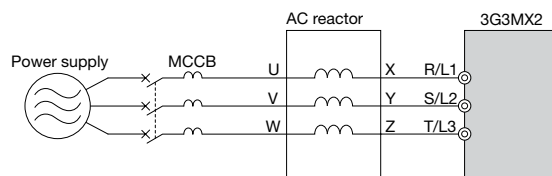

DC Reactor


3-phase 200 VAC				3-phase 400 VAC			
Max. applicable motor output	Model 3G3AX-□	Current value	Inductance	Max. applicable motor output	Model 3G3AX-□	Current value	Inductance
0.2 kW (1/4 HP)	RC21400016-DE	1.6 A	21.4 mH	0.4 kW (1/2 HP)	RC43000020-DE	2.0 A	43.0 mH
0.4 kW (1/2 HP)	RC10700032-DE	3.2 A	10.7 mH	0.7 kW (1 HP)	RC27000030-DE	3.0 A	27.0 mH
0.7 kW (1 HP)	RC06750061-DE	6.1 A	6.75 mH	1.5 kW (2 HP)	RC14000047-DE	4.7 A	14.0 mH
1.5 kW (2 HP)	RC03510093-DE	9.3 A	3.51 mH	2.2 kW (3 HP)	RC10100069-DE	6.9 A	10.1 mH
2.2 kW (3 HP)	RC02510138-DE	13.8 A	2.51 mH	3.0 kW (4 HP)	RC08250093-DE	9.3 A	8.25 mH
3.7 kW (5 HP)	RC01600223-DE	22.3 A	1.60 mH	4.0 kW (5 1/2 HP)	RC06400116-DE	11.6 A	6.40 mH
5.5 kW (7 1/2 HP)	RC01110309-DE	30.9 A	1.11 mH	5.5 kW (7 1/2 HP)	RC04410167-DE	16.7 A	4.41 mH
7.5 kW (10 HP)	RC00840437-DE	43.7 A	0.84 mH	7.5 kW (10 HP)	RC03350219-DE	21.9 A	3.35 mH
11.0 kW (15 HP)	RC00590614-DE	61.4 A	0.59 mH	11.0 kW (15 HP)	RC02330307-DE	30.7 A	2.33 mH
15.0 kW (20 HP)	RC00440859-DE	85.9 A	0.44 mH	15.0 kW (20 HP)	RC01750430-DE	43.0 A	1.75 mH

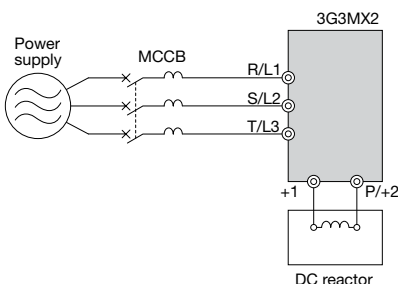

Output AC Reactor

3-phase 200 VAC				3-phase 400 VAC			
Max. applicable motor output	Model 3G3AX-□	Current value	Inductance	Max. applicable motor output	Model 3G3AX-□	Current value	Inductance
0.4 kW (1/2 HP)	RAO11500026-DE	2.6 A	11.50 mH	1.5 kW (2 HP)	RAO16300038-DE	3.8 A	16.30 mH
0.75 kW (1 HP)	RAO07600042-DE	4.2 A	7.60 mH				
1.5 kW (2 HP)	RAO04100075-DE	7.5 A	4.10 mH				
2.2 kW (3 HP)	RAO03000105-DE	10.5 A	3.00 mH	2.2 kW (3 HP)	RAO11800053-DE	5.3 A	11.80 mH
3.7 kW (5 HP)	RAO01830160-DE	16.0 A	1.83 mH	4.0 kW (5 1/2 HP)	RAO07300080-DE	8.0 A	7.30 mH
5.5 kW (7 1/2 HP)	RAO01150220-DE	22.0 A	1.15 mH	5.5 kW (7 1/2 HP)	RAO04600110-DE	11.0 A	4.60 mH
7.5 kW (10 HP)	RAO00950320-DE	32.0 A	0.95 mH	7.5 kW (10 HP)	RAO03600160-DE	16.0 A	3.60 mH
11.0 kW (15 HP)	RAO00630430-DE	43.0 A	0.63 mH	11.0 kW (15 HP)	RAO02500220-DE	22.0 A	2.50 mH
15.0 kW (20 HP)	RAO00490640-DE	64.0 A	0.49 mH	15.0 kW (20 HP)	RAO02000320-DE	32.0 A	2.00 mH

Ordering Information

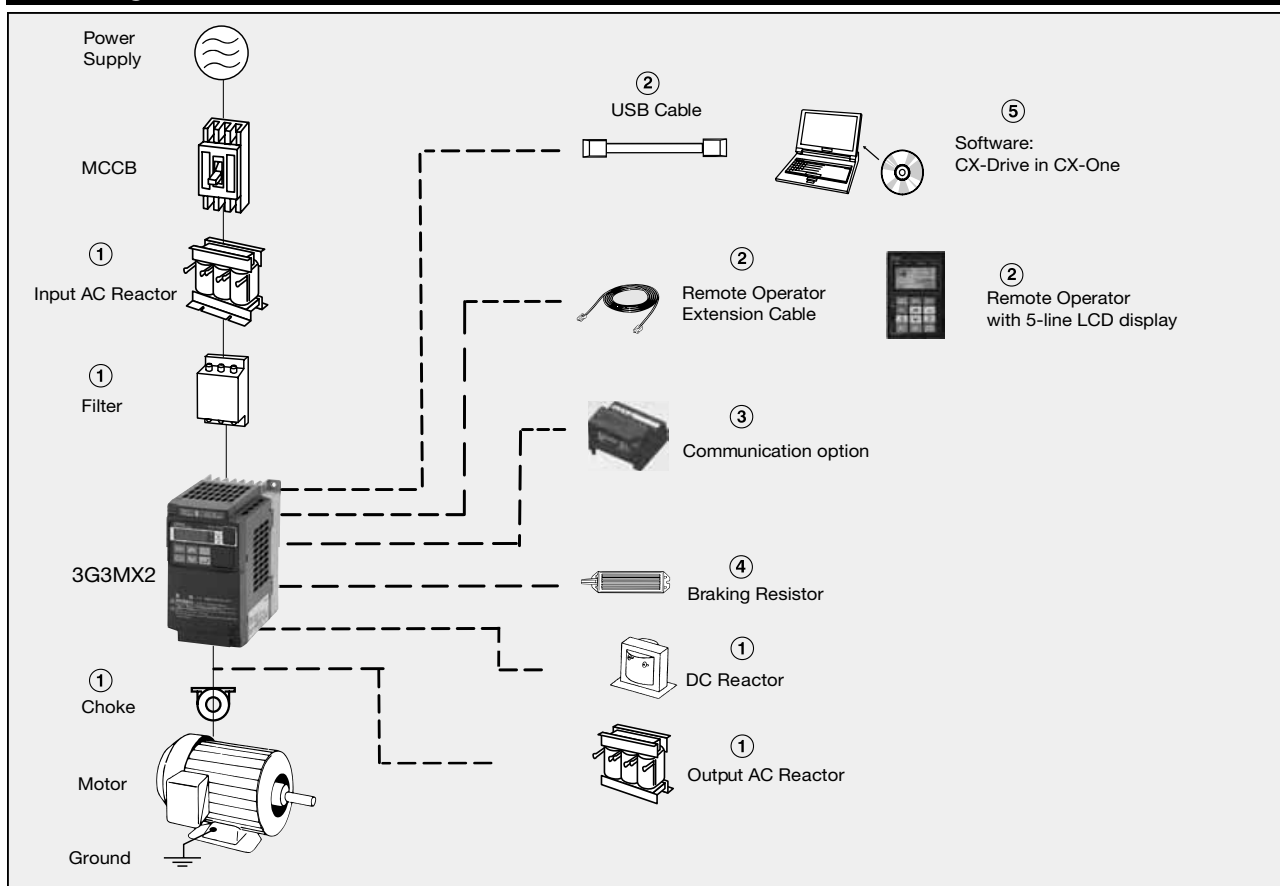

3G3MX2 AC Drives

Specifications							Model
Voltage class	Constant torque (Heavy load)			Variable torque (Light load)			Standard
	Max motor kW	Max motor HP	Rated current A	Max motor kW	Max motor HP	Rated current A	
1-phase 200 VAC	0.1	1/8	1.0	0.2	1/4	1.2	3G3MX2-AB001
	0.2	1/4	1.6	0.4	1/2	1.9	3G3MX2-AB002
	0.4	1/2	3.0	0.55	3/4	3.5	3G3MX2-AB004
	0.75	1	5.0	1.1	1 1/2	6.0	3G3MX2-AB007
	1.5	2	8.0	2.2	3	9.6	3G3MX2-AB015
	2.2	3	11.0	3.0	4	12.0	3G3MX2-AB022
3-phase 200 VAC	0.1	1/8	1.0	0.2	1/4	1.2	3G3MX2-A2001
	0.2	1/4	1.6	0.4	1/2	1.9	3G3MX2-A2002
	0.4	1/2	3.0	0.55	3/4	3.5	3G3MX2-A2004
	0.75	1	5.0	1.1	1 1/2	6.0	3G3MX2-A2007
	1.5	2	8.0	2.2	3	9.6	3G3MX2-A2015
	2.2	3	11.0	3.0	4	12.0	3G3MX2-A2022
	3.7	5	17.5	5.5	7 1/2	19.6	3G3MX2-A2037
	5.5	7 1/2	25.0	7.5	10	30.0	3G3MX2-A2055
	7.5	10	33.0	11	15	40.0	3G3MX2-A2075
	11	15	47.0	15	20	56.0	3G3MX2-A2110
3-phase 400 VAC	0.4	1/2	1.8	0.75	1	2.1	3G3MX2-A4004
	0.75	1	3.4	1.5	2	4.1	3G3MX2-A4007
	1.5	2	4.8	2.2	3	5.4	3G3MX2-A4015
	2.2	3	5.5	3.0	4	6.9	3G3MX2-A4022
	3.0	4	7.2	4.0	5	8.8	3G3MX2-A4030
	4.0	5	9.2	5.5	7 1/2	11.1	3G3MX2-A4040
	5.5	7 1/2	14.8	7.5	10	17.5	3G3MX2-A4055
	7.5	10	18.0	11	15	23.0	3G3MX2-A4075
	11	15	24.0	15	20	31.0	3G3MX2-A4110
	15	20	31.0	18.5	25	38.0	3G3MX2-A4150

Ordering Information

① Line Filters

Inverter		Line filter Rasmi	
Voltage	Model 3G3MX2-□	Model 3G3AX-□	Rated current (A)
1-phase 200 VAC	AB001/AB002/ AB004	FIM1010-RE	10
	AB007	FIM1014-RE	14
	AB015/AB022	FIM1024-RE	24
3-phase 200 VAC	A2001/A2002/ A2004/A2007	FIM2010-RE	10
	A2015/A2022	FIM2020-RE	20
	A2037	FIM2030-RE	30
	A2055/A2075	FIM2060-RE	60
	A2110	FIM2080-RE	80
	A2150	FIM2100-RE	100
3-phase 400 VAC	A4004/A4007	FIM3005-RE	5
	A4015/A4022/ A4030	FIM3010-RE	10
	A4040	FIM3014-RE	14
	A4055/A4075	FIM3030-RE	23
	A4110/A4150	FIM3050-RE	50

① Input AC Reactors

Inverter		AC Reactor
Voltage	Model 3G3MX2-□	Model 3G3AX-□
1-phase 200 VAC	AB001/AB002/AB004	Under development
	AB007	
	AB015/AB022	
3-phase 200 VAC	A2002/A2004/A2007	RAI02800080-DE
	A2015/A2022/A2037	RAI00880200-DE
	A2055/A2075	RAI00350335-DE
	A2110/A2150	RAI00180670-DE
3-phase 400 VAC	A4004/A4007/A4015	RAI07700050-DE
	A4022/A4030/A4040	RAI03500100-DE
	A4055/A4075	RAI01300170-DE
	A4110/A4150	RAI00740335-DE

① DC Reactors

1-phase 200 VAC		3-phase 200 VAC		3-phase 400 VAC	
Inverter	DC Reactor	Inverter	DC Reactor	Inverter	DC Reactor
3G3MX2-AB001	3G3AX-RC10700032-RE	3G3MX2-A2001	3G3AX-RC21400016-RE	3G3MX2-A4004	3G3AX-RC43000020-RE
3G3MX2-AB002		3G3MX2-A2002		3G3MX2-A4007	3G3AX-RC27000030-RE
3G3MX2-AB004	3G3AX-RC06750061-RE	3G3MX2-A2004	3G3AX-RC10700032-RE	3G3MX2-A4015	3G3AX-RC14000047-RE
3G3MX2-AB007	3G3AX-RC03510093-RE	3G3MX2-A2007	3G3AX-RC06750061-RE	3G3MX2-A4022	3G3AX-RC10100069-RE
3G3MX2-AB015	3G3AX-RC02510138-RE	3G3MX2-A2015	3G3AX-RC03510093-RE	3G3MX2-A4030	3G3AX-RC08250093-RE
3G3MX2-AB022	3G3AX-RC01600223-RE	3G3MX2-A2022	3G3AX-RC02510138-RE	3G3MX2-A4040	3G3AX-RC06400116-RE
-		3G3MX2-A2037	3G3AX-RC01600223-RE	3G3MX2-A4055	3G3AX-RC04410167-RE
		3G3MX2-A2055	3G3AX-RC01110309-RE	3G3MX2-A4075	3G3AX-RC03350219-RE
		3G3MX2-A2075	3G3AX-RC00840437-RE	3G3MX2-A4011	3G3AX-RC02330307-RE
		3G3MX2-A2011	3G3AX-RC00590614-RE	3G3MX2-A4015	3G3AX-RC01750430-RE
		3G3MX2-A2015	3G3AX-RC00440859-RE	-	

① Chokes

Model	Diameter (mm)	Description
3G3AX-FEJ2102-RE	21	For 2.2 kW (3.0 HP) motors or below
3G3AX-FEJ2515-RE	25	For 15 kW (20 HP) motors or below
3G3AX-FEJ5045-RE	50	For 45 kW (60 HP) motors or below

① Output AC Reactor

Inverter		AC Reactor
Voltage	Model 3G3MX2-□	Model 3G3AX-□
200 VAC	A2001/A2002/A2004 AB001/AB002/AB004	RAO11500026-DE
	A2007/AB007	RAO07600042-DE
	A2015/AB015	RAO04100075-DE
	A2022/AB022	RAO03000105-DE
	A2037	RAO01830160-DE
	A2055	RAO01150220-DE
	A2075	RAO00950320-DE
400 VAC	A4004/A4007/A4015	RAO16300038-DE
	A4022	RAO11800053-DE
	A4030/A4040	RAO07300080-DE
	A4055	RAO04600110-DE
	A4075	RAO03600160-DE

Ordering Information

② Accessories

Types	Model	Description	Functions
Digital operator	3G3AX-OP05	LCD remote operator	5 Line LCD remote operator with copy function, cable length max. 3m.
	3G3AX-CAJOP300-EE	Remote operator cable	3 meters cable for connecting remote operator
Accessories	3G3AX-CUSBM002-E	PC configuration cable	Mini USB to USB connector cable

③ Communication option boards

Types	Model	Description	Functions
Communication options	3G3AX-MX2-PRT	Profibus option card	Used for running or stopping the inverter, setting or referencing parameters, and monitoring output frequency, output current, or similar items through Profibus communications with the host controller.
	3G3AX-MX2-DRT	DeviceNet option card	Used for running or stopping the inverter, setting or referencing parameters, and monitoring output frequency, output current, or similar items through DeviceNet communications with the host controller.
	3G3AX-MX2-ERT	Ethercat option card	Under development
	3G3AX-MX2-CRT	CompoNet option card	Used for running or stopping the inverter, setting or referencing parameters, and monitoring output frequency, output current, or similar items through CompoNet communications with the host controller.
	3G3AX-MX2-ML2	Mechatrolink II option card	Under development
	3G3AX-MX2-CORT	CanOpen option card	Under development

④ Braking Unit, Braking Resistor Unit

Inverter						Braking resistor unit					
Voltage	Max. motor capacity		Inverter 3G3MX2-□		Connectable min. resistance Ω	Inverter mounted type (3%ED, 10 sec max)		Braking torque %	Inverter mounted type (10%ED, 10 sec max)		Braking torque %
	kW	HP	3-phase	1-phase		Model 3G3AX-□	Resistance Ω		Model 3G3AX-□	Resistance Ω	
200 V (1-phase/ 3-phase)	0.12	1/8	A2001	B001	100	REM00K1400-IE	400	200	REM00K1400-IE	400	200
	0.2	1/4	A2002	B002	100			180			180
	0.5	1/2	A2004	B004	100	REM00K1200-IE	200	180	REM00K1200-IE	200	180
	0.7	1	A2007	B007	50			100	REM00K2070-IE	70	200
	1.5	2	A2015	B015	50	REM00K2070-IE	70	140	REM00K4075-IE	75	130
	2.2	3	A2022	B022	35			90	REM00K4035-IE	35	180
	3.7	5	A2037	-	35	REM00K4075-IE	75	50	REM00K6035-IE	35	100
	5.5	7.5	A2055	-	20	REM00K4035-IE	35	75	REM00K9017-IE	17	150
	7.5	10	A2075	-	17			55	REM01K9017-IE	17	110
	11	15	A2110	-	17	REM00K6035-IE	35	40	REM02K1017-IE	17	75
	15	20	A2150	-	10	REM00K9017-IE	17	55	REM03K5010-IE	10	95
400 V (3-phase)	0.5	1/2	A4004	-	180	REM00K1400-IE	400	200	REM00K1400-IE	400	200
	1	1	A4007	-				200			200
	1.5	2	A4015	-		REM00K1200-IE	200	190	REM00K2200-IE	200	190
	2.2	3	A4022	-	100	REM00K2200-IE	200	130	REM00K5120-IE	120	200
	3	4	A4030	-		REM00K2120-IE	120	160			160
	4	5	A4040	-				120	REM00K6100-IE	100	140
	5.5	7.5	A4055	-	70	REM00K4075-IE	75	140	REM00K9070-IE	70	150
	7.5	10	A4075	-				100	REM01K9070-IE	70	110
	11	15	A4110	-		REM00K6100-IE	100	50	REM02K1070-IE	70	75
	15	20	A4150	-	35	REM00K9070-IE	70	55	REM03K5035-IE	35	110

Ordering Information**⑤ Computer Software**

Item	Description	Functions
CX-Drive	AC Drive/Servo Programming software	Set, transfer and compare parameters; perform test runs and adjustment; perform monitoring and data tracing for Omron inverters and servos included in CX-One software.
CX-One	All-in-one Automation software	Program, configure and simulate operations for PLCs, HMIs, networks, motion control systems, temperature and process controllers.

Note: Software runs on the following OS: Windows 2000 (Service Pack 3a or higher), XP, Vista or Windows 7.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces,
multiply by 0.03527.

Specifications are subject to change without notice.



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766
www.omron247.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.omron.eu

Authorized Distributor:

Automation Systems

- Programmable logic controllers (PLC) • Human machine interfaces (HMI) • Remote I/O
- Industrial PC's • Software

Motion & Drives

- Motion controllers • Servo systems • AC drives

Control Components

- Temperature controllers • Power supplies • Timers • Counters • Programmable relays
- Digital panel indicators • Electromechanical relays • Monitoring products • Solid-state relays
- Limit switches • Pushbutton switches • Low voltage switch gear

Sensing & Safety

- Photoelectric sensors • Inductive sensors • Capacitive & pressure sensors
- Cable connectors • Displacement & width-measuring sensors • Vision systems
- Safety networks • Safety sensors • Safety units/relay units • Safety door/guard lock switches

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[3G3AX-CUSBM002-E](#)