

## FEATURES

- Complete Linear Charger Controller for 2-Cell Lithium-Ion Batteries
- 1% Voltage Accuracy
- Programmable Charge Current
- C/10 Charge Current Detection Output
- Programmable Charge Termination Timer
- Space Saving 8-Pin MSOP Package
- Automatic Sleep Mode When Input Supply is Removed (15 $\mu$ A Battery Drain)
- Automatic Trickle Charging of Low Voltage Cells
- Programmable for Constant-Current-Only Mode

## APPLICATIONS

- Cellular Phones
- Handheld Computers
- Charging Docks and Cradles
- Programmable Current Source

## DESCRIPTION


The LTC<sup>®</sup>1731-8.2/LTC1731-8.4 are complete constant-current/constant-voltage linear charger controllers for 2-cell lithium-ion (Li-Ion) batteries. Nickel-cadmium (NiCd) and nickel-metal-hydride (NiMH) batteries can also be charged with constant current using external termination. The external sense resistor sets the charge current with 7% accuracy. An internal resistor divider and precision reference set the final float potential with 1% accuracy. The output float voltages are set internally to 8.2V (LTC1731-8.2) or 8.4V (LTC1731-8.4).

When the input supply is removed, the LTC1731-8.2/LTC1731-8.4 automatically enter a low current sleep mode, dropping the battery drain current to typically 15 $\mu$ A. An internal comparator detects the end-of-charge (C/10) condition while a programmable timer, using an external capacitor, sets the total charge time. Fully discharged cells are automatically trickle charged at 10% of the programmed current until battery voltage exceeds 4.95V.

The LTC1731-8.2/LTC1731-8.4 are available in the 8-pin MSOP and SO packages. For 1-cell Li-Ion battery charging, see the LTC1731-4.1 and LTC1731-4.2 data sheets.


 LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

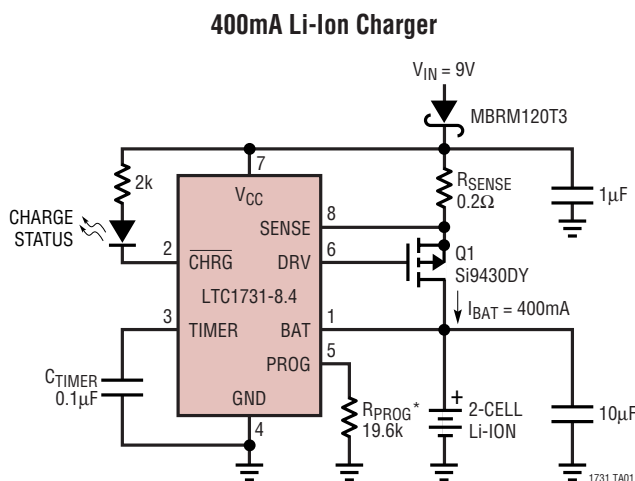

\*SHUTDOWN INVOKED BY FLOATING THE PROG PIN

Typical Li-Ion Charge Cycle

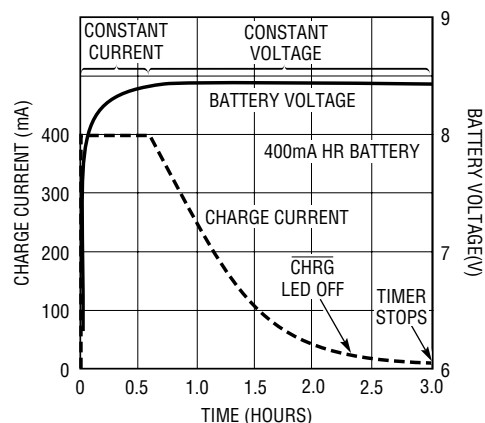

sn1731 17318fs



# LTC1731-8.2/LTC1731-8.4

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Input Supply Voltage ( $V_{CC}$ ) ..... 13.2V  
 SENSE, DRV, BAT, TIMER, PROG .....  $-0.3V$  to  $V_{CC}$   
 CHRG .....  $-0.3V$  to 13.2V

Operating Temperature Range (Note 2) .....  $-40^{\circ}$  to  $85^{\circ}C$   
 Storage Temperature Range .....  $-65^{\circ}C$  to  $150^{\circ}C$   
 Lead Temperature (Soldering, 10 sec) .....  $300^{\circ}C$

## PACKAGE/ORDER INFORMATION

|  <p>MS8 PACKAGE<br/>8-LEAD PLASTIC MSOP<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 200^{\circ}C/W</math></p> | ORDER PART NUMBER                  |  <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 125^{\circ}C/W</math></p> | ORDER PART NUMBER                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
|                                                                                                                                                                                                                  | LTC1731EMS8-8.2<br>LTC1731EMS8-8.4 |                                                                                                                                                                                                                | LTC1731ES8-8.2<br>LTC1731ES8-8.4 |
|                                                                                                                                                                                                                  | MS8 PART MARKING                   |                                                                                                                                                                                                                | S8 PART MARKING                  |
|                                                                                                                                                                                                                  | LTSW<br>LTPE                       |                                                                                                                                                                                                                | 173182<br>173184                 |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . $V_{CC} = 9V$ unless otherwise noted.

| SYMBOL          | PARAMETER                                | CONDITIONS                                                                         | MIN | TYP   | MAX  | UNITS   |
|-----------------|------------------------------------------|------------------------------------------------------------------------------------|-----|-------|------|---------|
| $V_{CC}$        | Input Supply Voltage                     | ●                                                                                  | 8.8 |       | 12   | V       |
| $I_{CC}$        | Input Supply Current                     | Charger On, Current Mode                                                           | ●   | 1     | 3    | mA      |
|                 |                                          | Shutdown Mode                                                                      | ●   | 1     | 2    | mA      |
|                 |                                          | Sleep Mode (Battery Drain Current)                                                 |     | 15    | 30   | $\mu A$ |
| $V_{BAT}$       | Regulated Output Voltage                 | LTC1731-8.2 ( $9V \leq V_{CC} \leq 12V$ )                                          | ●   | 8.118 | 8.2  | V       |
|                 |                                          | LTC1731-8.4 ( $9V \leq V_{CC} \leq 12V$ )                                          | ●   | 8.316 | 8.4  | V       |
| $I_{BAT}$       | Current Mode Charge Current              | $R_{PROG} = 19.6k$ , $R_{SENSE} = 0.2\Omega$                                       |     | 465   | 500  | mA      |
|                 |                                          | $R_{PROG} = 19.6k$ , $R_{SENSE} = 0.2\Omega$                                       | ●   | 415   | 500  | mA      |
|                 |                                          | $R_{PROG} = 97.6k$ , $R_{SENSE} = 0.2\Omega$                                       |     | 70    | 100  | mA      |
| $I_{TRIKL}$     | Trickle Charge Current                   | $V_{BAT} = 4V$ , $R_{PROG} = 19.6k$ , $I_{TRIKL} = (V_{CC} - V_{SENSE})/0.2\Omega$ | ●   | 30    | 50   | mA      |
| $V_{TRIKL}$     | Trickle Charge Threshold Voltage         | BAT Rising                                                                         | ●   | 4.7   | 4.95 | V       |
| $V_{UV}$        | $V_{CC}$ Undervoltage Lockout Voltage    | $V_{CC}$ Rising                                                                    | ●   | 8.2   | 8.8  | V       |
| $\Delta V_{UV}$ | $V_{CC}$ Undervoltage Lockout Hysteresis | $V_{CC}$ Falling                                                                   |     | 200   |      | mV      |
| $V_{MSD}$       | Manual Shutdown Threshold Voltage        | PROG Pin Rising                                                                    |     | 2.457 |      | V       |
|                 |                                          | PROG Pin Falling                                                                   |     | 2.446 |      | V       |
| $I_{DRV}$       | Drive Pin Current                        | $V_{DRV} = V_{CC} - 2V$                                                            |     | 26    |      | $\mu A$ |

## ELECTRICAL CHARACTERISTICS




The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{CC} = 9\text{V}$  unless otherwise noted.

| SYMBOL             | PARAMETER                              | CONDITIONS                                                                                    |   | MIN      | TYP      | MAX       | UNITS    |
|--------------------|----------------------------------------|-----------------------------------------------------------------------------------------------|---|----------|----------|-----------|----------|
| V <sub>ASD</sub>   | Automatic Shutdown Threshold Voltage   | (V <sub>CC</sub> – V <sub>BAT</sub> ) Falling<br>(V <sub>CC</sub> – V <sub>BAT</sub> ) Rising |   | 30<br>40 | 54<br>69 | 90<br>100 | mV<br>mV |
| V <sub>DIS</sub>   | Voltage Mode Disable Threshold Voltage | V <sub>DIS</sub> = (V <sub>CC</sub> – V <sub>TIMER</sub> )                                    | ● |          |          | 0.4       | V        |
| I <sub>PROG</sub>  | PROG Pin Current                       | Internal Pull-Up Current, No R <sub>PROG</sub>                                                |   |          | 2.5      |           | μA       |
|                    | PROG Pin Load Regulation               | PROG Pin Source Current, ΔV <sub>PROG</sub> ≤ 5mV                                             | ● | 300      |          |           | μA       |
| V <sub>PROG</sub>  | PROG Pin Voltage                       | R <sub>PROG</sub> = 19.6k                                                                     |   |          | 2.457    |           | V        |
| I <sub>CHRG</sub>  | CHRG Pin Weak Pull-Down Current        | V <sub>CHRG</sub> = 1V                                                                        |   | 50       | 100      | 150       | μA       |
| V <sub>CHRG</sub>  | CHRG Pin Output Low Voltage            | I <sub>CHRG</sub> = 5mA                                                                       |   |          | 0.6      | 1.2       | V        |
| I <sub>C/10</sub>  | End of Charge Indication Current Level | R <sub>PROG</sub> = 19.6k, R <sub>SENSE</sub> = 0.2Ω                                          | ● | 25       | 50       | 100       | mA       |
| t <sub>TIMER</sub> | TIMER Accuracy                         | C <sub>TIMER</sub> = 0.01μF                                                                   |   |          | 10       |           | %        |
| V <sub>CLAMP</sub> | DRV Pin Clamp Voltage                  | V <sub>CLAMP</sub> = V <sub>CC</sub> – V <sub>DRV</sub> , I <sub>DRIVE</sub> = 50μA           |   |          | 6.5      |           | V        |








**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** The LTC1731E-8.2/LTC1731E-8.4 are guaranteed to meet performance specifications from  $0^\circ\text{C}$  to  $70^\circ\text{C}$ . Specifications over the  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  operating temperature range are assured by design, characterization and correlation with statistical process controls. Consult factory for I grade parts.

## TYPICAL PERFORMANCE CHARACTERISTICS

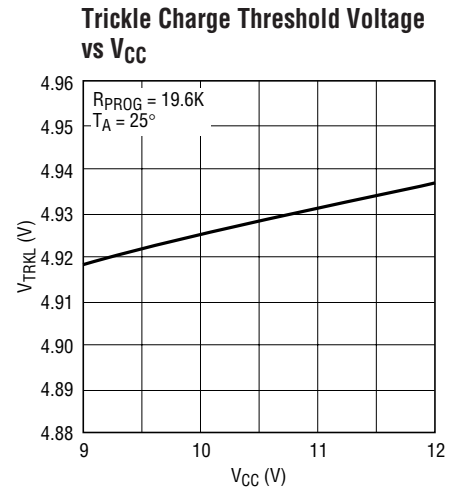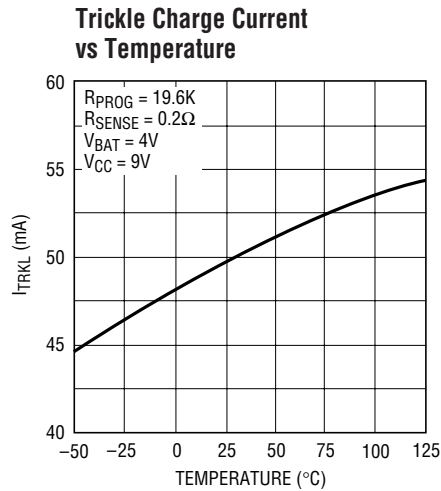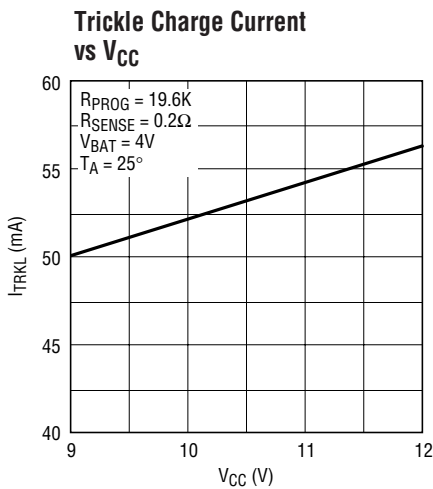

TYPICAL PERFORMANCE CHARACTERISTICS

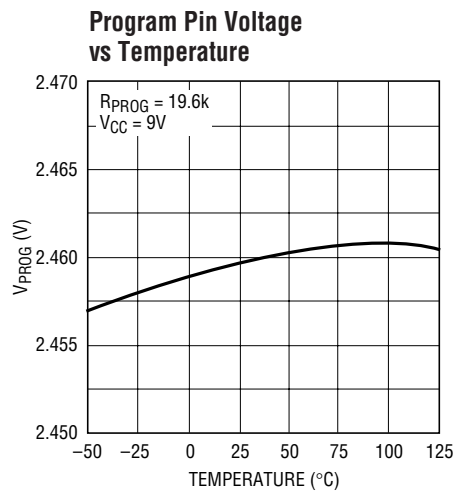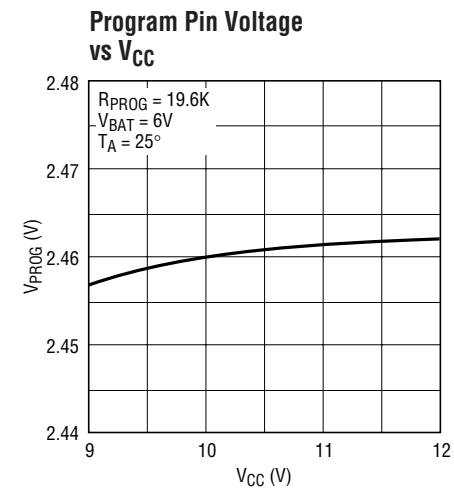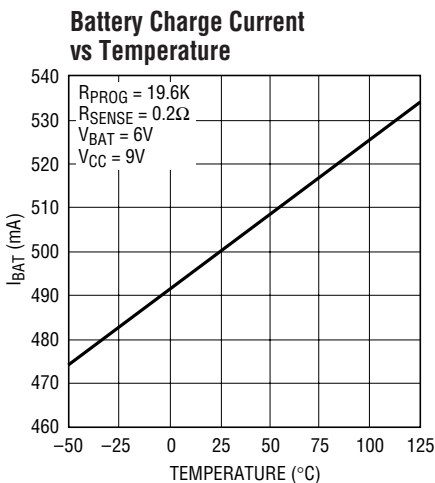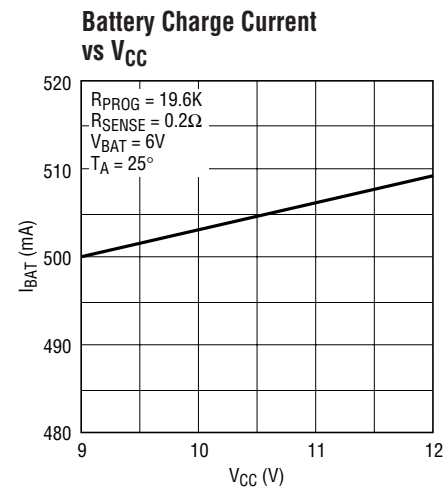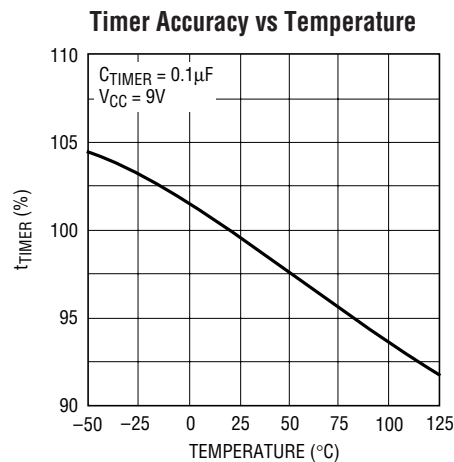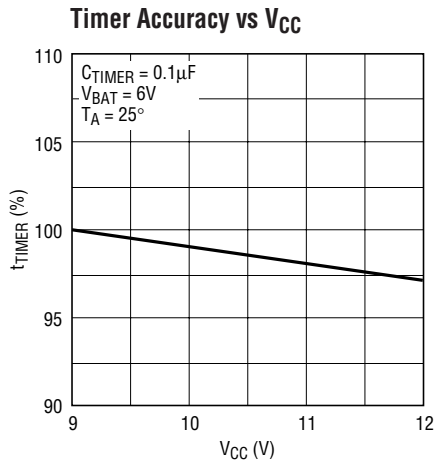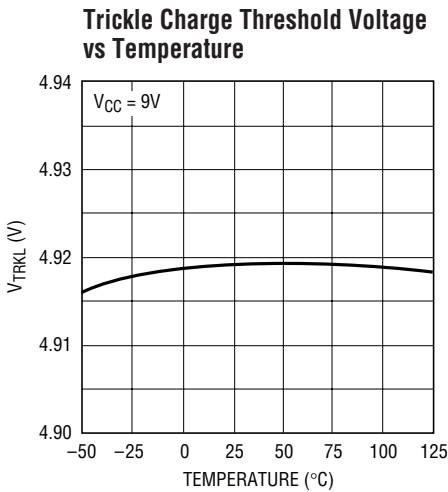

## PIN FUNCTIONS

**BAT (Pin 1):** Battery Sense Input. A bypass capacitor of at least 10 $\mu$ F is required to keep the loop stable when the battery is not connected. A precision internal resistive divider sets the final float potential on this pin. The resistor divider is disconnected in sleep mode.

**CHRG (Pin 2):** Open-Drain Charge Status Output. When the battery is being charged, the CHRG pin is pulled low by an internal N-channel MOSFET. When the charge current drops to 10% of the full-scale current for at least 0.32 seconds, the N-channel MOSFET turns off and a 100 $\mu$ A current source is connected from the CHRG pin to GND. When the timer runs out or the input supply is removed, the current source will be disconnected and the CHRG pin is forced into a high impedance state.

**TIMER (Pin 3):** Timer Capacitor and Constant-Voltage Mode Disable Input Pin. A capacitor C<sub>TIMER</sub> connected from this pin to ground sets a 30 hour/ $\mu$ F time period for charge termination. When the TIMER pin is connected to V<sub>CC</sub>, the constant-voltage mode and the timer is disabled and the IC will operate in constant-current mode only. Short the TIMER pin to GND to disable the internal timer and the C/10 functions.

**GND (Pin 4):** Ground.


**PROG (Pin 5):** Charge Current Program and Shutdown Input Pin. The charge current is programmed by connecting a resistor, R<sub>PROG</sub> to ground. The charge current is I<sub>BAT</sub> = (V<sub>PROG</sub> • 800 $\Omega$ )/(R<sub>PROG</sub> • R<sub>SENSE</sub>). The IC can be forced into shutdown by floating the PROG pin and allowing the internal 2.5 $\mu$ A current source to pull the pin above the 2.457V shutdown threshold voltage.

**DRV (Pin 6):** Drive Output Pin for the P-Channel MOSFET or PNP Transistor. If a PNP transistor is used, it must have high gain (see Applications Information section). The DRV pin is internally clamped to 6.5V below V<sub>CC</sub>.

**V<sub>CC</sub> (Pin 7):** Input Supply Voltage. V<sub>CC</sub> ranges from 8.8V to 12V when charging. If V<sub>CC</sub> drops below V<sub>BAT</sub> + 54mV, for example when the input supply is disconnected, then the IC enters sleep mode with I<sub>CC</sub> < 30 $\mu$ A. Bypass this pin with a 1 $\mu$ F capacitor.

**SENSE (Pin 8):** Current Sense Input. Connect this pin to the sense resistor. Choose the resistor value using the following equation:

$$R_{SENSE} = (V_{PROG} \cdot 800\Omega) / (R_{PROG} \cdot I_{BAT})$$

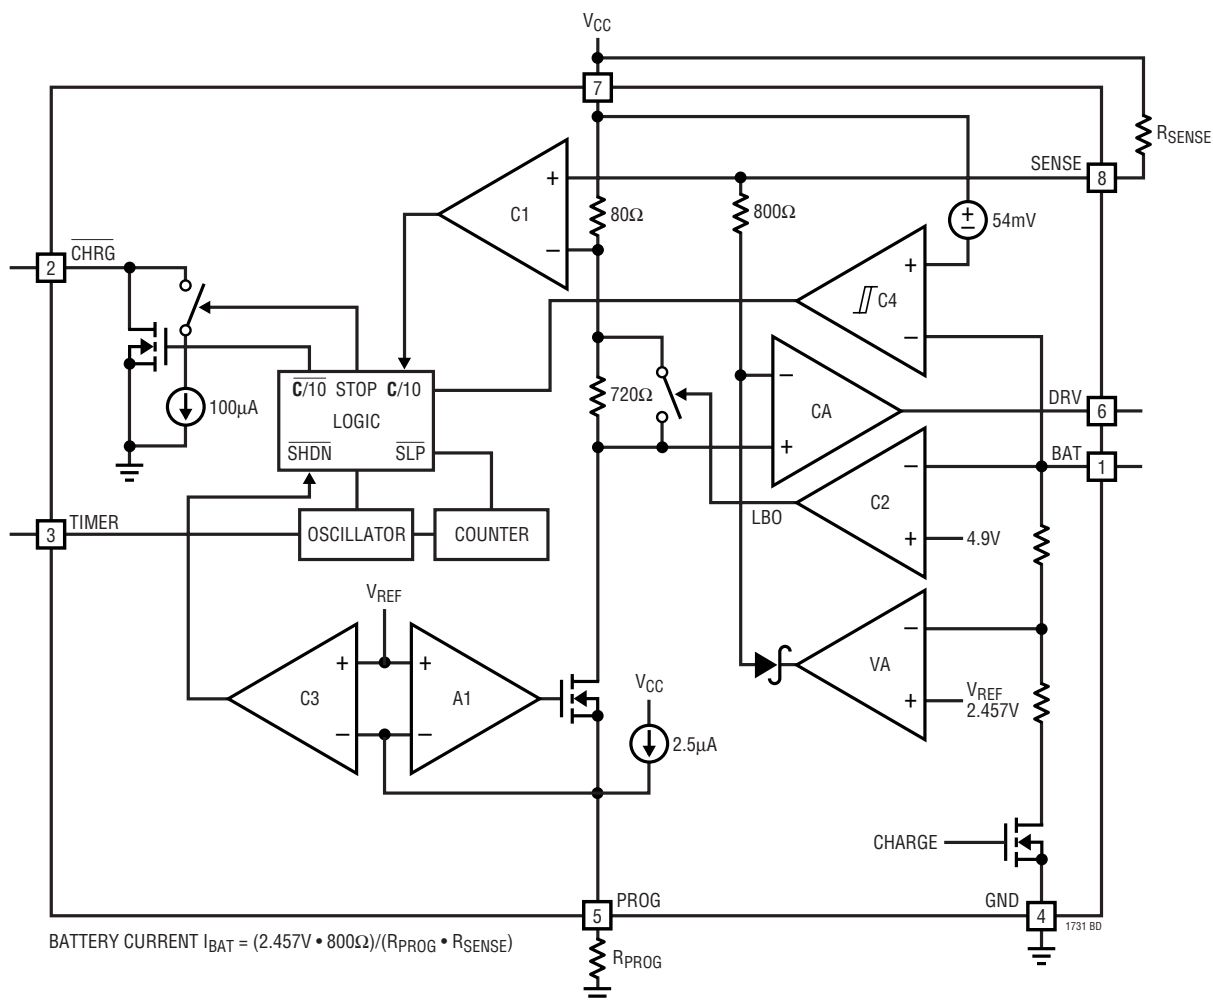**BLOCK DIAGRAM**

## OPERATION

The LTC1731-8.2/LTC1731-8.4 are linear battery charger controllers. The charge current is programmed by the combination of a program resistor ( $R_{\text{PROG}}$ ) from the PROG pin to ground and a sense resistor ( $R_{\text{SENSE}}$ ) between the  $V_{\text{CC}}$  and SENSE pins.  $R_{\text{PROG}}$  sets a program current through an internal trimmed  $800\Omega$  resistor that creates a voltage drop from  $V_{\text{CC}}$  to the input of the current amplifier (CA). The current amplifier servos the gate of the external P-channel MOSFET to force the same voltage drop across  $R_{\text{SENSE}}$  which sets the charge current. When the potential at the BAT pin approaches the preset float voltage, the voltage amplifier (VA) will start sinking current which shrinks the voltage drop across  $R_{\text{SENSE}}$ , thus reducing the charge current.

Charging begins when the potential at  $V_{\text{CC}}$  pin rises above the UVLO level and a program resistor is connected from the PROG pin to ground. At the beginning of the charge cycle, if the battery voltage is below 4.95V, the charger goes into trickle charge mode. The trickle charge current is 10% of the full-scale current. If the cell voltage stays low for one quarter of the total charge time, the charge sequence will terminate.

The charger goes into the fast charge constant-current mode after the voltage on the BAT pin rises above 4.95V. In constant-current mode, the charge current is set by the combination of  $R_{\text{SENSE}}$  and  $R_{\text{PROG}}$ .

When the battery approaches the final float voltage, the charge current will begin to decrease. When the current drops to 10% of the full-scale charge current, an internal comparator will turn off the N-channel MOSFET at the CHRG pin and connect a weak current source to ground to indicate a near end-of-charge (C/10) condition.

An external capacitor on the TIMER pin sets the total charge time. After a time-out occurs, the charge cycle is terminated and the  $\overline{\text{CHRG}}$  pin is forced to a high impedance state. To restart the charge cycle, simply remove the input voltage and reapply it, or float the PROG pin momentarily.

For batteries like lithium-ion that require an accurate final float potential, the internal 2.457V reference, voltage amplifier and the resistor divider provide regulation with  $\pm 1\%$  (max) accuracy. For NiMH and NiCd batteries, the LTC1731-8.2/LTC1731-8.4 can be turned into a current source by pulling the TIMER pin to  $V_{\text{CC}}$ . When in the constant-current only mode, the voltage amplifier, timer and the trickle charge function are all disabled.

The charger can be shut down by floating the PROG pin ( $I_{\text{CC}} \approx 1\text{mA}$ ). An internal current source will pull it high and clamp at 3.5V.

When the input voltage is not present, the charger goes into a sleep mode, dropping  $I_{\text{CC}}$  to  $15\mu\text{A}$ . This greatly reduces the current drain on the battery and increases the standby time.



## APPLICATIONS INFORMATION

When the LTC1731 is in the charge mode, the  $\overline{\text{CHRG}}$  pin is pulled to ground by an internal N-channel MOSFET. To detect this mode, force the digital output pin, OUT, high and measure the voltage at the  $\overline{\text{CHRG}}$  pin. The N-channel MOSFET will pull the pin low even with a 2k pull-up resistor. Once the charge current drops to 10% of the full-scale current ( $C/10$ ), the N-channel MOSFET is turned off and a 100 $\mu$ A current source is connected to the  $\overline{\text{CHRG}}$  pin. By forcing the OUT pin into a high impedance state, the current source will pull the pin low through the 100k resistor. When the internal timer has expired, the  $\overline{\text{CHRG}}$  pin will change to high impedance and the 100k resistor will then pull the pin high to indicate the charge cycle has ended.

### End of Charge (C/10)

The LTC1731-8.2/LTC1731-8.4 include a comparator to monitor the charge current to detect a near end-of-charge condition. This comparator does not terminate the charge cycle, but provides an output signal to indicate a near full charge condition. The timer is used to terminate the charge cycle. When the battery current falls below 10% of full scale, the comparator trips and turns off the N-channel MOSFET at the  $\overline{\text{CHRG}}$  pin and switches in a 100 $\mu$ A current source to ground. After an internal time delay of 320ms, this state is then latched. This delay will help prevent false triggering due to transient currents. The end-of-charge comparator is disabled in trickle charge mode.

### Gate Drive

Typically the LTC1731-8.2/LTC1731-8.4 drive an external P-channel MOSFET to supply current to the battery. The DRV pin is internally clamped to 6.5V below  $V_{CC}$ . This feature allows low voltage P-channel MOSFETs with gate to source breakdown voltage rated at 8V to be used.

An external PNP transistor can also be used as the pass transistor instead of the P-channel MOSFET. Due to the low current gain of the current amplifier (CA), a high gain Darlington PNP transistor is required to avoid excessive charging current error. The gain of the current amplifier is around 0.6 $\mu$ A/mV. For every 1 $\mu$ A of base current, a 1.6mV gain error shows up at the inputs of CA. With  $R_{\text{PROG}} = 19.6\text{k}$  and 100mV across  $R_{\text{SENSE}}$ , this gain error causes a 1.67% error in charge current.

### Constant-Current Only Mode

The LTC1731-8.2/LTC1731-8.4 can be used as a programmable current source by forcing the TIMER pin to  $V_{CC}$ . This is particularly useful for charging NiMH or NiCd batteries. In the constant-current only mode, the timer and voltage amplifier are both disabled. An external termination method is required to properly terminate the charge.


### Stability

The charger is stable without any compensation when a P-channel MOSFET is used as the pass transistor. However, a 10 $\mu$ F capacitor is recommended at the BAT pin to keep the ripple voltage low when the battery is disconnected. A ceramic output capacitor may also be used, but because of the very low ESR and high Q characteristics of multilayer ceramic capacitors, it may be necessary to add a 1 $\Omega$  resistor in series with the ceramic capacitor to improve voltage mode stability.

When a PNP transistor is chosen as the pass transistor, a 1000pF capacitor is required from the DRV pin to  $V_{CC}$ . This capacitor is needed to help stabilize the voltage loop. A 10 $\mu$ F capacitor at the BAT pin is also recommended when a battery is not present.

## PACKAGE DESCRIPTION

**MS8 Package**  
**8-Lead Plastic MSOP**  
 (Reference LTC DWG # 05-08-1660)

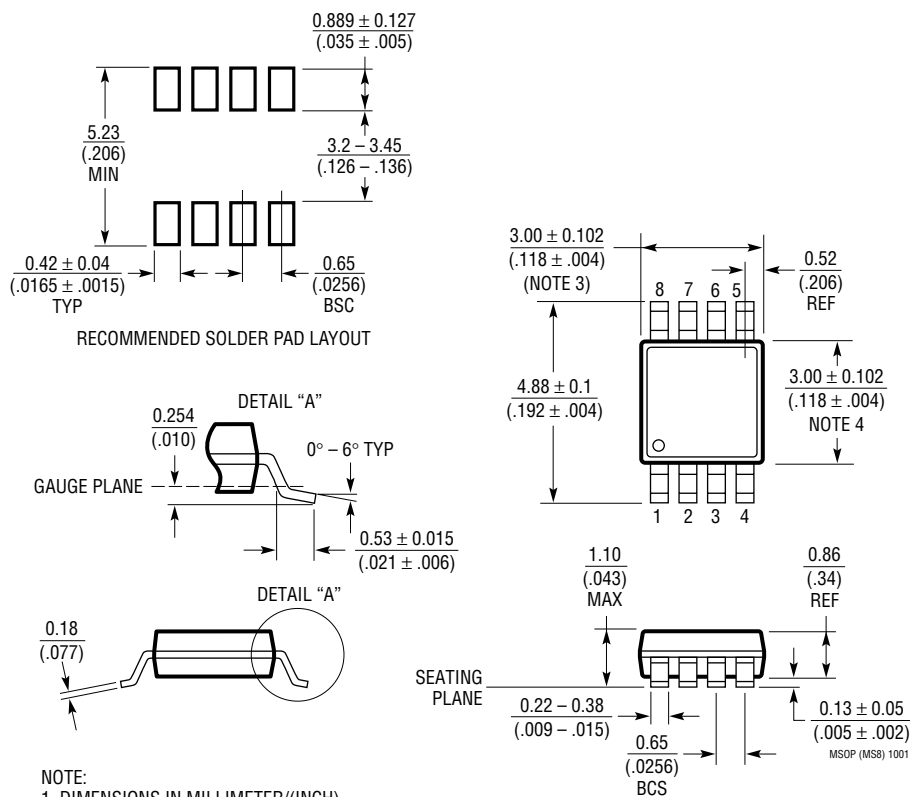


**NOTE:**

1. DIMENSIONS IN MILLIMETER/(INCH)
2. DRAWING NOT TO SCALE
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

## PACKAGE DESCRIPTION

**S8 Package**  
**8-Lead Plastic Small Outline (Narrow .150 Inch)**  
 (Reference LTC DWG # 05-08-1610)

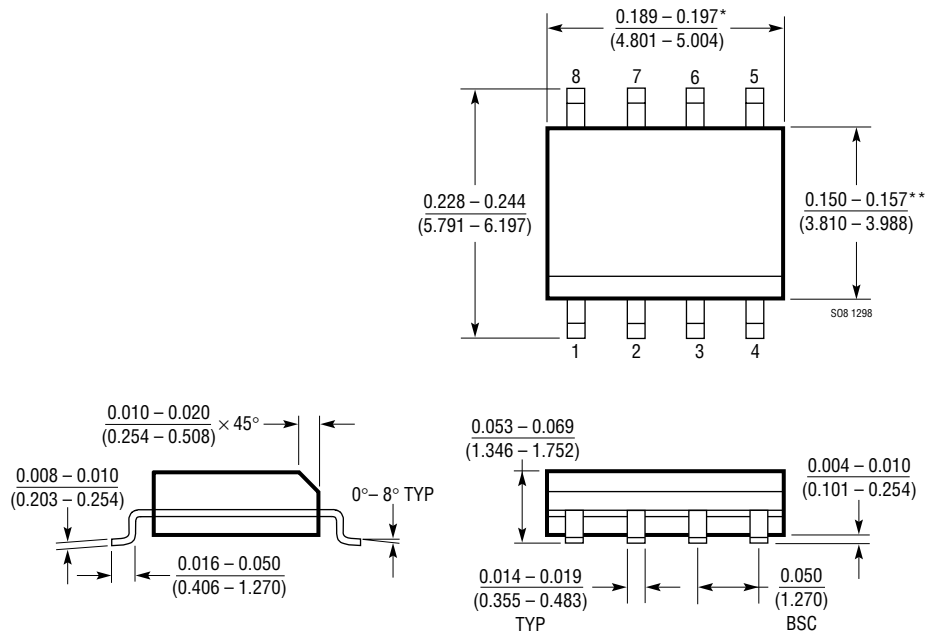


\*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

\*\*DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

## TYPICAL APPLICATION

Linear Charger Using a PNP Transistor

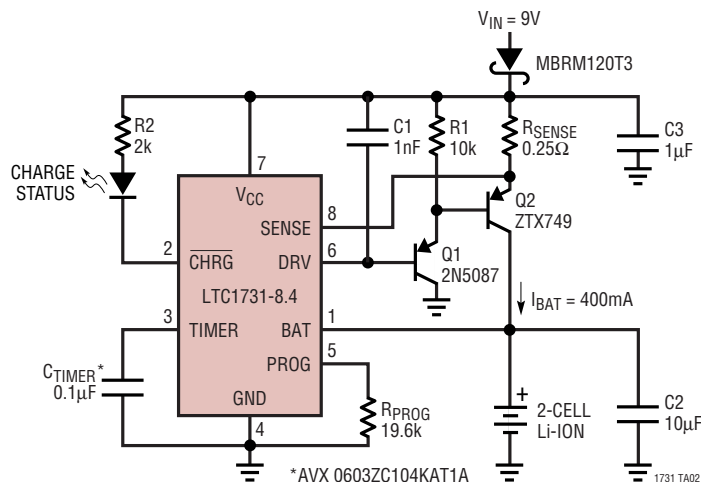

## RELATED PARTS

| PART NUMBER      | DESCRIPTION                                                                    | COMMENTS                                                                                                                      |
|------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| LT®1510-5        | 500kHz Constant-Voltage/Constant-Current Battery Charger                       | Most Compact, Up to 1.5A, Charges NiCd, NiMH, Li-Ion Cells                                                                    |
| LT1512           | SEPIC Battery Charger                                                          | $V_{IN}$ Can Be Higher or Lower Than Battery Voltage, 1.5A Switch                                                             |
| LT1571-1/-2/-5   | 200kHz/500kHz 1.5A Constant-Current/Constant-Voltage Battery Charger           | Charges 1- or 2-Cell Li-Ion Batteries, Preset and Adjustable Battery Voltages, C/10 Charge Detection                          |
| LTC1615          | SOT-23 Step-Up Switching Regulator                                             | $1.2V \leq V_{IN} \leq 15V$ ; Up to 34 Output; $I_Q = 20\mu A$                                                                |
| LT1620           | Rail-to-Rail Current Sense Amplifier                                           | Precise Output Current Programming, Up to 32V $V_{OUT}$                                                                       |
| LTC1682          | Low Noise Doubler Charge Pump                                                  | Output Noise = $60\mu V_{RMS}$ ; 2.5V to 5.5V Output                                                                          |
| LTC1729          | Termination Controller for Li-Ion                                              | Time or Charge Current Termination, Automatic Charger/Battery Detection, Status Output, Preconditioning, 8-Lead MSOP          |
| LTC1730          | Complete Li-Ion Pulse Battery Charger with Internal FET and Thermal Regulation | Efficient 1.5A Charger with Many Features Including Overcurrent Battery Protection                                            |
| LTC1731-4.1/-4.2 | Complete Li-Ion Linear Battery Charger Controller                              | Single Cell Li-Ion; C/10 Detection; Complete Charger                                                                          |
| LTC1732          | Complete Li-Ion Linear Battery Charger Controller                              | No Firmware Required; AC Adapter Indicator Automatic Charge and Recharge                                                      |
| LTC1733          | Complete Li-Ion Linear Battery Charger with Internal FET                       | 1.5A Charger with Many Features Including Thermal Feedback for Increased Charge Current without Exceeding Maximum Temperature |
| LTC1734          | ThinSOT Li-Ion Charger                                                         | Only Two External Components; $V_{PROG}$ Tracks $I_{CHARGE}$ No Diode Needed, No Sense Resistor Needed                        |
| LTC1754          | ThinSOT Charge Pump                                                            | $I_{OUT} = 50mA$ ; $2V \leq V_{IN} \leq 4.4V$ ; for Backlight White LED                                                       |
| LTC4050          | Complete Li-Ion Charger with Thermistor Interface                              | No Firmware required, AC Adapter Indicator Automatic Charge and Recharge                                                      |