

BATTERY DRIVE, MOBILE TYPE COMPACT STANDALONE THERMAL PRINTER 2" EASY LOADING MODEL

FTP-628WSL100/200-R series

■ OVERVIEW

The supply voltage of the FTP-628WSL Series is 120/240VAC (via AC adaptor) or battery. The unit uses 2 inch wide paper. The mechanism and interface board is a standard multiple purpose unit.

The semi-rugged printer unit is most suitable for applications such as handheld, mobile and portable devices, as well as for various other equipment.



■ FEATURES

- Lightweight and ultra small size
- Easy paper loading
- Bluetooth®, infrared, serial and USB interfaces
- 3.7V Lithion battery, 120 or 240 VAC adapter
- Drop-resistant - 1.5 meters
- Water resistant
- Prints 2-D barcodes and stacked barcodes
- 3 hour charge cycle
- Up to 6 paper rolls / charge
- Thin label capability
- RoHS compliant
- IP54 compliant
- Windows®2000/XP, CE 6.0, Linux, and iPhone Bluetooth drivers

FTP-628WSL100 /200-R Series

■ INTERFACE SPECIFICATION AT HOST SIDE

| Item | Specifications | |
|--|--|--|
| Bluetooth V2.1 + EDR (standard or iOS) | Profile: Modulation: Data speed: Maximum distance: Protocol stack: | GAPSDP, SPP. FHSS/GFSK, 8DPSK 460 kbps, 1306.9kbps 10m IrLAP, IrLMP, IrLAS, TinyTP, IrCoMM |
| RS-232C | Data speed: Synchronous method: Handshake: Input/output level: | 115,200, 19,200 / 9,600 / 4,800 bps Full duplex DTR/DSR, XON/XOFF control RS-232C |
| IrDA (Ver. 1.2, IrCoMM) | Data speed: | 115,200 / 57,600 / 38,400 /19,200 / 9,600 bps |
| USB (2.0 full speed) | Data speed: | 12Mbps max. |

■ PART NUMBERS

| Item | Part Number | Adapter | Includes |
|-------------------------------------|--------------------------------------|------------------------|---|
| Bluetooth, IrDA & serial interfaces | FTP-628WSL110#11 FTP-628WSL110#21 | 120V AC 120/240V AC | With AC cable, battery, belt clip & paper roll |
| IrDA & serial (RS-232C) interfaces | FTP-628WSL120#11 FTP-628WSL120#21 | 120V AC 120/240V AC | |
| Bluetooth/USB (iOS) | FTP-628WSL210#20 | 120/240V AC | Without AC cable, with battery, without belt clip & with paper roll |
| Bluetooth/USB (Android, Blackberry) | FTP-628WSL211#20 | 120/240V AC | |
| USB only | FTP-628WSL212#20 | 120/240V AC | |
| Serial interface cable | FTP-628Y304 | | |
| USB interface cable | FTP-629Y301#11 | | |

■ POWER SUPPLY SPECIFICATIONS

Battery

| | |
|---------------|-----------------------------------|
| Type | Lithium Ion, 1 parallel, 1 series |
| Manufacturer | Panasonic |
| Model | FTP-628MP0011 |
| Rated voltage | 3.7V |
| Life | 300 cycles |
| Weight | 44g |

AC Adapter

| | |
|---------------|------------------------------|
| Type | Switching regulator |
| Manufacturer | Nogano Japan Radio Co., Ltd. |
| Model | FTP-628MP0012 |
| Rated voltage | 5VDC |
| Weight | 160g |

FTP-628WSL100 /200-R Series

■ SPECIFICATIONS

| Item | | Specification | |
|---|-----------------------|---|----------------------|
| Part Number | | FTP-628WSL100 series | FTP-628WSL200 series |
| Dot structure | | 384 dots/line | |
| Dot pitch (horizontal) | | 0.125mm | |
| Dot pitch (vertical) | | 0.125mm | |
| Effective print area | | 48mm | |
| Paper width/diameter | | 58mm / ID 8mm, OD 36mm max. | |
| Paper thickness | | 60 to 100 μ m*1 | |
| Maximum printing speed | | Battery 40mm/sec. at 4.2V, AC adapter, 50mm/sec. at 5V (320 dotline/s) at 12.3% print ratio | |
| Character types | | Alphanumeric KANA: 159 International characters: 195 Registered characters: 224 JIS KANJI: APPROX. 6800 | |
| Character dimensions (W x H mm), number of characters | | 12 x 24 dots (1.5 x 3.0 mm), 32 columns 24 x 24 dots (3.0 x 3.0 mm), 16 columns 8 x 16 dots (1.0 x 2.0 mm), 48 columns 16 x 16 dots (2.0 x 2.0 mm), 24 columns | |
| Power | Battery (Lithium Ion) | 3.7VDC lithium 1,800mAh | |
| | AC Adapter | 100VAC to 120VAC adapter #11 100VAC to 240VAC adapter #20, 21 (AC cable not included) | |
| Power consumption | | 1.6-1.7A Printing (print ratio 12.5%) standby 30-60mA communication 90-170mA | |
| Dimensions (W x D x H) | | 84x 136.5 x 30.0mm body / 43.6mm papaer holder | |
| Case color | | Gray | Black |
| Weight | | 220g (printer with battery) 270g (battery and paper included) | |
| Expected life | Head | Pulse durability: 100 million pulse/dot (12.5% print ratio) Wear resistance: 50km | |
| | Battery | One charge: 100m 300 charge cycles | 500 charge cycles |
| | Paper holder | 5,000 times open/close | |
| MTBF | Mechanism | 3,000 hours | |
| | Interface board | 500,000 hours | |

*1: there may be exceptions

FTP-628WSL100 /200-R Series

FTP-628WSL100/200 Specs continued


| Item | | Specification |
|--------------------------------------|-----------------------|--|
| Bar Code Type | Standard | UPC-A, UPC-E, JAN13, JAN8, CODE 39, ITF, CODABAR, CODE 128 |
| | 2-D | MAXI, PDF417, QR |
| Interface | Serial | RS-232C |
| | IrDA | Version 1.2 (Ir COMM protocol) |
| | Bluetooth*3 | Version 2.1 +EDR (standard and iOS) |
| | USB | 2.0 full speed |
| Safety Standard | Noise | FCC Class B, FCC Part 15 |
| | Water resistant | JIS C0920 Class 2 |
| Environmental conditions | Operating temperature | 0°C to +50° C*4 |
| | Operating humidity | 30 to 85% RH (no condensation) |
| | Storage temperature | -20° C to +60°C |
| | Storage humidity | 5 to 90% RH (no condensation) |
| Detection functions | Head temperature | Detected by thermistor |
| | Mark detect | Detected by photo-interruptor |
| | Paper out | Detected by photo-interruptor |
| | Cover open | Detected by micro-switch |
| Major Functions | | Page mode Registration of character and image Enlarge characters Auto status reply |
| Recommended thermal sensitive papers | | High sensitive paper TF50KS-E4 (Nippon paper) |
| | | Standard Paper FTP-020P0704 TF-60KS-E (Nippon paper), PD150R (Oji paper) |
| | | Medium term paper TF-60KS-F1 (Nippon paper), PD170R (Oji paper), P220VBB-1 (Mitsubishi paper) |
| | | Long term paper (Oji paper) HA220AA (Mitsubishi) |
| | | Label paper HW54T (Nippon paper) |

Notes: *3: FTP-628WSL110, 211 (standard), FTP-628WSL210 (iOS)

*4: 0 to +40°C guarantee of print quality

FTP-628WSL100 /200-R Series

■ DIMENSIONS

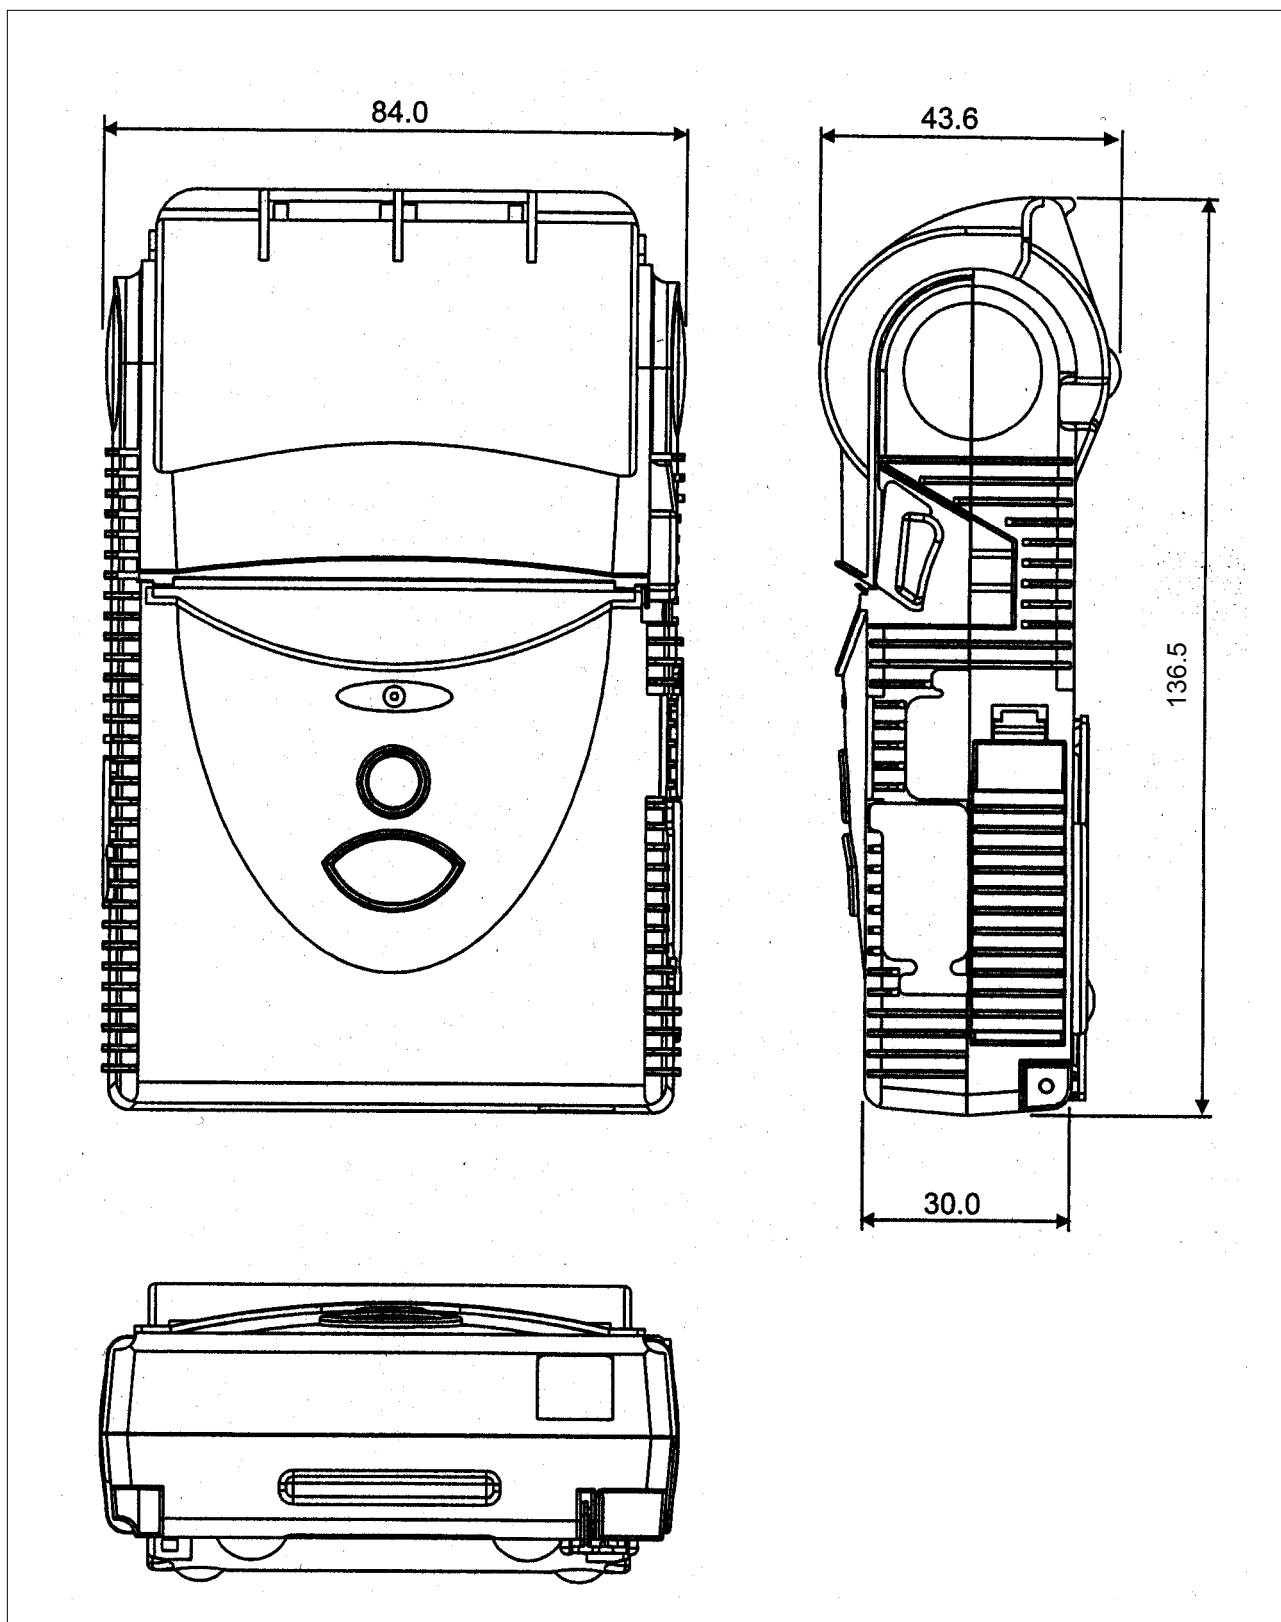

FTP-628WSL100 /200-R Series

■ COMMANDS

| Command | Contents |
|---|--|
| HT | Horizontal tab |
| LF | Line feed with printing |
| FF | Feeds forms (new page) |
| ECS RS | Sets reverse printing |
| ESC US | Resets reverse printing |
| ESC FF | Data printing in page print mode |
| ESC ! + n | Sets print mode |
| ESC \$ + n1 + n2 | Horizontal absolute position setting |
| ESC % + n | External registration character specification / cancellation |
| ESC & + y + c1 + c2 + x + d1 ~ dn | External registration character definition |
| ESC * + m + n1 + n2 + [d1 ~ dn] | Bit image mode registration |
| ESC - + n | Underline setting |
| ESC 3 + n | Sets the line feed length |
| ESC ? + n | External registration character deletion |
| ESC @ | Printer initialization |
| ESC A + n | Sets the space between lines |
| ESC C + n | Sets the page length by character line |
| ESC D + n | Sets the tab position |
| ESC E + n | Printing specification/cancellation |
| ESC J + n | Feeds paper in forward direction and prints |
| ESC K + n | Reverse paper feed |
| ESC L | Page print mode selectio |
| ESC Q + n + ! + j | Frame overlay selection |
| ESC R + n | Selects international character |
| ESC S | Line print mode selection |
| ESC T + n | Print direction setting in page mode |
| ESC V + n | Right Rotation 90° specification / cancellation |
| ESC W + x1 + x2 + y1 + y2 + Dx1 + dx2 + dy1 + dy2 | Print area setting in page print mode |
| ESC X + m + n | Sleep mode time setting |
| ESC ¥ + n1 + n2 | Internal process setting |

FTP-628WSL100 /200-R Series

Commands continued

| Command | Contents |
|----------------------------------|--|
| ESC c+1+n | Sets internal processing. |
| ESC s+n | Print speed setting |
| ESC {+n | Sets/resets upside down printing |
| ESC Y + SOH ESC+ x + a + DLE + n | RS-232C communication setting* |
| FS !+n | Kanji printing mode collective specification |
| FS & | Kanji printing mode specification |
| FS - + n | Kanji underline specification/cancellation |
| FS . | Kanji printing mode cancellation |
| FS 2 +c1 + c1 + d1~dn | User defined character definition |
| FS 9+n | Sets the detection functions |
| FS C+n | Kanji code system selection |
| FS E+n | Correction of impressed energy |
| FS r+n | Parameter transmission (valid for non-protocol mode) |
| GS \$+n+1+2 | Vertical absolute position specification in page print mode |
| GS &+m+x+y1+y2+[d]k | Registration of image data |
| GS '+m+n | Prints registered image data |
| GS < | Line feeds to the next mark |
| GS A+m+n | Sets the line feed length after mark detection |
| GS B+n | Bar code angle setting |
| GS E+n | Print quality setting |
| GS L + n1 +n2 | Left margin setting |
| GS W + n1 + n2 | Print area width setting |
| GS ¥ + n1 + n2 | Vertical relative position setting in page mode |
| GS a+n | Setting and cancelation of status transmission (non-protocol mode) |
| GS e+n+m | Bar code width setting |
| GS h+n | Bar code height setting |
| GS k+m+n+d1~dN | Bar code printing |
| GS k+m+k1+k2+k3+k4+d1~dn | Two dimensional code printing |
| GS k + m + n + pL + pH + d1~dn | B a r c o d e s (G S 1 D a t a b a r) p r i n t |

FTP-628WSL100 /200-R Series

Commands continued

| Command | Contents |
|----------------------------------|---|
| GS k + m + n + k1 + k2 + k3 + k4 | Barcode (GS1 DataBar) setting |
| GS (A + ETX +n | Bluetooth link time setting |
| GS (A + ACK +m+n | Bluetooth security mode setting |
| GS (A + BS +n+d1 to dn | Bluetooth PIN code setting |
| GS (A + HT +n+d1 to dn | Bluetooth device name setting |
| GS (A + ENQ | Bluetooth, information printing (WSL110 only) |

Fujitsu Components International Headquarter Offices

| | |
|---|--|
| Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141 8630, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@fcl.fujitsu.com Web: www.fcl.fujitsu.com | Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/ |
| North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components/ | Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcsl@fcal.fujitsu.com Web: http://www.fujitsu.com/sg/services/micro/components/ |

©2013 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. June 17, 2013.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fujitsu:

[FTP-628WSL210#20](#)