



Please refer to website for current pricing.


Pulleys for Round Belts

-Double-

Pulleys for Round Belts RoHS



Type	M Material	S Surface Treatment	A Accessories
MBWA	5052 Aluminum Alloy	Electroless Nickel Plating	Set Screws 2 Pcs. (304 Stainless Steel)
MBWS	304 Stainless Steel	-	

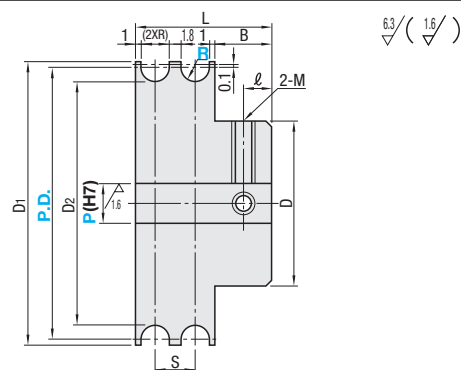

Part Number		R	Shaft Bore Specifications, Inner Diameter P (H7) 1mm Increment	S	D	D ₁	D ₂	L	ℓ	B	2-M (Coarse)	Accessories Set Screws	Applicable Round Belt Dia.	Unit Price	
Type	P.D.													MBWA	MBWS
MBWA MBWS	15	1.1	3~8	4	12	17	13	14	3	5.8	M3	M3x3	2		
	20		4~10		16	22	18								
	30		4~12		20	32	28								
	20	1.6	3~10	5	16	22	17	16	3	5.8	M3	M3x3	3		
	30		5~12		20	32	27								
	40		42		37										
	45	5~20	30	47	42										
	23	2.1	5~12	6	20	25	19	18	3	5.8	M3	M3x3	4		
	28				30	24									
	30				32	26									
	40				42	36									
	45	5~18	25	47	41	20	4	7.8	M4	M4x3	5				
	48	5~20	30	50	44										
	28	2.6	5~12	7	20	30	23	20	3	5.8	M3	M3x3	5		
	40		5~20		30	42	35								
	50		52		45										
	28	3.1	5~12	8	22	30	22	22	3	5.8	M3	M3x3	6		
	38		5~20		40	32									
	48				50	42									
	50				52	44									
	60				62	54									
	75				77	69									
	100	102		94											
	50	4.1	5~20	10	30	52	42	30	5	9.8	M5	M5x4	8		
	60				62	52									
	100				102	92									
	60	5.1	5~20	12	34	62	50	34	5	9.8	M5	M5x4	10		
	100				102	90									
140	142				130										

For MBWA, Electroless nickel plating may not be applied to shaft bores.

Order Example: Part Number - R - Shaft Bore Specifications, Inner Diameter
MBWS30 - 1.6 - P5

Price

Days to Ship: 6 Days, Express A, \$2.00/piece, #88

Non-Returnable P.88, A flat charge of \$5.40 for 3 or more identical pieces.


R2.6 / R3.1 / R4.1 / R5.1

6 Days, Express service is not available.

Non-Returnable P.88

Alterations Example: Part Number - R - Shaft Bore Specifications, Inner Diameter - (DC)
MBWA40 - 2.6 - P8 - DC

ex Example

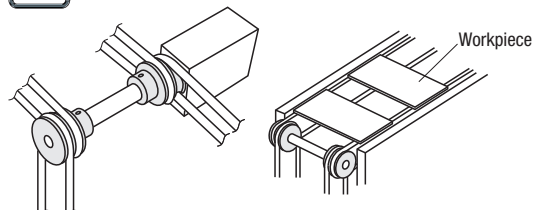

Alterations Code	Outer Diameter Cut DC
Spec.	Reduces D1 diameter by cutting. Order Code DC Applicable Belt Diameter 2 P.D.+0.8 3 P.D.+1.2 4 P.D.+1.6 5 P.D.+1.8 Applicable to corresponding belt dia. 2, 3, 4 and 5 only. Surface treatment may not be applied to the machined area.
Price Adder	




Idlers for Round Belts

-Double-

Idlers for Round Belts RoHS



Type	M Material	S Surface Treatment	A Accessories
MBXA	Bearing	5052 Aluminum Alloy	Electroless Nickel Plating
MBXS	Main Body	304 Stainless Steel	Retaining Ring (304 Stainless Steel)

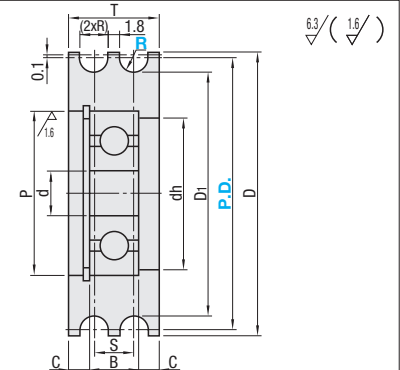

* Bearing Precision JIS B1514 Class 0
Bearings are press-fitted.

Part Number Type	P.D.	R	S	D	P	dh	D	D ₁	T	B	C	Bearing	Applicable Round Belt Dia.	Unit Price	
														MBXA	MBXS
MBXA MBXS	15	1.1													
	20														
	30														
	20	1.6													
	30														
	40														
	45	2.1													
	23														
	28														
	30														
	40														
	45														
	48	2.6													
	28														
	40														
	50	3.1													
	28														
	38														
	48														
	50														
	60														
	75	4.1													
	100														
	50	5.1													
	60														
	100														
	60														
	100														
	140														

For Detailed Bearing Dimensions, refer to P.893-903

Order Example: Part Number - R
MBXS30 - 1.6

Alterations Example: Part Number - R - (DC)
MBXA40 - 2.6 - DC

Days to Ship: 6 Days, Express A, \$2.00/piece, #88

Non-Returnable P.88, A flat charge of \$5.40 for 3 or more identical pieces.

R2.6 / R3.1 / R4.1 / R5.1

6 Days, Express service is not available.

Non-Returnable P.88

Price

Alterations Code	Outer Diameter Cut DC
Spec.	Reduces D diameter by cutting. Order Code DC Applicable Belt Diameter 2 P.D.+0.8 3 P.D.+1.2 4 P.D.+1.6 5 P.D.+1.8 Applicable to corresponding belt dia. 2, 3, 4 and 5 only. Surface treatment may not be applied to the machined area.
Price Adder	