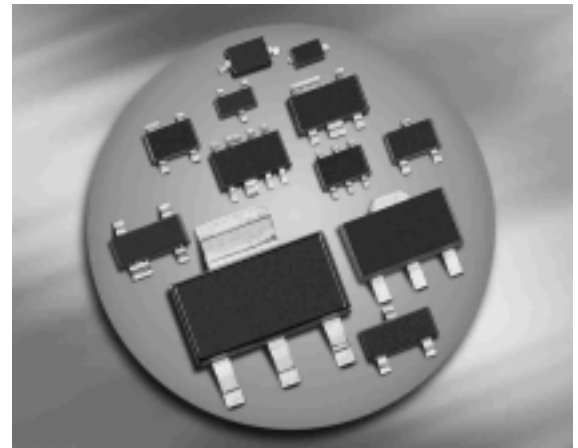



PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1 = 100k\Omega$, $R_2 = 100k\Omega$)


**BCR151F/L3
BCR151T**


Type	Marking	Pin Configuration						Package
BCR151F*	UDs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR151L3*	UD	1=B	2=E	3=C	-	-	-	TSFP-3-4
BCR151T*	UD	1=B	2=E	3=C	-	-	-	SC75

* Preliminary

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Input forward voltage	$V_{i(fwd)}$	20	
Input reverse voltage	$V_{i(rev)}$	10	
Collector current	I_C	50	mA
Total power dissipation- BCR151F, $T_S \leq 128^\circ\text{C}$ BCR151L3, $T_S \leq 135^\circ\text{C}$ BCR151T, $T_S \leq 109^\circ\text{C}$	P_{tot}	250 250 250	mW
Junction temperature	T_j	150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BCR151F		≤ 90	
BCR151L3		≤ 60	
BCR151T		≤ 165	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage $I_C = 100\ \mu\text{A}$, $I_B = 0$	$V_{(BR)CEO}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10\ \mu\text{A}$, $I_E = 0$	$V_{(BR)CBO}$	50	-	-	
Collector-base cutoff current $V_{CB} = 40\ \text{V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{EB} = 10\ \text{V}$, $I_C = 0$	I_{EBO}	-	-	75	μA
DC current gain ²⁾ $I_C = 5\ \text{mA}$, $V_{CE} = 5\ \text{V}$	h_{FE}	70	-	-	-
Collector-emitter saturation voltage ²⁾ $I_C = 5\ \text{mA}$, $I_B = 0.25\ \text{mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100\ \mu\text{A}$, $V_{CE} = 5\ \text{V}$	$V_{i(off)}$	0.5	-	1.8	
Input on voltage $I_C = 1\ \text{mA}$, $V_{CE} = 0.3\ \text{V}$	$V_{i(on)}$	1	-	3	
Input resistor	R_1	70	100	130	k Ω
Resistor ratio	R_1/R_2	0.9	1	1.1	-

AC Characteristics


Transition frequency $I_C = 10\ \text{mA}$, $V_{CE} = 5\ \text{V}$, $f = 100\ \text{MHz}$	f_T	-	120	-	MHz
Collector-base capacitance $V_{CB} = 10\ \text{V}$, $f = 100\ \text{MHz}$	C_{cb}	-	3	-	pF

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

²⁾Pulse test: $t < 300\ \mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5 \text{ V}$ (common emitter configuration)

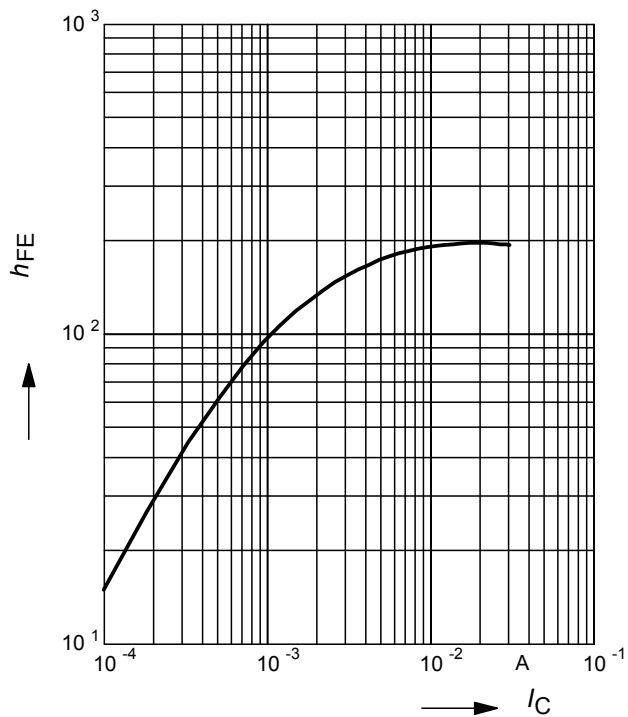


Collector-emitter saturation voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

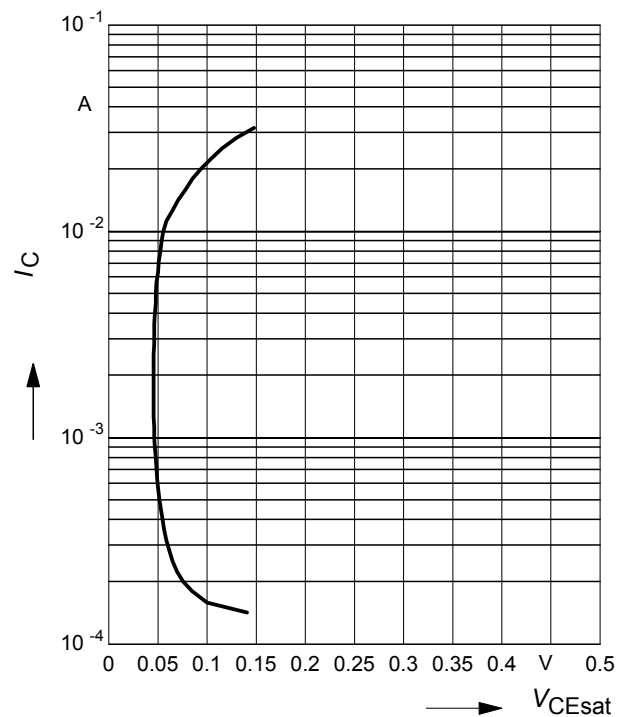


Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3 \text{ V}$ (common emitter configuration)

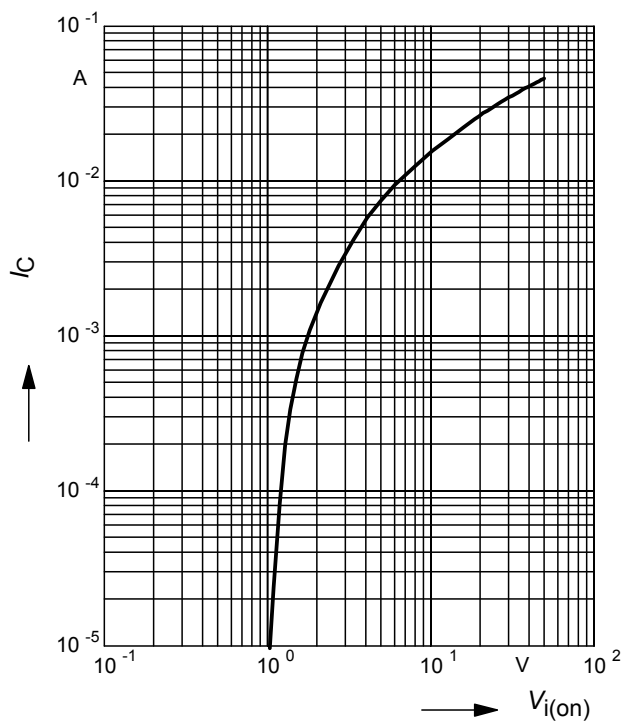


Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5 \text{ V}$ (common emitter configuration)

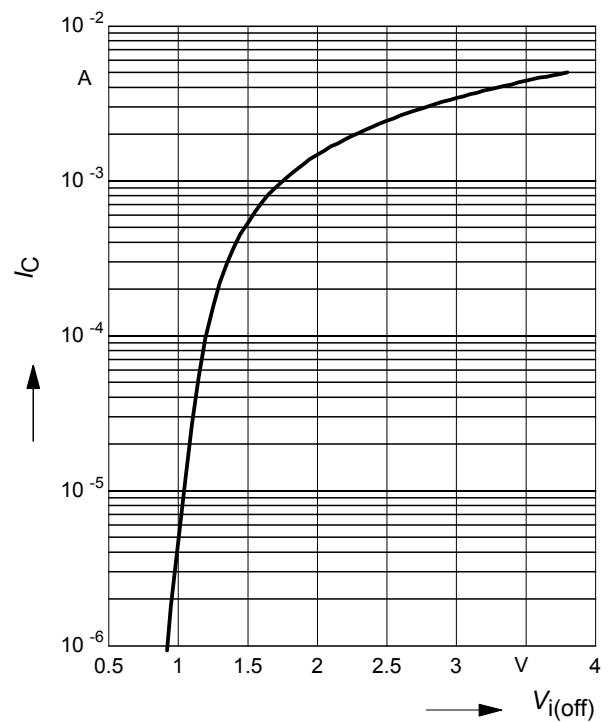


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR151F

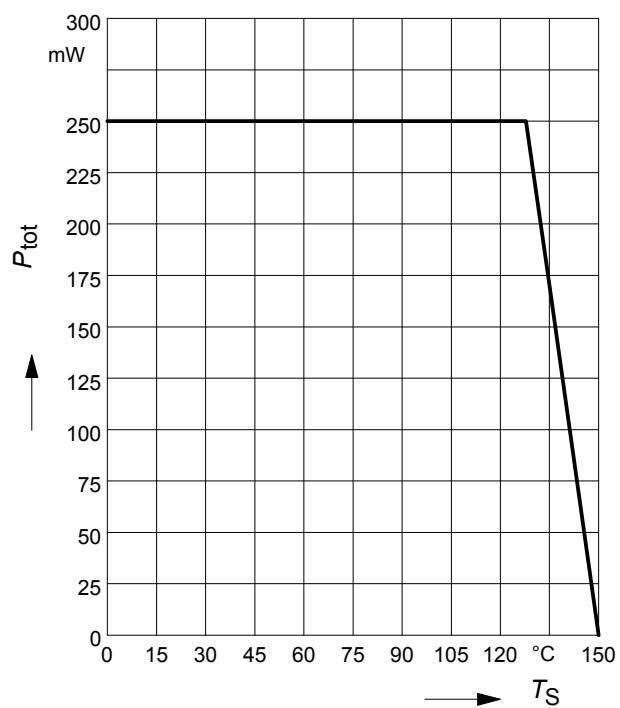


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR151L3

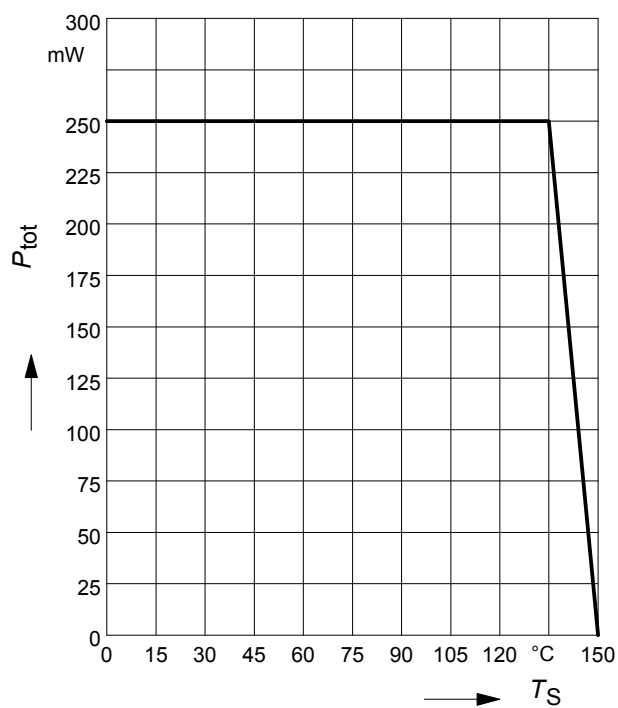


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR151T

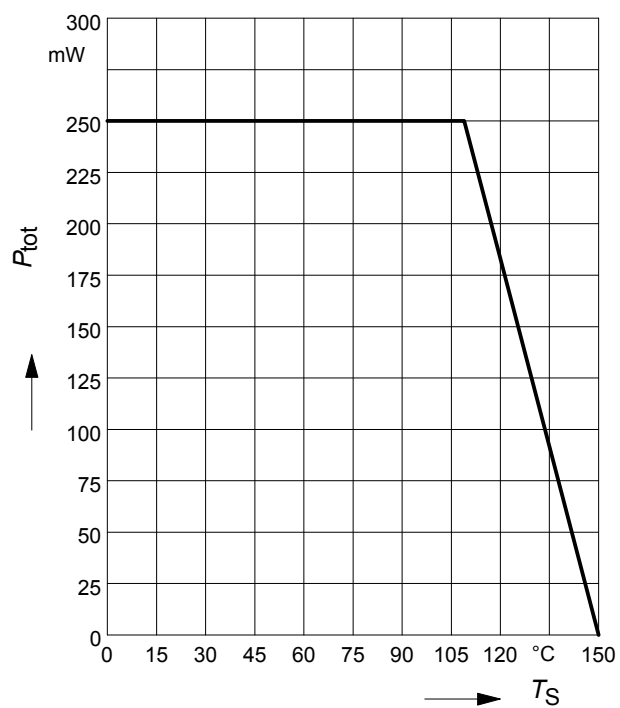

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR151F

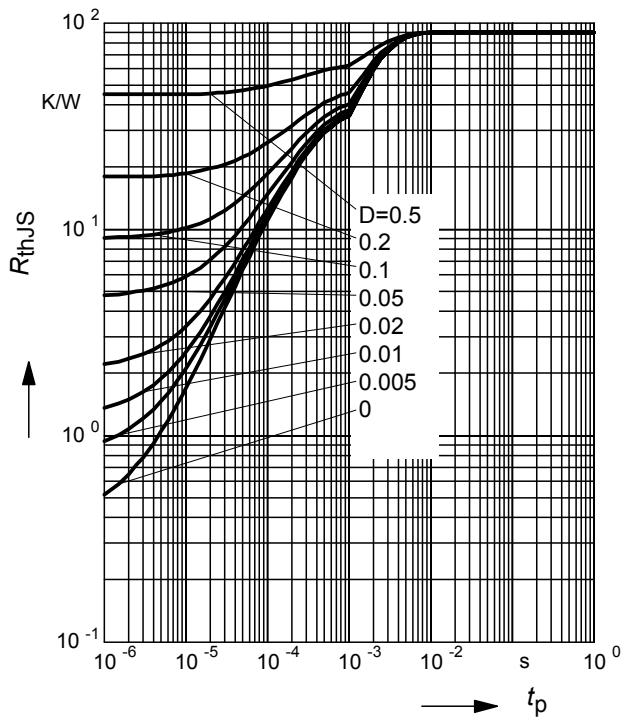

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR151F

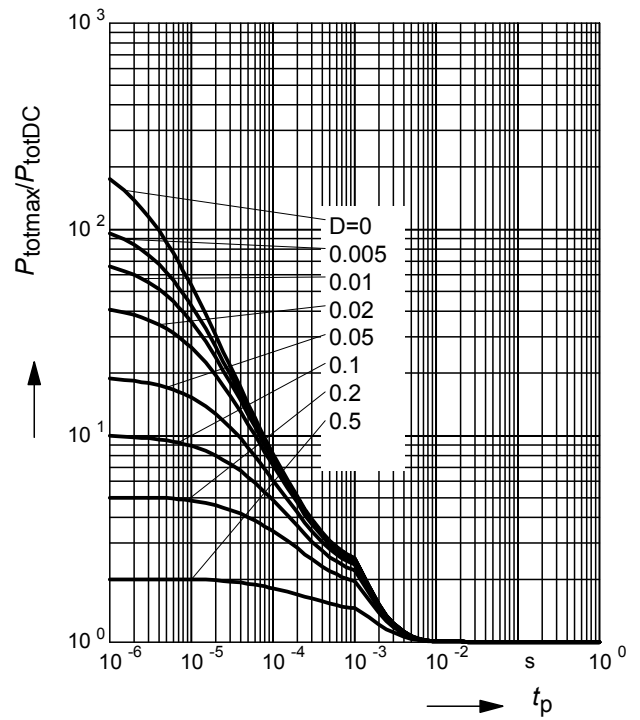

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR151L3

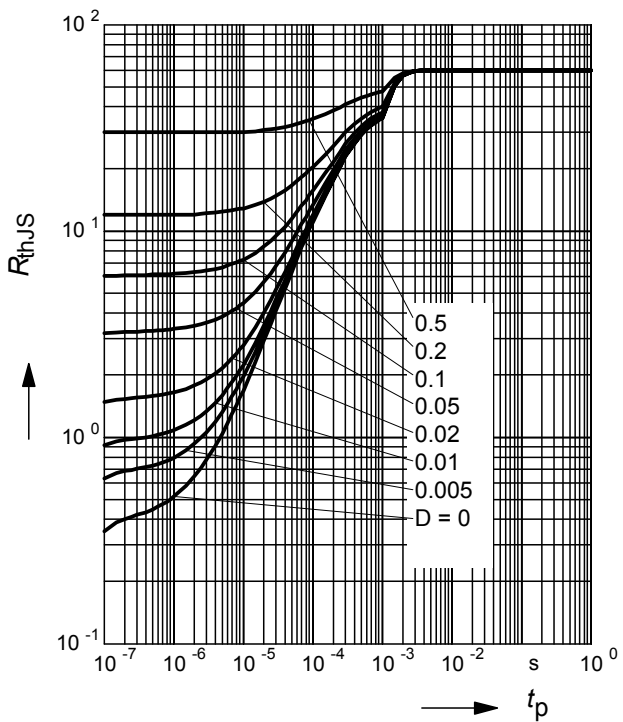

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR151L3

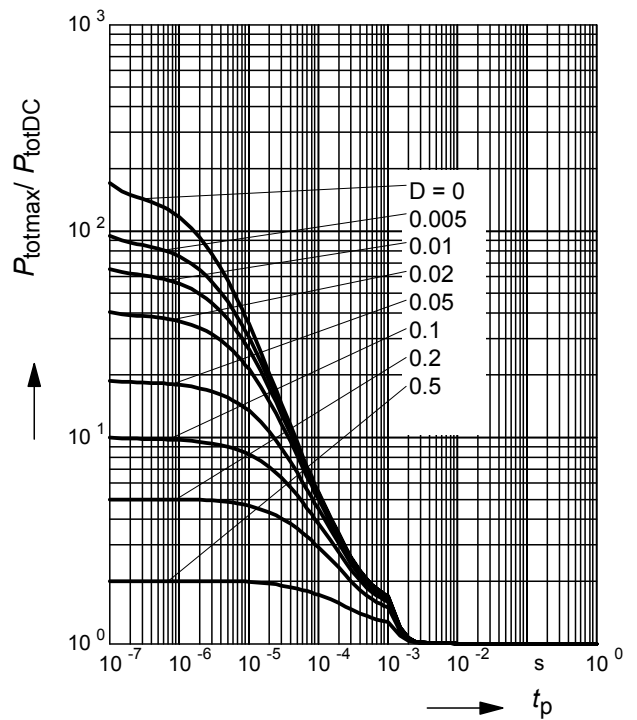

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR151T

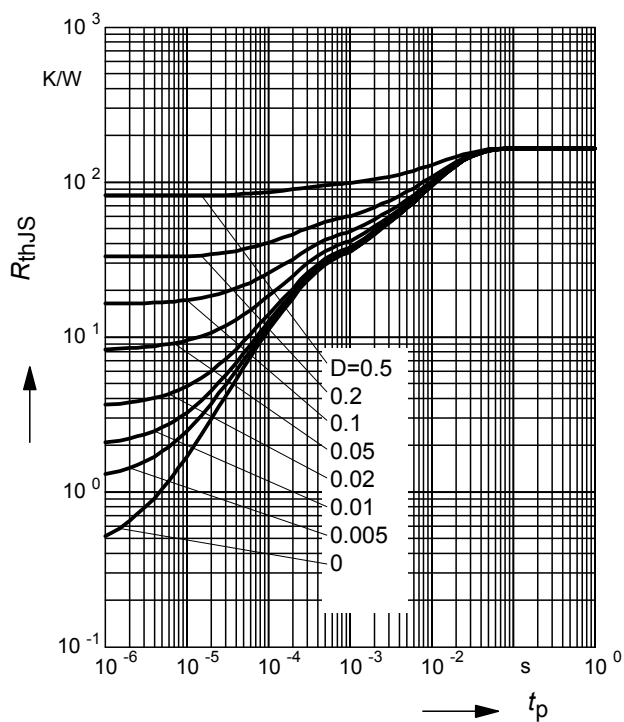

Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR151T

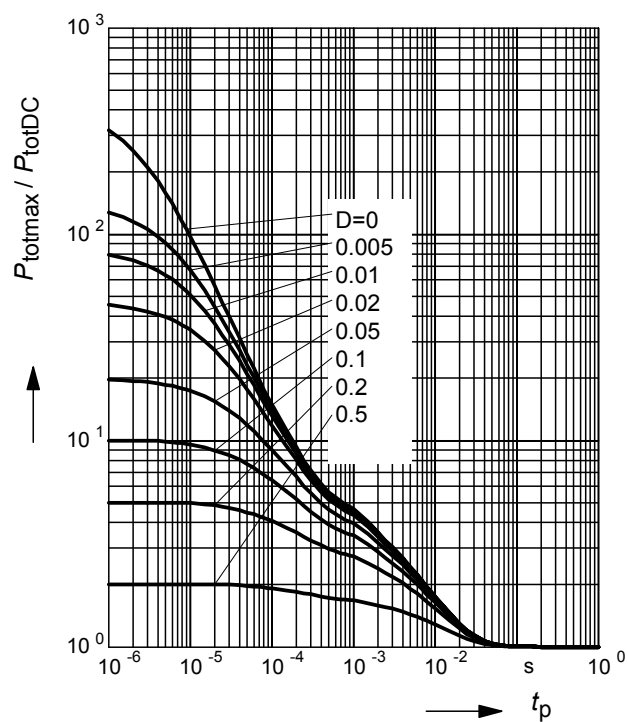

The technical drawing shows two views of the M6000-1000 cable gland:

- Front View (Left):** Shows the main body with a total width of 1.6 ± 0.2 . The distance between the mounting holes is $0.2^{+0.1}_{-0.05}$. The height of the main body is $0.2^{+0.1}_{-0.05}$. The distance from the bottom edge to the center of the mounting hole is 0.5 . The distance from the bottom edge to the center of the cable entry point is $0.2^{+0.1}_{-0.05}$.
- Side View (Right):** Shows the profile of the gland. The total height is 1.6 ± 0.2 . The top flange has a thickness of 0.1 MAX. and a radius of 0.7 ± 0.1 . The main body has a height of 1.9 ± 0.2 and a radius of 10° MAX. . The bottom flange has a thickness of 0.15 ± 0.1 and a radius of 10° MAX. . The distance from the bottom edge to the center of the mounting hole is 0.8 ± 0.1 .

Technical drawing of a mechanical part with dimensions:

- Overall width: 1.15
- Overall height: 0.65
- Top flange width: 0.4
- Top flange height: 0.65
- Bottom flange width: 0.4
- Bottom flange height: 0.65
- Central hole diameter: 0.5
- Distance from center to outer edge: 0.5

Diagram illustrating the label structure for the WHN label:


- 2005, December**
Date code
- WHN**
- BCR108T**
Type code
- Pin 1**

Date Code marking for discrete packages with one digit (SCD80, SC79, SC75¹⁾) CES-Code


Month	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014
01	a	p	A	P	a	p	A	P	a	p	A	P
02	b	q	B	Q	b	q	B	Q	b	q	B	Q
03	c	r	C	R	c	r	C	R	c	r	C	R
04	d	s	D	S	d	s	D	S	d	s	D	S
05	e	t	E	T	e	t	E	T	e	t	E	T
06	f	u	F	U	f	u	F	U	f	u	F	U
07	g	v	G	V	g	v	G	V	g	v	G	V
08	h	x	H	X	h	x	H	X	h	x	H	X
09	j	y	J	Y	j	y	J	Y	j	y	J	Y
10	k	z	K	Z	k	z	K	Z	k	z	K	Z
11	l	2	L	4	l	2	L	4	l	2	L	4
12	n	3	N	5	n	3	N	5	n	3	N	5

1) New Marking Layout for SC75, implemented at October 2005.


Package Outline

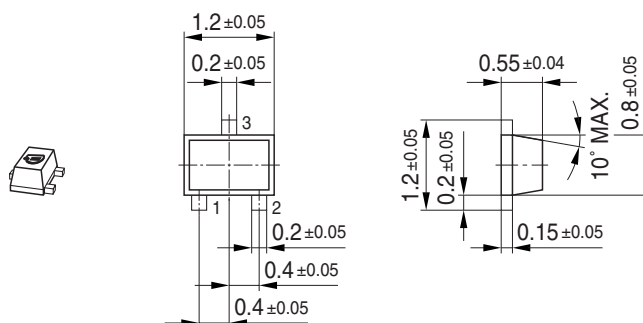

Foot Print




Marking Layout (Example)

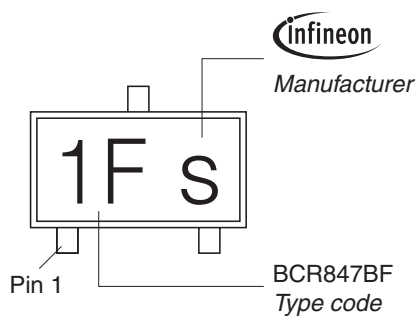


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø330 mm = 10.000 Pieces/Reel

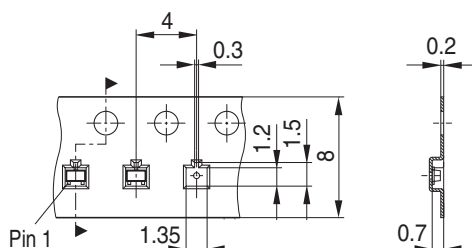


Package Outline

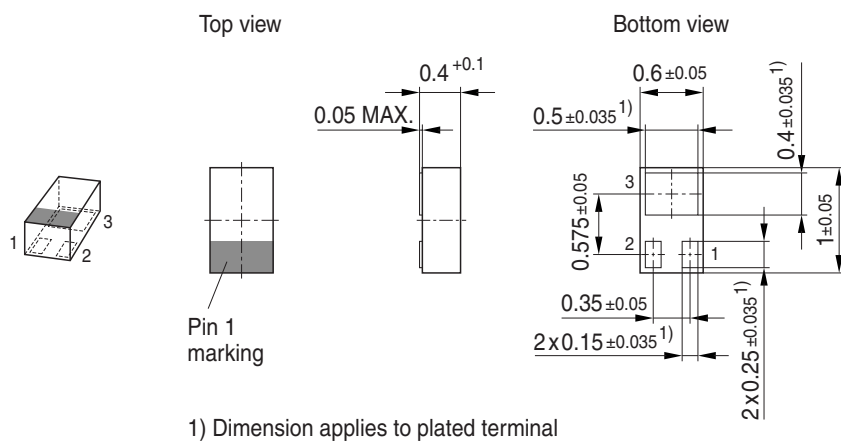


Foot Print

For board assembly information please refer to Infineon website "Packages"

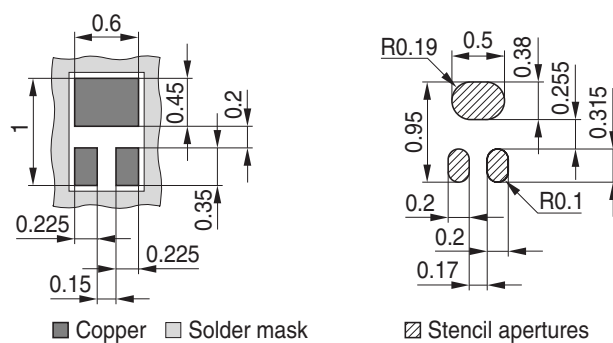


Marking Layout

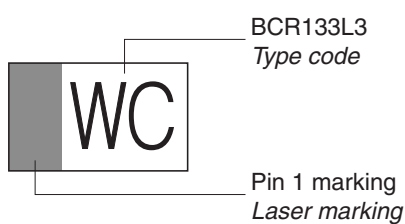

Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

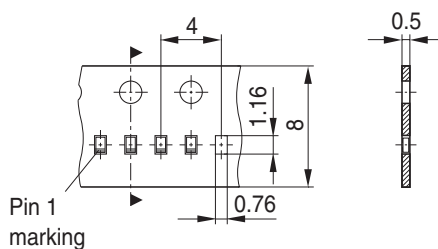

Edition 2006-02-01
Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2006.
All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.