


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16		A	RELEASE PER NPR	25 OCT 05	CSV	JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB PLUS CABLE
ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
- 2 GEOMETRY REQUIREMENTS:
RADIUS OF CURVATURE : 10–30 mm
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
TYCO ELECTRONICS STANDARD 230–702

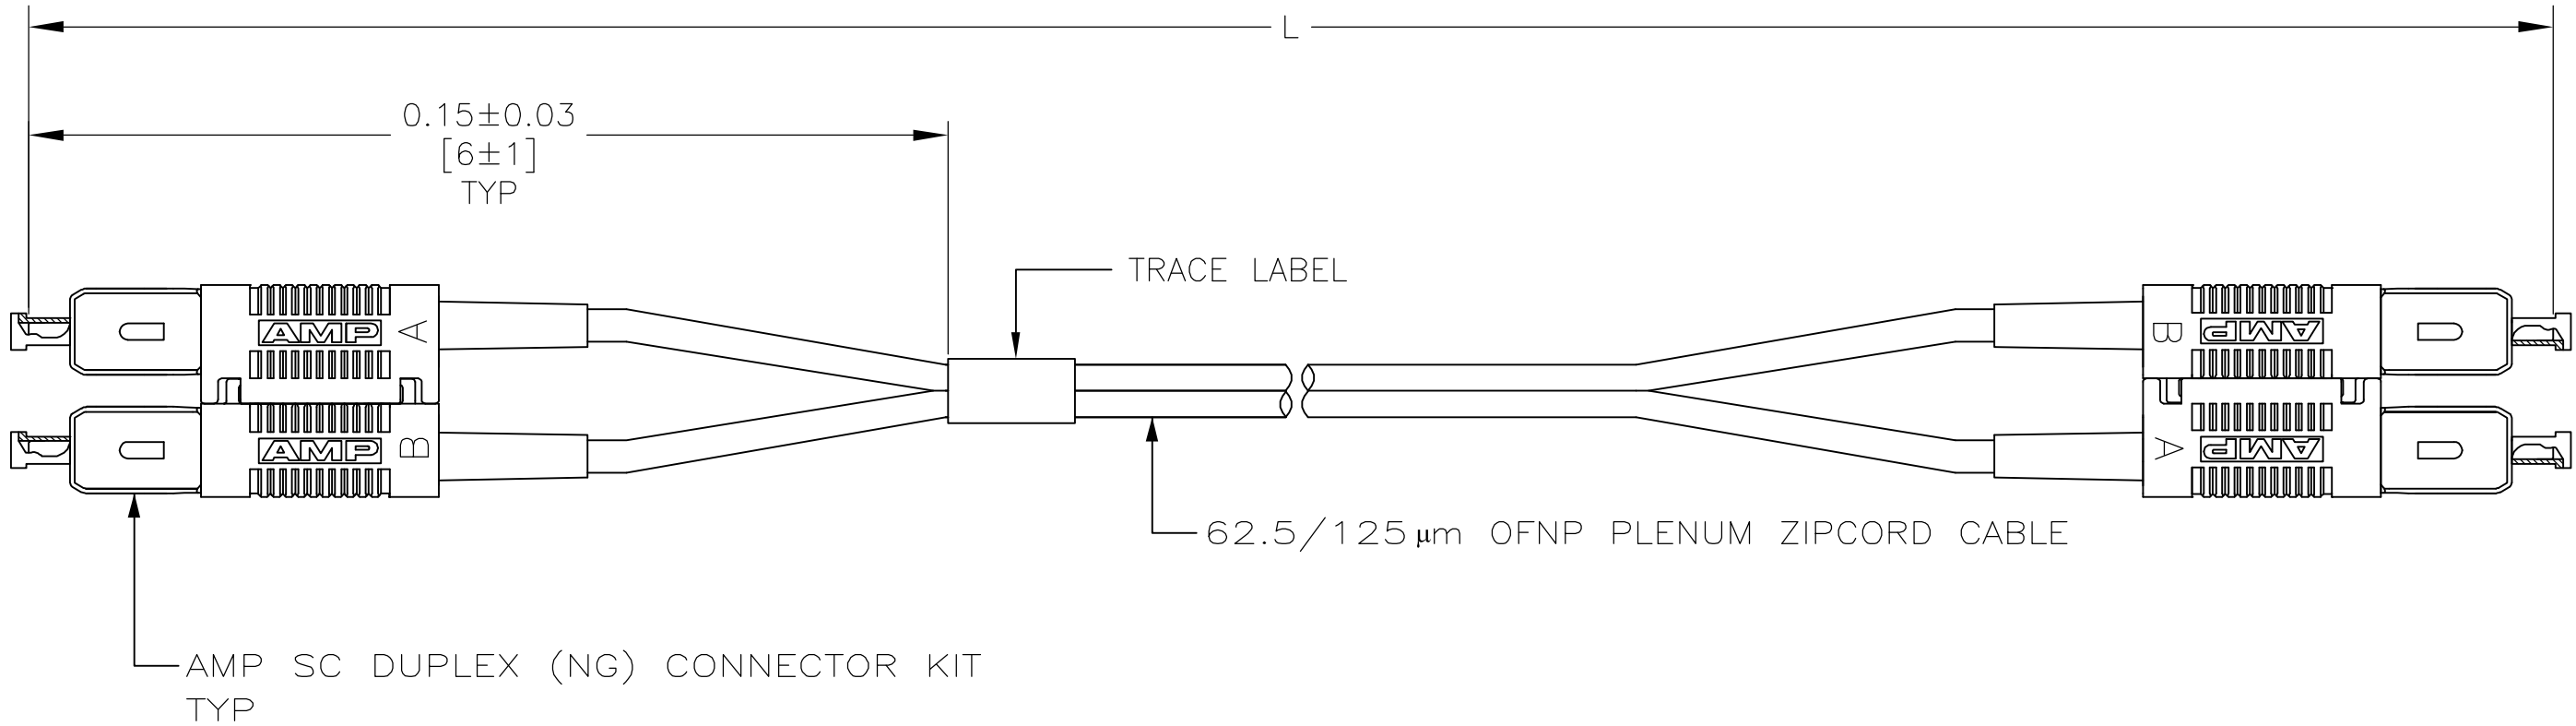

0.65	100.00±1.00 [3937.0±39.0]	9–6374039–9
0.57	50.00±0.50 [1969.0±20.0]	5–6374039–0
0.54	30.00±0.30 [1181.0±12.0]	3–6374039–0
0.53	20.00±0.30 [590.6±12.0]	2–6374039–0
0.52	14.00±0.15 [551.2±6.0]	1–674039–6
0.52	15.00±0.15 [590.6±6.0]	1–6374039–5
0.51	12.00±0.15 [472.4±6.0]	1–6374039–4
0.51	11.00±0.15 [433.1±6.0]	1–6374039–3
0.51	7.00±0.08 [275.6±3.0]	1–6374039–2
0.52	16.45±0.30 [648.0±12.0]	1–6374039–1
0.51	10.00±0.15 [394.0±6.0]	1–6374039–0
0.52	13.41±0.15 [528.0±6.0]	6374039–9
0.51	12.19±0.15 [480.0±6.0]	6374039–8
0.51	9.75±0.15 [384.0±6.0]	6374039–7
0.50	4.57±0.08 [180.0±3.0]	6374039–6
0.51	5.00±0.08 [197.0±3.0]	6374039–5
0.50	3.00±0.05 [118.0±2.0]	6374039–3
0.50	2.00±0.05 [79.0±2.0]	6374039–2
0.50	1.00±0.05 [39.0±2.0]	6374039–1

1 MAX IL (dB)	L	PART NUMBER
---------------	---	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 25 OCT 05	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608					
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 25 OCT 05	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125µm PLENUM ZIP, AMP SC DUPLEX FIBER CHANNEL, OPTIMATE -					
		APVD J.DUNCAN 25 OCT 05						
		PRODUCT SPEC -	SIZE A2			CAGE CODE 00779	DRAWING NO C=6374039	RESTRICTED TO -
MATERIAL -		APPLICATION SPEC -	WEIGHT -			SCALE NTS		
		FINISH -	CUSTOMER DRAWING			SHEET 1	OF 1	REV A