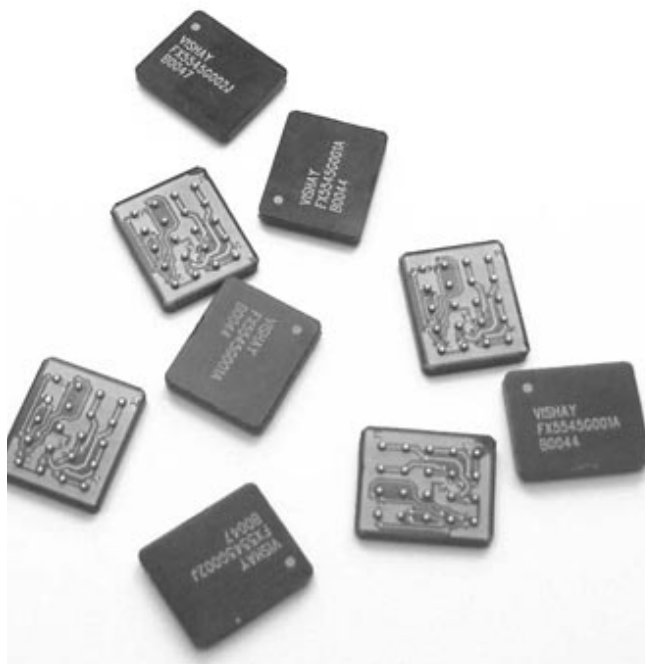


Industry Smallest and Low Profile 12W 2A DC/DC Boost Converter with High Output Power Density



FEATURES

- Fully integrated DC/DC converter
- High efficiency over large load range
- 100% duty cycle
- Power density - more than 440W/inch³
- 1µA shutdown current
- 2.5V to 6V input range (1Li+ and 3-cell NiCd or NiMH cells)
- 3.3V to 6V output voltage
- Programmable PWM/PSM controls
- Low output ripple
- BGA construction
- Temperature range: - 40°C to + 85°C
- No external components needed
- Output power 12W
- Maximum current 2A
- Low profile
- UL recognized component E250930



Available

RoHS*
COMPLIANT


The DC/DC converter is a programmable topology synchronized Boost converter for today's continuous changing portable electronic market. The DC/DC converter provides flexibility of utilizing various battery configurations and chemistries such as NiCd, NiMH, or Li+ with an input voltage range of 2.5V to 6V. An additional flexibility is provided with topology programmability to power multiple loads such as power amplifiers, microcontrollers, or base band logic IC's. For ultra-high efficiency, converters are designed to operate in synchronous rectified PWM mode under full load while transforming into externally controlled pulse-skipping mode (PSM) under light load.

The DC/DC converter is available in 20-ports BGA package. In order to satisfy the stringent ambient temperature requirements, the DC/DC converter is designed to handle the industrial temperature range of - 40°C to + 85°C.

APPLICATION


- Point of Load (POL) applications such as drivers for FPGA's, microprocessors, DSP's amplifiers, etc.
- Cordless phones, PDAs and others
- Supply voltage source for low-voltage chip sets
- Portable computers
- Battery back-up supplies
- Cameras

ORDERING INFORMATION


	FX	5545	G106	☐	☐	☐	☐	☐	☐
FUNCTION									
SIZE									
CIRCUIT IDENTIFIER									
OUTPUT VOLTAGE - Output Voltage-Example: 2.7V should be written as 2V7 as the V indicates the decimal point, or ADJ for adjustable version - self selectable output voltage.									
PACKAGING - B1 = 10pcs in bulk; B5 = 50pcs in bulk; T1 = 13" reel; T2 = 7" reel.									
For lead (Pb)-free solder please add E2 suffix. Leave blank for regular SnPb.									

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]	
L	0.58 ± 0.01 [14.7 ± 0.25]
W	0.48 ± 0.01 [12.2 ± 0.25]
A	0.1 ± 0.01 [2.54 ± 0.25]
B	0.09 ± 0.01 [2.29 ± 0.25]
C	0.09 ± 0.01 [2.27 ± 0.25]
T	0.126 max [3.2 max]
Ball Diameter	0.03 ± 0.001 [0.762 ± 0.025]

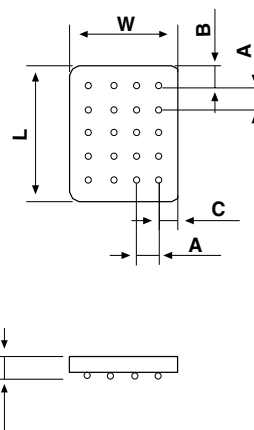

BOTTOM SIDE

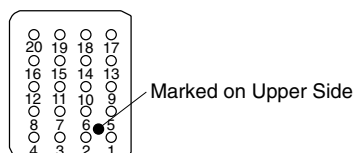


*Note: Pin Description application note is available at www.vishay.com/doc?10119

**Note: if not used must be connected to Vin.

PIN CONFIGURATION*

PIN	CONNECTION
1, 2	$\overline{SD}$
3, 7	SYNC**
4, 8	N/C
5, 9	Vin
6, 10	PWM/PSM
11, 12	N/C
13, 17	GND
14, 18	Vout
15, 19	N/C
16, 20	GND

RECOMMENDED PAD PATTERN in inches [millimeters]		
A	D	F
0.1 ± 0.01 [2.54 ± 0.25]	0.03 ± 0.001 [0.8 ± 0.02]	0.02 ± 0.001 [0.5 ± 0.02]



TAPE AND REEL


See Tape and Reel Information - Type B



STANDARD ELECTRICAL SPECIFICATIONS					
PARAMETER	UNIT	CONDITION	MIN	TYP	MAX
Input					
Voltage Range	V _{DC}		2.5		6
Quiescent Current	μA	$\overline{\text{PSM}}$ mode		200	
Soft Start Time	ms	T _{SS} for V _{out} = 6.0V		22	
		T _{SS} for V _{out} = 5.0V		22	
		T _{SS} for V _{out} = 3.3V		19	
SD, PWM/PSM, SYNC					
Logic High	V	V _H	2.4		
Logic Low	V	V _L			0.8
Normal Mode	μA	I _{DD}			750
$\overline{\text{PSM}}$ Mode	μA	I _{DD}			250
Shutdown Mode	μA	I _{DD}			1
Shutdown Time	ms	T _{SS} for V _{out} = 6.0V		15	
		T _{SS} for V _{out} = 5.0V		14	
		T _{SS} for V _{out} = 3.3V		14	
Insulation					
Test Voltage	V _{AC}	60Hz 60sec	750		
Resistance	Ω	V _{ISO} = 500 V _{DC}	1 x 10 ¹¹		
Leakage Current	nA	V _{ISO} = 500 V _{DC}			5
Output					
Power	W			12	
Voltage	V _{DC}			3.3 to 6	
Voltage Tolerance	%	at 25°C Ambient Temperature	- 3		3
Temp. Coefficient	%/°C				0.03
Ripple and Noise	mVpp	DC to 20 MHz		65	
General					
Package Weight	gr.				1.5
Oscillator					
Frequency	KHz			670	
SYNC Range	KHz	F _{SYNC} /F _{OSC}	1.2		1.5
Temperature					
Operation	°C		- 40		+ 85
Storage	°C		- 55		+ 125
Operating Junction Temp.	°C	T _J		150	
Thermal Impedance	°C/W _D *	θ _{JA}		82	


*Note: W_D = Power Dissipated

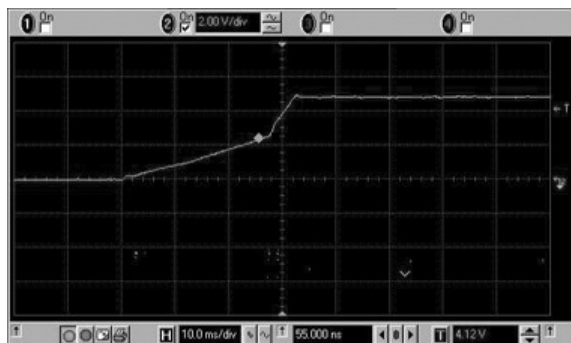Rise Time




Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A

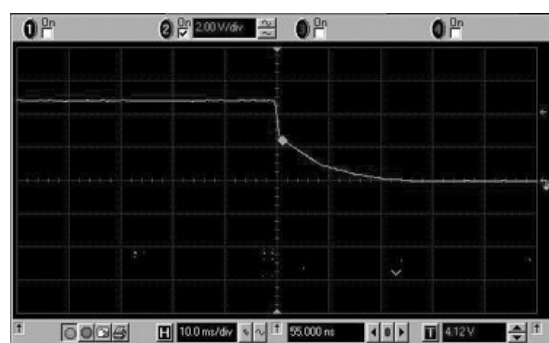
Fall Time



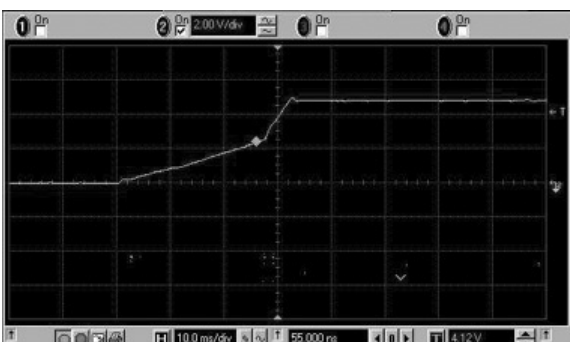
Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A



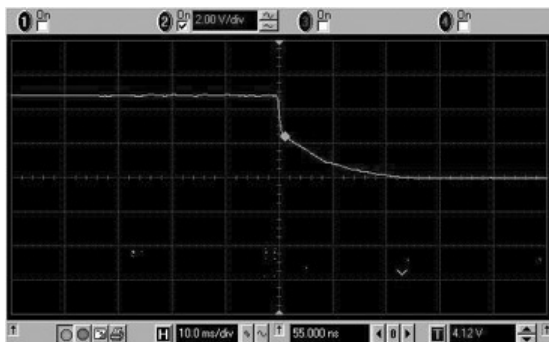
Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A



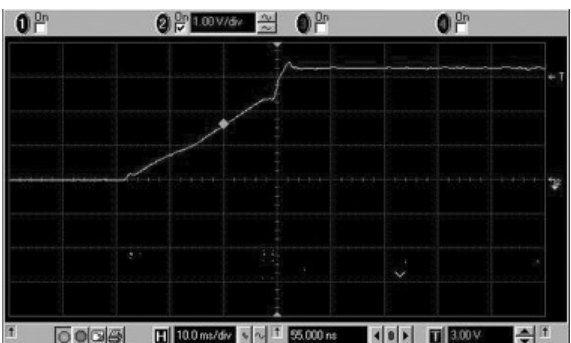
Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A



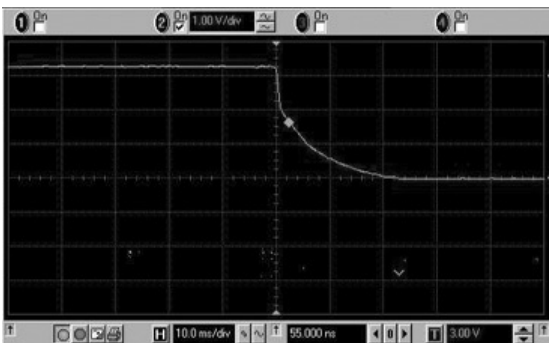
Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A










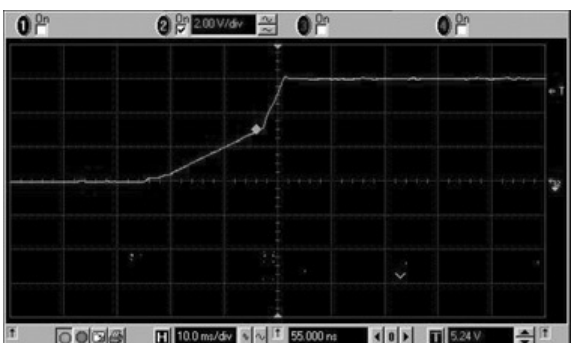
Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A











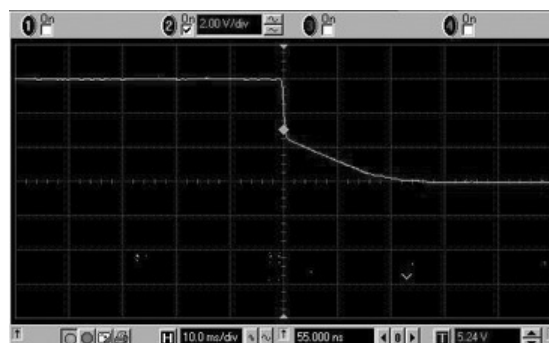Rise Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A



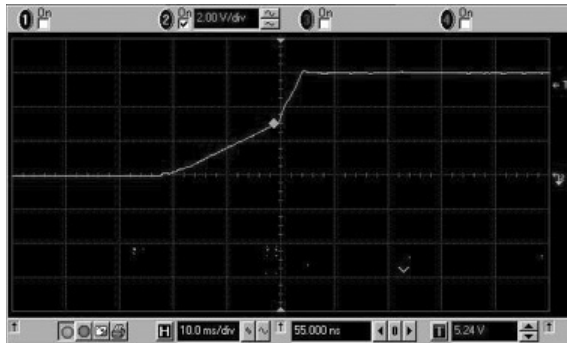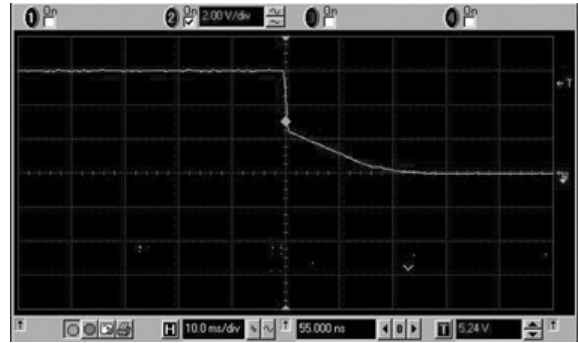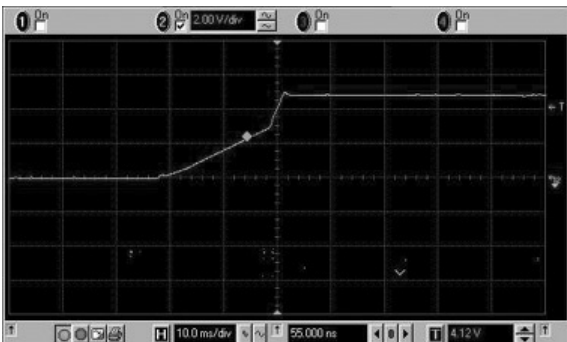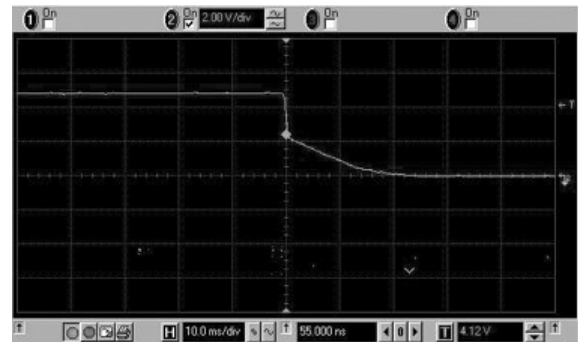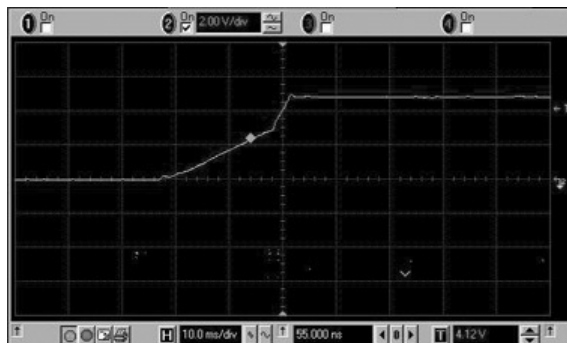
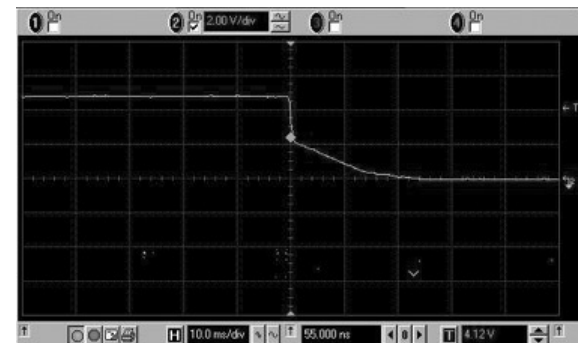
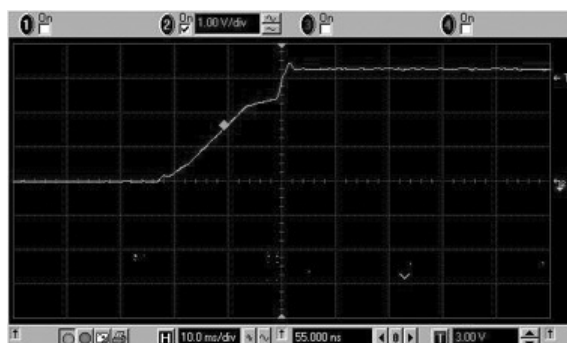
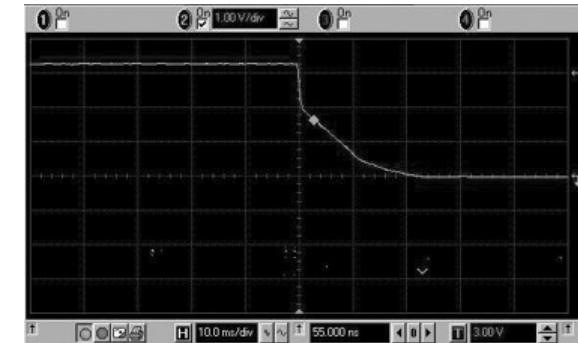
Fall Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A

Rise Time

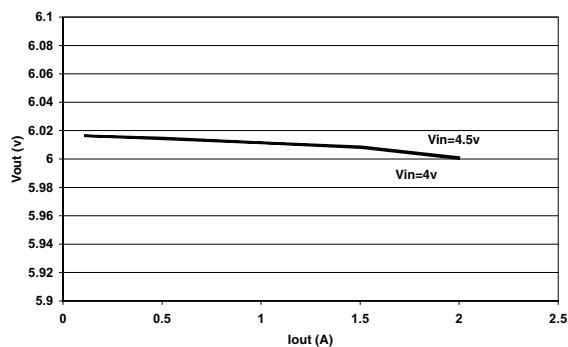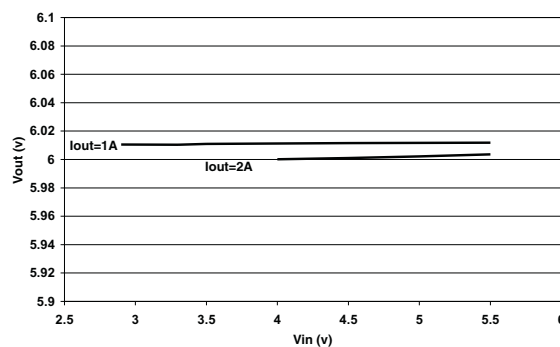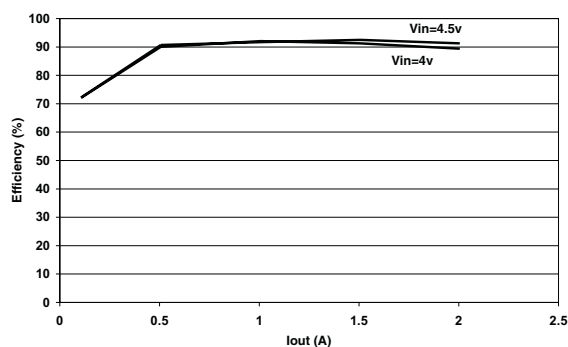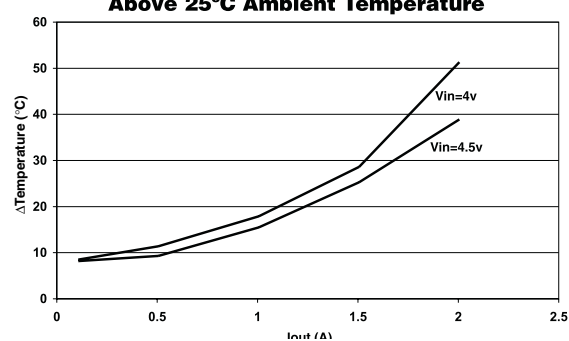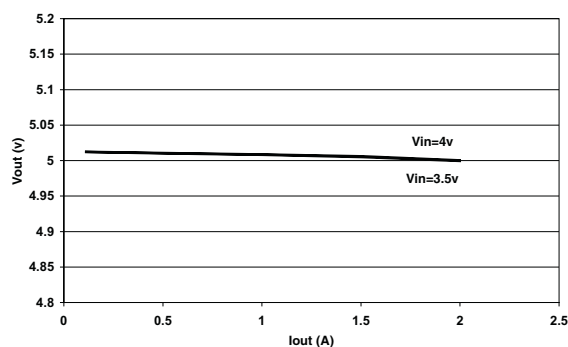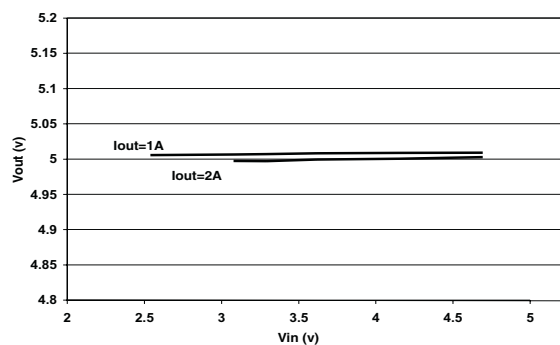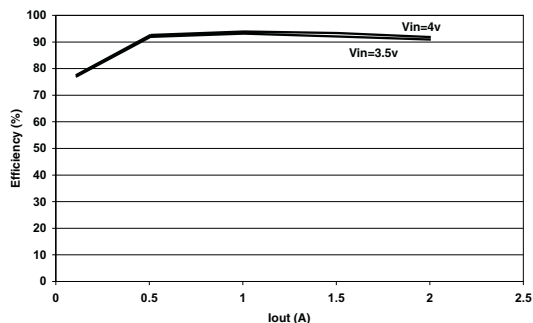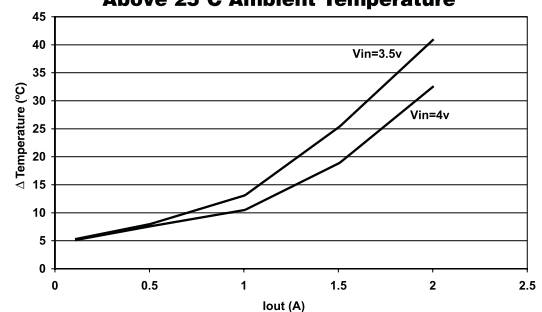Rise Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A
Fall Time

Fall Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A

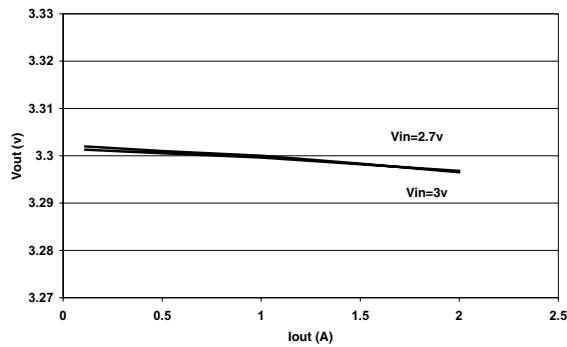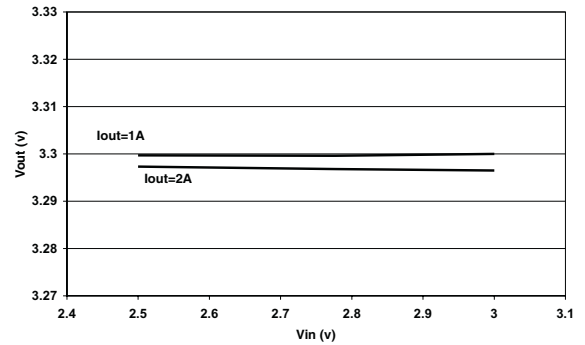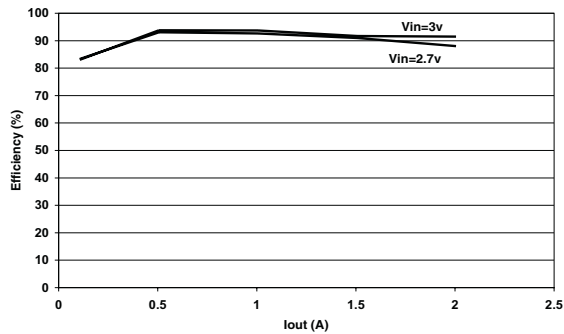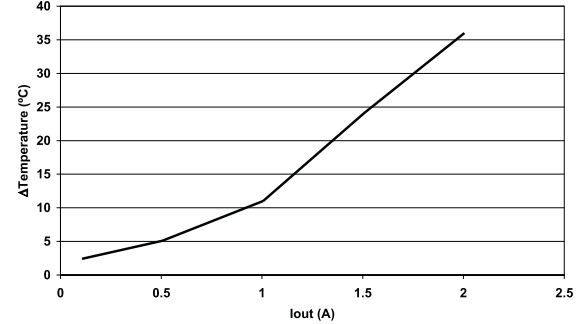Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A

Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A

Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A

Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A

Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A

Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A

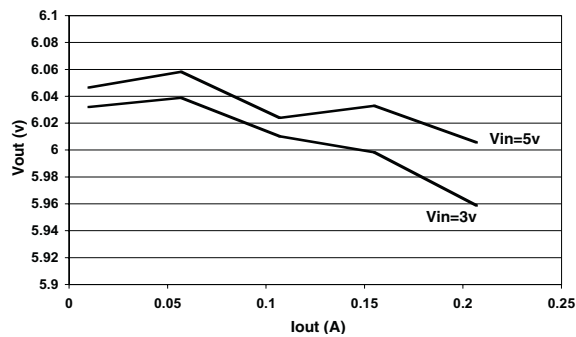
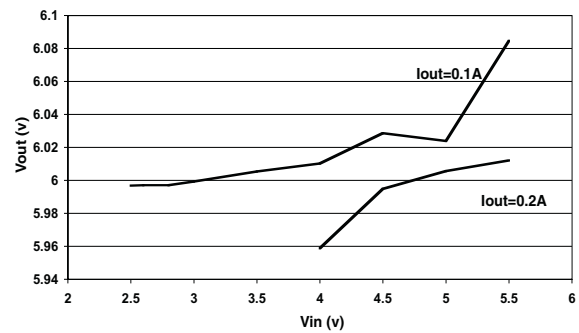
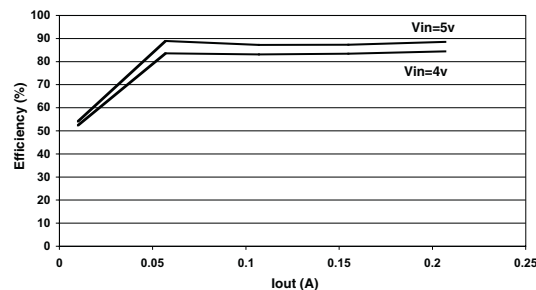
PWM MODE 6V**Vout vs. Iout *****Vout vs. Vin *****Efficiency vs. Iout *****Δ Temperature vs. Iout ***
Above 25°C Ambient Temperature**PWM MODE 5V****Vout vs. Iout *****Vout vs. Vin *****Efficiency vs. Iout *****Δ Temperature vs. Iout ***
Above 25°C Ambient Temperature

*Note: Measurements were taken with Power supply: ZUP 20-40 from Nemic Lambda; Electronic load: 6063B from Agilent; Multimeter: Fluke 45 from Fluke and 34401 digital multimeter from Agilent; Scope: Infiniium 54815A from Agilent.







PWM MODE 3.3V

Vout vs. Iout *

Vout vs. Vin *

Efficiency vs. Iout *

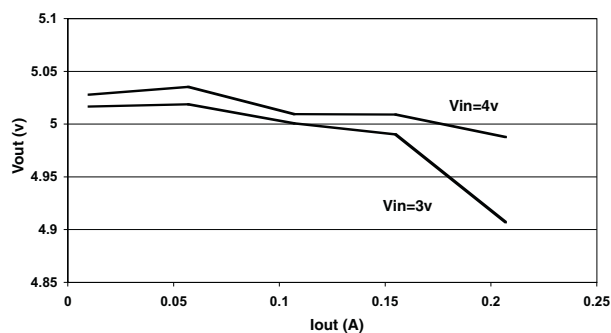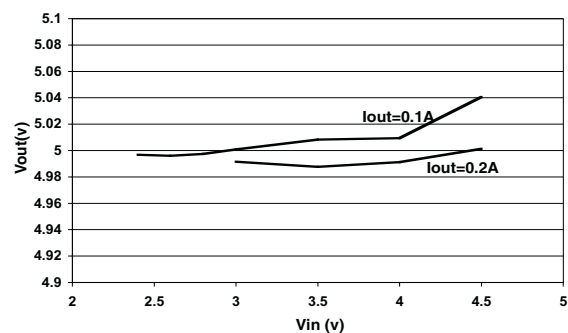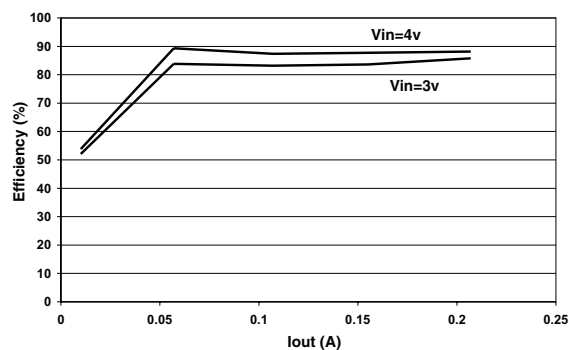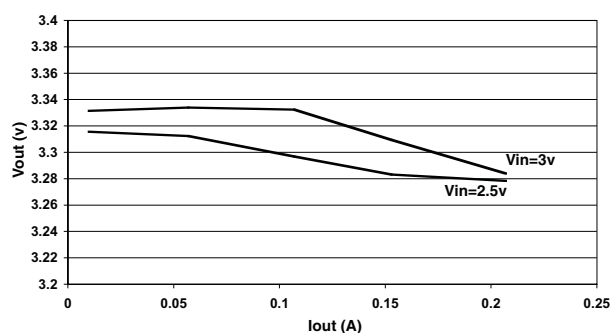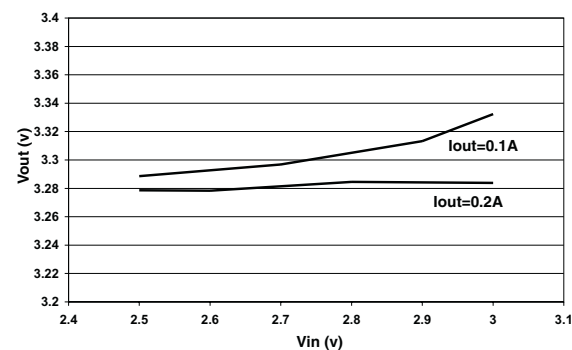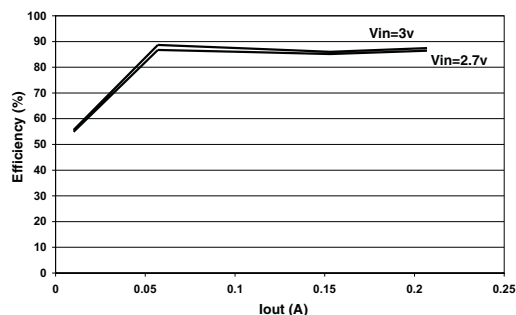Δ Temperature vs. Iout *
Above 25°C Ambient Temperature; Vin=2.5V


PSM MODE 6V

Vout vs. Iout *

Vout vs. Vin *

Efficiency vs. Iout *


*Note: Measurements were taken with Power supply: ZUP 20-40 from Nemic Lambda; Electronic load: 6063B from Agilent; Multimeter: Fluke 45 from Fluke and 34401 digital multimeter from Agilent; Scope: Infiniium 54815A from Agilent.

PSM MODE 5V**Vout vs. Iout *****Vout vs. Vin *****Efficiency vs. Iout *****PSM MODE 3.3V****Vout vs. Iout *****Vout vs. Vin *****Efficiency vs. Iout ***

*Note: Measurements were taken with Power supply: ZUP 20-40 from Nemic Lambda; Electronic load: 6063B from Agilent; Multimeter: Fluke 45 from Fluke and 34401 digital multimeter from Agilent; Scope: Infiniium 54815A from Agilent.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.