

- Structure** : Silicon Monolithic Integrated Circuit
- Product** : Built-in input selector, High voltage 6ch electric volume IC
- Type** : **BD3433K**
- Feature** : •Input selector, Input gain adjustor, 6ch independent control volume by soft switching, 2 output gain adjustor
•Differential input circuit, volume by soft-switching, mixing-switch for monaural signal

○Absolute maximum rating: (Ta=25°C)

Item	Symbol	Terminal	Rating	Unit
Terminal applied voltage	VCC-GND	※1	10	V
	VEE-GND	※1	-10	
	VLGC	Control terminal (CS/SCK/SDA) ※1	5.5	
Power dissipation	Pd	※2	850	mW
Operating Temperature	Topr		-40 ~ +85	°C
Storage Temperature	Tastg		-55 ~ +125	°C

※1: Maximum applied voltage based on GND.

※2: Derating is done 8.5mW/°C for Ta>25°C.

Mounted on (Material: FR4 glass epoxy board (beaten-copper area <3%), size:70mm × 70mm × 1.6mm)

※3: No radiation-proof design

○Operating Voltage: (Operating condition at Ta=25°C)

Item	Symbol	Terminal	Condition	MIN	TYP	MAX	Unit
Operating power supply voltage	VCC	VCC-GND	※1	7.0	9	9.5	V
	VEE	VEE-GND		-9.5	-9	-7.0	V

※1: When it is within operating temperature, basic circuit function is guaranteed within operating voltage. However, setting constant and element, voltage setting, and temperature setting are required when in operation. Other than the condition stipulated within the range, the standard value of electrical characteristics could not be guaranteed, while original function is retained.

Status this document

This Japanese version of this document is the formal specification.

A customer may use this translation version only for reference to help reading the formal version.

If there are any differences in translation version of this document, formal version takes priority.

Electrical Characteristics:

Abbreviations:

“G_{iaj}”: Setting value of Input gain adjustor

“Vol.Ex”: Setting value of volume for monaural signal

“Goajb”: Setting value of output gain adjustor B

“Vol”: Setting value of volume (1~6ch)

“Goaja”: Setting value of output gain adjustor A

“Mix”: ON/OFF setting for mixing switch.

Measurement condition (Unless specified particularly) :

T_a=25°C, V_{CC}=9V, V_{EE}=-9V, V_{in}=1V_{rms}/1kHz, Load resistance=10kΩ, Load capacitance=10pF,

G_{iaj}=0dB, Vol=0dB, Goaja=0dB, Goajb=0dB, Vol.Ex=-∞dB, Mix=OFF

General characteristics

Item	Symbol	Condition	MIN	TYP	MAX	Unit
Current consumption	ICC		-	10	17	mA
	IEE		-17	-9	-	
VCO oscillation frequency	F _{vco}		-	400	-	kHz
Ripple rejection	RR _c	Ripple = 0.1V _{rms} / 1kHz (Input terminal AC short)	40	85	-	dB
	RR _e	Ripple= 0.1V _{rms} / 1kHz (Input terminal AC short)	30	70	-	dB
Reset operation voltage	V _{RS}	Initialize all register data by V _{CC} <V _{RS} → V _{CC} >V _{RS}	-	3.4	-	V
Required time for Power on reset	TPOR	Minimum required time to reach 3V after V _{CC} voltage ON.	20	-	-	μsec

Logic circuit

Item	Symbol	Terminal	MIN	TYP	MAX	Unit
“H” level input voltage	V _{IH}	CS, SCK, SDA	2.3	-	5.5	V
“L” level input voltage	V _{IL}	CS, SCK, SDA	0	-	1.0	V
Input clock frequency	f _{SCK}	SCK	-	-	1.5	MHz

Volume circuit

Item	Symbol	Condition		MIN	TYP	MAX	Unit
Voltage gain	GV			-1	0	1	dB
Bandwidth	FW	Frequency, which drop -1dB towards 1kHz		100	-	-	kHz
Slew rate	SR			-	1.65	-	V/μsec
Maximum input voltage	VIM	THD+N = 1% , Vol = -10dB		3.8	4.25	-	Vrms
Maximum output voltage	VOM1	THD+N = 1% Vol = +10dB		3.8	4.25	-	Vrms
	VOM2		Goaja=+2.5dB	5	5.6	-	
	VOM3		Goajb=-4.5dB	2.2	2.5	-	
Input impedance	RI			70k	100k	130k	Ω
Output impedance	RO			-	-	50	Ω
Input gain setting value error	EGI	Output reference is G _{iaj} =0dB G _{iaj} =6、12 dB, V _{in} =0.1Vrms		-1	0	1	dB
Volume setting value error	EV1	Vol=0dB Output standard	Vol=+23~-+1, -1~-20dB (+23~-+1dB 時 V _{in} =0.1Vrms)	-1.0	0	1.0	dB
	EV2		Vol=-21~-40dB	-1.5	0	1.5	
	EV3		Vol=-41~-60dB	-2.0	0	2.0	
	EV4		Vol=-61~-79dB	-3.0	0	3.0	
Volume maximum attenuation	VMU	Vol=-∞dB (mute) , BW=20~20kHz		-	-108	-85	dB
Output gain setting value error	EGOA	Goaja=0dB Goajb=0dB Output standard	Goaja=+2.5dB	-1	0	1	dB
	EGOB		Goajb=-4.5dB	-1	0	1	
Gain balance between channels	CB			-1	0	1	dB
Cross-talk between channels	CTC	BW=20~20kHz (Input terminal AC short)		85	106	-	dB
Output noise voltage	VNO	BW=A-Weight (Input terminal AC short)	Vol=0dB	-	2.5	10	μVrms
Residual output noise voltage	VNR		Vol=-∞dB	-	2	10	
THD+N	THD	BW=20~20kHz, V _{out} =1Vrms		-	0.001	0.05	%
Soft switching transition time	Tss1	Soft switching:ON	0.64 msec/dB	-	0.64	-	msec /dB
	Tss2		1.28 msec/dB	-	1.28	-	
	Tss3		2.56 msec/dB	-	2.56	-	
	Tss4		5.12 msec/dB	-	5.12	-	


■ Monaural signal circuit

Common condition unless specified particularly :

Vol=-∞dB, G_{iaj}=G_{oaja}=G_{oajb}=0dB, Vol.Ex=0dB, Mix=ON

Item	Symbol	Condition	MIN	TYP	MAX	Unit
Voltage gain	G _{Ve}	Phase inversion between input and output	-1.0	0	1.0	dB
Maximum input voltage	V _{IME}	THD+N=1%, Vol.Ex=-10dB	3.8	4.25	-	V _{rms}
Input impedance	R _{Ie}		19	27	35	kΩ
Volume setting value error	E _{Ve1}	Vol.Ex=0dB Output standard Vol=+15~-1, -1~-20dB (+15~-1dB 時 Vin=0.1V _{rms})	-1.0	0	1.0	dB
	E _{Ve2}		-1.5	0	1.5	
	E _{Ve3}		-2.0	0	2.0	
	E _{Ve4}		-3.0	0	3.0	
Volume maximum attenuation	V _{MUe}	Vol.Ex=-∞dB (mute), BW=20~20kHz	-	-108	-85	dB
Output noise voltage	V _{NOe}	BW=A-Weight Vol.Ex = 0dB	-	4.5	15	μV _{rms}
Residual noise voltage	V _{NRe}	(Input terminal AC short) Vol.Ex = -∞dB	-	3.5	10	
THD+N	THD _e	BW=20~20kHz, V _{out} =1V _{rms}	-	0.002	0.05	%
Common-mode signal rejection ratio	CMRR	BW=20~20kHz	40	60	-	dB
Soft switching transition time	T _{sse1}	Soft switching:ON	0.64 msec/dB	-	0.64	msec /dB
	T _{sse2}		1.28 msec/dB	-	1.28	
	T _{sse3}		2.56 msec/dB	-	2.56	
	T _{sse4}		5.12 msec/dB	-	5.12	

○Timing chart:

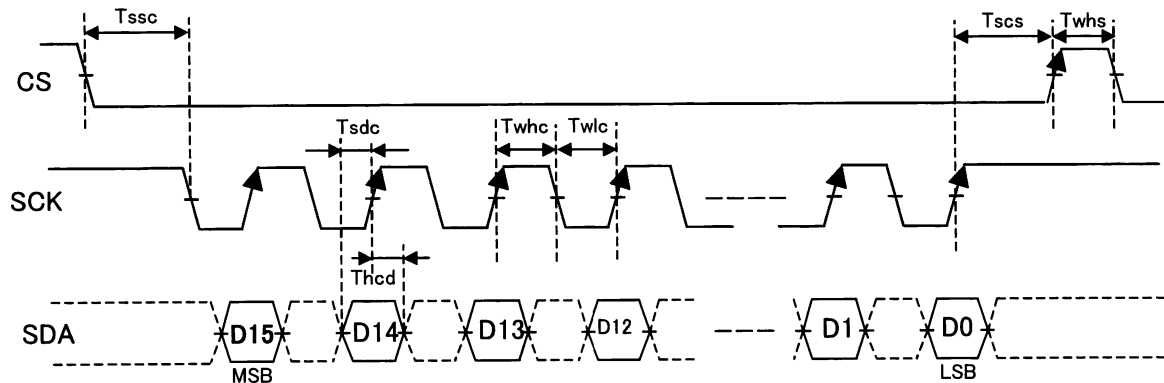


•When CS is "Low", enable micro computer control data (SCK/SDA). (It doesn't work, when it is "High").

•Data (SDA) reads at a leading edge of clock (SCK).

•Latch reads at a leading edge of CS. (SCK has to be kept as "High" after D0 acquisition)


○External Dimension: QFP44 (Unit:mm)

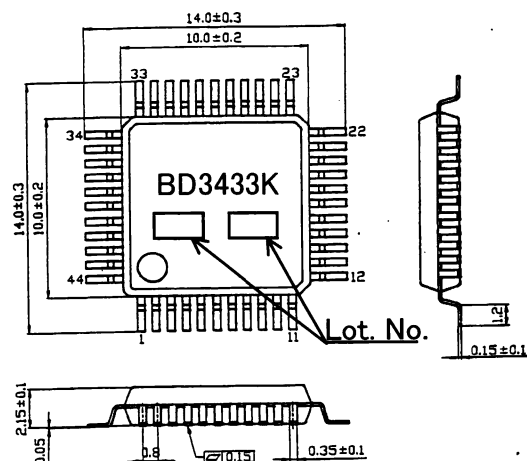

○Terminal Number, Terminal name:

Terminal Number	Terminal name	Terminal Number	Terminal name	Terminal Number	Terminal name	Terminal Number	Terminal name
1	AGNDE	12	INBFR	23	OUTAFR	34	DGND
2	INAFRL	13	AGND4	24	OUTAC	35	SDA
3	INAFR	14	INBC	25	OUTASW	36	SCK
4	AGND1	15	INBSW	26	OUTARL	37	CS
5	INAC	16	AGND5	27	OUTARR	38	TEST
6	INASW	17	INBRL	28	OUTBFL	39	ADJ
7	AGND2	18	INBRR	29	OUTBFR	40	VEE
8	INARL	19	AGND6	30	OUTBC	41	AGNDM
9	INARR	20	SOUTRL	31	OUTBSW	42	VCC
10	AGND3	21	SOUTRR	32	OUTBRL	43	INEX+
11	INBFL	22	OUTAFL	33	OUTBRR	44	INEX-

○Block diagram:

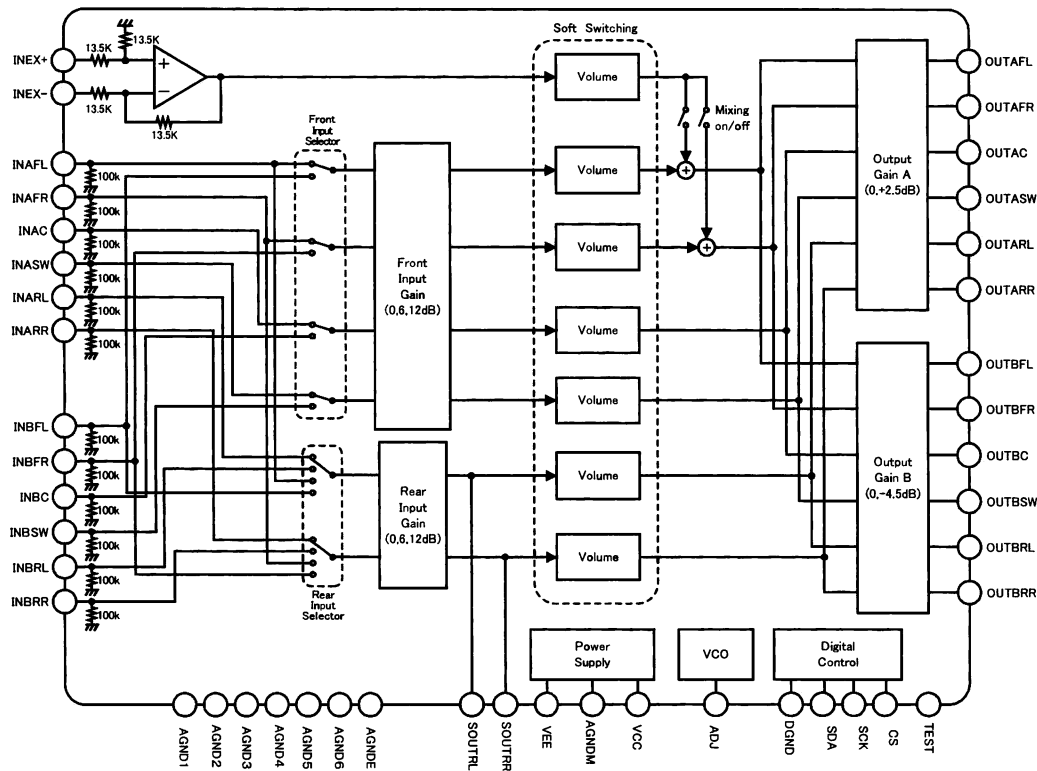

○Application Instruction

- Absolute Maximum Ratings;**
It may cause failure if operation is beyond absolute maximum ratings of applied voltage or operating temperature. In case of failure, it is not possible to set short mode or open mode. If particular mode requires beyond absolute maximum ratings, please take a physical safety measure.
- VEE electrical potential**
Please minimize electrical potential of VEE terminal under any operational condition.
- Thermal design**
Please consider power dissipation (Pd) on actual operational condition and provide enough margins for thermal design.
- Operation in intense electric field**
Please note that malfunction may occur if operation is under intense electric field.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available,
please contact your nearest sales office.

Please contact our sales offices for details ;

U.S.A / San Diego	TEL : +1(858)625-3630	FAX : +1(858)625-3670
Atlanta	TEL : +1(770)754-5972	FAX : +1(770)754-0691
Dallas	TEL : +1(972)312-8818	FAX : +1(972)312-0330
Germany / Dusseldorf	TEL : +49(2154)9210	FAX : +49(2154)921400
United Kingdom / London	TEL : +44(1)908-282-666	FAX : +44(1)908-282-528
France / Paris	TEL : +33(0)1 56 97 30 60	FAX : +33(0) 1 56 97 30 80
China / Hong Kong	TEL : +852(2)740-6262	FAX : +852(2)375-8971
Shanghai	TEL : +86(21)6279-2727	FAX : +86(21)6247-2066
Dalian	TEL : +86(411)8230-8549	FAX : +86(411)8230-8537
Beijing	TEL : +86(10)8525-2483	FAX : +86(10)8525-2489
Taiwan / Taipei	TEL : +866(2)2500-6956	FAX : +866(2)2503-2869
Korea / Seoul	TEL : +82(2)8182-700	FAX : +82(2)8182-715
Singapore	TEL : +65-6332-2322	FAX : +65-6332-5662
Malaysia / Kuala Lumpur	TEL : +60(3)7958-8355	FAX : +60(3)7958-8377
Philippines / Manila	TEL : +63(2)807-6872	FAX : +63(2)809-1422
Thailand / Bangkok	TEL : +66(2)254-4890	FAX : +66(2)256-6334

Japan /
(Internal Sales)

Tokyo	2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082	
	TEL : +81(3)5203-0321	FAX : +81(3)5203-0300
Yokohama	2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575	
	TEL : +81(45)476-2131	FAX : +81(45)476-2128
Nagoya	Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002	
	TEL : +81(52)581-8521	FAX : +81(52)561-2173
Kyoto	579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216	
	TEL : +81(75)311-2121	FAX : +81(75)314-6559
(Contact address for overseas customers in Japan)		
Yokohama	TEL : +81(45)476-9270	FAX : +81(045)476-9271