

LEADED SPXOs

- Disable current 50μA typical

Marking

- Model number + Operating Temperature Code (if applicable)

- Frequency Stability Code

- Frequency
- Date Code (Year/Week)

Minimum Order Information Required

- Frequency + Model Number + Operating Temperature (if applicable) + Frequency Stability

Outline in mm

-

Pin connections

1. N/C or Enable/Disable.
4. GND
5. Output
8. +Vs

-
- Diagram of a square plate with four holes. The overall width is 13.20. The distance between the centers of the left two holes is 7.62SQ. The holes are numbered 1, 4, 8, and 5.

Output Waveform - HCMOS/TTL

-

$$\text{Duty cycle} = \frac{t}{T} \times 100(\%)$$

- Terminal Strength: 0.91kg max. Force perpendicular to top & bottom
- Hermetic Seal: not to exceed 1×10^{-8} mBar litres of Helium leakage
- Solderability: MIL-STD-202E, Method 208C
- Vibration: 10 to 55Hz 0.76mm displacement, sweep 60 seconds, duration 2 hours
- Rapid Change of Temperature over Operating Temperature Range: 10 cycles
- Shock: 981 m/s^2 for 6ms, three shocks in each direction along the three mutually perpendicular planes

34

- Logic '0' to pin 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
- No connection or Logic '1' to pin 1 enables oscillator output
- Maximum 'pull-down' resistance required to disable output = 20k Ω

Electrical Specifications - maximum limiting values when measured in HCMOS test circuit.

Frequency Range	Frequency Stability	Supply Voltage	Supply Current	Rise Time(t_r)	Fall Time(t_f)	Duty Cycle	Model Number
500.0kHz to < 5.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	20mA	15ns	15ns	45/55%	IQX0-22, -22I, -23, -23I
5.0 to < 16.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	20mA	10ns	10ns	45/55%	IQX0-22, -22I, -23, -23I
16 to < 30.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	30mA	10ns	10ns	45/55%	IQX0-22, -22I, -23, -23I
30 to < 50.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	40mA	8ns	8ns	45/55%	IQX0-22, -22I, -23, -23I
50 to < 70.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	50mA	6ns	6ns	40/60%	IQX0-22, -22I, -23, -23I
70 to 160.0MHz	$\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$	$5V \pm 0.25V$	70mA	5ns	5ns	40/60%	IQX0-22, -22I, -23, -23I

Ordering Example

Frequency 22.0MHz

Model number IQX0-22I


Operating Temperature Code: I = -40 to 85°C Not applicable for 0 to 70°C

Frequency Stability: A = $\pm 25\text{ppm}$, B = $\pm 50\text{ppm}$, C = $\pm 100\text{ppm}$

Please note that the rise and fall times listed are the maximum values we specify to cover various frequency breaks. In practise the actual values are generally lower depending upon the spot frequency chosen. For typical values please contact our sales office.

LEADED SPX0s


Test Circuit - HCMOS

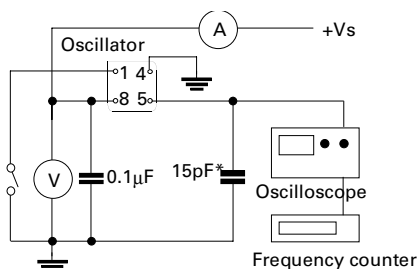

*Inclusive of jigging & equipment capacitance

Note: Pin 1 = No connection on non tri-state models

Test Circuit - TTL

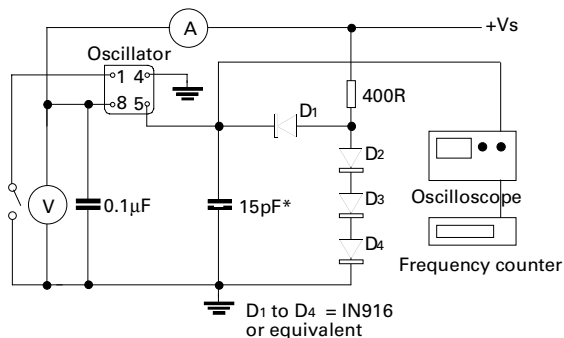

*Inclusive of jigging & equipment capacitance

Note: Pin 1 = No connection on non tri-state models