


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	B	Revised and Redrawn		1/11/93			JL	
1210	C	Drawing was TJ-200-*	JWM	7/19/01	JC	7/19/01	JC	7/19/01

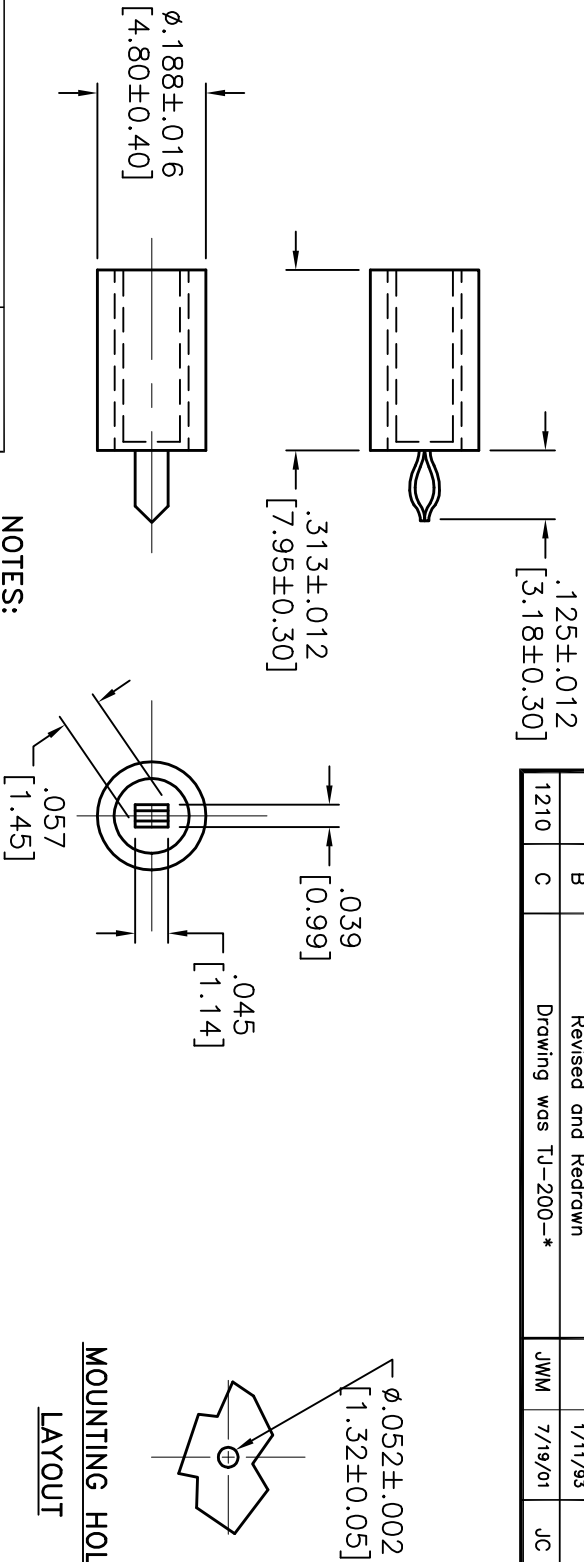

**MOUNTING HOLE
LAYOUT**

PART NUMBER	COLOR
TJ-200-BK	BLACK
TJ-200-BL	BLUE
TJ-200-GR	GREEN
TJ-200-R	RED
TJ-200-W	WHITE

- NOTES:**
1. MATERIAL:
CONTACT: BERYLLIUM COPPER
PER QQ-C-533
BODY: NYLON 66 PER ASTM D4066
 2. CONTACT FINISH: SILVER
 3. CURRENT RATING: 5 AMPS
 4. BREAKDOWN VOLTAGE: 3500 VRMS MIN.
 5. CONTACT RESISTANCE: .010 OHMS MAX.
 6. FLAMMABILITY: UL94V-2
SELF-EXTINGUISHING
 7. CONTINUOUS USE TEMPERATURE:
-40°F (-40°C) TO 185°F (85°C)
 8. ADJACENT JACK CAP.: 1 pF MAX AT 1 MHz
 9. FOR STANDARD TIP PLUG: $\phi .080$ "
 10. SPRING LOADED.
 11. CONTACT PROTECTED FROM FLUX AND SOLDER.
 12. FORMED CONTACT.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

DRAWING TITLE:				Vertical Test Jacks			
DRAWN BY:		DATE:		SIZE		ELECTRONIC FILE	
JP		1/11/93		A		TA-372.dwg	
CHECKED BY:		DATE:		DWG. NO.		REV	
JC		1/14/93		TA-372		C	
APPROVED BY:		DATE:		SCALE:		SHEET:	
JL		1/19/93		NTS		1 OF 1	

**Tolerances: Unless
Otherwise Specified:**
.X = $\pm .015$
.XX = $\pm .010$
.XXX = $\pm .005$

SPC-F005.DWG