BFP450

Linear Low Noise Silicon Bipolar RF Transistor

Datasheet

Revision 1.2, 2013-07-29

RF & Protection Devices

Edition 2013-07-29

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2013 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BFP450, Linear Low Noise Silicon Bipolar RF Transistor

Revision History: 2013-07-29, Revision 1.2

Page	Subjects (changes since previous revision)
	This datasheet replaces the revision from 2012-09-11. The product itself has not been changed and the device characteristics remain unchanged. Only the product description and information available in the datasheet have been expanded and updated.

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™; PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Table of Contents

Table of Contents 4
List of Figures 5
List of Tables 6
1 Product Brief 7
2 Features 8
3 Maximum Ratings 9
4 Thermal Characteristics 10
5 Electrical Characteristics 11
5.1 DC Characteristics 11
5.2 General AC Characteristics 11
5.3 Frequency Dependent AC Characteristics 12
5.4 Characteristic DC Diagrams 16
5.5 Characteristic AC Diagrams 19
6 Simulation Data 26
7 Package Information SOT343 27

List of Figures

Figure 4-1 Total Power Dissipation $P_{tot} = f(T_s)$ . . . 10
Figure 5-1 BFP450 Testing Circuit . . . 12
Figure 5-2 Collector Current vs. Collector Emitter Voltage $I_C = f(V_{CE})$, I_B = Parameter in mA . . . 16
Figure 5-3 DC Current Gain $h_{FE} = f(I_C)$, V_{CE} = 3 V . . . 16
Figure 5-4 Collector Current vs. Base Emitter Voltage $I_C = f(V_{BE})$, V_{CE} = 2 V . . . 17
Figure 5-5 Base Current vs. Base Emitter Forward Voltage $I_B = f(V_{BE})$, V_{CE} = 2 V . . . 17
Figure 5-6 Base Current vs. Base Emitter Reverse Voltage $I_B = f(V_{EB})$, V_{CE} = 2 V . . . 18
Figure 5-7 Transition Frequency $f_T = f(I_C)$, f = 1 GHz, V_{CE} = Parameter in V . . . 19
Figure 5-8 3rd Order Intercept Point $OIP3 = f(I_C)$, $Z_S = Z_L$= 50 Ω, V_{CE}, f = Parameters . . . 19
Figure 5-9 Collector Base Capacitance $C_{CB} = f(V_{CB})$, f = 1 MHz . . . 20
Figure 5-10 Gain G_{ma}, G_{ms}, $|S_{21}|^2 = f(f)$, V_{CE} = 3 V, I_C = 90 mA . . . 20
Figure 5-11 Maximum Power Gain $G_{max} = f(I_C)$, V_{CE} = 3 V, = Parameter in GHz . . . 21
Figure 5-12 Maximum Power Gain $G_{max} = f(V_{CE})$, I_C = 90 mA, = Parameter in GHz . . . 21
Figure 5-13 Input Matching $S_{11} = f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA . . . 22
Figure 5-14 Source Impedance for Minimum Noise Figure = $f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA . . . 22
Figure 5-15 Output Matching $S_{22} = f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA . . . 23
Figure 5-16 Noise Figure $NF_{min} = f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA, $Z_S = Z_{opt}$ . . . 23
Figure 5-17 Noise Figure $NF_{min} = f(I_C)$, V_{CE} = 3 V, $Z_S = Z_{opt}$= Parameter in GHz . . . 24
Figure 5-18 Noise Figure $NF_{50} = f(I_C)$, V_{CE} = 3 V, Z_S = 50 Ω= Parameter in GHz . . . 24
Figure 5-19 Comparison Noise Figure NF_{50} / NF_{min}= $f(I_C)$, V_{CE} = 3 V, f = 1.9 GHz . . . 25
Figure 7-1 Package Outline . . . 27
Figure 7-2 Package Footprint . . . 27
Figure 7-3 Marking Description (Marking BFP450: ANs) . . . 27
Figure 7-4 Tape Dimensions . . . 27

List of Tables

Table 3-1 Maximum Ratings 9
Table 4-1 Thermal Resistance 10
Table 5-1 DC Characteristics at T_A = 25 °C 11
Table 5-2 General AC Characteristics at T_A = 25 °C 11
Table 5-3 AC Characteristics, V_{CE} = 3 V, f = 150 MHz 12
Table 5-4 AC Characteristics, V_{CE} = 3 V, f = 450 MHz 13
Table 5-5 AC Characteristics, V_{CE} = 3 V, f = 900 MHz 13
Table 5-6 AC Characteristics, V_{CE} = 3 V, f = 1.5 GHz 14
Table 5-7 AC Characteristics, V_{CE} = 3 V, f = 1.9 GHz 14
Table 5-8 AC Characteristics, V_{CE} = 3 V, f = 2.4 GHz 15
Table 5-9 AC Characteristics, V_{CE} = 3 V, f = 3.5 GHz 15

1 Product Brief

The BFP450 is a high linearity wideband NPN bipolar RF transistor. The collector design supports voltages up to V_{CEO} = 4.5 V and currents up to I_C = 170 mA. With its high linearity at currents as low as 50 mA the device supports energy efficient designs. The typical transition frequency is approximately 24 GHz, hence the device offers high power gain at frequencies up to 3 GHz in amplifier applications. The device is housed in an easy to use plastic package with visible leads.

2 Features

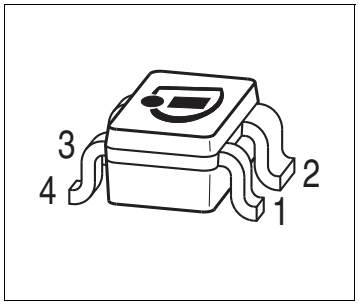

- Highly linear low noise driver amplifier for all RF frontends up to 3 GHz
- Based on Infineon´s reliable high volume 25 GHz silicon bipolar technology
- Output compression point OP_{1dB} = 19 dBm at 90 mA, 3 V, 1.9 GHz, 50 Ω system
- Output 3rd order intermodulation point $OIP3$ = 31 dBm at 90 mA, 3 V, 1.9 GHz, 50 Ω system
- Maximum available gain G_{ma} = 15.5 dB at 50 mA, 3 V, 1.9 GHz
- Minimum noise figure NF_{min} = 1.7 dB at 50 mA, 3 V, 1.9 GHz
- Pb-free (RoHS compliant) and halogen-free package with visible leads
- Qualification report according to AEC-Q101 available

RoHS

Applications Examples

Driver amplifier

- ISM bands 434 and 868 MHz
- 1.9 GHz cordless phones
- CATV LNA

Transmitter driver amplifier

- 2.4 GHz WLAN and Bluetooth

Output stage LNA for active antennas

- TV, GPS, SDARS, 2.4 GHz WLAN, etc

Suitable for 3 - 5.5 GHz oscillators

Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions

Product Name	Package	Pin Configuration				Marking
BFP450	SOT343	1 = B	2 = E	3 = C	4 = E	ANs

3 Maximum Ratings

Table 3-1 Maximum Ratings

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}				Open base
		–	4.5	V	T_A = 25 °C
		–	4.1	V	T_A = -55 °C
Collector emitter voltage	V_{CES}	–	15	V	E-B short circuited
Collector base voltage	V_{CBO}	–	15	V	Open emitter
Emitter base voltage	V_{EBO}	–	1.5	V	Open collector
Collector current	I_C	–	170	mA	–
Base current	I_B	–	10	mA	–
Total power dissipation[1)]	P_{tot}	–	500	mW	T_S ≤ 90 °C
Junction temperature	T_J	–	150	°C	–
Storage temperature	T_{Stg}	-55	150	°C	–

1) T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the pcb.

Attention: Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

4 Thermal Characteristics

Table 4-1 Thermal Resistance

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Junction - soldering point[1)]	R_{thJS}	–	120	–	K/W	–

1) For the definition of R_{thJS} please refer to Application Note AN077 (Thermal Resistance Calculation)

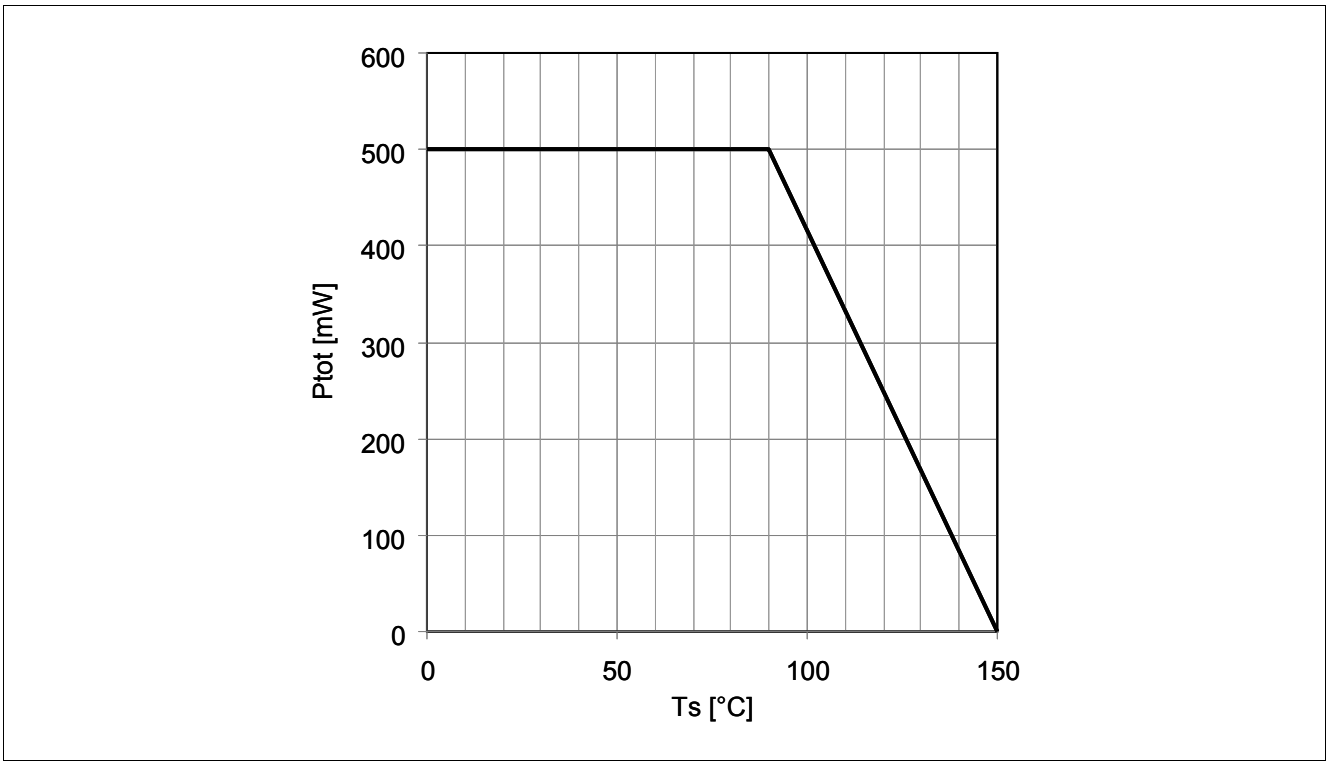

Figure 4-1 Total Power Dissipation $P_{tot} = f(T_s)$

5 Electrical Characteristics

5.1 DC Characteristics

Table 5-1 DC Characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(BR)CEO}$	4.5	5	–	V	I_C = 1 mA, I_B = 0 Open base
Collector emitter leakage current	I_{CES}	– –	– 1	1[1)] 30[1)]	µA nA	V_{CE} = 15 V, V_{BE} = 0 V_{CE} = 3 V, V_{BE} = 0 E-B short circuited
Collector base leakage current	I_{CBO}	–	1	30[1)]	nA	V_{CB} = 3 V, I_E = 0 Open emitter
Emitter base leakage current	I_{EBO}	–	0.05	3[1)]	µA	V_{EB} = 0.5 V, I_C = 0 Open collector
DC current gain	h_{FE}	60 50	95 85	130 120		V_{CE} = 4 V, I_C = 50 mA V_{CE} = 3 V, I_C = 90 mA Pulse measured

1) Maximum values not limited by the device but the short cycle time of the 100% test

5.2 General AC Characteristics

Table 5-2 General AC Characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Transition frequency	f_T	18	24	–	GHz	V_{CE} = 3 V, I_C = 90 mA, f = 1 GHz
Collector base capacitance	C_{CB}	–	0.48	0.8	pF	V_{CB} = 3 V, V_{BE} = 0 V f = 1 MHz Emitter grounded
Collector emitter capacitance	C_{CE}	–	1.2	–	pF	V_{CE} = 3 V, V_{BE} = 0 V f = 1 MHz Base grounded
Emitter base capacitance	C_{EB}	–	1.7	–	pF	V_{EB} = 0.5 V, V_{CB} = 0 V f = 1 MHz Collector grounded

5.3 Frequency Dependent AC Characteristics

Measurement setup is a test fixture with Bias T's in a 50 Ω system, T_A = 25 °C

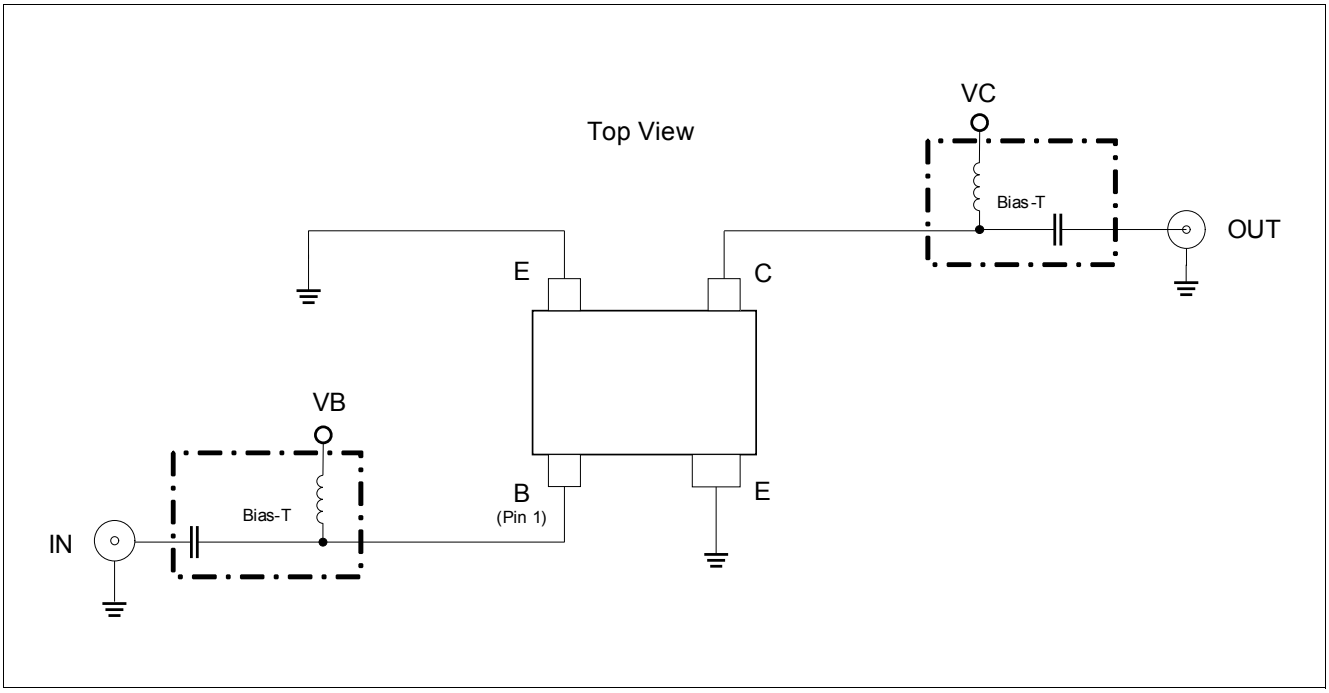

Figure 5-1 BFP450 Testing Circuit

Table 5-3 AC Characteristics, V_{CE} = 3 V, f = 150 MHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ms}	–	34.5	–		I_C = 50 mA
Class A operation point	G_{ms}	–	35.5	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	33	–		I_C = 50 mA
Class A operation point	S_{21}	–	33.5	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.55	–		I_C = 50 mA
Associated gain	G_{ass}	–	32	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	30.5	–		I_C = 90 mA

Table 5-4 AC Characteristics, V_{CE} = 3 V, f = 450 MHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ms}	–	28.5	–		I_C = 50 mA
Class A operation point	G_{ms}	–	29	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	25	–		I_C = 50 mA
Class A operation point	S_{21}	–	25	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.55	–		I_C = 50 mA
Associated gain	G_{ass}	–	27.5	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	30	–		I_C = 90 mA

Table 5-5 AC Characteristics, V_{CE} = 3 V, f = 900 MHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ms}	–	23	–		I_C = 50 mA
Class A operation point	G_{ms}	–	23.5	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	18.5	–		I_C = 50 mA
Class A operation point	S_{21}	–	19	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.6	–		I_C = 50 mA
Associated gain	G_{ass}	–	23	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	30.5	–		I_C = 90 mA

Table 5-6 AC Characteristics, V_{CE} = 3 V, f = 1.5 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ma}	–	18	–		I_C = 50 mA
Class A operation point	G_{ma}	–	18	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	14	–		I_C = 50 mA
Class A operation point	S_{21}	–	14	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.65	–		I_C = 50 mA
Associated gain	G_{ass}	–	17	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	31	–		I_C = 90 mA

Table 5-7 AC Characteristics, V_{CE} = 3 V, f = 1.9 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ma}	–	15.5	–		I_C = 50 mA
Class A operation point	G_{ma}	–	15.5	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	9.5	11.5	–		I_C = 50 mA
Class A operation point	S_{21}	–	11.5	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.7	–		I_C = 50 mA
Associated gain	G_{ass}	–	14	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	31	–		I_C = 90 mA

Table 5-8 AC Characteristics, V_{CE} = 3 V, f = 2.4 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ma}	–	13.5	–		I_C = 50 mA
Class A operation point	G_{ma}	–	13.5	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	9.5	–		I_C = 50 mA
Class A operation point	S_{21}	–	9.5	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	1.8	–		I_C = 50 mA
Associated gain	G_{ass}	–	12	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	19	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	30	–		I_C = 90 mA

Table 5-9 AC Characteristics, V_{CE} = 3 V, f = 3.5 GHz

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum power gain					dB	
High linearity operation point	G_{ma}	–	10	–		I_C = 50 mA
Class A operation point	G_{ma}	–	10	–		I_C = 90 mA
Transducer gain					dB	$Z_S = Z_L$ = 50 Ω
High linearity operation point	S_{21}	–	5.5	–		I_C = 50 mA
Class A operation point	S_{21}	–	6	–		I_C = 90 mA
Minimum noise figure					dB	$Z_S = Z_{opt}$
Minimum noise figure	NF_{min}	–	2.05	–		I_C = 50 mA
Associated gain	G_{ass}	–	9	–		I_C = 50 mA
Linearity					dBm	$Z_S = Z_L$ = 50 Ω
1 dB gain compression point	OP_{1dB}	–	18.5	–		I_C = 90 mA
3rd order intercept point	$OIP3$	–	29.5	–		I_C = 90 mA

Notes

1. *AC parameter limits verified by random sampling*
2. *In order to get the NF_{min} values stated in this chapter the test fixture losses have been subtracted from all measured result*
3. *$OIP3$ value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50 Ω from 0.2 MHz to 12 GHz.*

5.4 Characteristic DC Diagrams

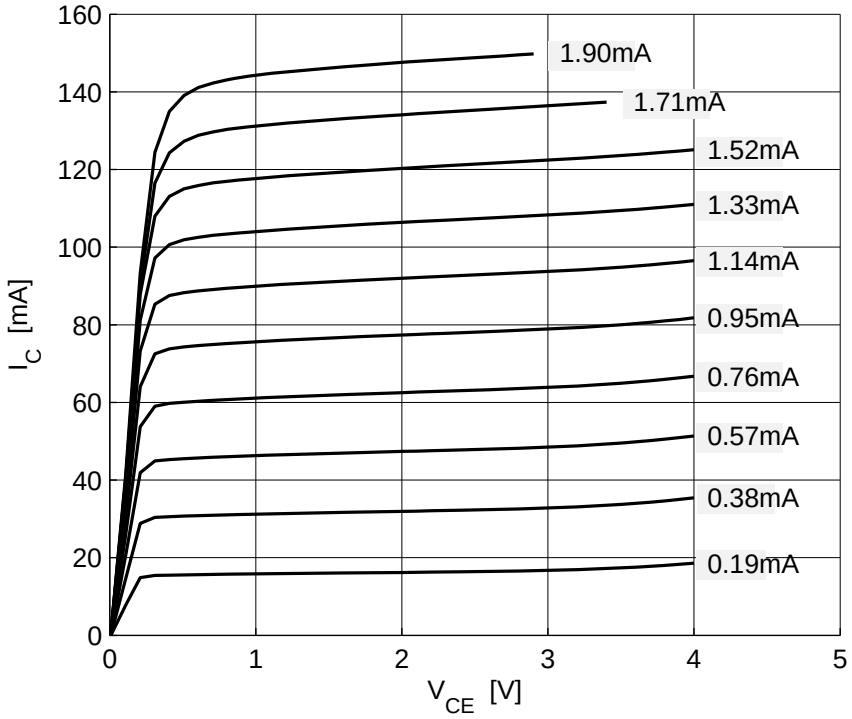

Figure 5-2 Collector Current vs. Collector Emitter Voltage $I_C = f(V_{CE})$, I_B = Parameter in mA

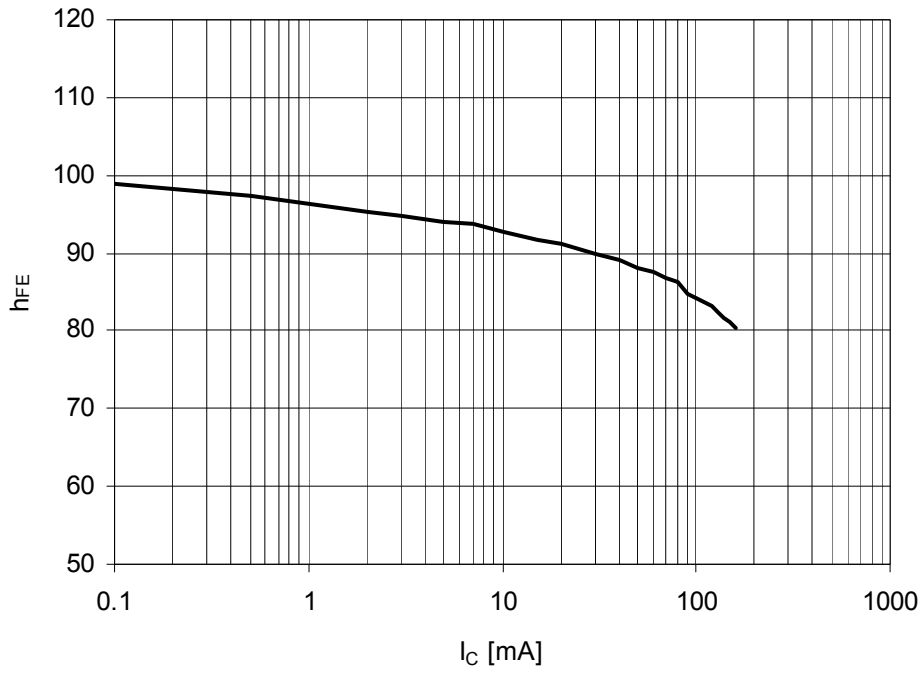

Figure 5-3 DC Current Gain $h_{FE} = f(I_C)$, V_{CE} = 3 V

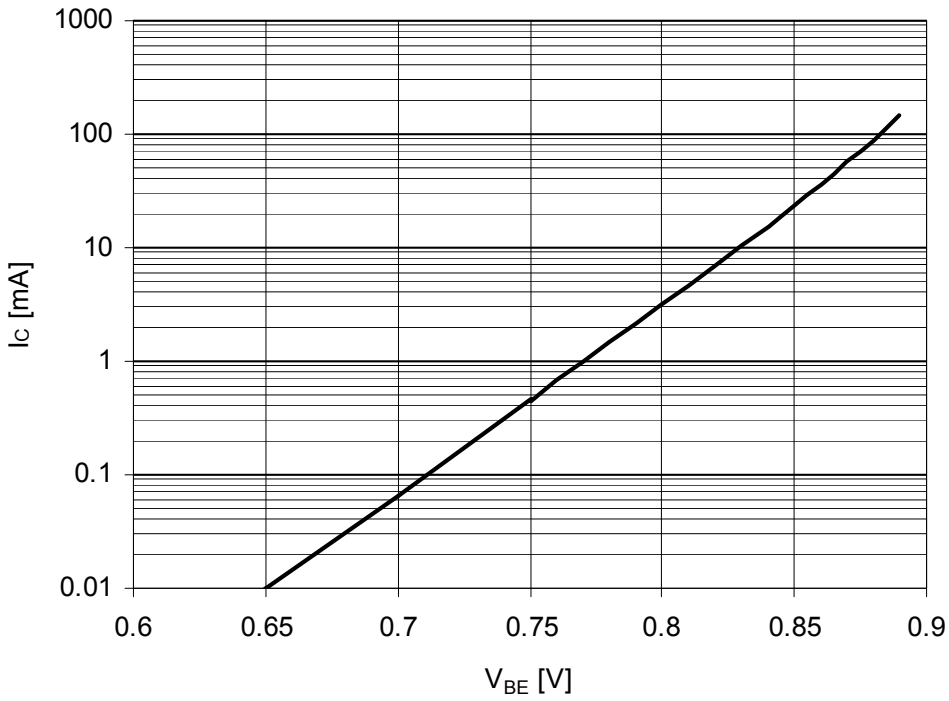

Figure 5-4 Collector Current vs. Base Emitter Voltage $I_C = f(V_{BE})$, V_{CE} = 2 V

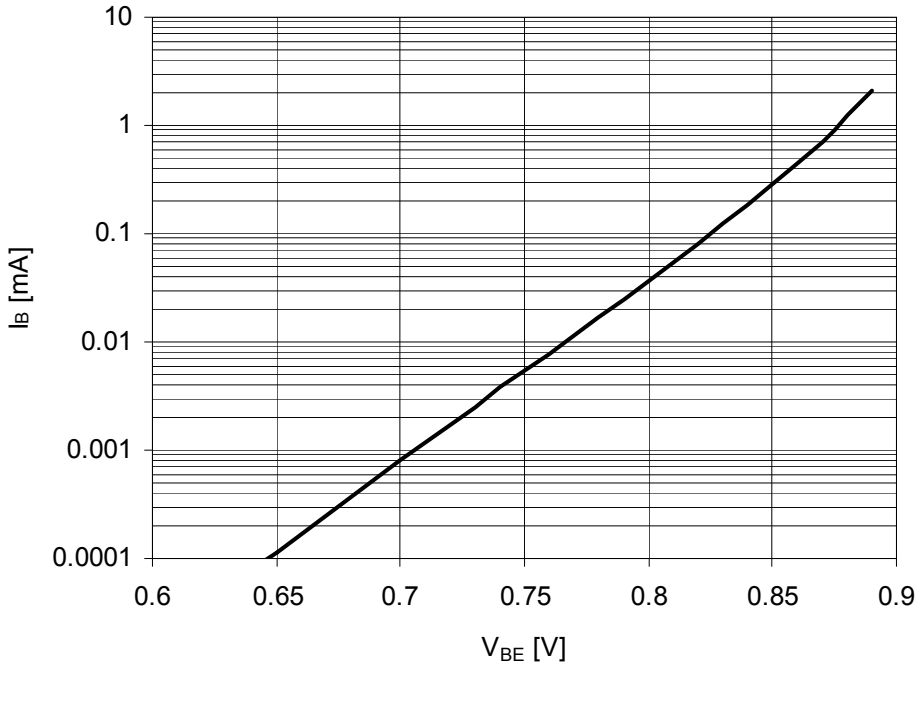

Figure 5-5 Base Current vs. Base Emitter Forward Voltage $I_B = f(V_{BE})$, V_{CE} = 2 V

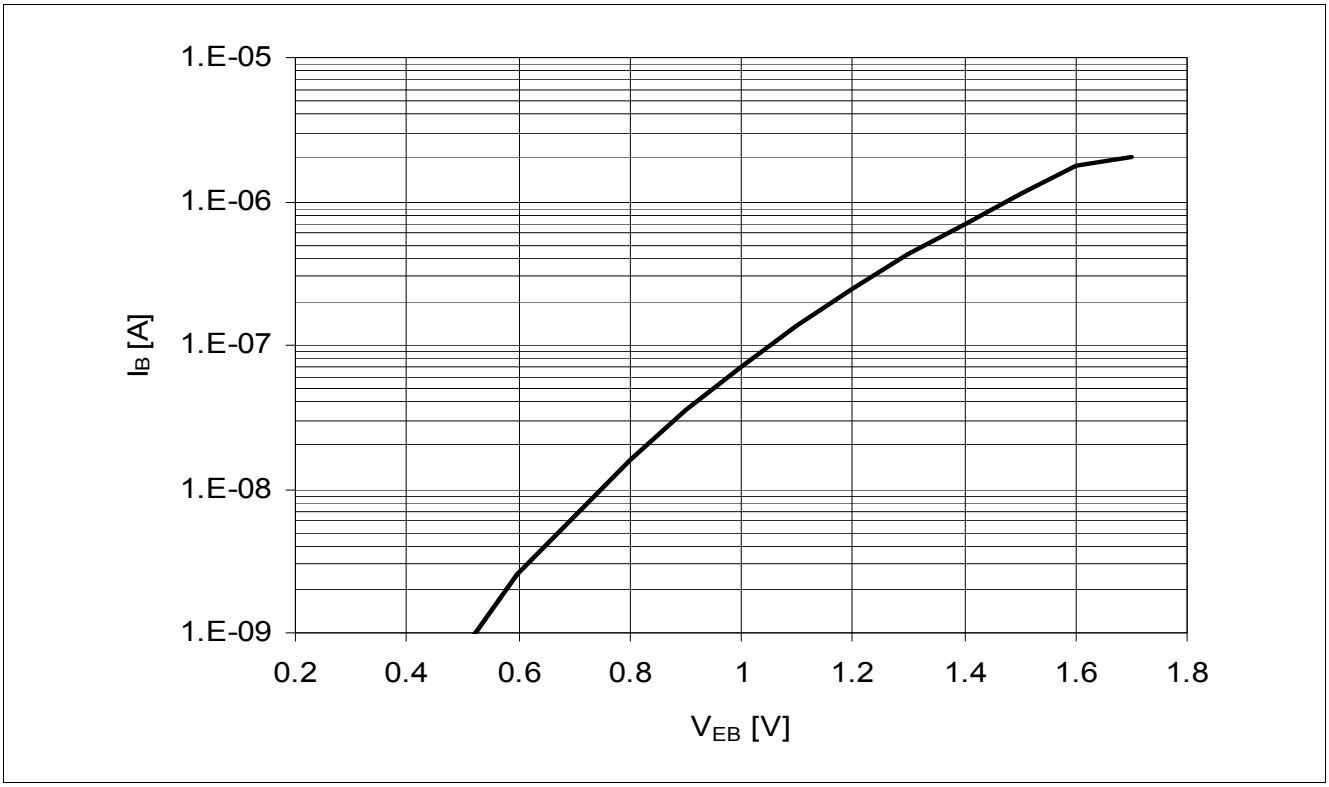

Figure 5-6 Base Current vs. Base Emitter Reverse Voltage $I_B = f(V_{EB})$, V_{CE} = 2 V

5.5 Characteristic AC Diagrams

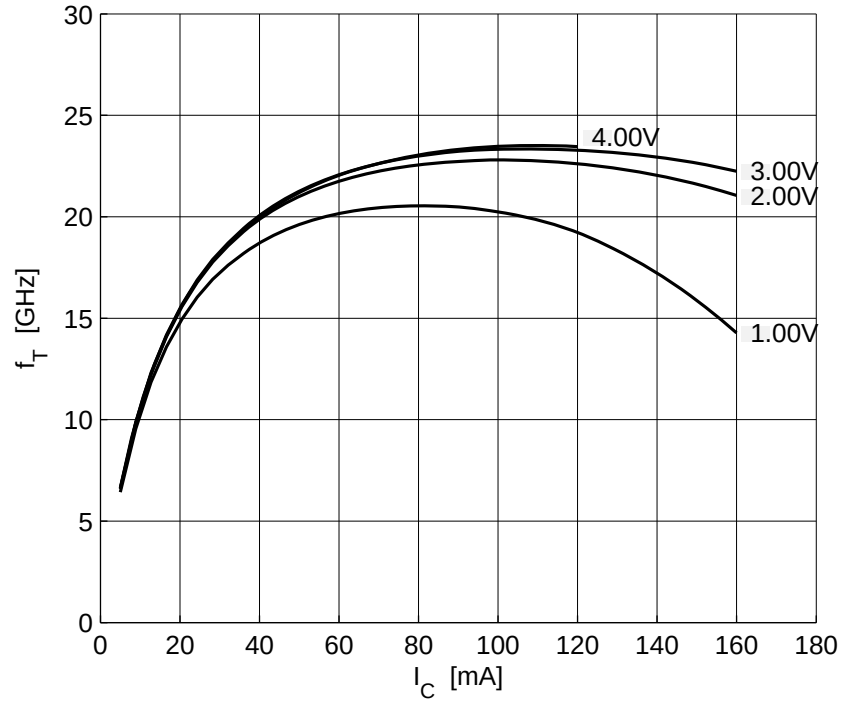

Figure 5-7 Transition Frequency $f_T = f(I_C)$, f = 1 GHz, V_{CE} = Parameter in V

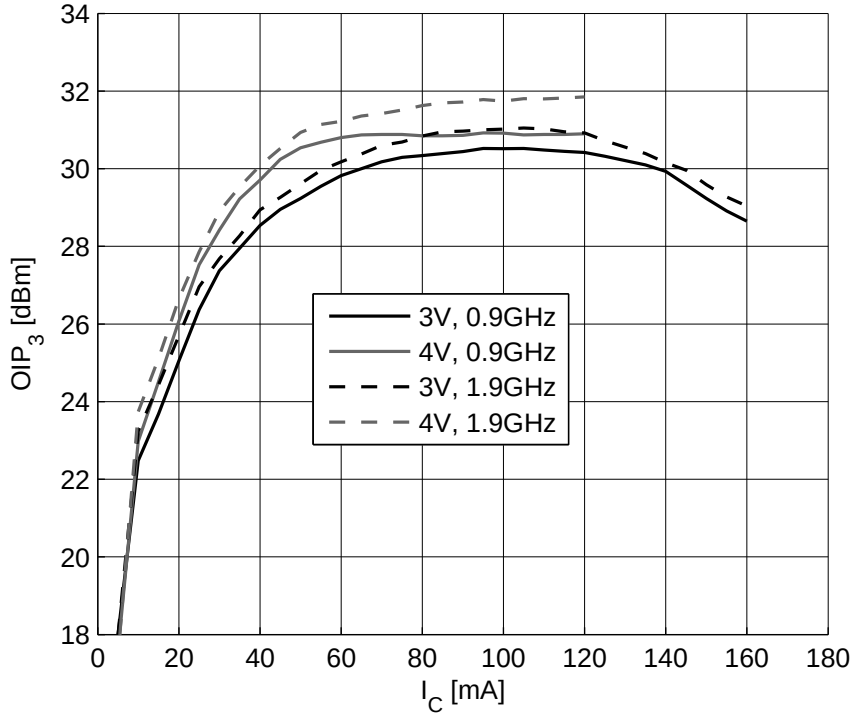

Figure 5-8 3rd Order Intercept Point $OIP3 = f(I_C)$, $Z_S = Z_L$= 50 Ω, V_{CE}, f = Parameters

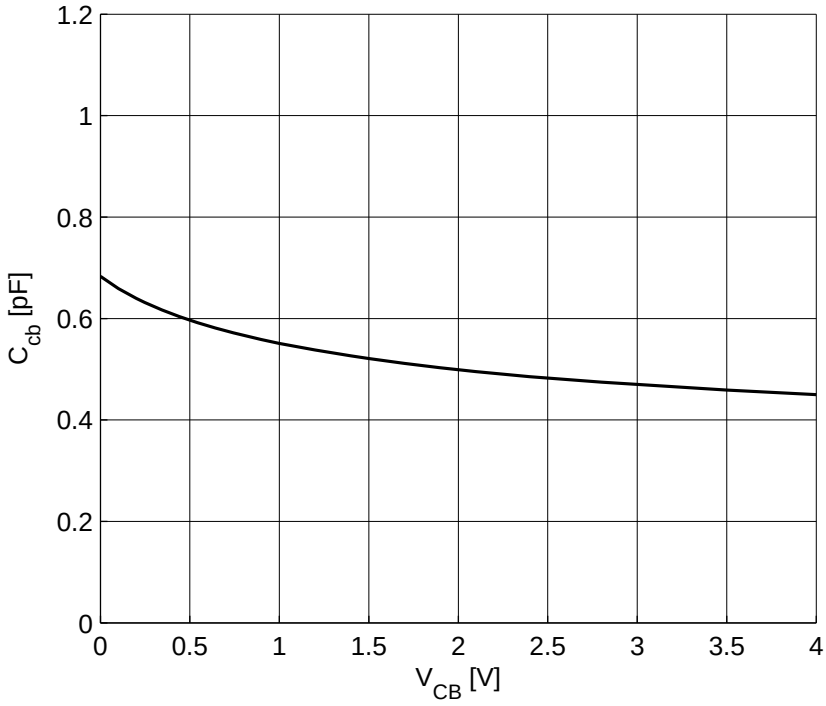

Figure 5-9 Collector Base Capacitance $C_{CB} = f(V_{CB})$, f = 1 MHz

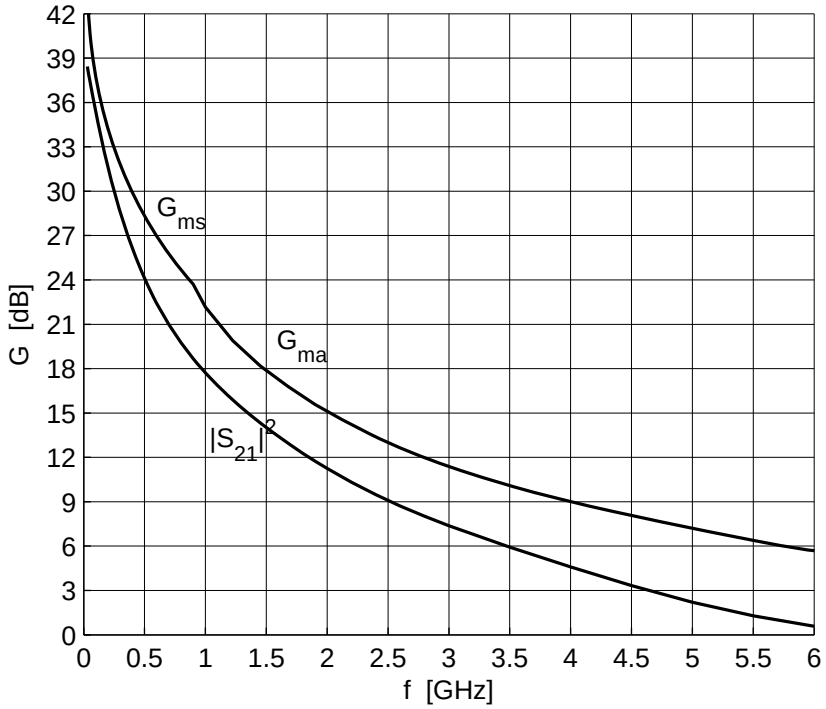

Figure 5-10 Gain G_{ma}, G_{ms}, $|S_{21}|^2 = f(f)$, V_{CE} = 3 V, I_C = 90 mA

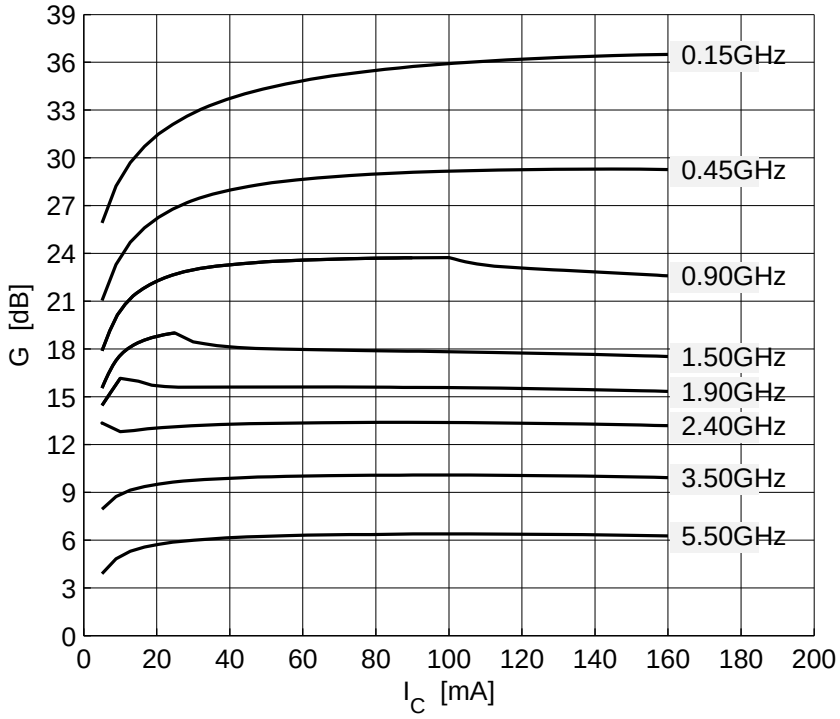

Figure 5-11 Maximum Power Gain $G_{max} = f(I_C)$, V_{CE} = 3 V, = Parameter in GHz

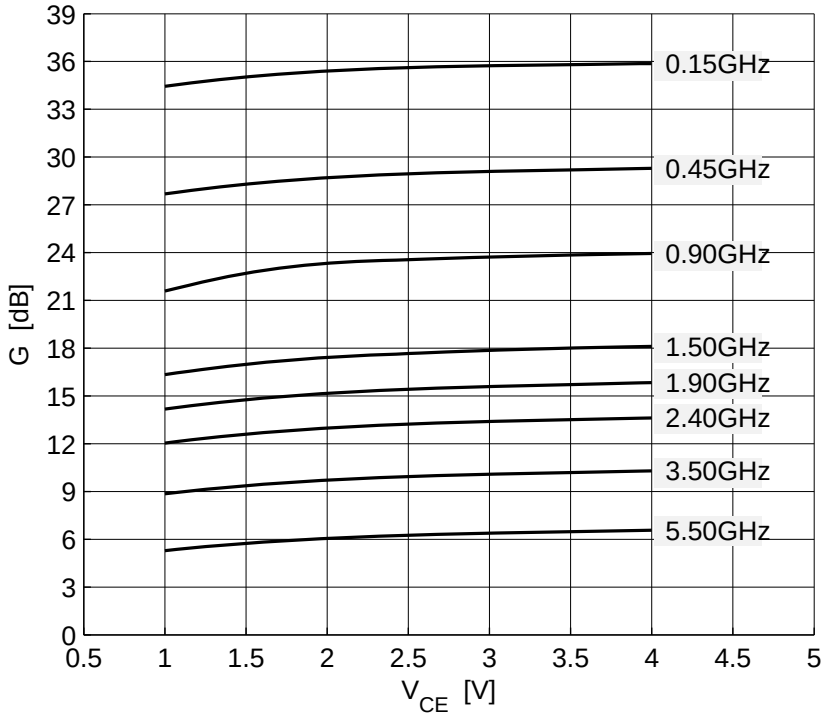

Figure 5-12 Maximum Power Gain $G_{max} = f(V_{CE})$, I_C = 90 mA, = Parameter in GHz

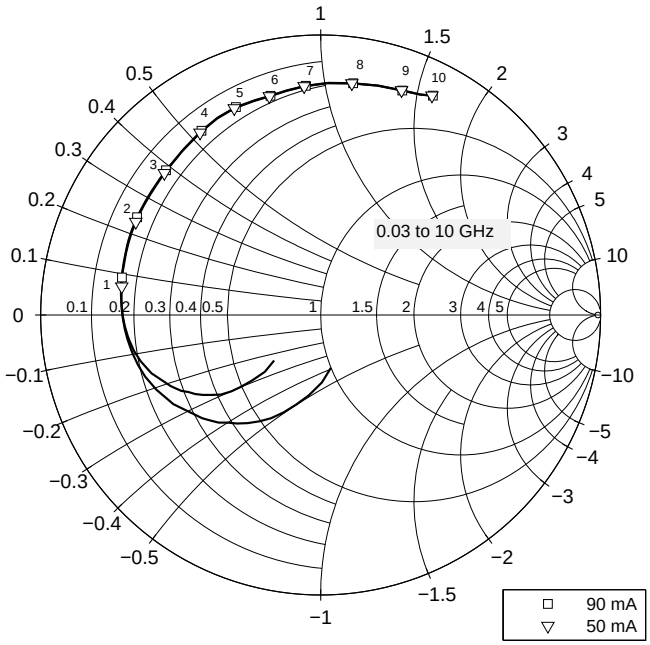

Figure 5-13 Input Matching S_{11} = *f* (*f*), V_{CE} = 3 V, I_C = 50 / 90 mA

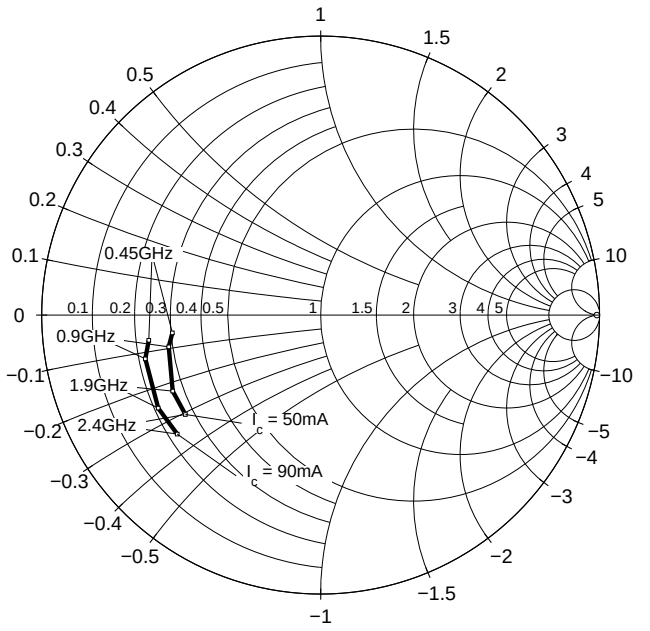

Figure 5-14 Source Impedance for Minimum Noise Figure = *f* (*f*), V_{CE} = 3 V, I_C = 50 / 90 mA

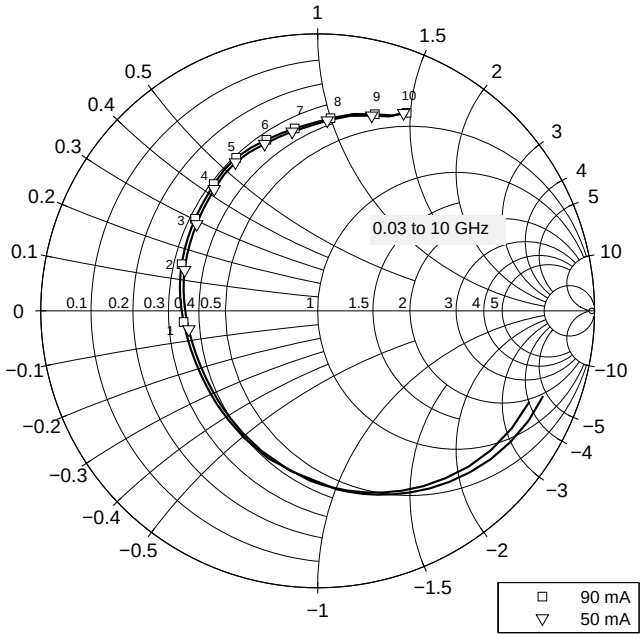

Figure 5-15 Output Matching $S_{22} = f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA

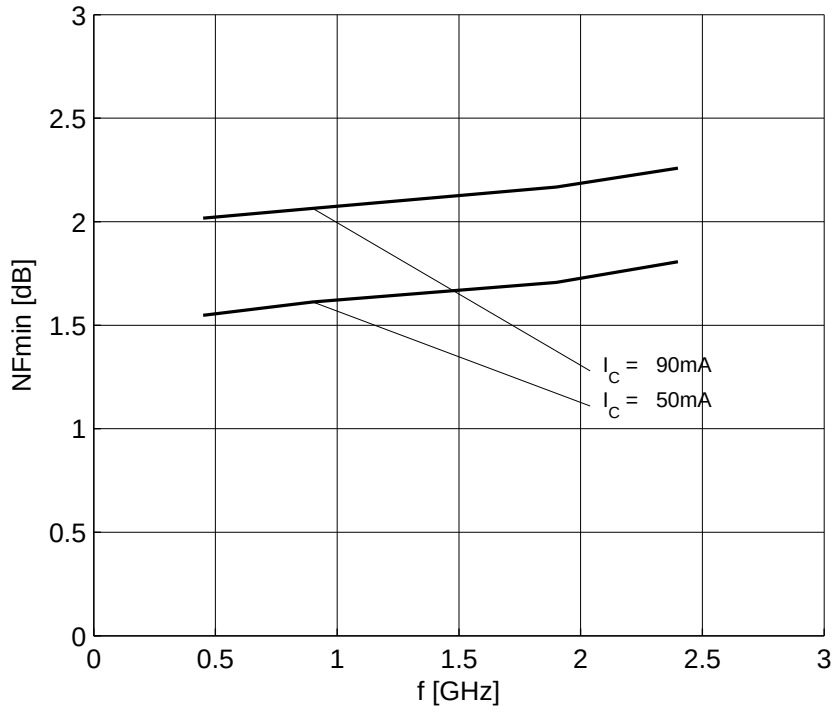

Figure 5-16 Noise Figure $NF_{min} = f(f)$, V_{CE} = 3 V, I_C = 50 / 90 mA, $Z_S = Z_{opt}$

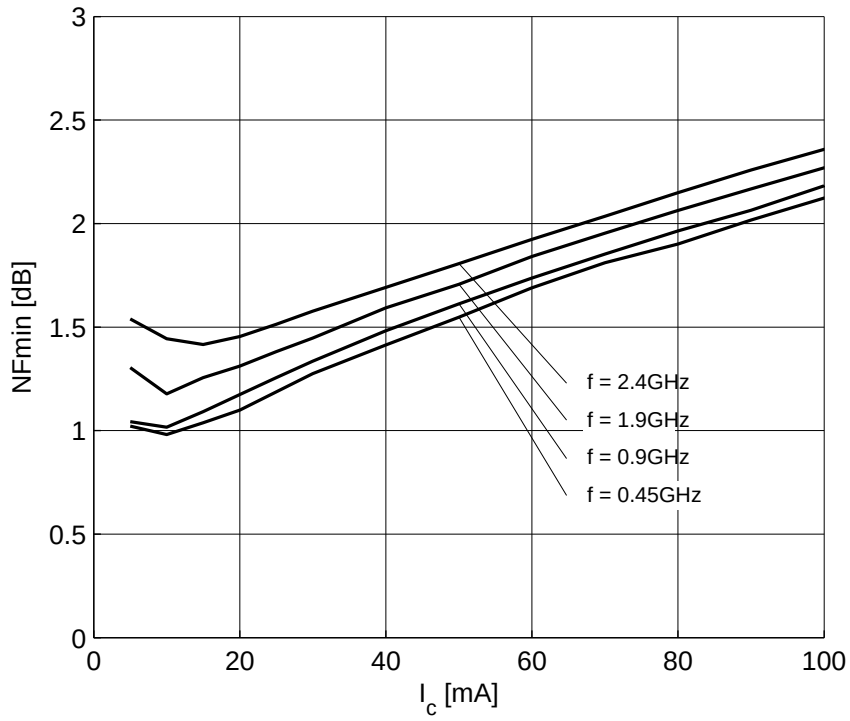

Figure 5-17 Noise Figure $NF_{min} = f(I_C)$, V_{CE} = 3 V, $Z_S = Z_{opt}$= Parameter in GHz

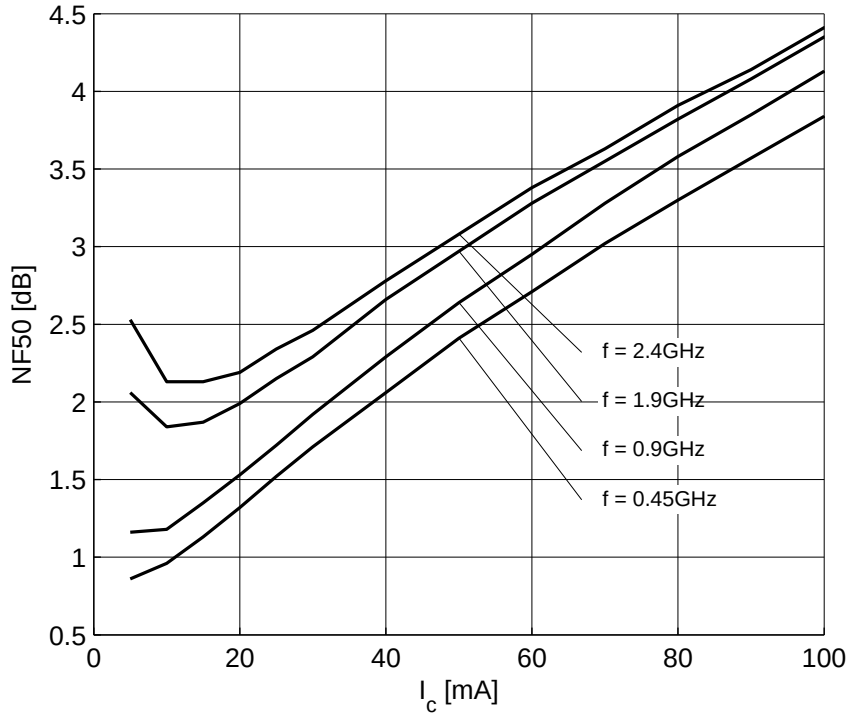

Figure 5-18 Noise Figure $NF_{50} = f(I_C)$, V_{CE} = 3 V, Z_S = 50 Ω= Parameter in GHz

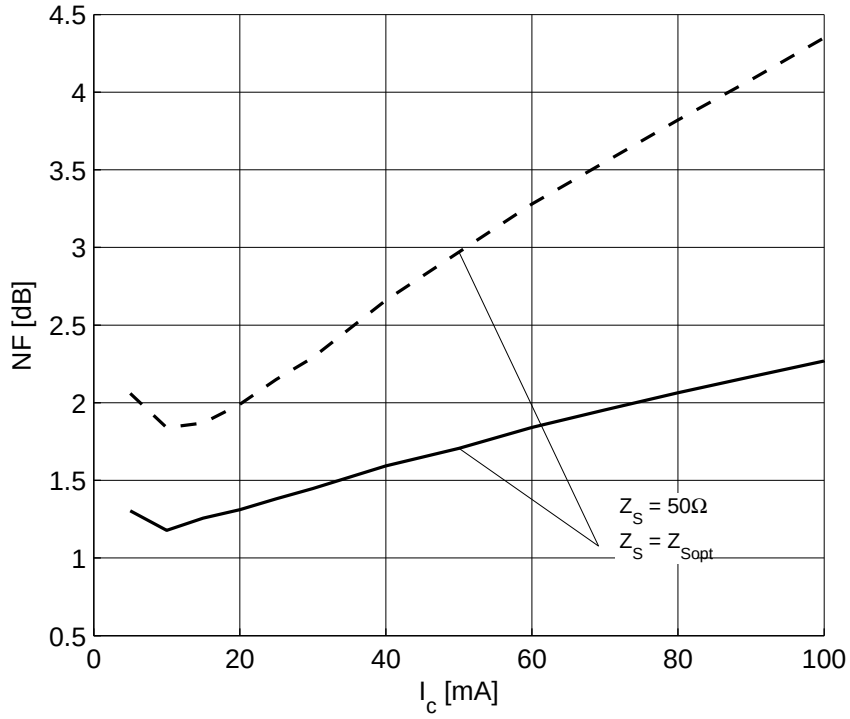

Figure 5-19 Comparison Noise Figure NF_{50} / NF_{min}= f (I_C), V_{CE} = 3 V, f = 1.9 GHz

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. T_A = 25 °C.

6 Simulation Data

For the SPICE Gummel Poon (GP) model as well as for the S-parameters (including noise parameters) please refer to our internet website: **www.infineon.com/rf.models**. Please consult our website and download the latest versions before actually starting your design.
You find the BFP450 SPICE GP model in the internet in MWO- and ADS-format, which you can import into these circuit simulation tools very quickly and conveniently. The model already contains the package parasitics and is ready to use for DC- and high frequency simulations. The terminals of the model circuit correspond to the pin configuration of the device.
The model parameters have been extracted and verified up to 10 GHz using typical devices. The BFP450 SPICE GP model reflects the typical DC- and RF-performance within the limitations which are given by the SPICE GP model itself.

7 Package Information SOT343

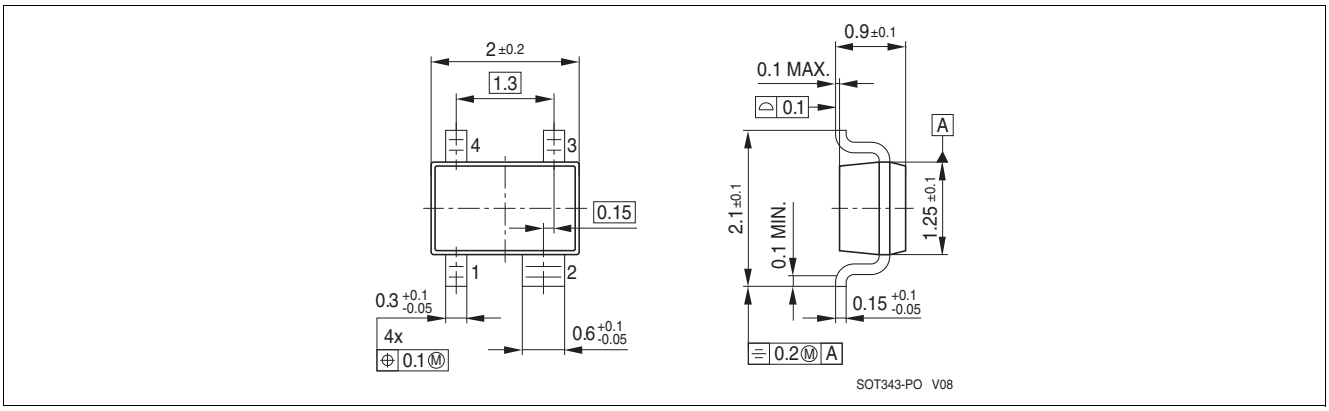

Figure 7-1 Package Outline

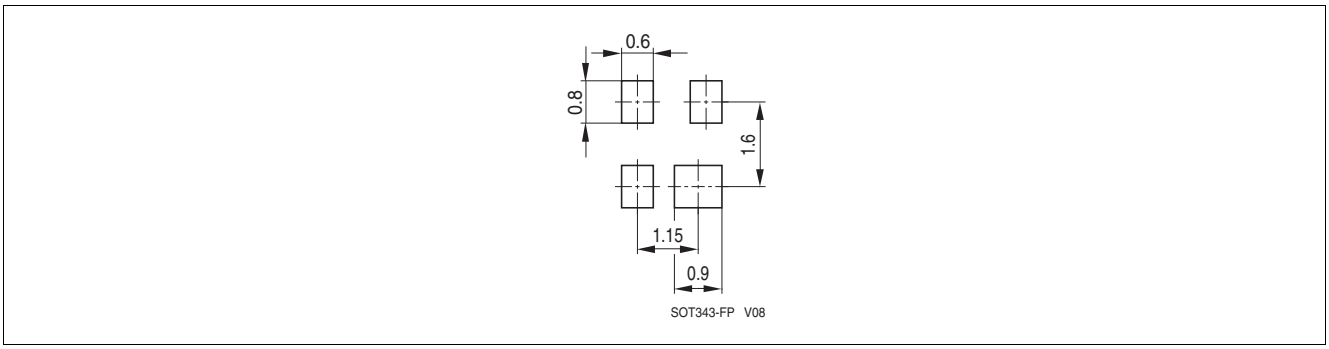

Figure 7-2 Package Footprint

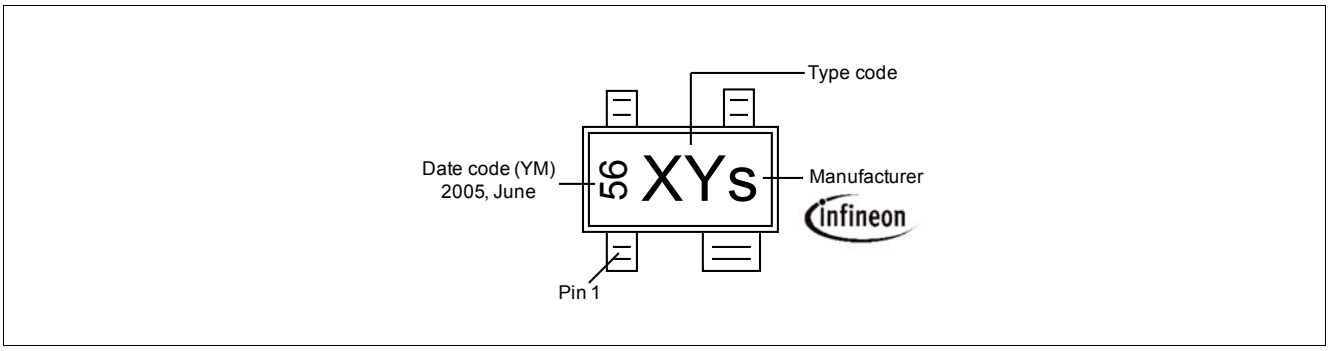

Figure 7-3 Marking Description (Marking BFP450: ANs)

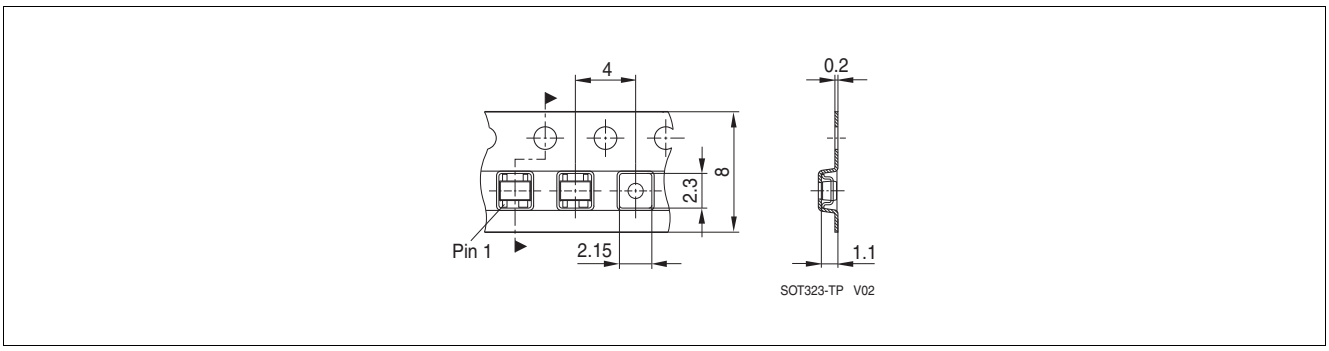

Figure 7-4 Tape Dimensions

w w w . i n f i n e o n . c o m

Published by Infineon Technologies AG