

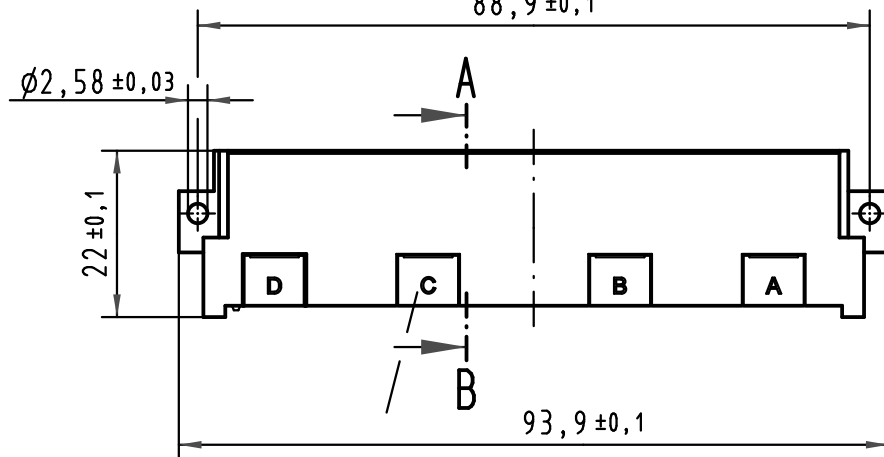
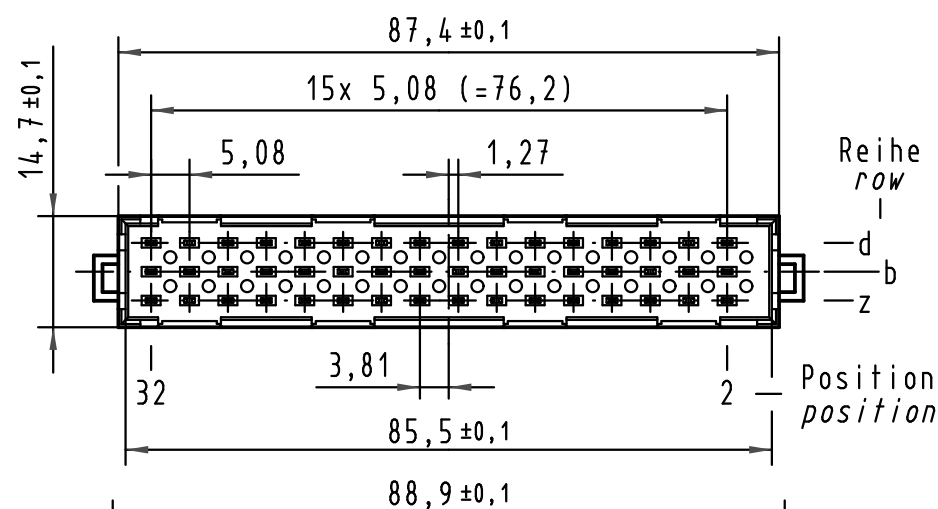
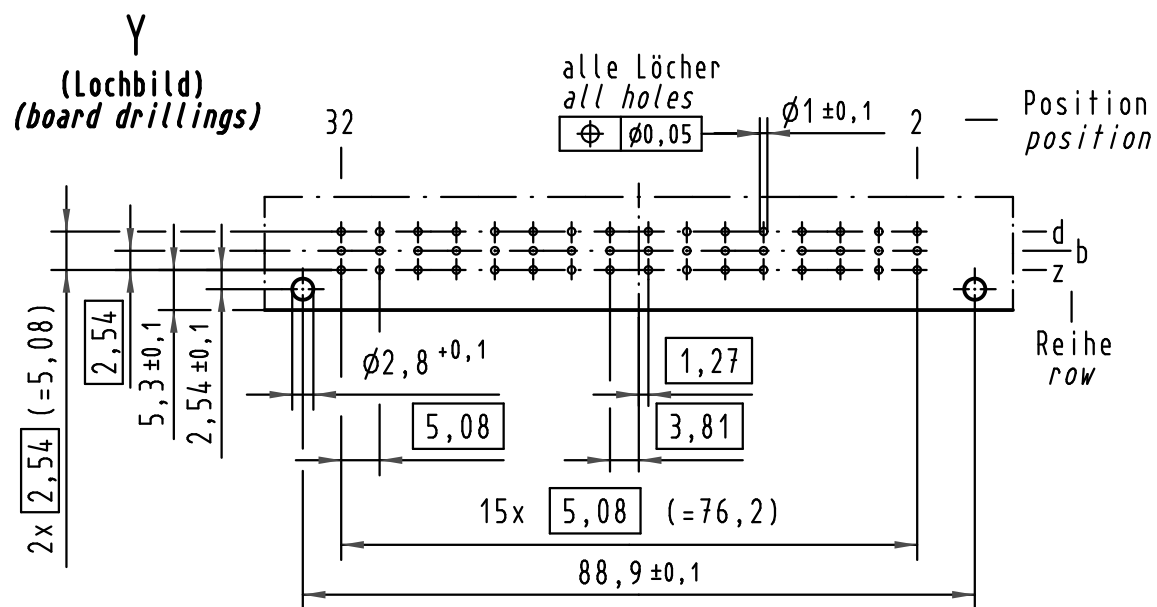
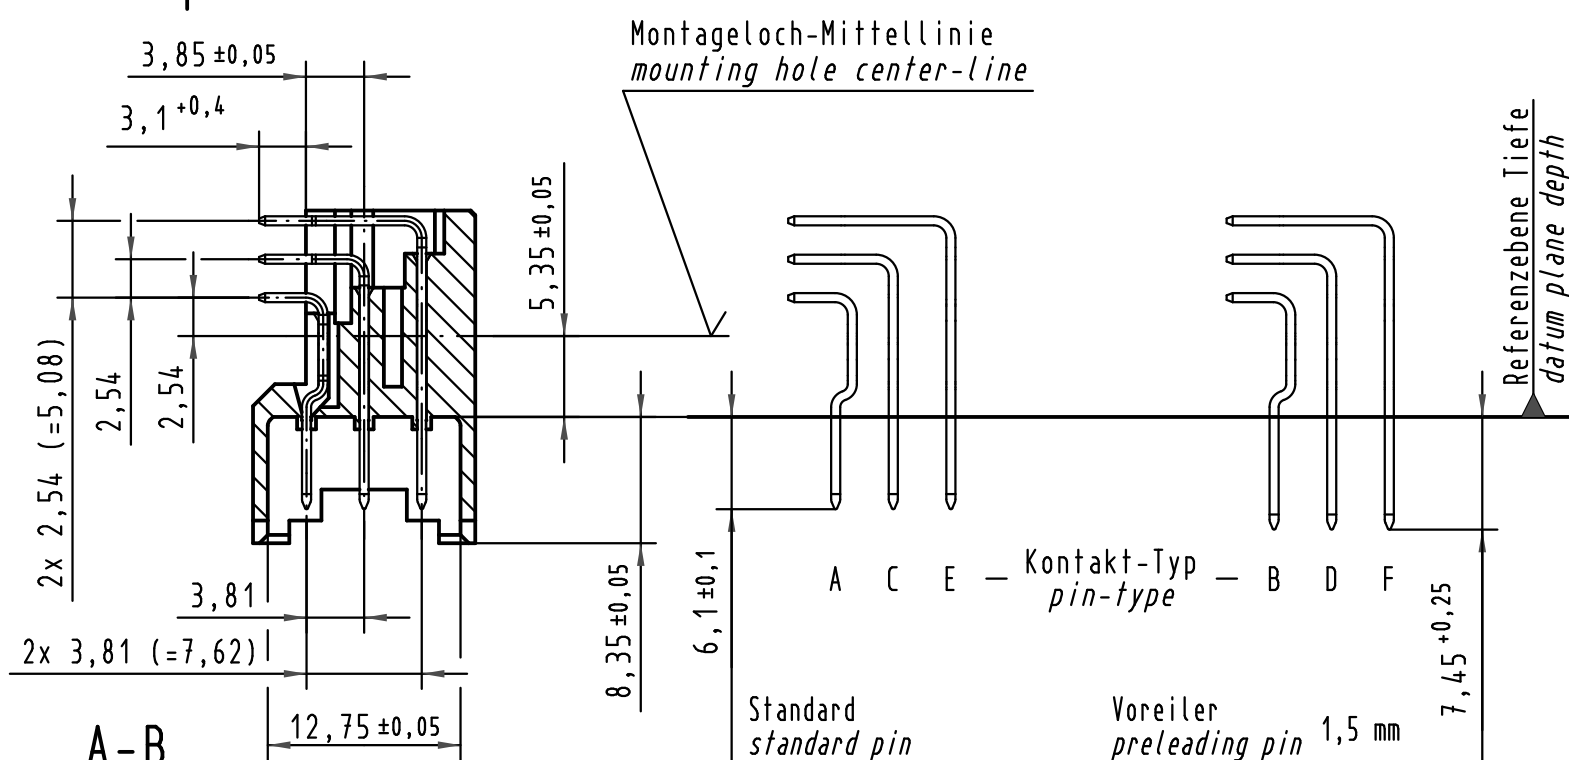


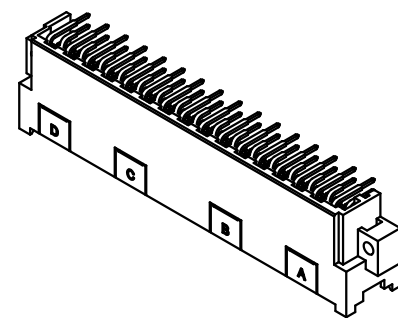


Sollbruchstelle für Kodierung
breaking point for coding

X



A-B
2:1


X Kontaktbelegung
contact loading

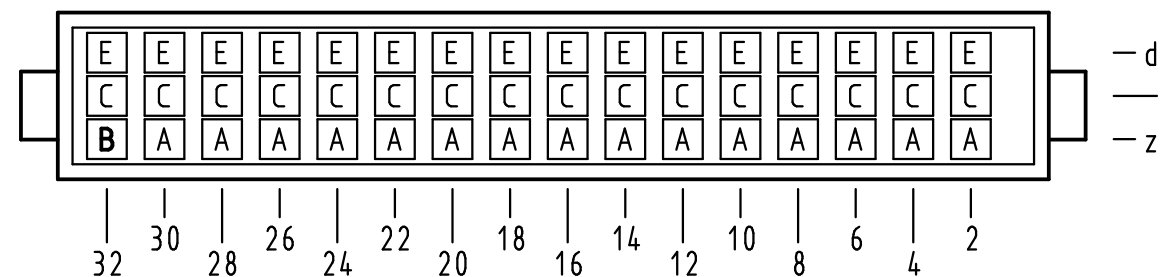

09 06 148 7921	3	Au flash over PdNi over Ni
09 06 148 6921	2	Au flash over PdNi over Ni
09 06 148 2921	1	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

Z
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

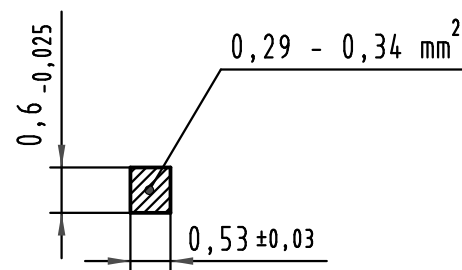

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

	Dat.	Name	Maßstab/Scale
Detail.	31.01.02	Rie.	1:1 (2:1; 10:1)
Insp.	31.01.02	kfoe	
Stand.			

35260 09.09.08 Hage.
33143 14.10.05 Hage.
30790
Mod. Dat. Name

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP

Nicht tolerierte Maße/Free size tolerances
IEC 60603-2

Bauform / type F
Messerleiste Einlöt gewinkelt 2,54 48 pol.
male connector solder angled 2,54 48 pol.

TB 09 06 148 x921

Sub. Blatt/ page