

CL 222 TM

EMI-proof right angle dip type connectors

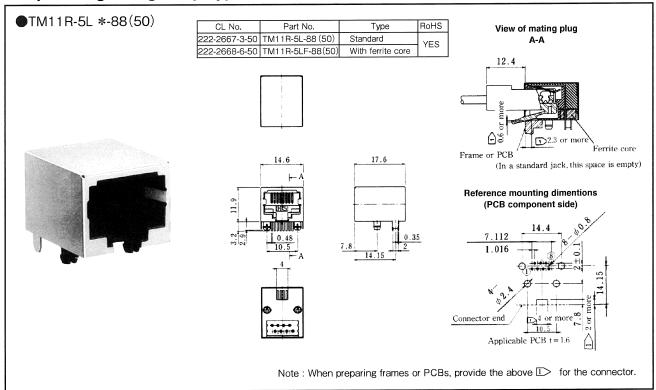

EMI-proof quadruplet right angle dip type connectors

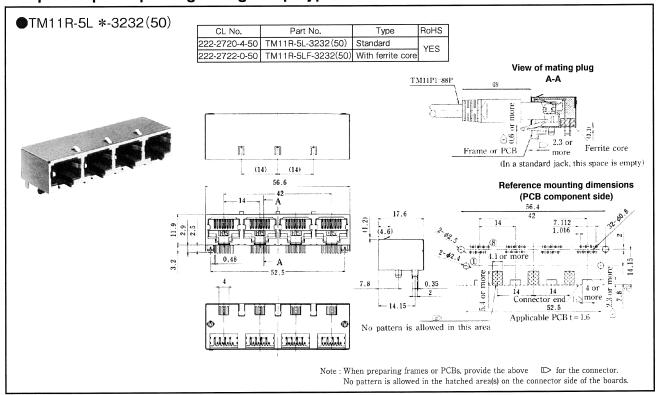

CL 222 TM

EMI-PROTECTED JACKS

GENERAL

The EMI-protected modular connectors have been developed from the TM Series connectors, to resist noise. Designed to comply with the FCC (Federal Communications Commission) 68 Standard, they range from standard parts to EMI-protected parts.

Furthermore, they are highly operable and resistant to severe environmental conditions to ensure customer satisfaction with shielding performance.


OFEATURES

- (1) Plug connectors have a single-body shell and clamp to ensure secure protection from EMI.
- (2) To prevent electrostatic problems, plug connectors are designed so that the metal shell can be covered with a plastic hood.
- (3) Jack connectors that allow the shielded parts to be connected first during mating to protect the circuits within the set.
- (4) Plug harnesses can be wired easily and securely with a special tool.
- (5) Eight-conductor plugs and jack connectors comply with the ISO 8877 Standard (ISDN interface connector).

MAIN APPLICATIONS


ISDN related equipment, HBS, mobile telephones, office automation equipment.


OJACKS WITH LEAD WIRES

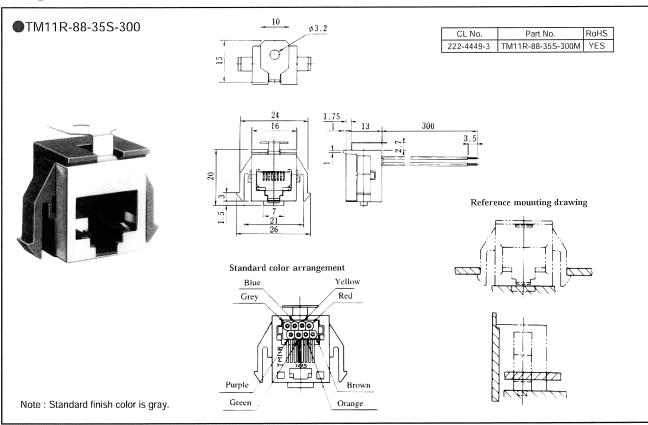

CL 222 TM


Right angle dip type connectors

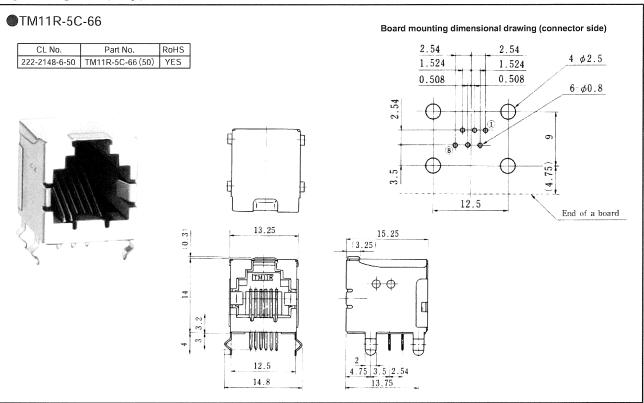

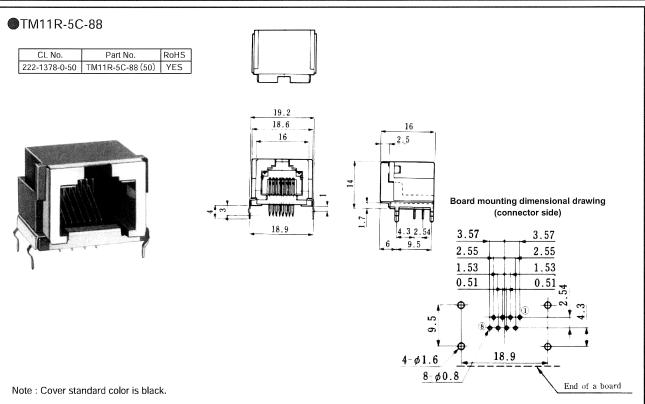

CL 222 TM

Right angle dip type connectors (With a decorative panel)

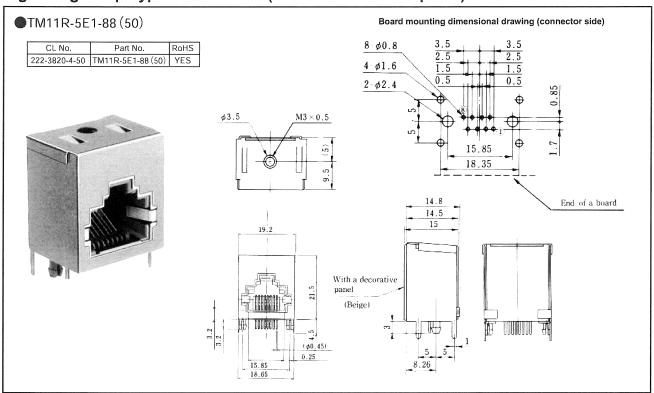

Straight dip type connectors

