

Low-Power Off-line PSR LED Controller**AP1686****General Description**

The AP1686 is a high performance AC/DC power supply controller for LED lighting application. The device uses Pulse Frequency Modulation (PFM) method to build discontinuous conduction mode (DCM) flyback power supplies.

The AP1686 provides accurate constant voltage, constant current (CV/CC) regulation without requiring an opto-coupler and the secondary control circuitry. It also eliminates the need of loop compensation circuitry while maintaining good stability. The AP1686 can achieve excellent regulation and high average efficiency, yet meets no-load consumption less than 30mW.

It also has an adjustable built-in line compensation function to achieve tight CC.

The AP1686 is available in SOT-23-6 package.

Features

- Primary Side Control for Tight Constant Current and Constant Voltage
- 30mW No-load Input Power
- Bipolar Junction Transistor (BJT) Driving
- Open Circuit Protection
- Over Voltage Protection
- Short Circuit Protection
- SOT-23-6 Package

Applications

- LED Driver

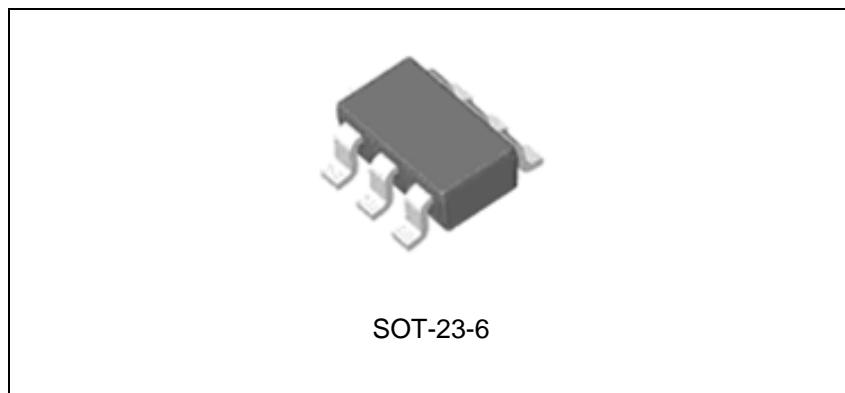


Figure 1. Package Type of AP1686

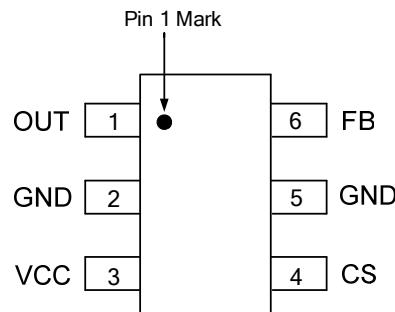
Low-Power Off-line PSR LED Controller**AP1686****Pin Configuration**K6 Package
(SOT-23-6)

Figure 2. Pin Configuration of AP1686 (Top View)

Pin Description

Pin Number	Pin Name	Function
1	OUT	The OUT pin is used to turn on and turn off the power switch. When turning on the power switch, the OUT pin will output 30mA source current to support the base current of the power BJT. When turning off the power switch, the resistance between the OUT and GND will become to 5Ω
2, 5	GND	The GND pin is the ground of the IC. When the power BJT is turned off, a fast reverse sinking current to the gate of BJT will flow out from this pin. Attention should be paid to in the PCB layout
3	VCC	The VCC pin supplies the power for the IC. In order to get the correct operation of the IC, a capacitor with low ESR should be placed as close as possible to the VCC pin
4	CS	The CS is the current sense pin of the IC. The IC will turn off the power BJT according to the voltage on the CS pin. When the power BJT is on, a current is output from the CS pin which is proportional to the line voltage to realize the function of line compensation
6	FB	The CV and CC regulation are realized based on the voltage sampling of this pin

Low-Power Off-line PSR LED Controller

AP1686

Functional Block Diagram

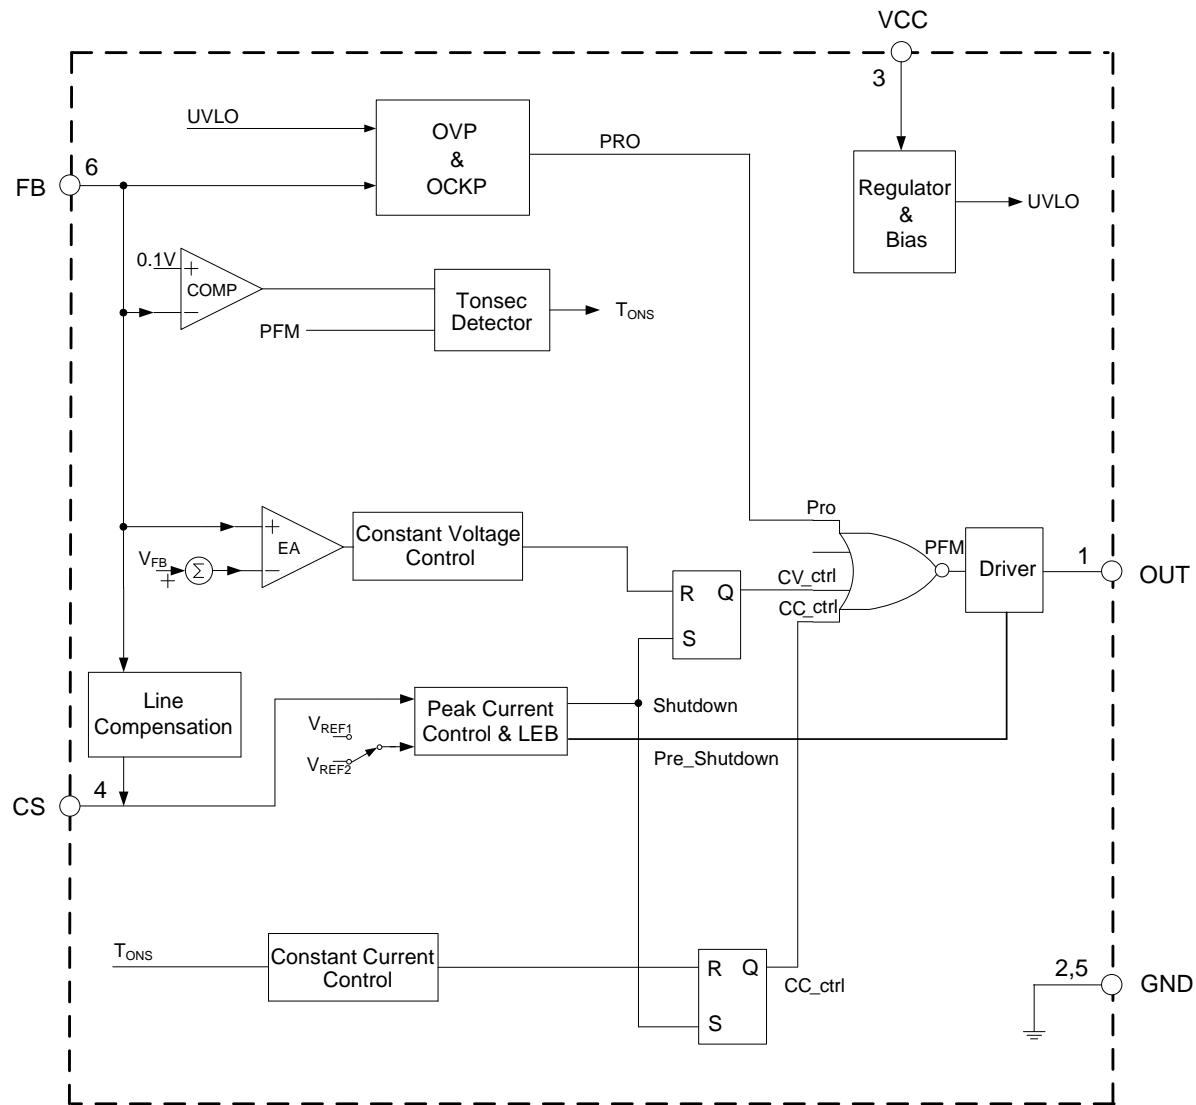
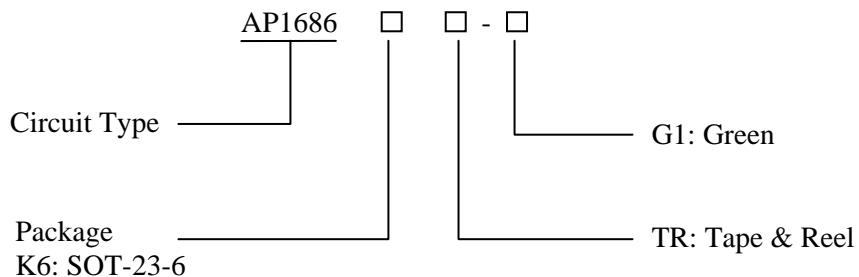


Figure 3. Functional Block Diagram of AP1686

Low-Power Off-line PSR LED Controller**AP1686****Ordering Information**

Package	Temperature Range	Part Number	Marking ID	Packing Type
SOT-23-6	-40 to 85°C	AP1686K6TR-G1	GBQ	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "G1" suffix in the part number, are RoHS compliant and green.

Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	-0.3 to 30	V
CS to GND Voltage		-0.3 to 7	V
FB Input Voltage	V_{FB}	-40 to 7.5	V
Source Current at OUT Pin	I_{SOURCE}	Internally Limited	A
Operating Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-65 to 150	°C
Lead Temperature (Soldering, 10 sec)	T_{LEAD}	300	°C
Thermal Resistance (Junction to Ambient)	θ_{JA}	200	°C/W
ESD (Human Body Model)		2000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.



Low-Power Off-line PSR LED Controller

AP1686

Electrical Characteristics

$V_{CC}=15V$, $T_A=25^\circ C$, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
UVLO SECTION						
Startup Threshold	V_{TH} (ST)		13	15.5	18	V
Minimal Operating Voltage	V_{OPR} (MIN)		3	3.5	4.5	V
STANDBY CURRENT SECTION						
Startup Current	I_{ST}	$V_{CC}=V_{TH}$ (ST)-1V, Before startup	0	0.2	0.6	μA
Operating Current	I_{CC} (OPR)	Static current	250	400	600	
DRIVE OUTPUT SECTION						
Output Current	Sink	I_{SINK}	Apply 1V @OUT pin	200	300	500
	Source	I_{SOURCE}		24	30	45
CURRENT SENSE SECTION						
Current Sense Threshold Voltage	V_{CS}		440	500	550	mV
Equivalent Current Sense Voltage Accuracy (Note 2)	$\frac{\Delta V_{CS,eq}}{V_{CS,eq}}$				4	%
Leading Edge Blanking	t_{LEB}	The minimum power switch turn on time	300	475	720	ns
FEEDBACK INPUT SECTION						
Input Resistance of FB Pin	R_{FB}	$V_{FB}=4V$	1	1.6	2	$M\Omega$
Feedback Threshold	V_{FB}		3.7	3.974	4.21	V
LINE COMPENSATION SECTION						
Line Compensation Transconductance (Note 2)	g_m		1.14	1.43	1.72	μS
PROTECTION SECTION						
Over Voltage Protection	V_{FB} (OVP)		6.5	7.5	8.5	V
Maximum On Time of Primary Side	t_{onp} (MAX)		11	18	50	μs

Note 2: The output current is given by $I_{OUT} = \frac{V_{CS,eq}}{R_{CS}} \times \frac{N_p}{N_s}$

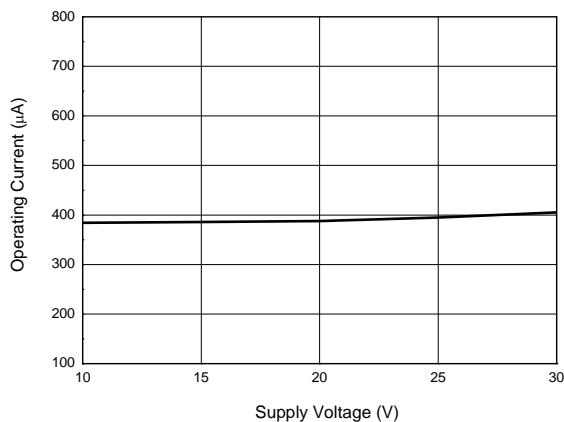
Low-Power Off-line PSR LED Controller**AP1686****Typical Performance Characteristics**

Figure 4. Operating Current vs. Supply Voltage

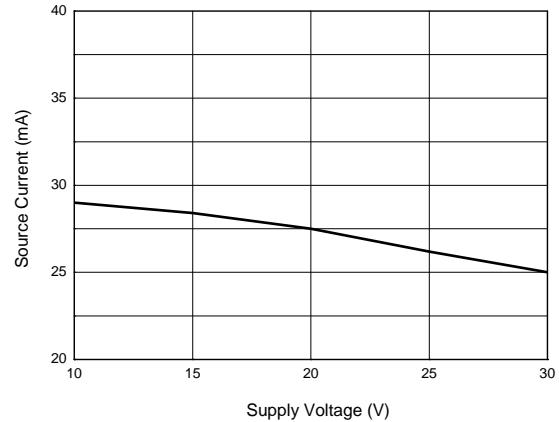


Figure 5. Source Current vs. Supply Voltage

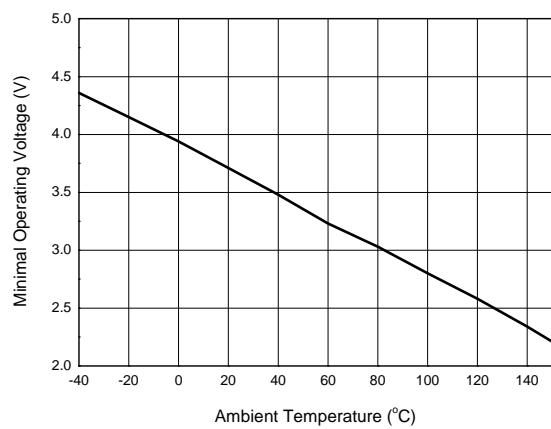


Figure 6. Minimal Operating Voltage vs. Ambient Temperature

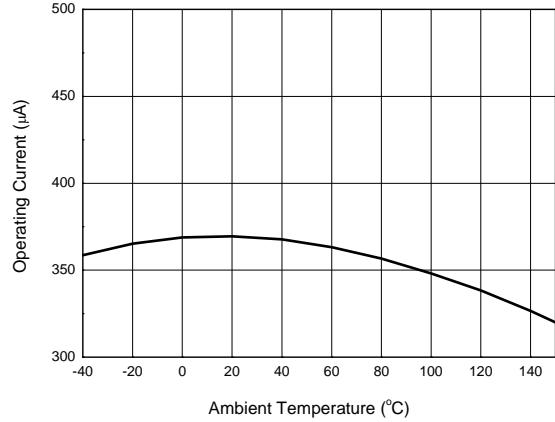


Figure 7. Operating Current vs. Ambient Temperature

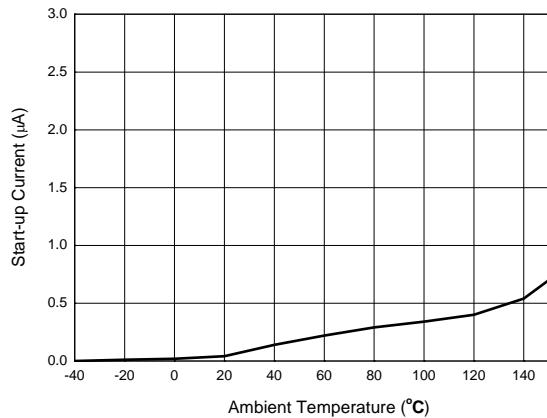
Low-Power Off-line PSR LED Controller**AP1686****Typical Performance Characteristics (Continued)**

Figure 8. Start-up Current vs. Ambient Temperature

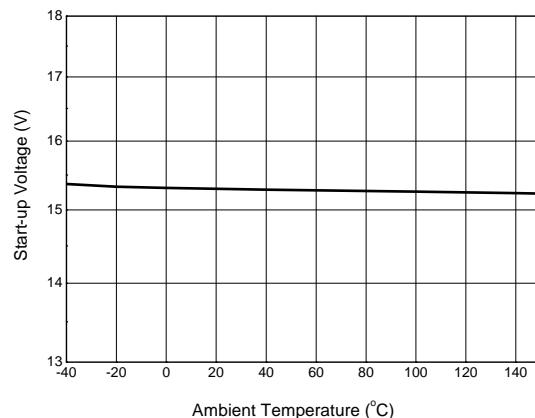


Figure 9. Start-up Voltage vs. Ambient Temperature

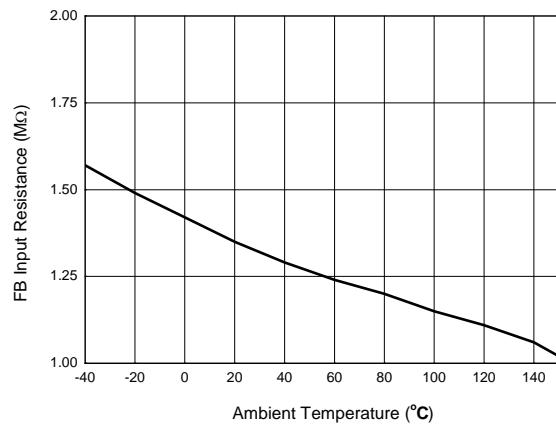


Figure 10. FB Input Resistance vs. Ambient Temperature

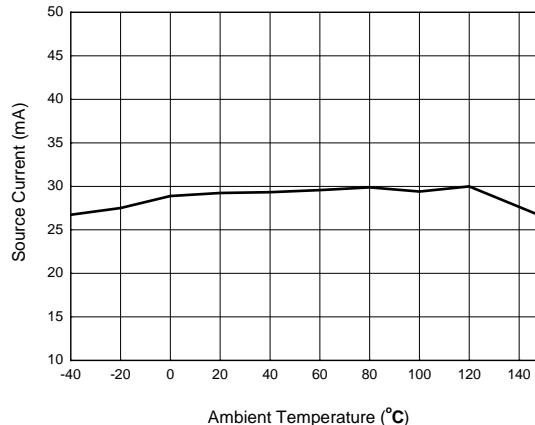


Figure 11. Source Current vs. Ambient Temperature

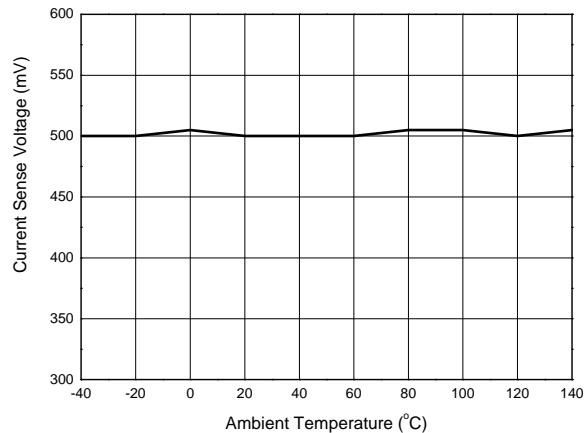
Low-Power Off-line PSR LED Controller**AP1686****Typical Performance Characteristics (Continued)**

Figure 12. Current Sense Voltage vs.
Ambient Temperature

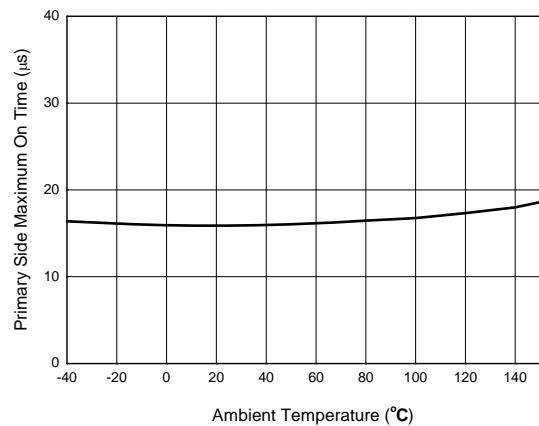


Figure 13. Primary Side Maximum On Time
vs. Ambient Temperature

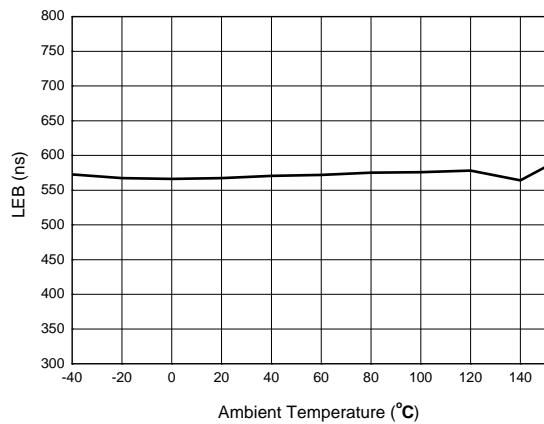


Figure 14. LEB vs. Ambient Temperature

Low-Power Off-line PSR LED Controller

AP1686

Typical Application


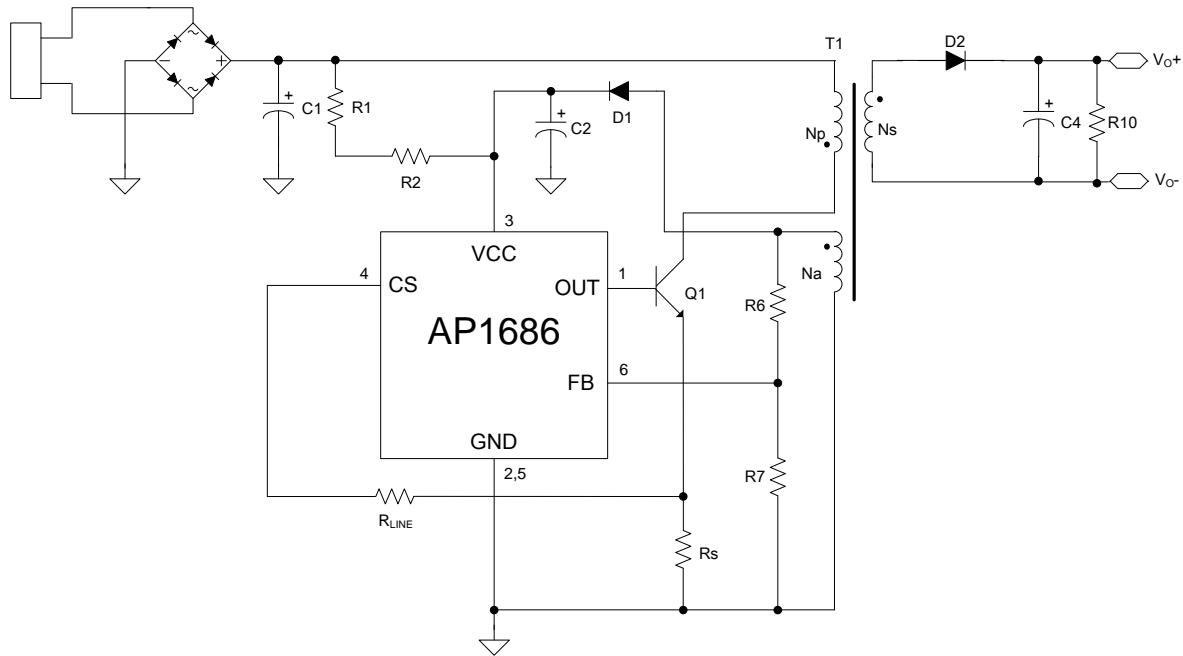


Figure 15. Typical LED Driver Application

Low-Power Off-line PSR LED Controller**AP1686****Mechanical Dimensions****SOT-23-6****Unit: mm(inch)**

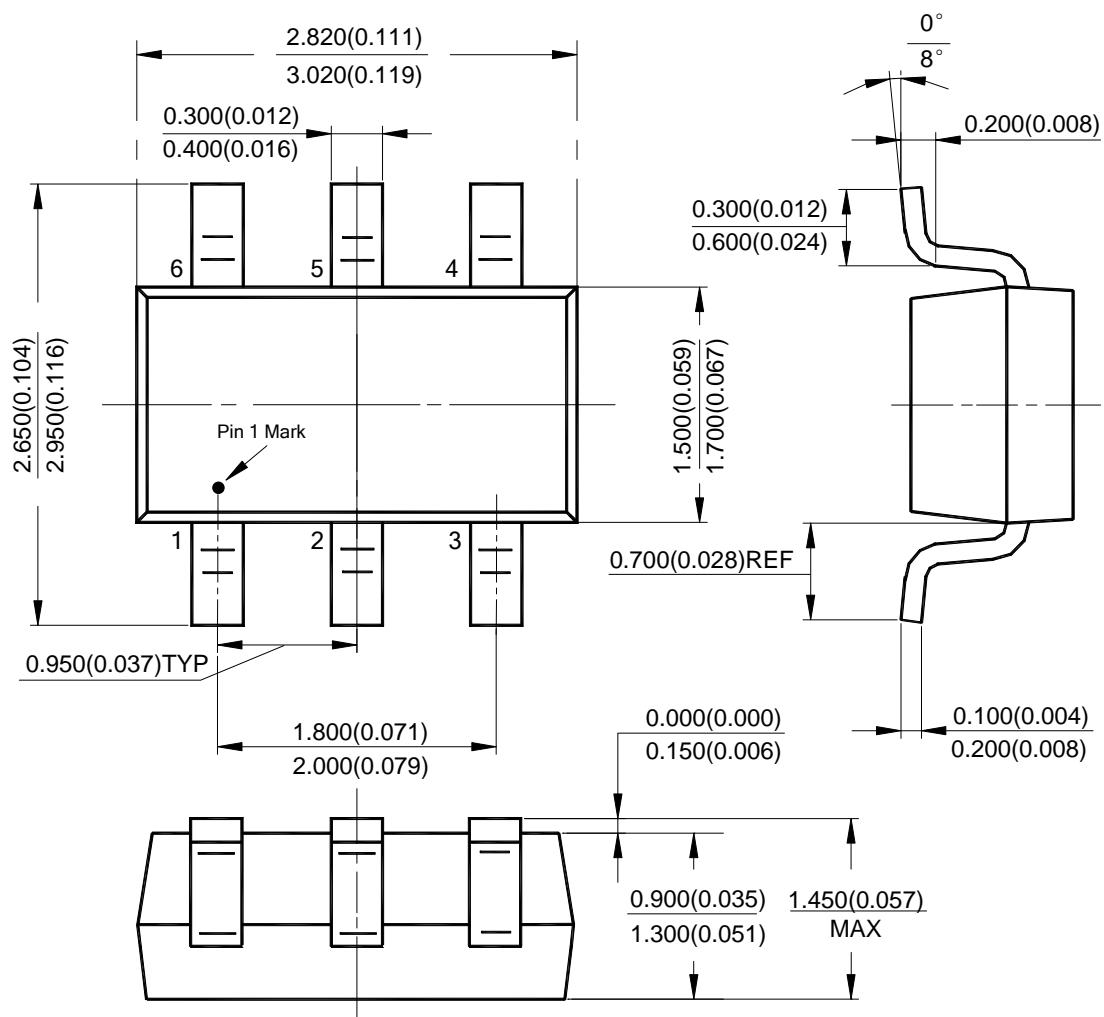

BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office
Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen,
China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.
30920 Huntwood Ave. Hayward,
CA 94544, USA
Tel: +1-510-324-2988
Fax: +1-510-324-2788