

8-BIT SINGLE-CHIP MICROCONTROLLER

DESCRIPTION

The μPD78070A is a limited-function product from which the internal ROM of the μPD78078 subseries has been removed. Through interchangeable external ROM, program maintenance can be performed easily. Besides a high-speed, high-performance CPU, this microcontroller has an internal RAM, I/O ports, 8-bit resolution A/D converter, 8-bit resolution D/A converter, timer, serial interface, real-time output port, interrupt control, and various other peripheral hardware.

Detailed information about product features and specifications can be found in the following documents. Be sure to read the following documents before starting design.

μPD78070A, 78070AY User's Manual: U10200E

78K/0 Series User's Manual – Instructions: IEU-1372

FEATURES

- Internal high-capacity RAM
 - Internal high-speed RAM : 1024 bytes
 - Buffer RAM: 32 bytes
- Two packages
 - 100-pin plastic QFP (fine pitch) (14 x 14 mm)
 - 100-pin plastic QFP (14 x 20 mm)
- External memory expansion space : 64 Kbytes
- Instruction execution time can be varied from high-speed (0.4 μs) to ultra-low-speed (122 μs)
- I/O ports: 61 (N-ch open-drain : 8)
- 8-bit resolution A/D converter : 8 channels
- 8-bit resolution D/A converter : 2 channels
- Serial interface : 3 channels
 - 3-wire/SBI/2-wire mode : 1 channel
 - 3-wire mode : 1 channel
 - 3-wire/UART mode : 1 channel
- Timer : 7 channels
- Power supply voltage : V_{DD} = 2.7 to 5.5 V

APPLICATIONS

CD-ROM driver, printer, PPC, etc.

ORDERING INFORMATION


Part Number	Package
μPD78070AGC-7EA	100-pin plastic QFP (Fine pitch) (14 × 14 mm, Resin thickness 1.45 mm)
μPD78070AGF-3BA	100-pin plastic QFP (14 × 20 mm, Resin thickness 2.7 mm)

The information in this document is subject to change without notice.

The mark ★ shows major revised points.

78K/0 Series Development

The following shows the 78K/0 series products development. Subseries names are shown inside frames.

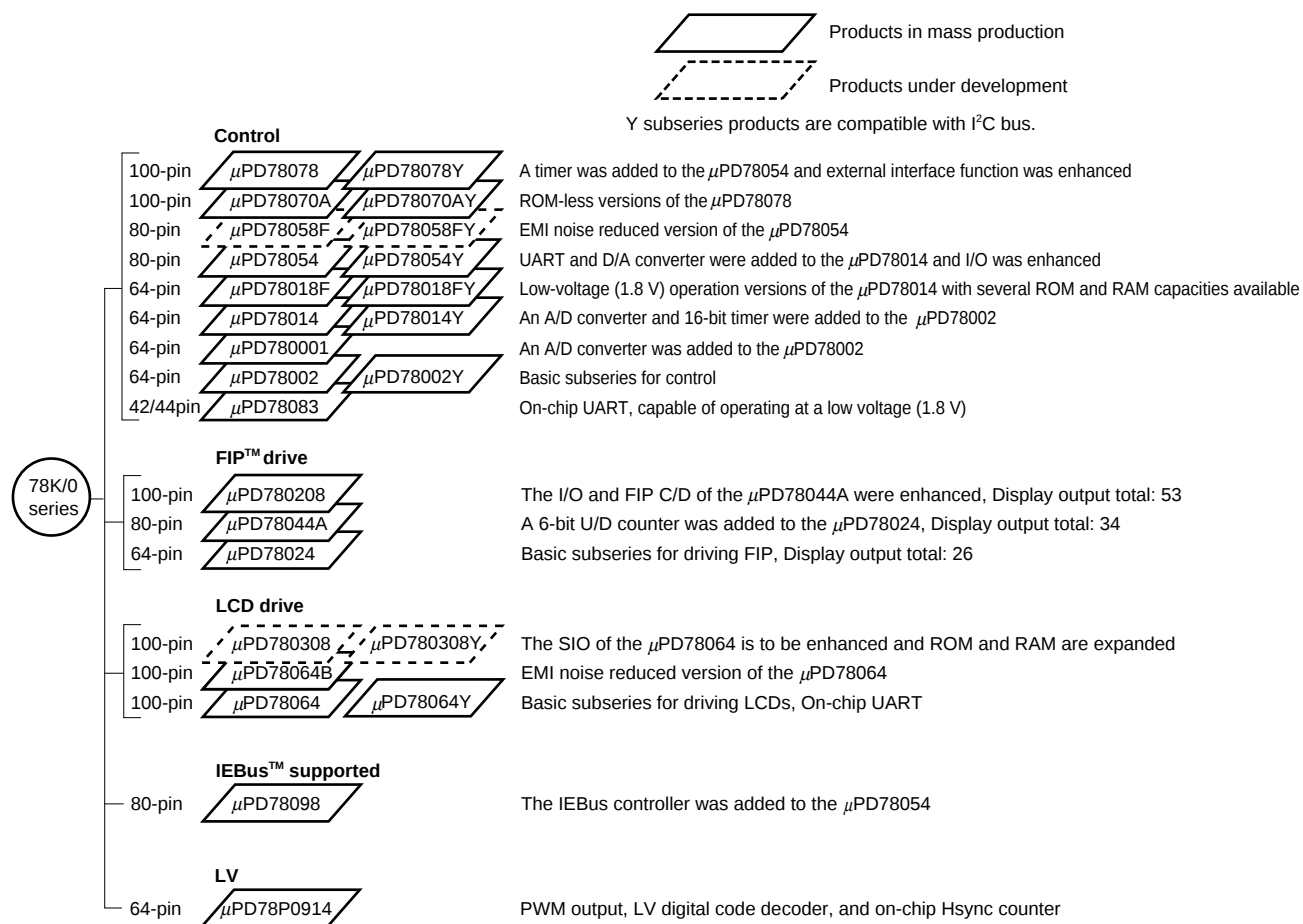

The following table lists the main functional differences between subseries products.

Function Subseries name		ROM capacity	Timer				8-bit	8-bit	Serial Interface	I/O	V _{DD}	External
			8-bit	16-bit	Watch	WDT	A/D	D/A			MIN. Value	Expansion
Control	μPD78078	32 K-60 K	4ch	1ch	1ch	1ch	8ch	2ch	3ch (UART: 1ch)	88	1.8 V	Available
	μPD78070A	–								61	2.7 V	
	μPD78058F	48 K-60 K	2ch	1ch	1ch	8ch	2ch	3ch (UART: 1ch)	69	2.0 V		
	μPD78054	16 K-60 K										
	μPD78018F	8 K-60 K								53	1.8 V	
	μPD78014	8 K-32 K								53	2.7 V	
	μPD780001	8 K								39		
	μPD78002	8 K-16 K		53		–						
	μPD78083					8ch	1ch (UART: 1ch)	33	1.8 V	–		
FIP driving	μPD780208	32 K-60 K	2ch	1ch	1ch	1ch	8ch	–	2ch	74	2.7 V	–
	μPD78044A	16 K-40 K								68		
	μPD78024	24 K-32 K								54		
LCD driving	μPD780308	48 K-60 K	2ch	1ch	1ch	1ch	8ch	–	3ch (UART: 1ch)	57	1.8 V	–
	μPD78064B	32 K							2ch (UART: 1ch)		2.0 V	
	μPD78064	16 K-32 K										
IEBus supported	μPD78098	32 K-60 K	2ch	1ch	1ch	1ch	8ch	2ch	3ch (UART: 1ch)	69	2.7 V	Available
LV	μPD78P0914	32 K	6ch	–	–	1ch	8ch	–	2ch	54	4.5 V	Available

FUNCTION DESCRIPTION

Item		Function
Internal memory	ROM	Not provided
	Internal high-speed RAM	1024 bytes
	Buffer RAM	32 bytes
Memory space		64 Kbytes
General registers		8 bits × 32 registers (8 bits × 8 registers × 4 banks)
Instruction cycle		On-chip instruction execution time setting function
	When main system clock is selected	0.4 μs/0.8 μs/1.6 μs/3.2 μs/6.4 μs/12.8 μs (@ 5.0 MHz)
	When subsystem clock is selected	122 μs (@ 32.768 kHz)
Instruction set		• 16-bit operation • Multiply/divide (8 bits × 8 bits, 16 bits ÷ 8 bits) • Bit manipulation (set, reset, test, Boolean operation) • BCD adjust, etc.
I/O ports		Total : 61 • CMOS input : 2 • CMOS I/O : 51 • N-ch open-drain I/O : 8
A/D converter		• 8-bit resolution × 8 channels
D/A converter		• 8-bit resolution × 2 channels
Serial interface		• 3-wire/SBI/2-wire bus mode selectable: 1 channel • 3-wire mode (on-chip max. 32-byte automatic data transmit/receive function): 1 channel • 3-wire/UART mode selectable: 1 channel
Timer		• 16-bit timer/event counter: 1 channel • 8-bit timer/event counter: 4 channels • Watch timer: 1 channel • Watchdog timer: 1 channel
Timer output		5 (14-bit PWM output × 1, 8-bit PWM output × 2)
Clock output		19.5 kHz, 39.1 kHz, 78.1 kHz, 156 kHz, 313 kHz, 625 kHz, 1.25 MHz, 2.5 MHz, 5.0 MHz (@ 5.0-MHz operation with main system clock) 32.768 kHz (@ 32.768-kHz operation with subsystem clock)
Buzzer output		1.2 kHz, 2.4 kHz, 4.9 kHz, 9.8 kHz (@ 5.0-MHz operation with main system clock)
Vectored interrupts	Maskable interrupts	Internal : 15, external : 7
	Non-maskable interrupts	Internal : 1
	Software interrupts	Internal : 1
Test input		Internal : 1
Power supply voltage		V _{DD} = 2.7 to 5.5 V
Package		• 100-pin plastic QFP (Fine pitch) (14 × 14 mm, Resin thickness 1.45 mm) • 100-pin plastic QFP (14 × 20 mm, Resin thickness 2.7 mm)

CONTENTS

1. PIN CONFIGURATION (TOP VIEW) ...	7
2. BLOCK DIAGRAM ...	10
3. PIN FUNCTIONS ...	11
3.1 Port Pins ...	11
3.2 Non-port Pins ...	13
3.3 Pin I/O Circuits and Recommended Connection of Unused Pins ...	15
4. MEMORY SPACE ...	19
5. PERIPHERAL HARDWARE FUNCTIONS ...	20
5.1 Ports ...	20
5.2 Clock Generator ...	21
5.3 Timer/Event Counter ...	22
5.4 Clock Output Control Circuit ...	24
5.5 Buzzer Output Control Circuit ...	25
5.6 A/D Converter ...	25
5.7 D/A Converter ...	25
5.8 Serial Interfaces ...	26
5.9 Real-Time Output Port ...	28
6. INTERRUPT FUNCTIONS AND TEST FUNCTION ...	29
6.1 Interrupt Functions ...	29
6.2 Test Function ...	33
7. EXTERNAL DEVICE EXPANSION FUNCTIONS ...	34
8. STANDBY FUNCTION ...	34
9. RESET FUNCTION ...	34
10. INSTRUCTION SET ...	35
11. ELECTRICAL SPECIFICATIONS...	38
12. PACKAGE DRAWINGS ...	63
13. RECOMMENDED SOLDERING CONDITIONS ...	65

★


★

APPENDIX A. DEVELOPMENT TOOLS ... 67

APPENDIX B. RELATED DOCUMENTS ... 69

1. PIN CONFIGURATION (Top View)


- 100-pin plastic QFP (Fine pitch) (14 × 14 mm)
μPD78070AGC-7EA

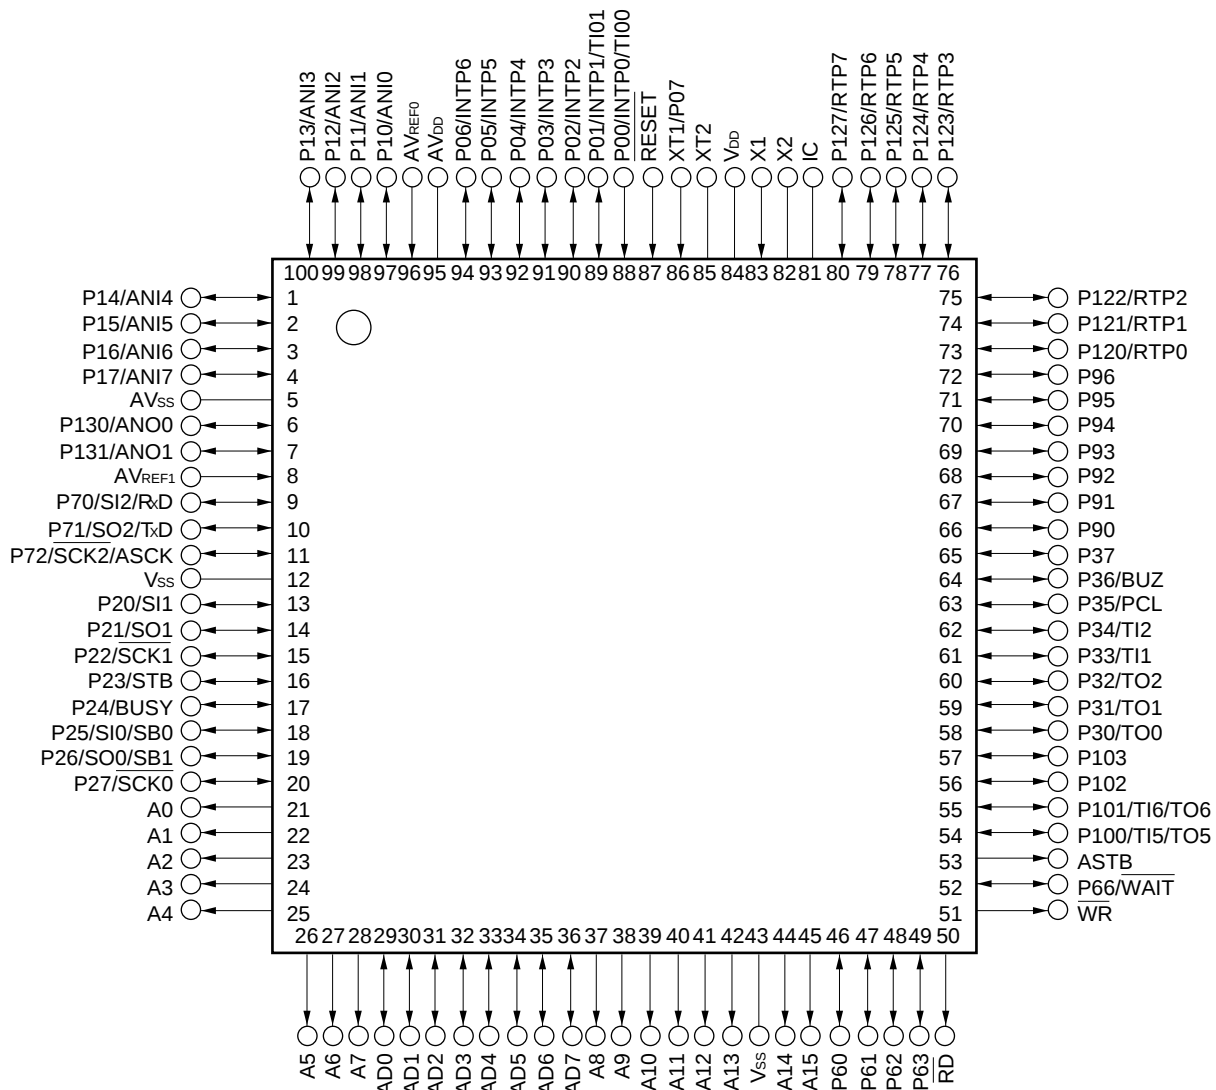

- Cautions**
1. Connect IC (Internally Connected) pin directly to V_{SS}.
 2. Connect AV_{DD} pin to V_{DD}.
 3. Connect AV_{SS} pin to V_{SS}.

- 100-pin plastic QFP (14 × 20 mm)


μPD78070AGF-3BA

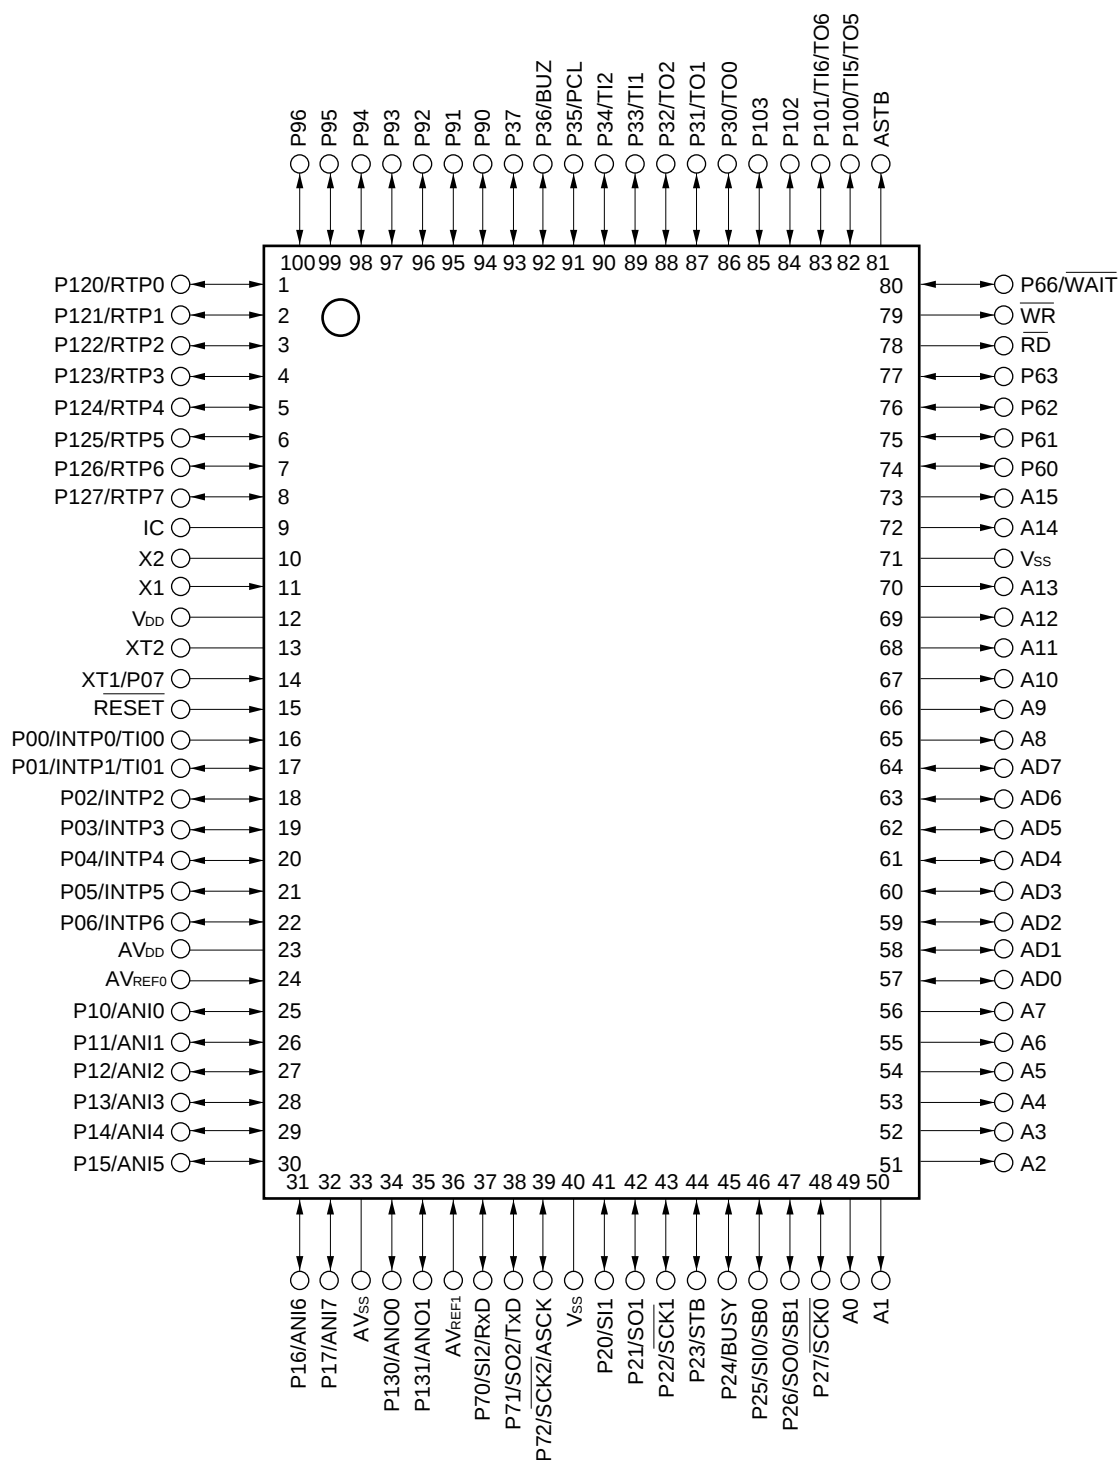

- Cautions**
1. Connect IC (Internally Connected) pin directly to V_{SS}.
 2. Connect AV_{DD} pin to V_{DD}.
 3. Connect AV_{SS} pin to V_{SS}.

P00-P07	: Port0	PCL	: Programmable Clock
P10-P17	: Port1	BUZ	: Buzzer Clock
P20-P27	: Port2	STB	: Strobe
P30-P37	: Port3	BUSY	: Busy
P60-P63, P66	: Port6	AD0-AD7	: Address/Data Bus
P70-P72	: Port7	A0-A15	: Address Bus
P90-P96	: Port9	$\overline{RD}$	: Read Strobe
P100-P103	: Port10	$\overline{WR}$	: Write Strobe
P120-P127	: Port12	WAIT	: Wait
P130, P131	: Port13	ASTB	: Address Strobe
RTP0-RTP7	: Real-time Output Port	X1, X2	: Crystal (Main System Clock)
INTP0-INTP6	: Interrupt from Peripherals	XT1, XT2	: Crystal (Subsystem Clock)
TI00, TI01	: Timer Input	$\overline{RESET}$	: Reset
TI1, TI2, TI5, TI6	: Timer Input	ANI0-ANI7	: Analog Input
TO0-TO2, TO5, TO6	: Timer Output	ANO0, ANO1	: Analog Output
SB0, SB1	: Serial Bus	AV _{DD}	: Analog Power Supply
SI0-SI2	: Serial Input	AV _{SS}	: Analog Ground
SO0-SO2	: Serial Output	AV _{REF0} , AV _{REF1}	: Analog Reference Voltage
$\overline{SCK0}$ - $\overline{SCK2}$	: Serial Clock	V _{DD}	: Power Supply
RxD	: Receive Data	V _{SS}	: Ground
TxD	: Transmit Data	IC	: Internally Connected
ASCK	: Asynchronous Serial Clock		

2. BLOCK DIAGRAM

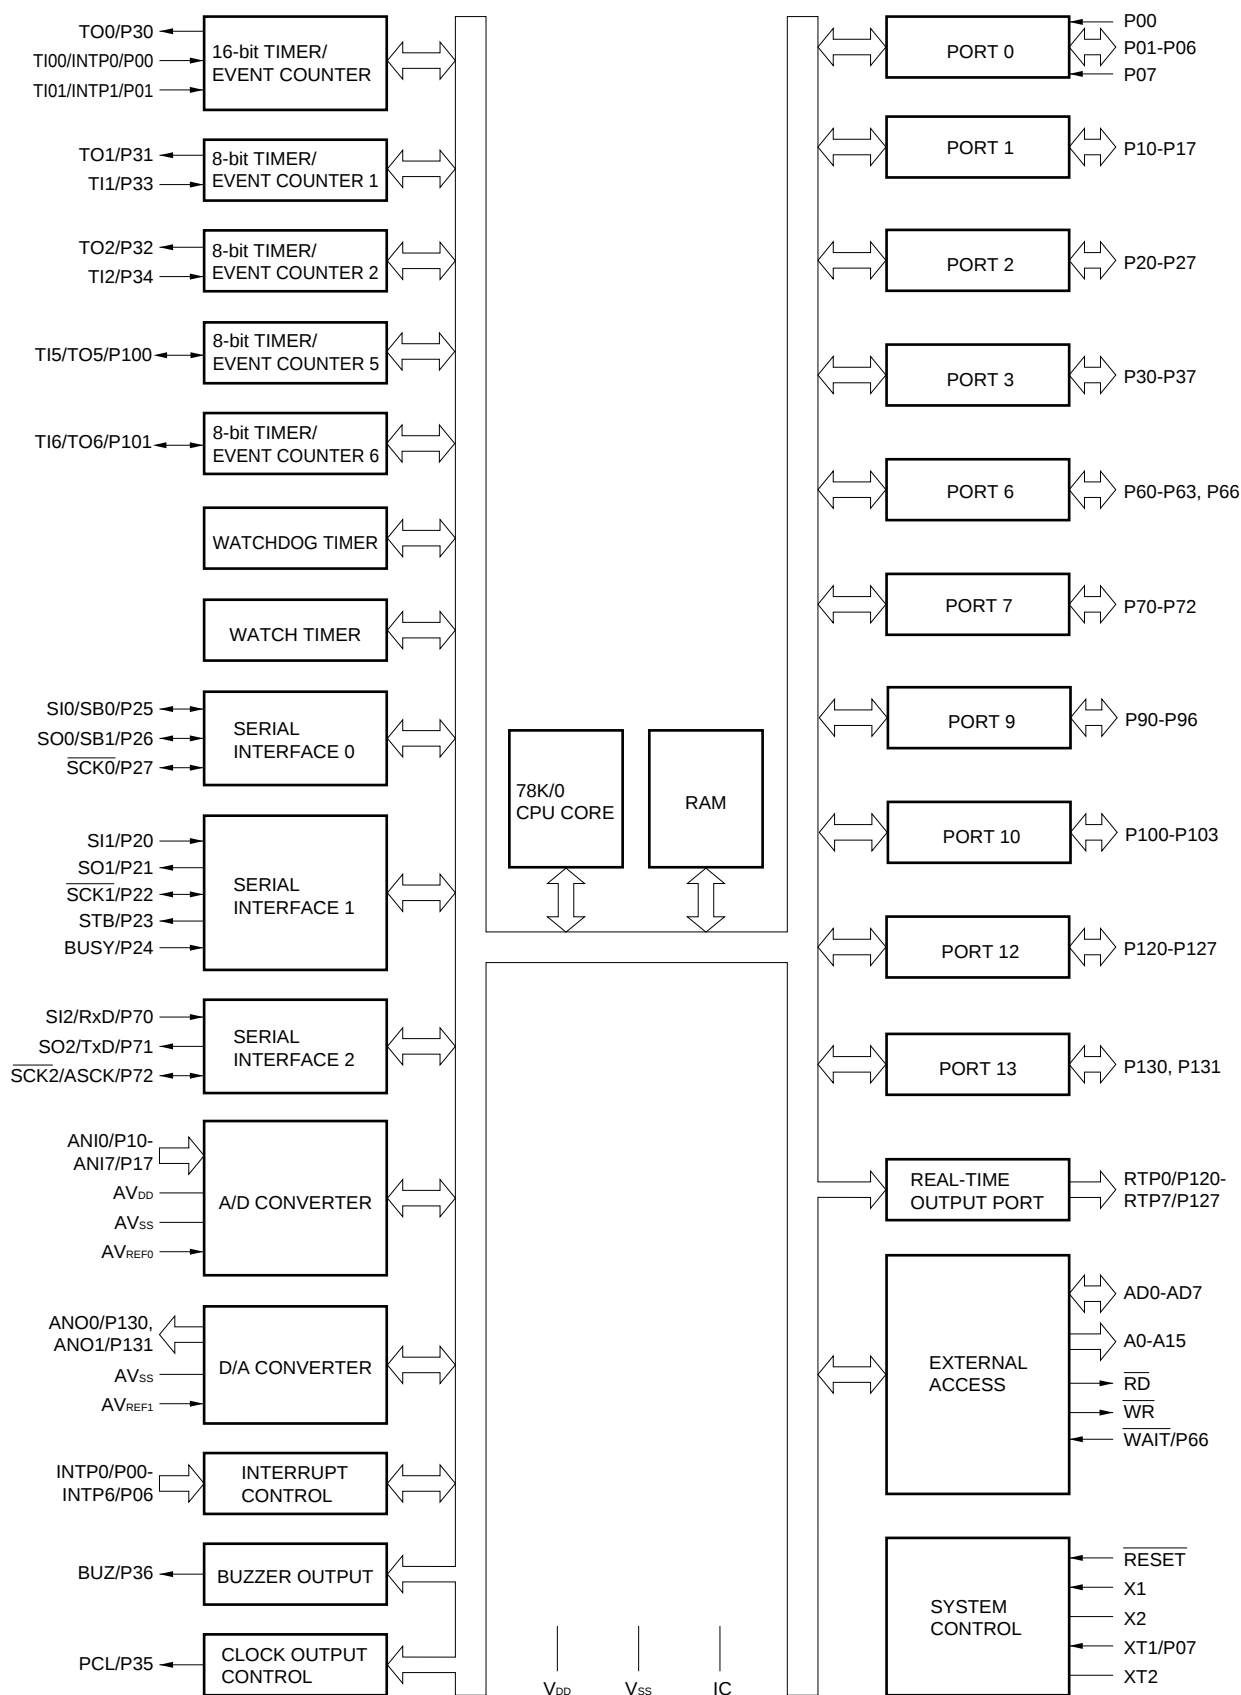

3. PIN FUNCTIONS

3.1 Port Pins (1/2)

Pin Name	Input/Output	Function		After Reset	Alternate Function
P00	Input	Port 0	Input only.	Input	INTP0/TI00
P01	Input/output	8-bit input/output port.	Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.	Input	INTP1/TI01
P02					INTP2
P03					INTP3
P04					INTP4
P05					INTP5
P06					INTP6
P07 ^{Note1}	Input		Input only.	Input	XT1
P10-P17	Input/output	Port 1 8-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software. ^{Note2}		Input	ANI0-ANI7
P20	Input/output	Port 2 8-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	SI1
P21					SO1
P22					SCK1
P23					STB
P24					BUSY
P25					SI0/SB0
P26					SO0/SB1
P27					SCK0
P30	Input/output	Port 3 8-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	TO0
P31					TO1
P32					TO2
P33					TI1
P34					TI2
P35					PCL
P36					BUZ
P37					—

- Notes**
1. When using the P07/XT1 pin as an input port, set bit 6 (FRC) of the processor clock control register (PCC) to 1. Do not use the on-chip feedback resistor of the subsystem clock oscillator.
 2. When using the P10/ANI0 to P17/ANI7 pins as the A/D converter analog inputs, their on-chip pull-up resistors are automatically disconnected.

3.1 Port Pins (2/2)

Pin Name	Input/Output	Function		After Reset	Alternate Function
P60	Input/output	Port 6 5-bit input/output port. Input/output can be specified bit-wise.	N-ch open-drain input/output port. LED can be driven directly.	Input	—
P61					
P62					
P63					
P66			When used as an input port, on-chip pull-up resistor can be used by software.		WAIT
P70	Input/output	Port 7 3-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	SI2/RxD
P71					SO2/TxD
P72					SCK2/ASCK
P90	Input/output	Port 9 7-bit input/output port. Input/output can be specified bit-wise.	N-ch open-drain input/output port.	Input	—
P91					
P92					
P93					
P94					
P95					
P96			When used as an input port, on-chip pull-up resistor can be used by software.		
P100	Input/output	Port 10 4-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	TI5/TO5
P101					TI6/TO6
P102, P103					—
P120-P127	Input/output	Port 12 8-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	RTP0-RTP7
P130, P131	Input/output	Port 13 2-bit input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be used by software.		Input	ANO0, ANO1

3.2 Non-port Pins (1/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
INTP0	Input	External interrupt input by which the active edge (rising edge, falling edge, or both rising and falling edges) can be specified.	Input	P00/TI00
INTP1				P01/TI01
INTP2				P02
INTP3				P03
INTP4				P04
INTP5				P05
INTP6				P06
SI0	Input	Serial interface serial data input.	Input	P25/SB0
SI1				P20
SI2				P70/RxD
SO0	Output	Serial interface serial data output.	Input	P26/SB1
SO1				P21
SO2				P71/TxD
SB0	Input/Output	Serial interface serial data input/output.	Input	P25/SI0
SB1				P26/SO0
SCK0	Input/Output	Serial interface serial clock input/output.	Input	P27
SCK1				P22
SCK2				P72/ASCK
STB	Output	Serial interface automatic transmit/receive strobe output.	Input	P23
BUSY	Input	Serial interface automatic transmit/receive busy input.	Input	P24
RxD	Input	Asynchronous serial interface serial data input.	Input	P70/SI2
TxD	Output	Asynchronous serial interface serial data output.	Input	P71/SO2
ASCK	Input	Asynchronous serial interface serial clock input.	Input	P72/SCK2
TI00	Input	External count clock input to 16-bit timer (TM0).	Input	P00/INTP0
TI01		Capture trigger signal input to capture register (CR00).		P01/INTP1
TI1		External count clock input to 8-bit timer (TM1).		P33
TI2		External count clock input to 8-bit timer (TM2).		P34
TI5		External count clock input to 8-bit timer (TM5).		P100/TO5
TI6		External count clock input to 8-bit timer (TM6).		P101/TO6
TO0	Output	16-bit timer output (also used for 14-bit PWM output).	Input	P30
TO1		8-bit timer output.		P31
TO2				P32
TO5		8-bit timer output (also used for 8-bit PWM output).		P100/TO5
TO6				P101/TO6
PCL	Output	Clock output (for main system clock, subsystem clock trimming).	Input	P35

3.2 Non-port Pins (2/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
BUZ	Output	Buzzer output.	Input	P36
RTP0-RTP7	Output	Real-time output port by which data is output in synchronization with a trigger.	Input	P120-P127
AD0-AD7	Input/Output	Data bus for external memory.	Input	—
A0-A15	Output	Address bus for external memory.	Input	—
RD	Output	External memory read operation strobe signal output.	Input	—
WR		External memory write operation strobe signal output.		—
WAIT	Input	Wait insertion at external memory access.	Input	P66
ANI0-ANI7	Input	A/D converter analog input.	Input	P10-P17
ANO0, ANO1	Output	D/A converter analog output.	Input	P130, P131
AVREF0	Input	A/D converter reference voltage input.	—	—
AVREF1	Input	D/A converter reference voltage input.	—	—
AVDD	—	A/D converter analog power supply. Connected to VDD.	—	—
AVSS	—	A/D converter ground potential. Connected to VSS.	—	—
RESET	Input	System reset input.	—	—
X1	Input	Main system clock oscillation crystal connection.	—	—
X2	—		—	—
XT1	Input	Subsystem clock oscillation crystal connection.	Input	P07
XT2	—		—	—
VDD	—	Positive power supply.	—	—
VSS	—	Ground potential.	—	—
IC	—	Internal connection. Connected directly to VSS.	—	—

3.3 Pin I/O Circuits and Recommended Connection of Unused Pins

The input/output circuit type of each pin and recommended connection of unused pins are shown in Table 3-1.
For the input/output circuit configuration of each type, see Figure 3-1.

Table 3-1. Types of Pin Input/Output Circuits (1/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins
P00/INTP0/TI00	2	Input	Connect to V _{SS} .
P01/INTP1/TI01	8-A	Input/Output	Independently connect to V _{SS} via a resistor.
P02/INTP2			
P03/INTP3			
P04/INTP4			
P05/INTP5			
P06/INTP6			
P07/XT1	16	Input	Connect to V _{DD} .
P10/ANI0-P17/ANI7	11	Input/Output	Independently connect to V _{DD} or V _{SS} via a resistor.
P20/SI1	8-A		
P21/SO1	5-A		
P22/SCK1	8-A		
P23/STB	5-A		
P24/BUSY	8-A		
P25/SI0/SB0	10-A		
P26/SO0/SB1			
P27/SCK0			
P30/TO0	5-A		
P31/TO1			
P32/TO2			
P33/TI1	8-A		
P34/TI2			
P35/PCL	5-A		
P36/BUZ			
P37			
P60-P63	13-C	Input/Output	Independently connect to V _{DD} via a resistor.
P66/WAIT	5-A	Input/Output	Independently connect to V _{DD} or V _{SS} via a resistor.

★

Table 3-1. Types of Pin Input/Output Circuits (2/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins
P70/SI2/RxD	8-A	Input/Output	Independently connect to V _{DD} or V _{SS} via a resistor.
P71/SO2/TxD	5-A		
P72/ $\overline{\text{SCK2}}$ /ASCK	8-A		
P90-P93	13-C	Input/Output	Independently connect to V _{DD} via a resistor.
P94-P96	5-A	Input/Output	Independently connect to V _{DD} or V _{SS} via a resistor.
P100/TI5/TO5	8-A		
P101/TI6/TO6			
P102, P103	5-A		
P120/RTP0-P127/RTP7			
P130/ANO0, P131/ANO1	12-A	Input/Output	Independently connect to V _{SS} via a resistor.
AD0-AD7	5-E	Input/Output	Independently connect to V _{DD} via a resistor.
A0-A15	5-A	Output	Leave open.
$\overline{\text{RD}}$			
$\overline{\text{WR}}$			
ASTB			
$\overline{\text{RESET}}$	2	Input	—
XT2	16	—	Leave open.
AV _{REF0}	—		Connect to V _{SS} .
AV _{REF1}			Connect to V _{DD} .
AV _{DD}			
AV _{SS}			Connect to V _{SS} .
IC			Connect directly to V _{SS} .

Figure 3-1. Pin Input/Output Circuits (1/2)


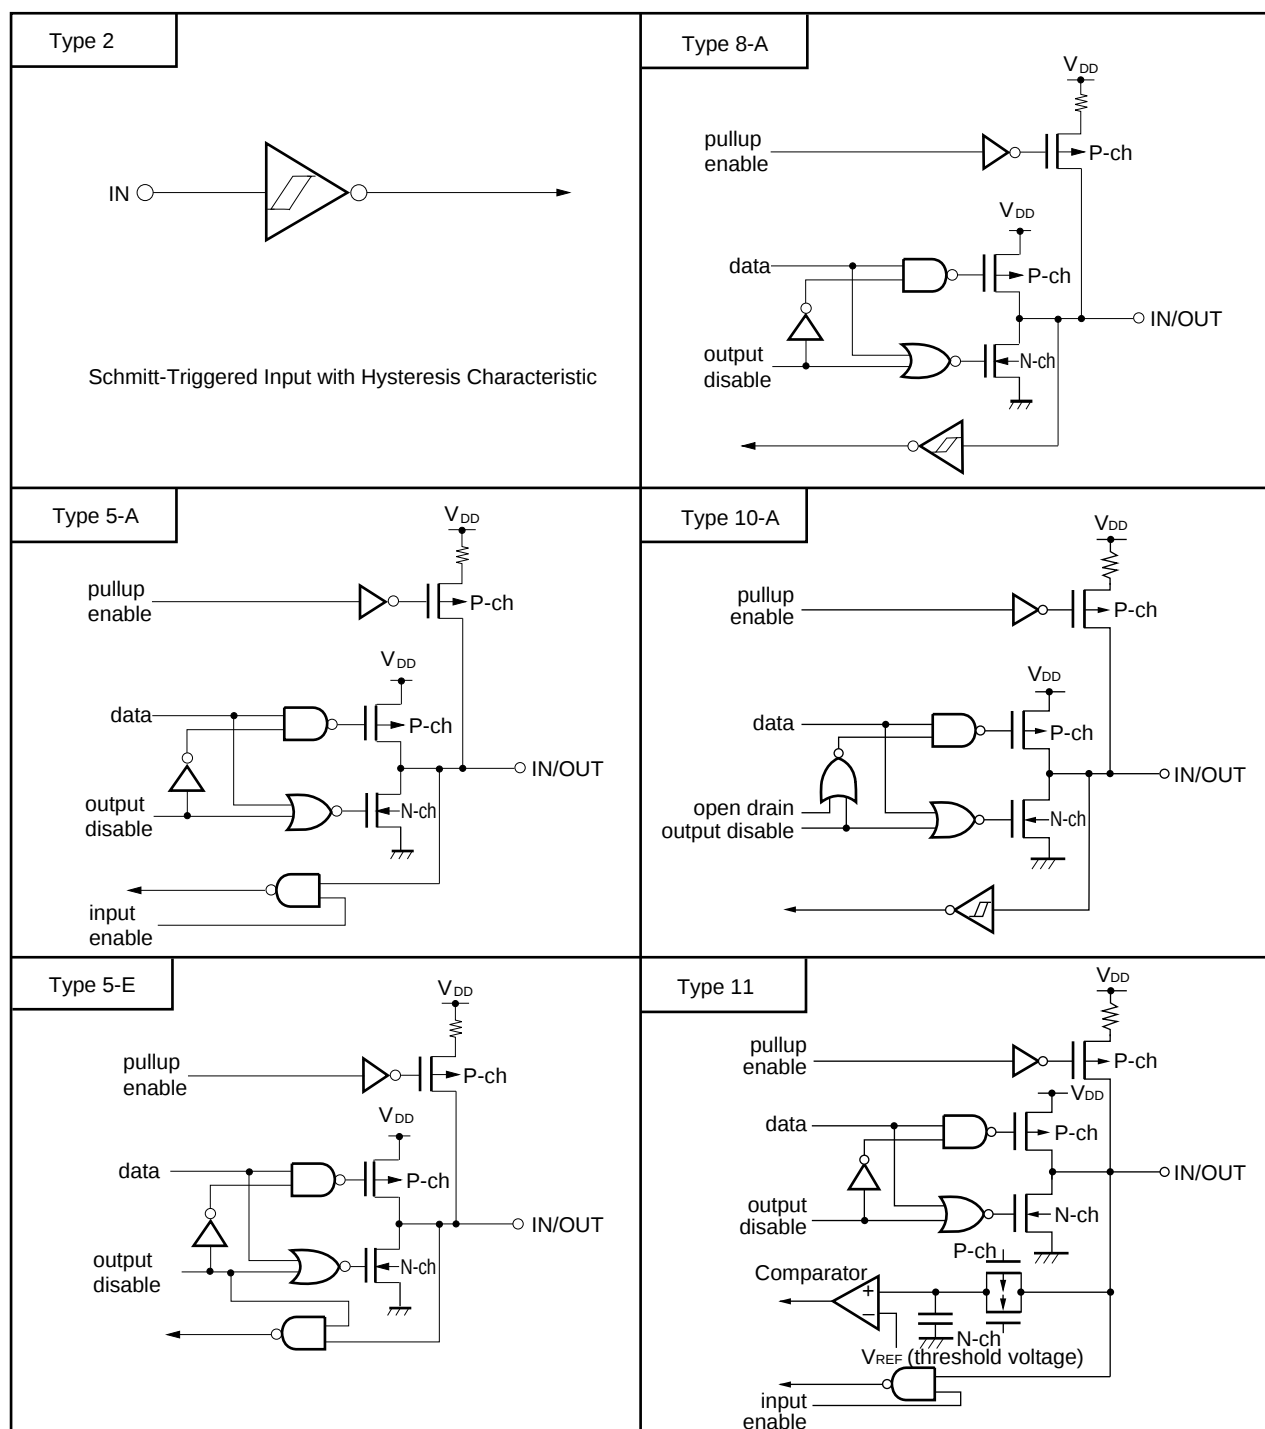



Figure 3-1. Pin Input/Output Circuits (2/2)

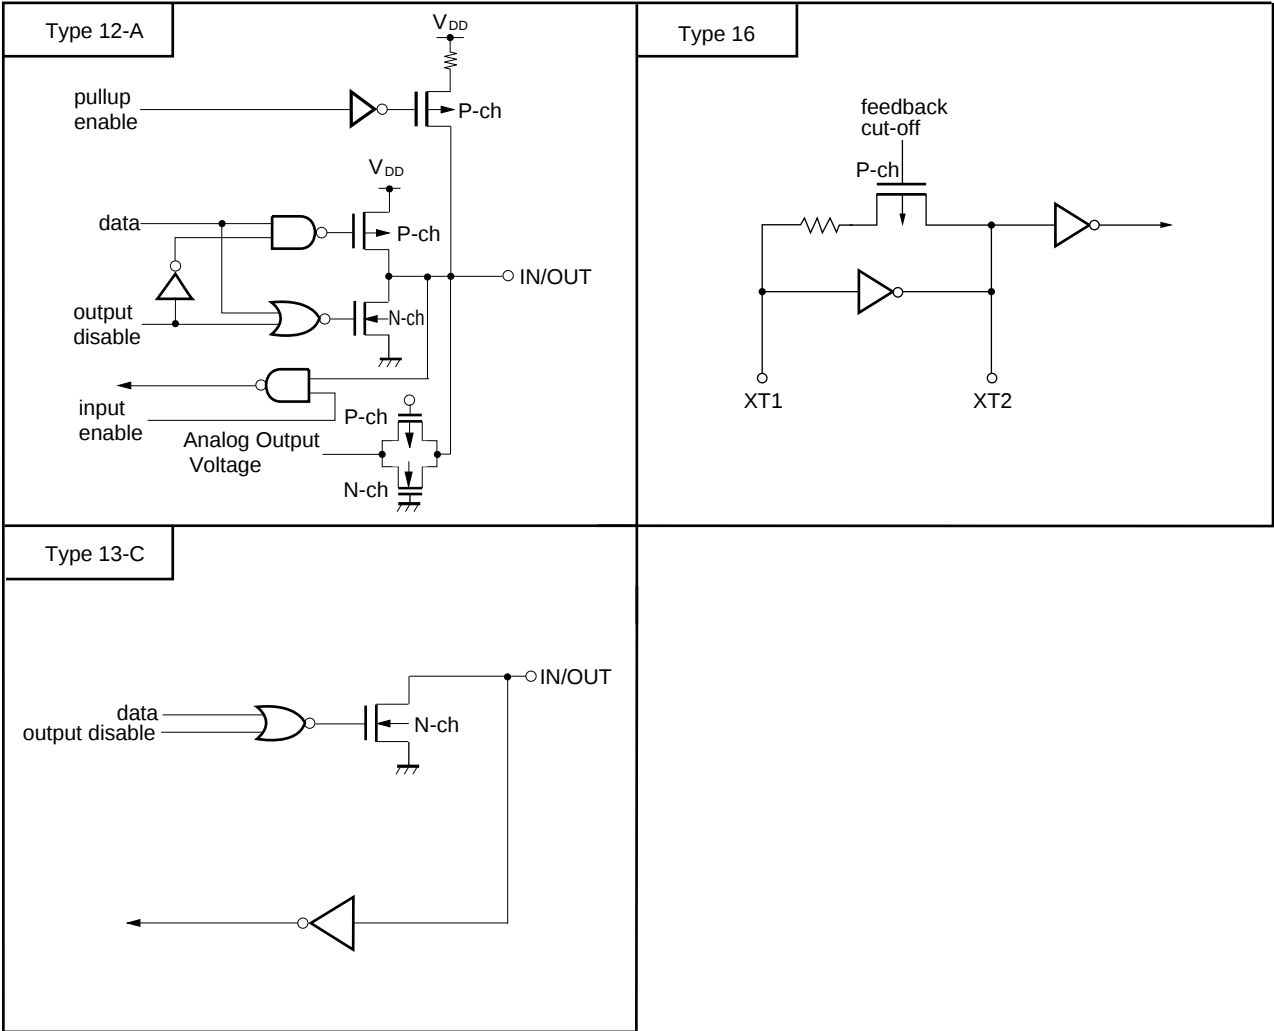

4. MEMORY SPACE

The memory map of the μPD78070A is shown in Figure 4-1.

Figure 4-1. Memory Map

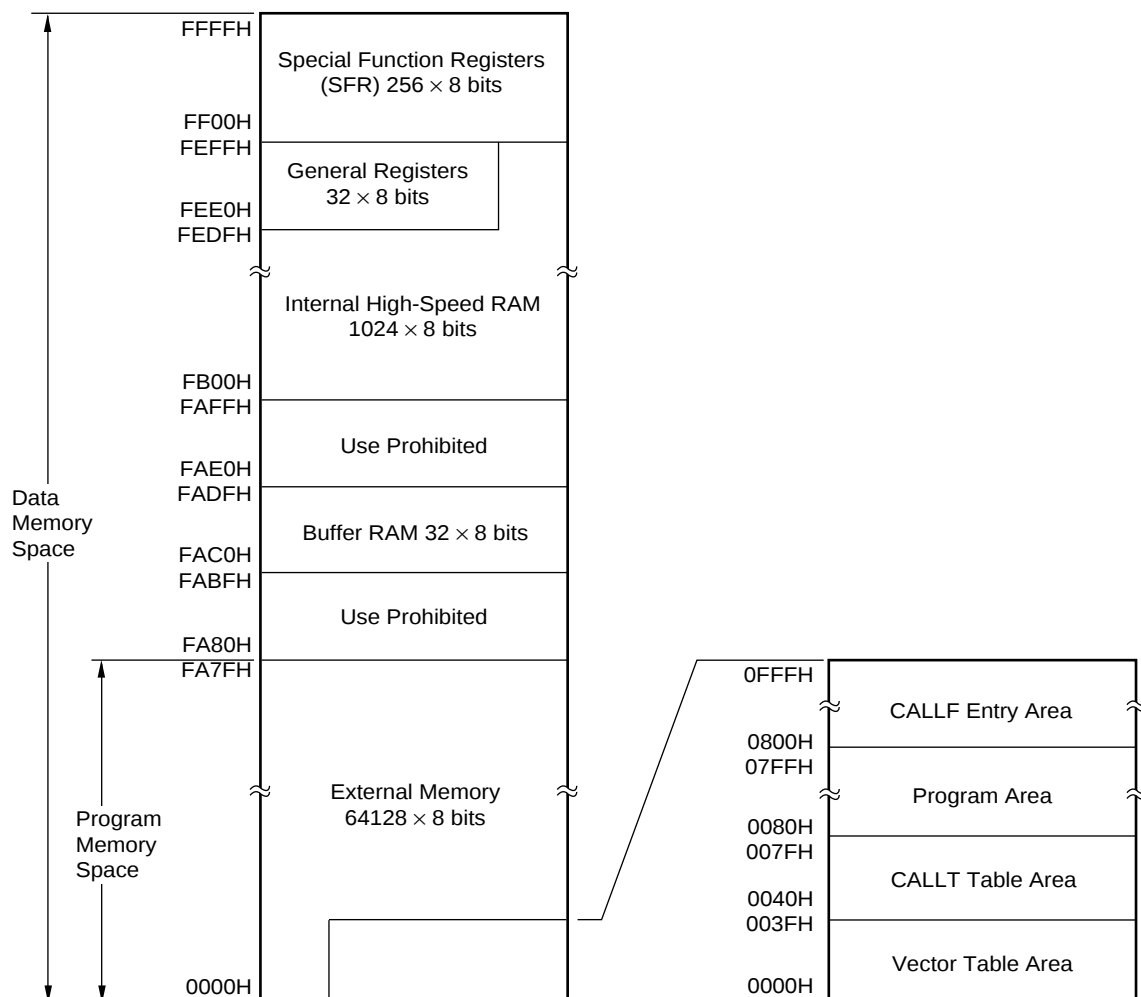

5. PERIPHERAL HARDWARE FUNCTIONS

5.1 Ports

Input/output ports are classified into three types.

• CMOS inputs (P00, P07)	: 2
• CMOS input/outputs (P01-P06, Port 1-3, P66, Port 7, P94-P96, Port 10, Port 12, Port 13)	: 51
• N-ch open-drain input/outputs (P60-P63, P90-P93)	: 8
Total	: 61

Table 5-1. Functions of Ports


Port Name	Pin Name	Function
Port 0	P00, P07	Input only.
	P01-P06	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 1	P10-P17	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 2	P20-P27	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 3	P30-P37	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 6	P60-P63	N-ch open-drain input/output port. Input/output can be specified bit-wise. LED can be driven directly.
	P66	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 7	P70-P72	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 9	P90-P93	N-ch open-drain input/output port. Input/output can be specified bit-wise.
	P94-P96	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 10	P100-P103	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 12	P120-P127	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.
Port 13	P130, P131	Input/output port. Input/output can be specified bit-wise. When used as an input port, on-chip pull-up resistor can be connected by software.

5.2 Clock Generator

There are two kinds of clock generators: main system and subsystem clock generators. It is possible to change the instruction execution time.

- 0.4 μ s/0.8 μ s/1.6 μ s/3.2 μ s/6.4 μ s/12.8 μ s (at main system clock frequency of 5.0 MHz)
- 122 μ s (at subsystem clock frequency of 32.768 kHz)

Figure 5-1. Clock Generator Block Diagram

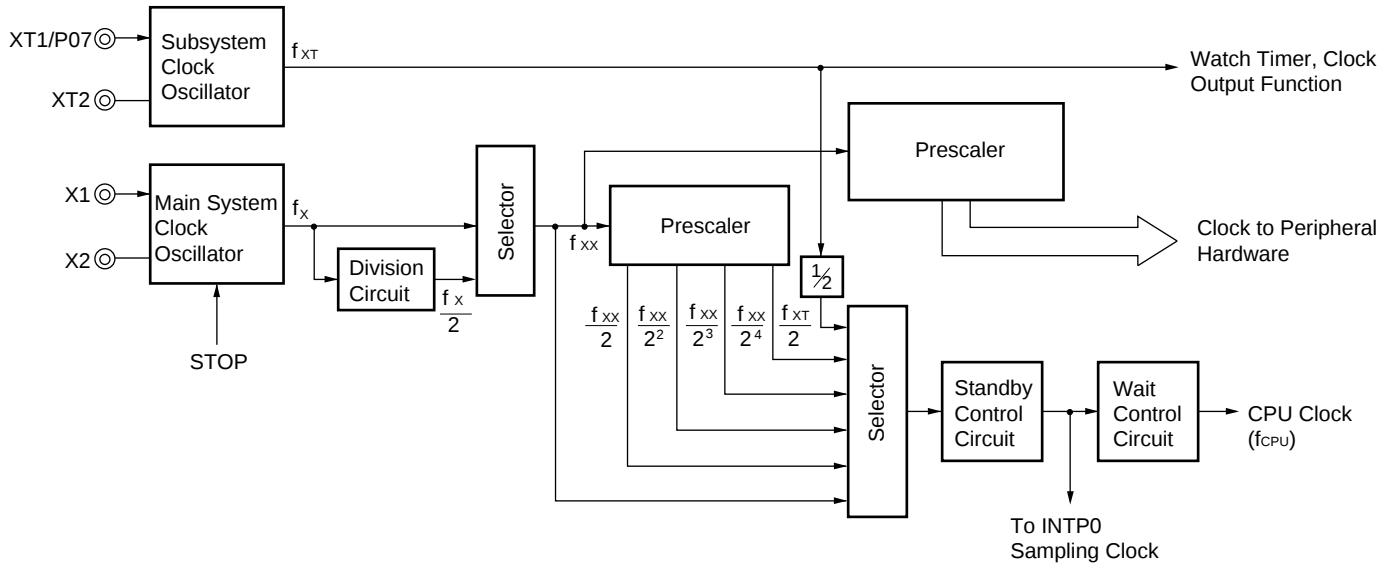

5.3 Timer/Event Counter

There are the following seven timer/event counter channels:

- 16-bit timer/event counter : 1 channel
- 8-bit timer/event counter : 4 channels
- Watch timer : 1 channel
- Watchdog timer : 1 channel

Table 5-2. Types and Functions of Timer/Event Counters

		16-bit Timer/ Event Counter	8-bit Timer/ Event Counter 1, 2	8-bit Timer/ Event Counter 5, 6	Watch Timer	Watchdog Timer
Type	Interval timer	1 channel	2 channels	2 channels	1 channel	1 channel
	External event counter	1 channel	2 channels	2 channels	—	—
Function	Timer output	1 output	2 outputs	2 outputs	—	—
	PWM output	1 output	—	2 outputs	—	—
	Pulse width measurement	2 inputs	—	—	—	—
	Square wave output	1 output	2 outputs	2 outputs	—	—
	One-shot pulse output	1 output	—	—	—	—
	Interrupt request	2	2	2	1	1
	Test input	—	—	—	1	—

Figure 5-2. 16-Bit Timer/Event Counter Block Diagram

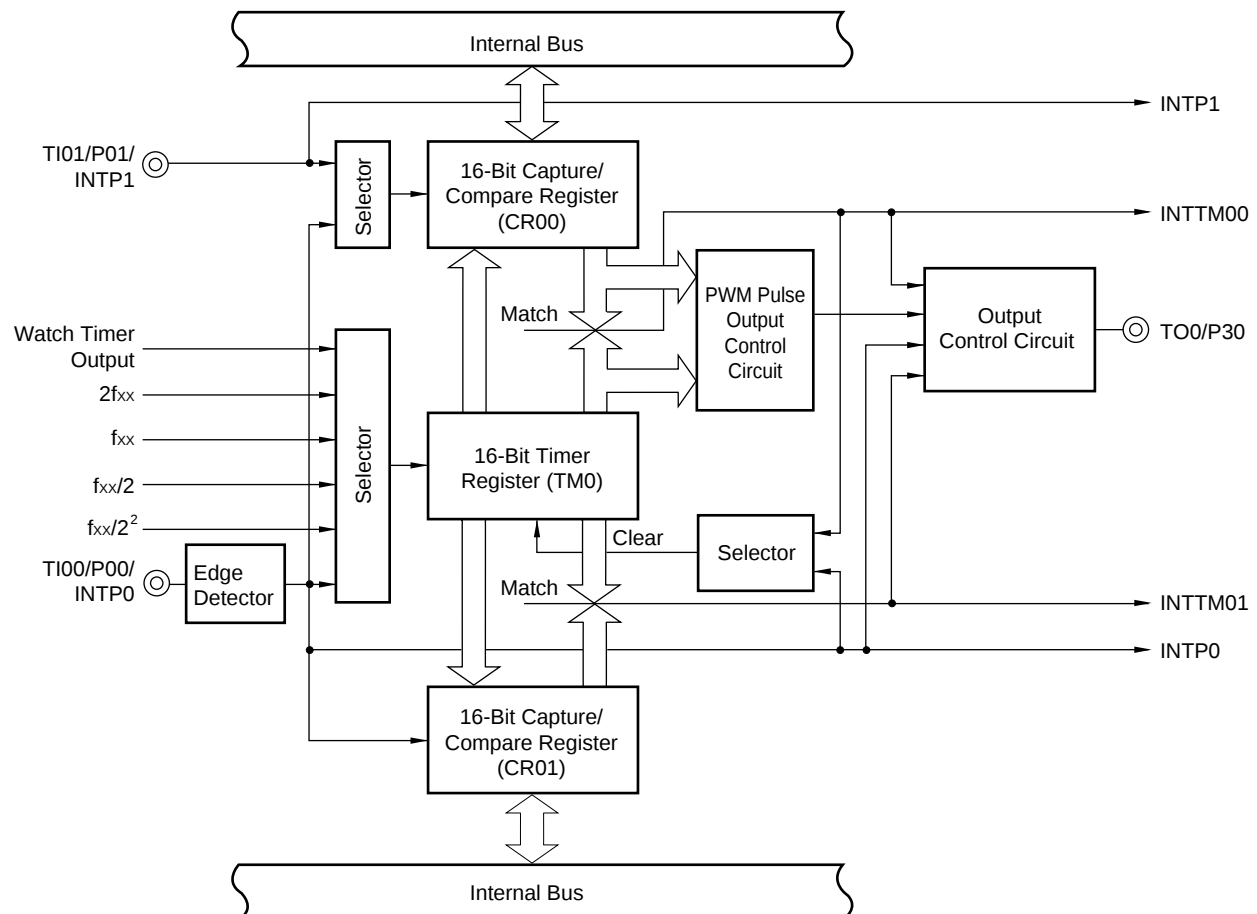


Figure 5-3. 8-Bit Timer/Event Counter 1, 2 Block Diagram


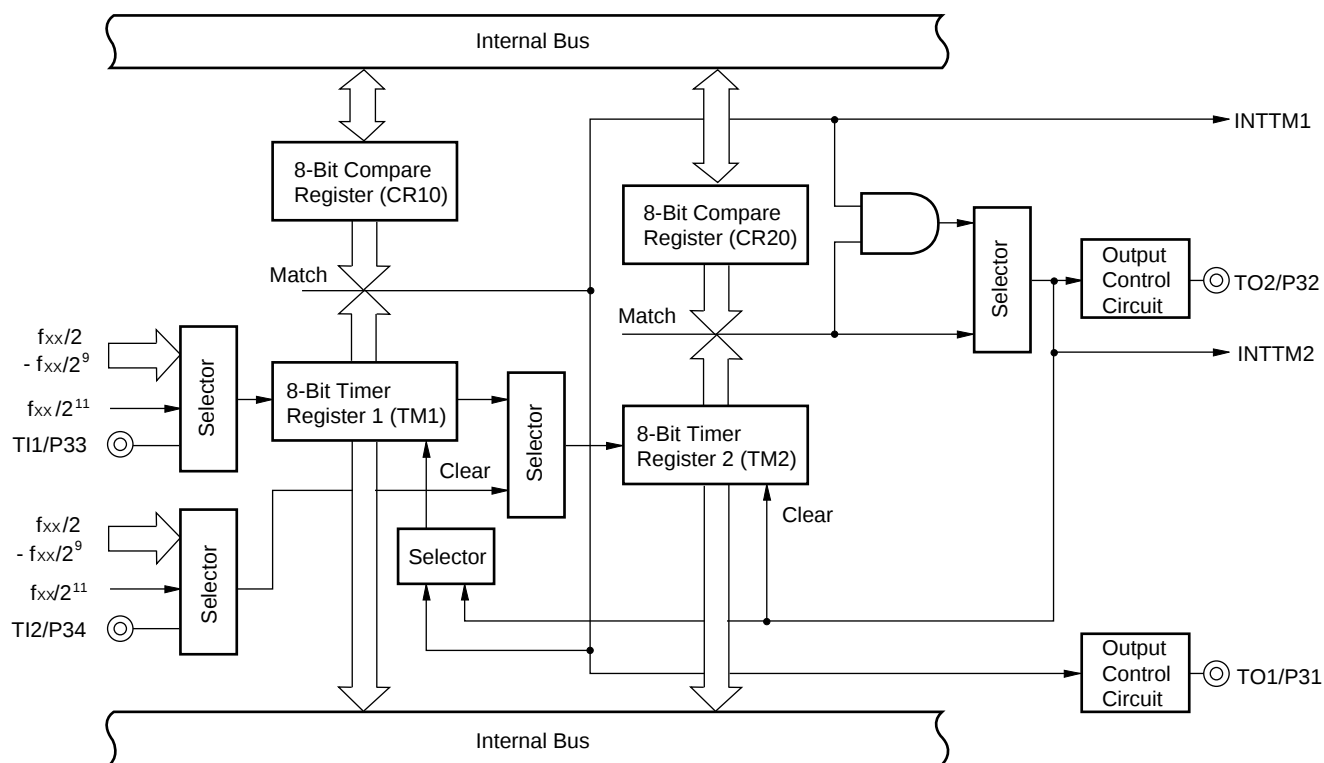


Figure 5-4. 8-Bit Timer/Event Counter 5, 6 Block Diagram

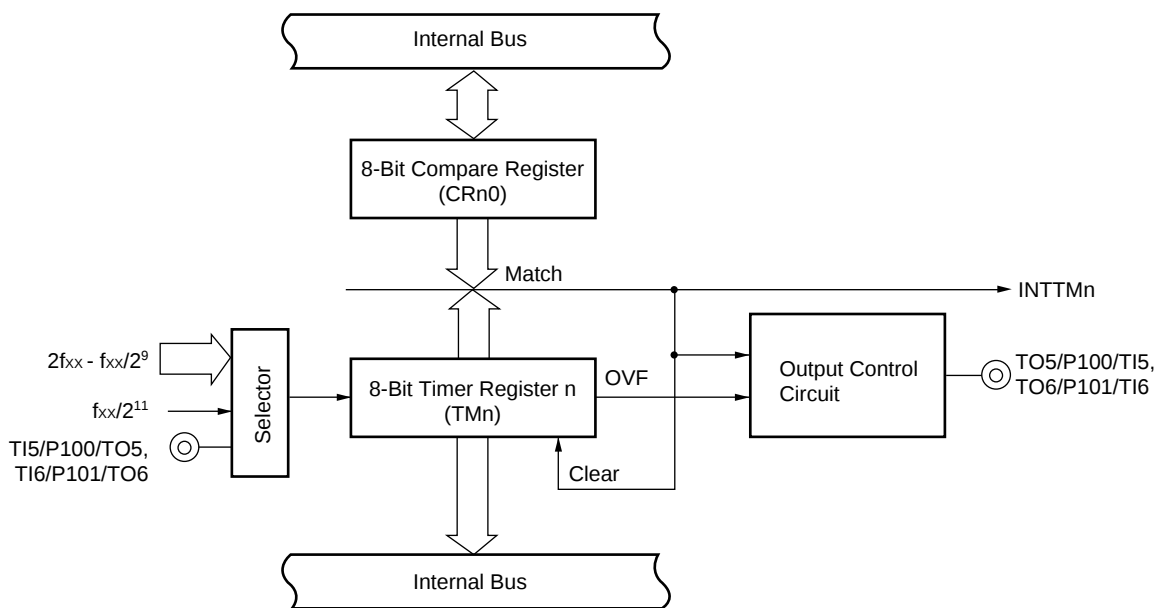

n = 5, 6

Figure 5-5. Watch Timer Block Diagram


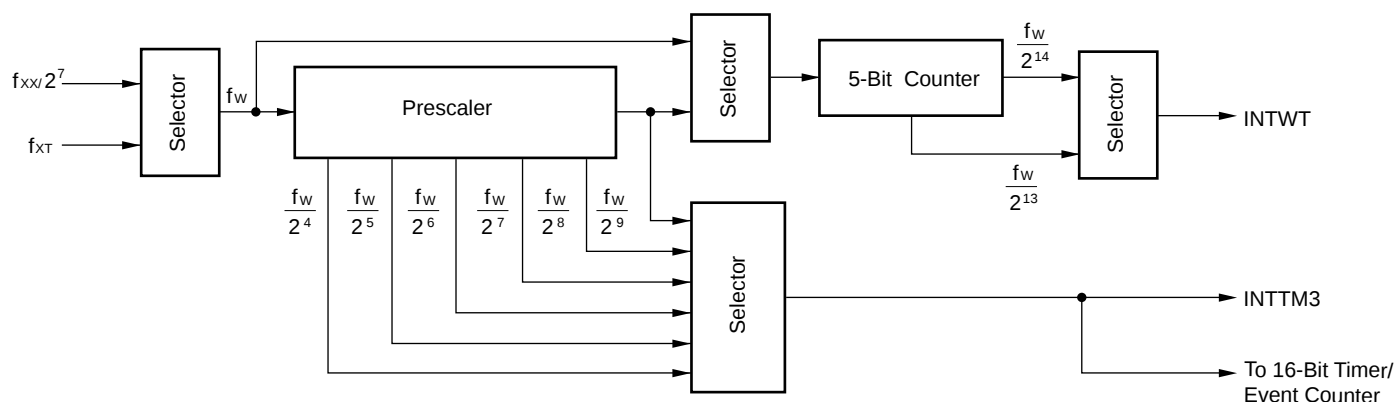


Figure 5-6. Watchdog Timer Block Diagram

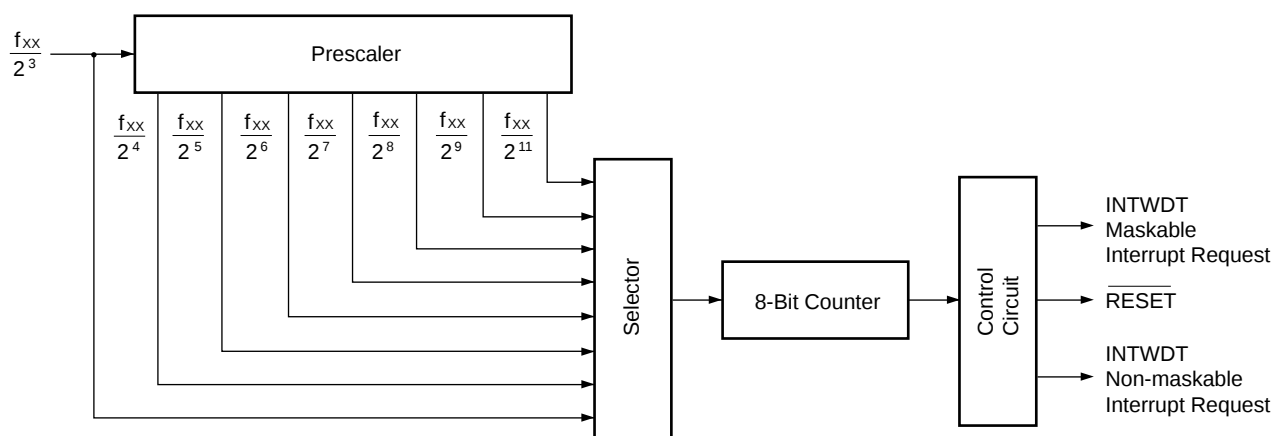


5.4 Clock Output Control Circuit

This circuit can output clocks of the following frequencies:

- 19.5 kHz/39.1 kHz/78.1 kHz/156 kHz/313 kHz/625 kHz/1.25 MHz/2.5 MHz/5.0 MHz (at main system clock frequency of 5.0 MHz)
- 32.768 kHz (at subsystem clock frequency of 32.768 kHz)

Figure 5-7. Clock Output Control Circuit Block Diagram

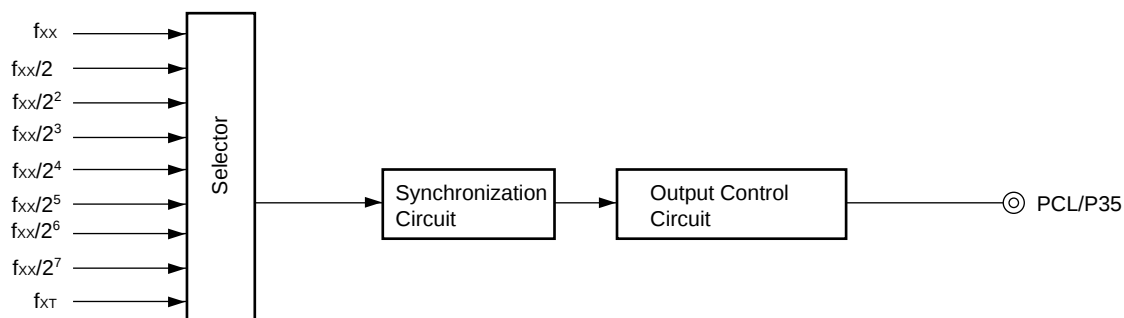


5.5 Buzzer Output Control Circuit

This circuit can output clocks of the following frequencies that can be used for driving buzzers:

- 1.2 kHz/2.4 kHz/4.9 kHz/9.8 kHz (at main system clock frequency of 5.0 MHz)

Figure 5-8. Buzzer Output Control Circuit Block Diagram

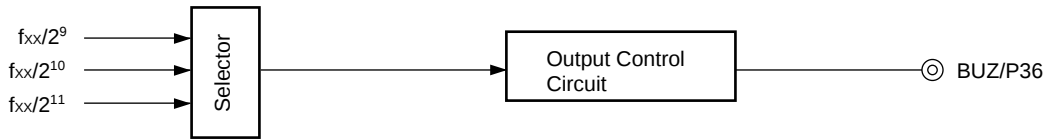


5.6 A/D Converter

The A/D converter consists of eight 8-bit resolution channels.

A/D conversion can be started by the following two methods:

- Hardware starting
- Software starting

Figure 5-9. A/D Converter Block Diagram

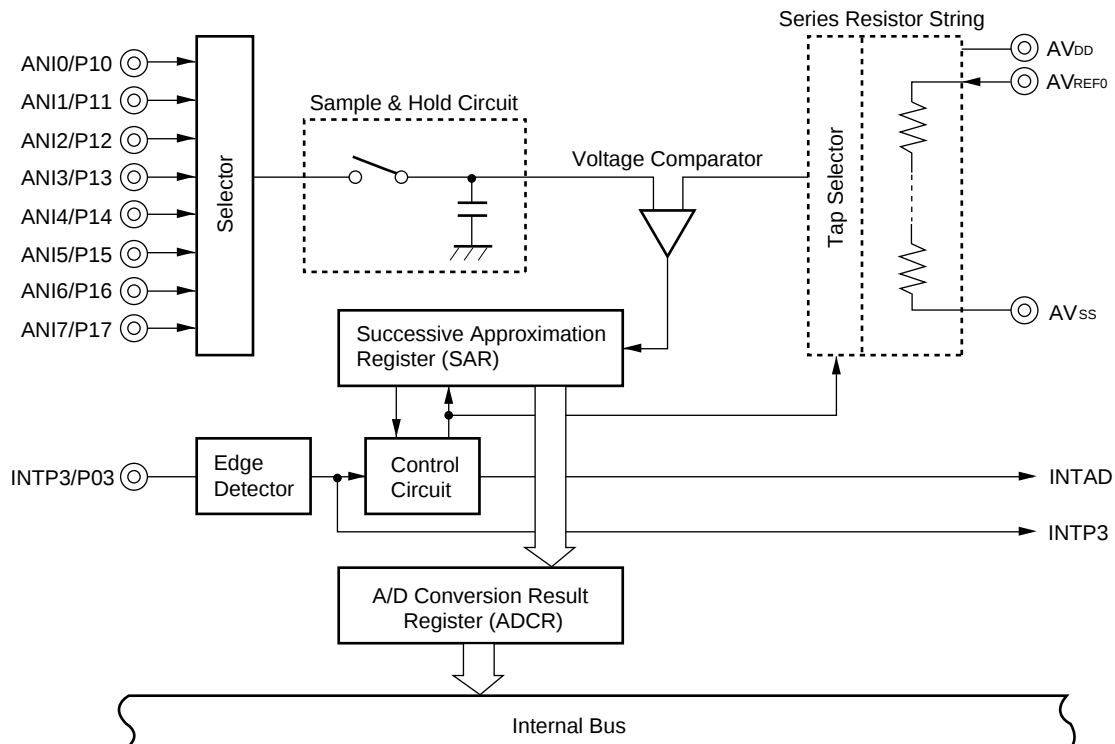


5.7 D/A Converter

The D/A converter consists of two 8-bit resolution channels.

The conversion method is the R-2R resistor ladder method.

Figure 5-10. D/A Converter Block Diagram

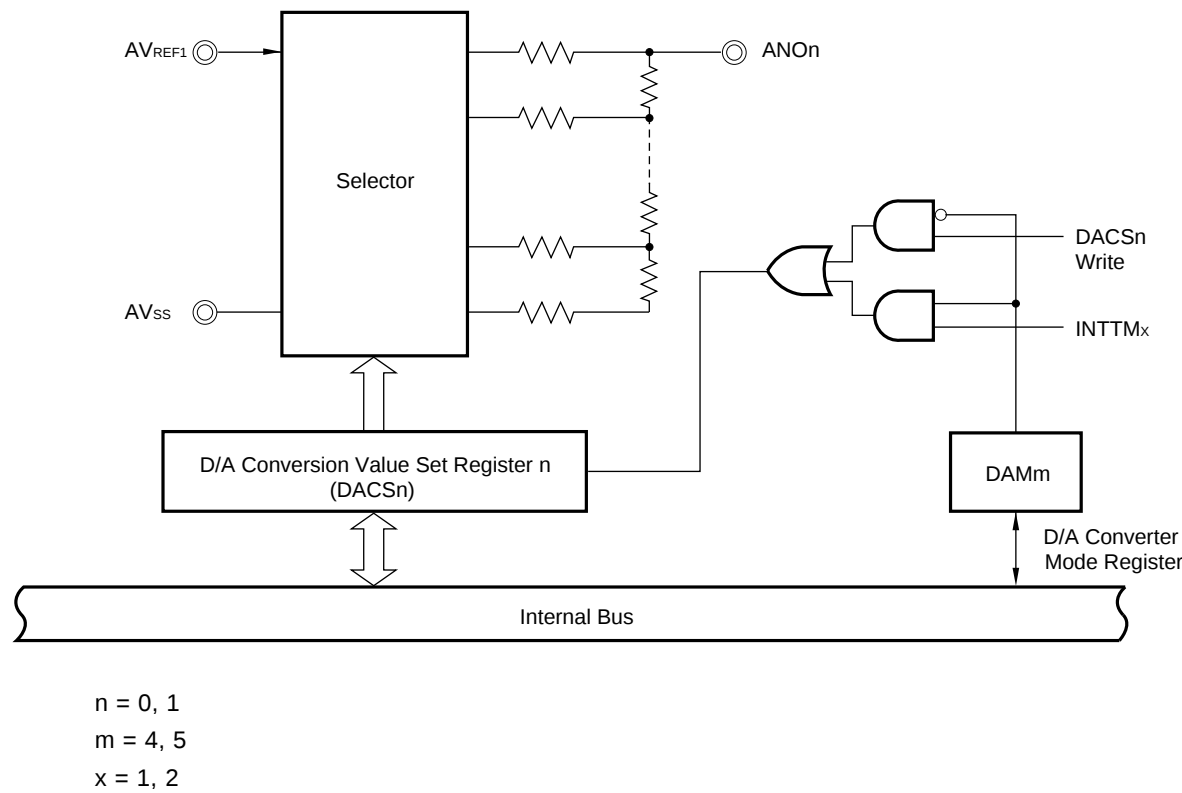

5.8 Serial Interfaces

There are the following three on-chip serial interface channels synchronous with the clock:

- Serial interface channel 0
- Serial interface channel 1
- Serial interface channel 2

Table 5-3. Types and Functions of Serial Interfaces

Function	Serial Interface Channel 0	Serial Interface Channel 1	Serial Interface Channel 2
3-wire serial I/O mode	○ (MSB/LSB first bit switching possible)	○ (MSB/LSB first bit switching possible)	○ (MSB/LSB first bit switching possible)
3-wire serial I/O mode with automatic data transmit/receive function	—	○ (MSB/LSB first bit switching possible)	—
2-wire serial I/O mode	○ (MSB first)	—	—
Serial bus interface (SBI) mode	○ (MSB first)	—	—
Asynchronous serial interface (UART) mode	—	—	○ (On-chip dedicated baud rate generator)

Figure 5-11. Serial Interface Channel 0 Block Diagram

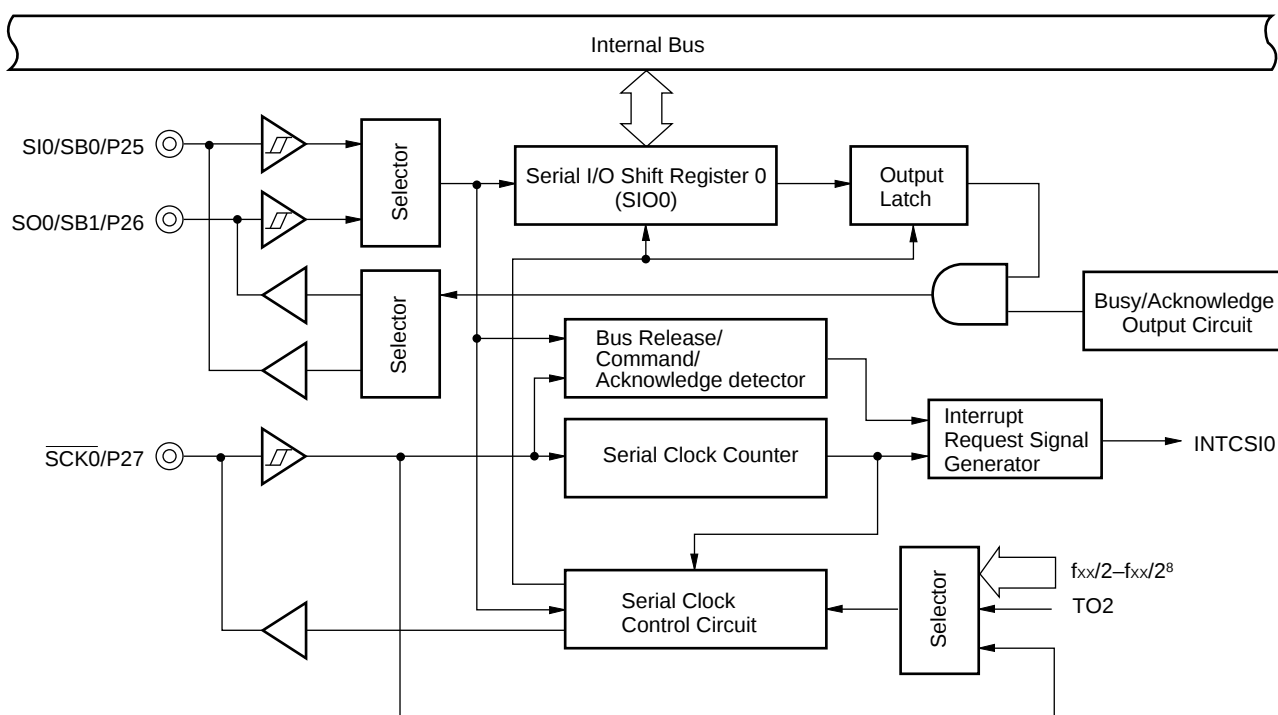


Figure 5-12. Serial Interface Channel 1 Block Diagram


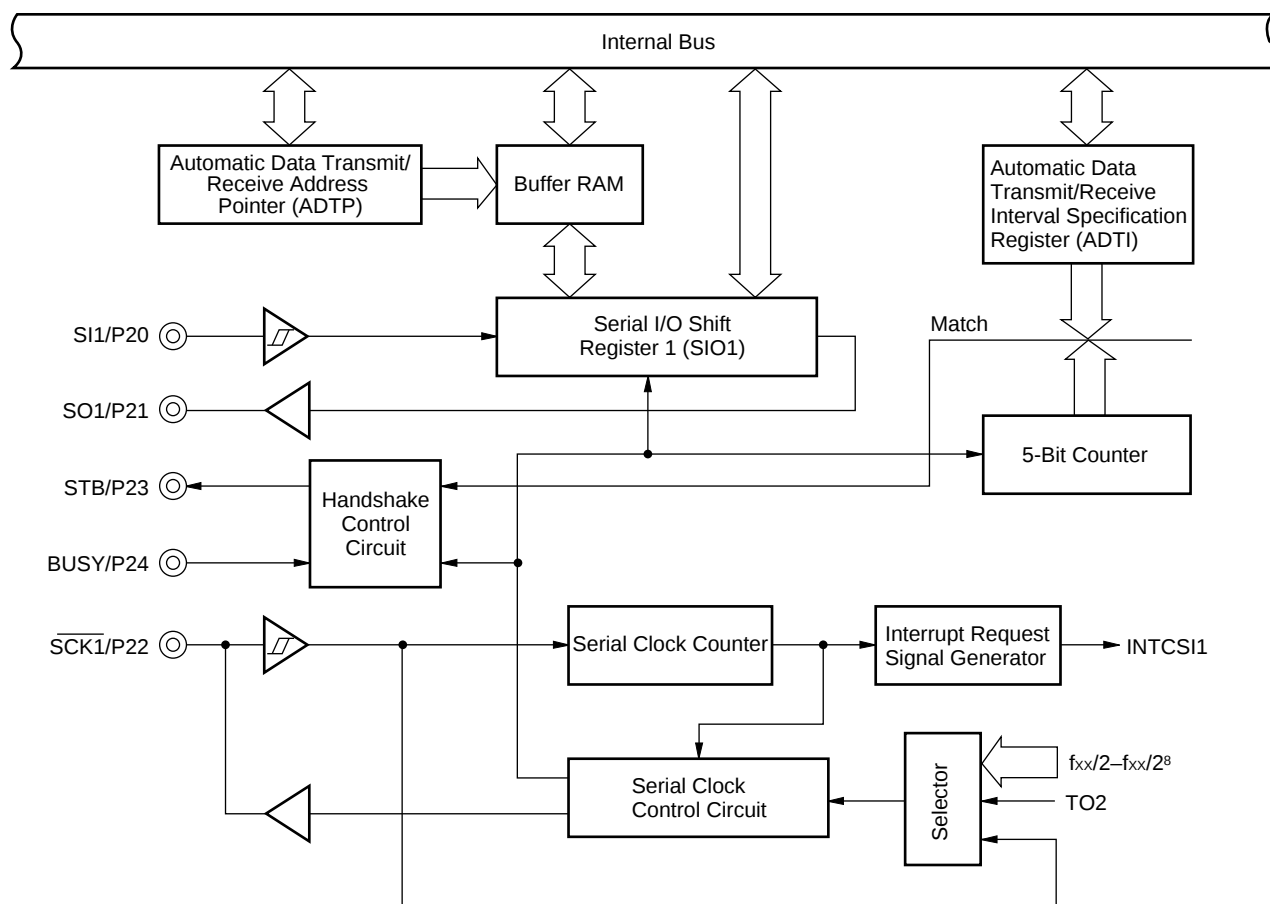


Figure 5-13. Serial Interface Channel 2 Block Diagram

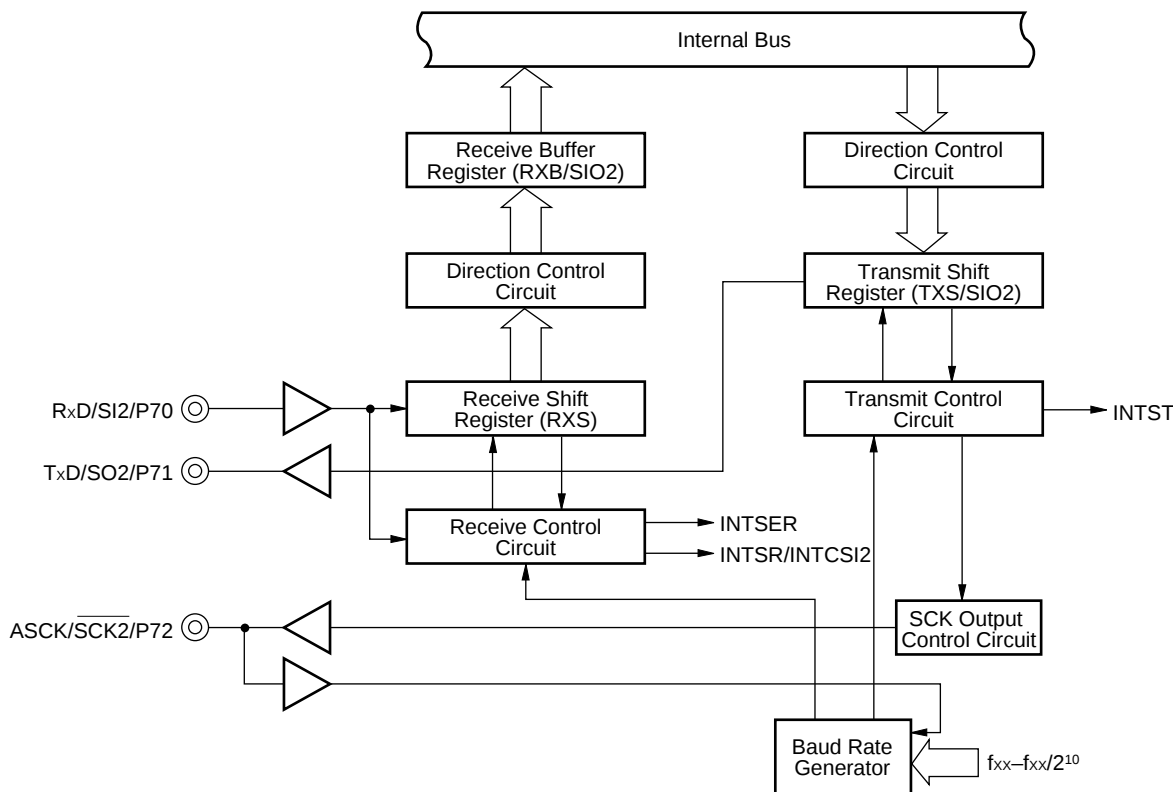


5.9 Real-Time Output Port

Data set previously in the real-time output buffer is transferred to the output latch by hardware concurrently with timer interrupt or external interrupt generation in order to output to off-chip. This is a real-time output function. Pins used to output to off-chip are called real-time output ports.

By using a real-time output port, a signal which has no jitter can be output. This is most applicable to control of stepping motors, etc.

Figure 5-14. Real-Time Output Port Block Diagram

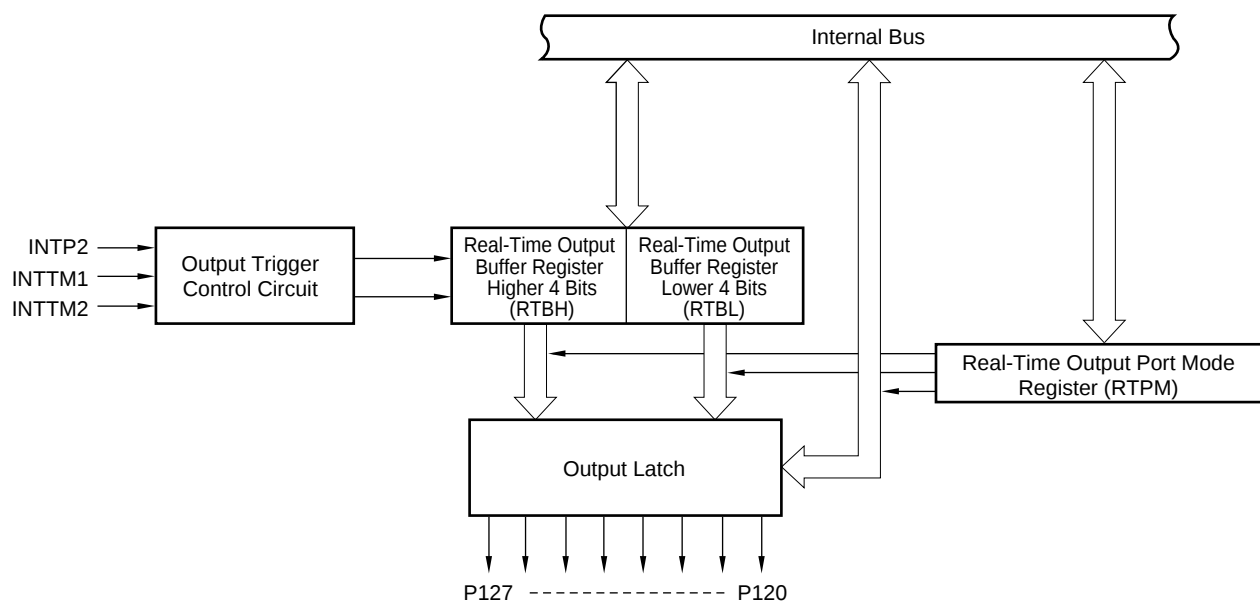

6. INTERRUPT FUNCTIONS AND TEST FUNCTION

6.1 Interrupt Functions

A total of 24 interrupt functions are provided, divided into the following three types.

- Non-maskable interrupt : 1
- Maskable interrupts : 22
- Software interrupt : 1

Table 6-1. List of Interrupt Sources

Interrupt Type	Default Priority ^{Note1}	Interrupt Source		Internal/ External	Vector Table Address	Basic Structure Type ^{Note2}
		Name	Trigger			
Non-maskable	—	INTWDT	Overflow of watchdog timer (When the watchdog timer mode 1 is selected)	Internal	0004H	(A)
Maskable	0	INTWDT	Overflow of watchdog timer (When the interval timer mode is selected)			(B)
	1	INTP0	Pin input edge detection	External	0006H	(C)
	2	INTP1			0008H	(D)
	3	INTP2			000AH	
	4	INTP3			000CH	
	5	INTP4			000EH	
	6	INTP5			0010H	
	7	INTP6			0012H	
	8	INTCSI0	Completion of serial interface channel 0 transfer	Internal	0014H	(B)
	9	INTCSI1	Completion of serial interface channel 1 transfer		0016H	
	10	INTSER	Occurrence of serial interface channel 2 UART reception error		0018H	
	11	INTSR	Completion of serial interface channel 2 UART reception		001AH	
		INTCSI2	Completion of serial interface channel 2 3-wire transfer			
	12	INTST	Completion of serial interface channel 2 UART transmission		001CH	
	13	INTTM3	Reference time interval signal from watch timer		001EH	
	14	INTTM00	Generation of matching signal of 16-bit timer register and capture/compare register (CR00)		0020H	
	15	INTTM01	Generation of matching signal of 16-bit timer register and capture/compare register (CR01)		0022H	
	16	INTTM1	Generation of matching signal of 8-bit timer/event counter 1		0024H	
	17	INTTM2	Generation of matching signal of 8-bit timer/event counter 2		0026H	
	18	INTAD	Completion of A/D conversion		0028H	
	19	INTTM5	Generation of matching signal of 8-bit timer/event counter 5		002AH	
	20	INTTM6	Generation of matching signal of 8-bit timer/event counter 6		002CH	
Software	—	BRK	Execution of BRK instruction	Internal	003EH	(E)

- Notes**
1. Default priority is the priority order when several maskable interrupts are generated at the same time. 0 is the highest priority and 20 is the lowest priority.
 2. Basic structure types (A) to (E) correspond to (A) to (E) in Figure 6-1.






Figure 6-1. Basic Configuration of Interrupt Function (1/2)**(A) Internal non-maskable interrupt****(B) Internal maskable interrupt****(C) External maskable interrupt (INTP0)**

Figure 6-1. Basic Configuration of Interrupt Function (2/2)

(D) External maskable interrupt (except INTP0)



(E) Software interrupt

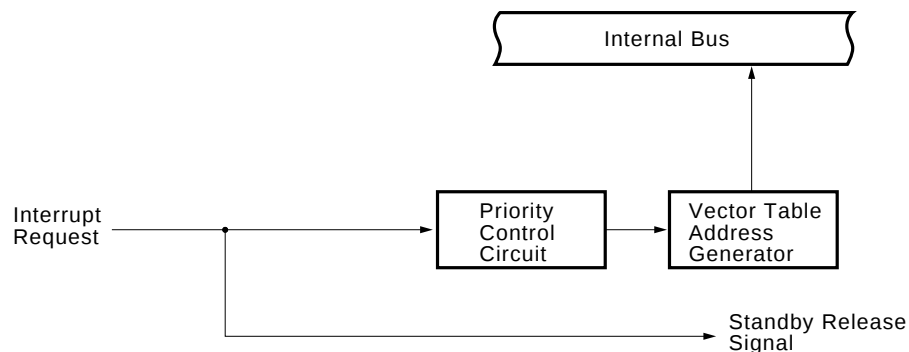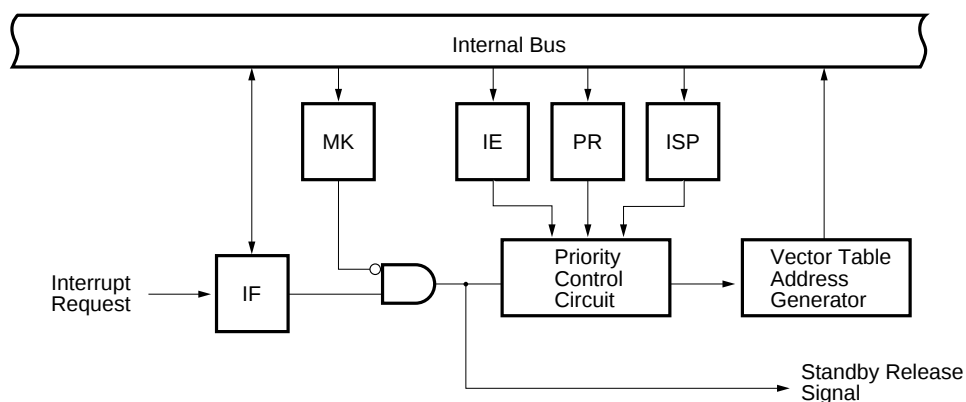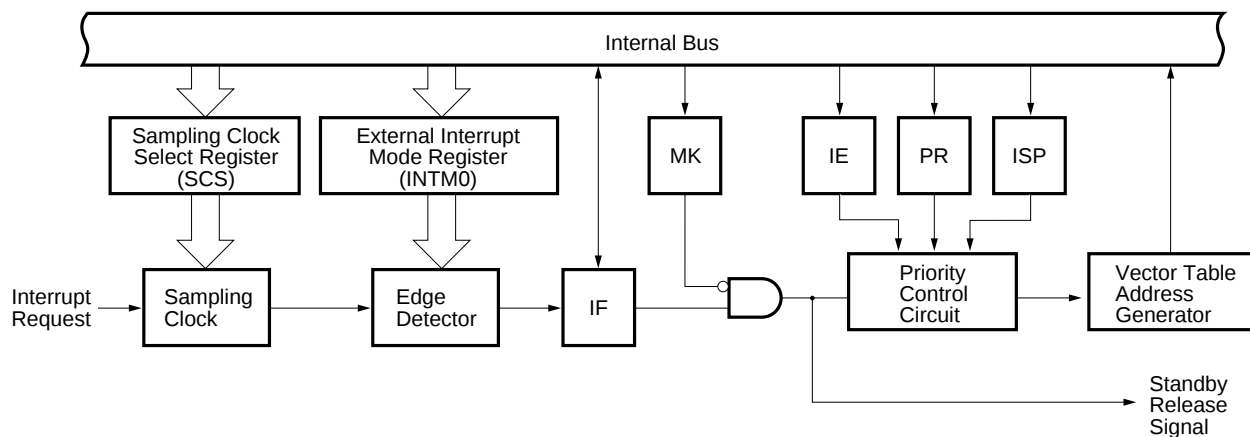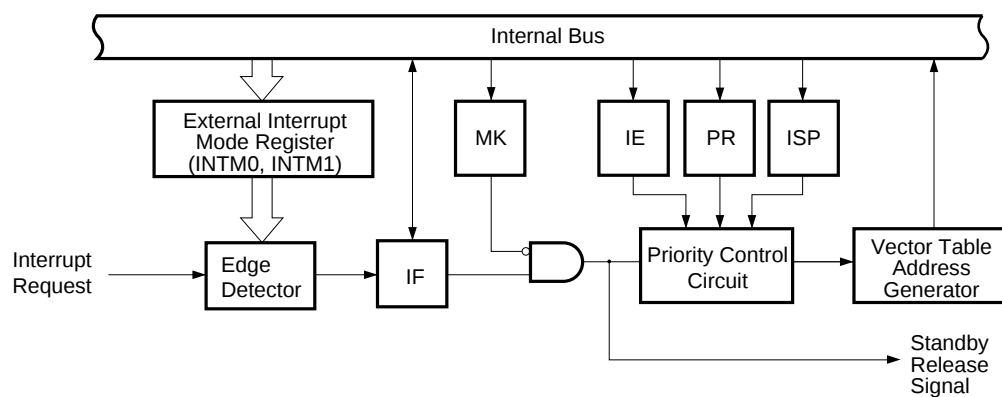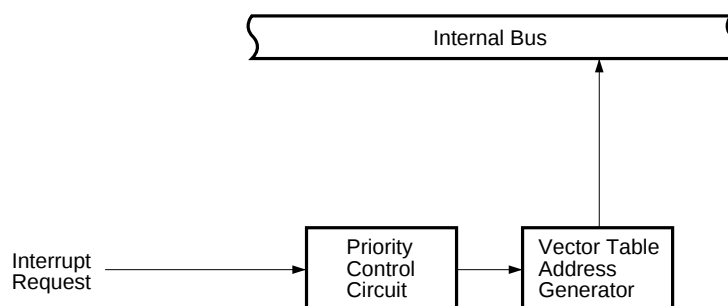

IF : Interrupt request flag
 IE : Interrupt enable flag
 ISP : In-service priority flag
 MK : Interrupt mask flag
 PR : Priority specification flag


6.2 Test Function

Table 6-2 shows the test function available.

Table 6-2. Test Input Source

Test Input Source		Internal/
Name	Trigger	External
INTWT	Overflow of watch timer	Internal

Figure 6-2. Basic Configuration of Test Function

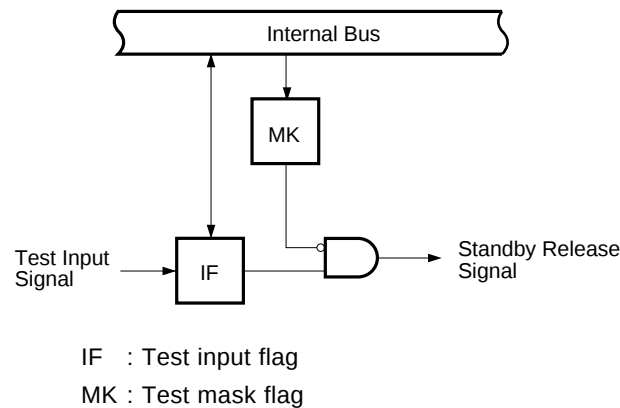

7. EXTERNAL DEVICE EXPANSION FUNCTIONS


The external device expansion functions connect external devices to areas other than the RAM and SFR. The μPD78070A is a ROM-less product, and therefore requires the connection of external ROM. Connect external devices using an independent address bus and data bus.

8. STANDBY FUNCTION

The standby function is designed to reduce current consumption. It has the following two modes:

- **HALT mode** : In this mode, the CPU operation clock is stopped. The average current consumption can be reduced by intermittent operation by combining this mode with the normal operation mode.
- **STOP mode** : In this mode, oscillation of the main system clock is stopped. All the operations performed on the main system clock are suspended, and only the subsystem clock is used for extremely small power consumption.

Figure 8-1. Standby Function

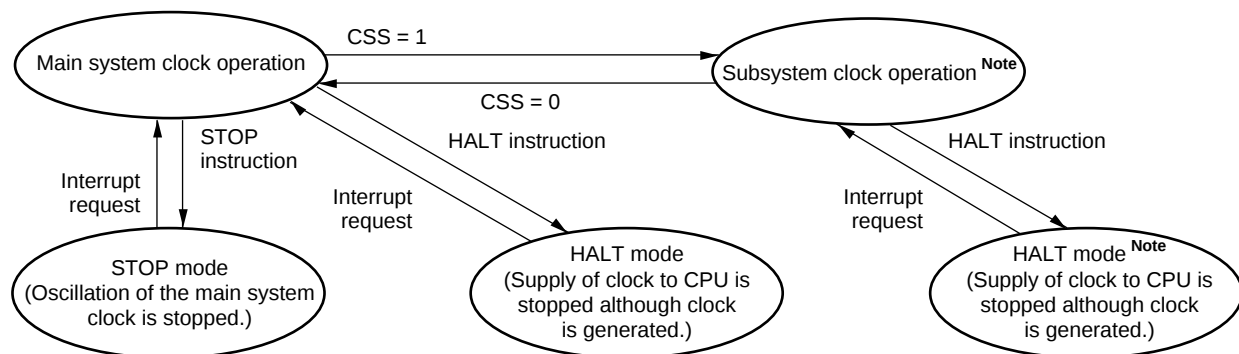

Note Current consumption is reduced by shutting off the main system clock. If the CPU is operating on the subsystem clock, shut off the main system clock by setting bit 7 (MCC) of the processor clock control register (PCC). You cannot use a STOP instruction.

Caution When the main system clock is stopped and the device is operating on the subsystem clock, wait until the oscillation stabilization time has been secured by the program before switching back to the main system clock.

9. RESET FUNCTION

There are the following two reset methods.

- External reset input by $\overline{\text{RESET}}$ pin
- Internal reset by watchdog timer runaway time detection

10. INSTRUCTION SET

(1) 8-bit instructions

MOV, XCH, ADD, ADDC, SUB, SUBC, AND, OR, XOR, CMP, MULU, DIVUW, INC, DEC, ROR, ROL, RORC, ROLC, ROR4, ROL4, PUSH, POP, DBNZ

2nd Operand 1st Operand	#byte	A	r ^{Note}	sfr	saddr	!addr16	PSW	[DE]	[HL]	[HL + byte] [HL + B] [HL + C]	\$addr16	1	None
A	ADD ADDC SUB SUBC AND OR XOR CMP		MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP		ROR ROL RORC ROLC	
r	MOV	MOV ADD ADDC SUB SUBC AND OR XOR CMP											INC DEC
B, C											DBNZ		
sfr	MOV	MOV											
saddr	MOV ADD ADDC SUB SUBC AND OR XOR CMP	MOV									DBNZ		INC DEC
!addr16		MOV											
PSW	MOV	MOV											PUSH POP
[DE]		MOV											

Note Except r = A

2nd Operand 1st Operand	#byte	A	r	sfr	saddr	!addr16	PSW	[DE]	[HL]	[HL + byte] [HL + B] [HL + C]	\$addr16	1	None
[HL]		MOV											ROR4 ROL4
[HL + byte] [HL + B] [HL + C]		MOV											
X													MULU
C													DIVUW

(2) 16-bit instructions

MOVW, XCHW, ADDW, SUBW, CMPW, PUSH, POP, INCW, DECW

2nd Operand 1st Operand	#word	AX	rp ^{Note}	sfrp	saddrp	!addr16	SP	None
AX	ADDW SUBW CMPW		MOVW XCHW	MOVW	MOVW	MOVW	MOVW	
rp	MOVW	MOVW ^{Note}						INCW, DECW PUSH, POP
sfrp	MOVW	MOVW						
saddrp	MOVW	MOVW						
!addr16		MOVW						
SP	MOVW	MOVW						

Note Only when rp = BC, DE, HL

(3) Bit manipulation instructions

MOV1, AND1, OR1, XOR1, SET1, CLR1, NOT1, BT, BF, BTCLR

2nd Operand 1st Operand	A.bit	sfr.bit	saddr.bit	PSW.bit	[HL].bit	CY	\$addr16	None
A.bit						MOV1	BT BF BTCLR	SET1 CLR1
sfr.bit						MOV1	BT BF BTCLR	SET1 CLR1
saddr.bit						MOV1	BT BF BTCLR	SET1 CLR1
PSW.bit						MOV1	BT BF BTCLR	SET1 CLR1
[HL].bit						MOV1	BT BF BTCLR	SET1 CLR1
CY	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1			SET1 CLR1 NOT1

(4) Call instructions/Branch instructions

CALL, CALLF, CALLT, BR, BC, BNC, BZ, BNZ, BT, BF, BTCLR, DBNZ

2nd Operand 1st Operand	AX	!addr16	!addr11	[addr5]	\$addr16
Basic instruction	BR	CALL BR	CALLF	CALLT	BR BC BNC BZ BNZ
Compound instruction					BT BF BTCLR DBNZ

(5) Other instructions

ADJBA, ADJBS, BRK, RET, RETI, RETB, SEL, NOP, EI, DI, HALT, STOP

(iii) UART mode (Dedicated baud rate generator output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Transfer rate		$V_{DD} = 4.5 \text{ to } 5.5 \text{ V}$			78125	bps
					39063	bps

(iv) UART mode (External clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
ASCK cycle time	t_{KCY13}	$V_{DD} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
ASCK high-/low-level width	$t_{KH13},$	$V_{DD} = 4.5 \text{ to } 5.5 \text{ V}$	400			ns
	t_{KL13}		800			ns
Transfer rate		$V_{DD} = 4.5 \text{ to } 5.5 \text{ V}$			39063	bps
					19531	bps
ASCK rise, fall time	$t_{R13},$ t_{F13}				160	ns

★ 11. ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings (T_A = 25 °C)

Parameter	Symbol	Test Conditions		Ratings	Unit
Supply voltage	V _{DD}			−0.3 to +7.0	V
	AV _{DD}			−0.3 to V _{DD} +0.3	V
	AV _{REF0}			−0.3 to V _{DD} +0.3	V
	AV _{REF1}			−0.3 to V _{DD} +0.3	V
	AV _{SS}			−0.3 to +0.3	V
Input voltage	V _{I1}	P00-P07, P10-P17, P20-P27, P30-P37, P66, P70-P72, P94-P96, P100-P103, P120-P127, P130, P131, AD0-AD7, X1, X2, XT2, RESET		−0.3 to V _{DD} +0.3	V
	V _{I2}	P60-P63, P90-P93	N-ch open-drain	−0.3 to V _{DD} +0.3	V
Output voltage	V _O			−0.3 to V _{DD} +0.3	V
Analog input voltage	V _{AN}	P10-P17	Analog input pins	AV _{SS} − 0.3 to AV _{REF0} + 0.3	V
Output current, high	I _{OH}	Per pin		−10	mA
		Total for P30-P37, P60-P63, P66, P90-P96, P100-P103, P120-P127, A14, A15, RD, WR, ASTB		−15	mA
		Total for P01-P06, P10-P17, P20-P27, P70-P72, P130, P131, AD0-AD7, A0-A13		−15	mA
Output current, low	I _{OL} ^{Note}	Per pin	Peak value	30	mA
			r.m.s. value	15	mA
		Total for A8-A13	Peak value	50	mA
			r.m.s. value	20	mA
		Total for P60-P63, A14, A15	Peak value	100	mA
			r.m.s. value	70	mA
		Total for P30-P37, P66, P90-P96, P100-P103, P120-P127, RD, WR, ASTB	Peak value	50	mA
			r.m.s. value	20	mA
		Total for P20-P27, AD0-AD7, A0-A7	Peak value	50	mA
			r.m.s. value	20	mA
		Total for P01-P06, P10-P17, P70-P72, P130, P131	Peak value	50	mA
			r.m.s. value	20	mA
Operating ambient temperature	T _A			−40 to +85	°C
Storage temperature	T _{stg}			−65 to +150	°C

Note The r.m.s. value should be calculated as follows: [r.m.s. value] = [Peak value] × $\sqrt{\text{Duty}}$




Caution Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The parameters apply independently. The device should be operated within the limits specified under DC and AC Characteristics.

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

Capacitance ($T_A = 25\text{ }^{\circ}\text{C}$, $V_{DD} = V_{SS} = 0\text{ V}$)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Input capacitance	C_{IN}	$f = 1\text{ MHz}$, Unmeasured pins returned to 0 V.			15	pF
Output capacitance	C_{OUT}				15	pF
I/O capacitance	C_{IO}				15	pF

Main System Clock Oscillator Characteristics ($T_A = -40\text{ to }+85\text{ }^{\circ}\text{C}$, $V_{DD} = 2.7\text{ to }5.5\text{ V}$)

Resonator	Recommended Circuit	Parameter	Test Conditions	MIN.	TYP.	MAX.	Unit
Ceramic resonator		Oscillation frequency (f_x) ^{Note1}	$V_{DD} = \text{Oscillation voltage range}$	1.0		5.0	MHz
		Oscillation stabilization time ^{Note2}	After V_{DD} came to MIN. of oscillation voltage range			4	ms
Crystal resonator		Oscillation frequency (f_x) ^{Note1}		1.0		5.0	MHz
		Oscillation stabilization time ^{Note2}	$V_{DD} = 4.5\text{ to }5.5\text{ V}$			10 30	ms
External clock		X1 input frequency (f_x) ^{Note1}		1.0		5.0	MHz
		X1 input high- and low-level widths (t_{xH} , t_{xL})		85		500	ns

Notes 1. Only the oscillator characteristics are shown. For the instruction execution time, refer to **AC Characteristics**.



2. Time required for oscillation to stabilize after a reset or the STOP mode has been released.

Cautions 1. When using the oscillation circuit of the main system clock, wire the portion enclosed in dotted lines in the figures as follows to avoid adverse influences on the wiring capacitance:

- Keep the wiring length as short as possible.
- Do not cross the wiring over other signal lines.
- Do not route the wiring in the vicinity of lines through which a high fluctuating current flows.
- Always keep the ground point of the capacitor of the oscillation circuit at the same potential as V_{SS} .
- Do not connect the power source to a ground pattern through which a high current flows.
- Do not extract signals from the oscillation circuit.

2. When the main system clock is stopped and the device is operating on the subsystem clock, wait until the oscillation stabilization time has been secured by the program before switching back to the main system clock.

Subsystem Clock Oscillator Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Resonator	Recommended Circuit	Parameter	Test Conditions	MIN.	TYP.	MAX.	Unit
Crystal resonator		Oscillation frequency (f_{XT}) ^{Note1}		32	32.768	35	kHz
		Oscillation stabilization time ^{Note2}	$V_{DD} = 4.5$ to 5.5 V		1.2	2	s
External clock		XT1 input frequency (f_{XT}) ^{Note1}		32		100	kHz
		XT1 input high-, low-level widths (t_{XTH} , t_{XTL})		5		15	μs

- Notes**
1. Only the oscillator characteristics are shown. For the instruction execution time, refer to AC Characteristics.
 2. Time required for oscillation to stabilize after V_{DD} reaches the minimum value of the oscillation voltage range.

Cautions

1. When using the oscillation circuit of the subsystem clock, wire the portion enclosed in dotted lines in the figures as follows to avoid adverse influences on the wiring capacitance:

- Keep the wiring length as short as possible.
 - Do not cross the wiring over other signal lines.
 - Do not route the wiring in the vicinity of lines through which a high fluctuating current flows.
 - Always keep the ground point of the capacitor of the oscillation circuit at the same potential as V_{SS} .
 - Do not connect the power source pattern through which a high current flows.
 - Do not extract signals from the oscillation circuit.
2. The amplification factor of the subsystem clock oscillator is designed to be low to reduce the current consumption and therefore, the subsystem clock oscillator is influenced by noise more easily than the main system clock oscillator. When using the subsystem clock, therefore, exercise utmost care in wiring the circuit.

DC Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Input voltage, high	V_{IH1}	P10-P17, P21, P23, P30-P32, P35-P37, P66, P71, P94-P96, P102, P103, P120-P127, P130, P131, AD0-AD7	$0.7V_{DD}$		V_{DD}	V
	V_{IH2}	P00-P06, P20, P22, P24-P27, P33, P34, P70, P72, P100, P101, $\overline{RESET}$	$0.8V_{DD}$		V_{DD}	V
	V_{IH3}	P60-P63, P90-P93 (N-ch open-drain)	$0.7V_{DD}$		V_{DD}	V
	V_{IH4}	X1, X2	$V_{DD}-0.5$		V_{DD}	V
	V_{IH5}	XT1/P07, XT2	$V_{DD} = 4.5$ to 5.5 V		V_{DD}	V
			$0.9V_{DD}$		V_{DD}	V
Input voltage, low	V_{IL1}	P10-P17, P21, P23, P30-P32, P35-P37, P66, P71, P94-P96, P102, P103, P120-P127, P130, P131, AD0-AD7	0		$0.3V_{DD}$	V
	V_{IL2}	P00-P06, P20, P22, P24-P27, P33, P34, P70, P72, P100, P101, $\overline{RESET}$	0		$0.2V_{DD}$	V
	V_{IL3}	P60-P63, P90-P93 (N-ch open-drain)	$V_{DD} = 4.5$ to 5.5 V		$0.3V_{DD}$	V
			0		$0.2V_{DD}$	V
	V_{IL4}	X1, X2	0		0.4	V
	V_{IL5}	XT1/P07, XT2	$V_{DD} = 4.5$ to 5.5 V		$0.2V_{DD}$	V
			0		$0.1V_{DD}$	V
Output voltage, high	V_{OH}	$V_{DD} = 4.5$ to 5.5 V, $I_{OH} = -1$ mA	$V_{DD}-1.0$			V
		$I_{OH} = -100$ μA	$V_{DD}-0.5$			V
Output voltage, low	V_{OL1}	P60-P63	$V_{DD} = 4.5$ to 5.5 V, $I_{OL} = 15$ mA	0.4	2.0	V
		P01-P06, P10-P17, P20-P27, P30-P37, P66, P70-P72, P90-P96, P100-P103, P120-P127, P130, P131, AD0-AD7, A0-A15, $\overline{RD}$, $\overline{WR}$, $\overline{ASTB}$	$V_{DD} = 4.5$ to 5.5 V, $I_{OL} = 1.6$ mA		0.4	V
	V_{OL2}	SB0, SB1, $\overline{SCK0}$	$V_{DD} = 4.5$ to 5.5 V, Open-drain, pulled up (R = 1 kΩ)		$0.2V_{DD}$	V
	V_{OL3}	$I_{OL} = 400$ μA			0.5	V

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

DC Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions		MIN.	TYP.	MAX.	Unit
Input leakage current, high	I_{LIH1}	$V_{IN} = V_{DD}$	P00-P06, P10-P17, P20-P27, P30-P37, P60-P63, P66, P70-P72, P90-P96, P100-P103, P120-P127, P130, P131, AD0-AD7, $\overline{RESET}$			3	μA
	I_{LIH2}		X1, X2, XT1/P07, XT2			20	μA
Input leakage current, low	I_{LIL1}	$V_{IN} = 0$ V	P00-P06, P10-P17, P20-P27, P30-P37, P60-P63, P66, P70-P72, P90-P96, P100-P103, P120-P127, P130, P131, AD0-AD7, $\overline{RESET}$			-3	μA
	I_{LIL2}		X1, X2, XT1/P07, XT2			-20	μA
Output leakage current, high	I_{LOH}	$V_{OUT} = V_{DD}$				3	μA
Output leakage current, low	I_{LOL}	$V_{OUT} = 0$ V				-3	μA
Software pull-up resistor	R	$V_{IN} = 0$ V, P01-P06, P10-P17, P20-P27, P30-P37, P66, P70-P72, P94-P96, P100-P103, P120-P127, P130, P131	$V_{DD} = 4.5$ to 5.5 V	15	40	90	k Ω
				20		500	k Ω

Remark Unless otherwise specified, dual-function pin characteristics are the same as port pin characteristics.

DC Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Supply current ^{Note1}	I_{DD1}	5.0-MHz crystal oscillation operating mode ($f_{xx} = 2.5$ MHz) ^{Note2}	$V_{DD} = 5.0\text{ V} \pm 10\%$ ^{Note5}	4.5	13.5	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$ ^{Note6}	0.7	2.1	mA
		5.0-MHz crystal oscillation operating mode ($f_{xx} = 5.0$ MHz) ^{Note3}	$V_{DD} = 5.0\text{ V} \pm 10\%$ ^{Note5}	8.0	24.0	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$ ^{Note6}	0.9	2.7	mA
	I_{DD2}	5.0-MHz crystal oscillation HALT mode ($f_{xx} = 2.5$ MHz) ^{Note2}	$V_{DD} = 5.0\text{ V} \pm 10\%$ ^{Note5}	1.4	4.2	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$ ^{Note6}	0.5	1.5	mA
		5.0-MHz crystal oscillation HALT mode ($f_{xx} = 5.0$ MHz) ^{Note3}	$V_{DD} = 5.0\text{ V} \pm 10\%$ ^{Note5}	1.6	4.8	mA
			$V_{DD} = 3.0\text{ V} \pm 10\%$ ^{Note6}	0.65	1.95	mA
	I_{DD3}	32.768-kHz crystal oscillation operating mode ^{Note4}	$V_{DD} = 5.0\text{ V} \pm 10\%$	60	120	μA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	32	64	μA
	I_{DD4}	32.768-kHz crystal oscillation operating mode ^{Note4}	$V_{DD} = 5.0\text{ V} \pm 10\%$	25	55	μA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	5	15	μA
	I_{DD5}	XT1 = V_{DD} STOP mode Feedback resistor used	$V_{DD} = 5.0\text{ V} \pm 10\%$	1	30	μA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	0.5	10	μA
	I_{DD6}	XT1 = V_{DD} STOP mode Feedback resistor not used	$V_{DD} = 5.0\text{ V} \pm 10\%$	0.1	30	μA
			$V_{DD} = 3.0\text{ V} \pm 10\%$	0.05	10	μA

Notes 1. Not including AV_{REF0} , AV_{REF1} and AV_{DD} currents or port currents (including current flowing into on-chip pull-up resistors).

2. $f_{xx} = f_x/2$ operation (when oscillation mode selection register (OSMS) is set to 00H).
3. $f_{xx} = f_x$ operation (when OSMS is set to 01H).
4. When the main system clock is stopped.
5. High-speed mode operation (when processor clock control register (PCC) is set to 00H).
6. Low-speed mode operation (when PCC is set to 04H).

Remark f_{xx} : Main system clock frequency (f_x or $f_x/2$)
 f_x : Main system clock oscillation frequency

AC Characteristics

(1) Basic Operation ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions		MIN.	TYP.	MAX.	Unit
Cycle time (minimum instruction execution time)	T_{CY}	Operating on main system clock	$f_{XX} = f_X/2$ ^{Note1}	0.8		64	μs
			$f_{XX} = f_X$ ^{Note2}	$V_{DD} = 3.5$ to 5.5 V	0.4	32	μs
					0.8	32	μs
		Operating on subsystem clock		40	122	125	μs
TI00 input high-/low-level widths	t_{TIO0H}	$V_{DD} = 3.5$ to 5.5 V		$2f_{sam}+0.1$ ^{Note3}			μs
	t_{TIO0L}			$2f_{sam}+0.2$ ^{Note3}			μs
TI01 input high-/low-level widths	t_{TIO1H} , t_{TIO1L}			10			μs
TI1, TI2, TI5, TI6 input frequency	f_{TI1}	$V_{DD} = 4.5$ to 5.5 V		0		4	MHz
				0		275	kHz
TI1, TI2, TI5, TI6 input high-/low-level widths	t_{TIIH1}	$V_{DD} = 4.5$ to 5.5 V		100			ns
	t_{TIL1}			1.8			μs
Interrupt input high-/low-level widths	t_{INTH}	INTP0	$V_{DD} = 3.5$ to 5.5 V	$2f_{sam}+0.1$ ^{Note3}			μs
	t_{INTL}			$2f_{sam}+0.2$ ^{Note3}			μs
		INTP1-INTP6		10			μs
RESET low-level width	t_{RSL}			10			μs

Notes 1. When oscillation mode selection register (OSMS) is set to 00H.


2. When OSMS is set to 01H.

3. f_{sam} can be selected as $f_{XX}/2^N$, $f_{XX}/32$, $f_{XX}/64$ or $f_{XX}/128$ ($N = 0-4$) by bits 0 and 1 (SCS0, SCS1) of the sampling clock selection register.


Remark f_{XX} : Main system clock frequency (f_X or $f_X/2$)

f_X : Main system clock oscillation frequency

T_{CY} vs V_{DD}
(Main System Clock f_{xx} = f_x/2 Operation)

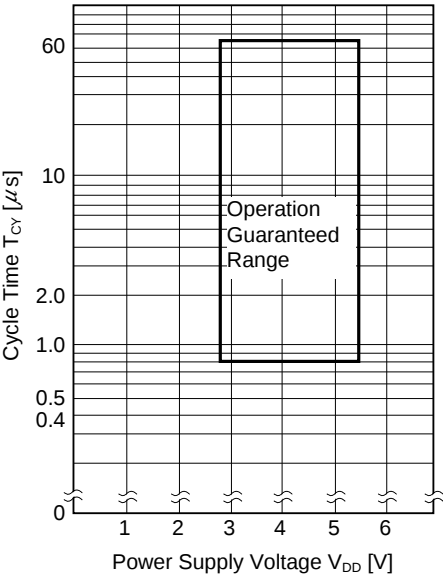

T_{CY} vs V_{DD}
(Main System Clock f_{xx} = f_x Operation)

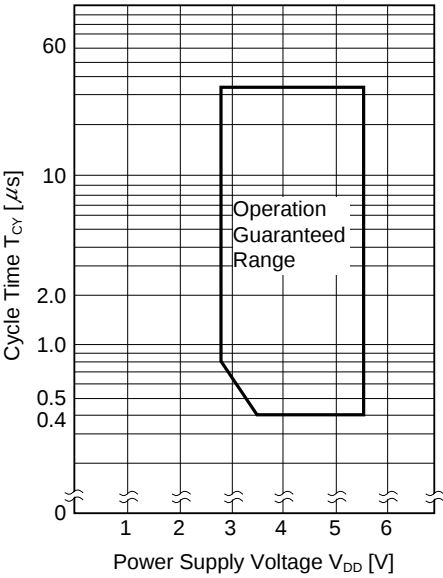

(2) Read/Write Operation

(a) When MCS = 1, PCC2 to PCC0 = 000B ($T_A = -40$ to $+85$ °C, $V_{DD} = 4.5$ to 5.5 V)

Parameter	Symbol	Test Conditions	MIN.	MAX.	Unit
ASTB high-level width	t_{ASTH}		$0.85t_{CY} - 50$		ns
Address setup time	t_{ADS}		$0.85t_{CY} - 50$		ns
Address hold time	t_{ADH}		50		ns
Address $\rightarrow$ Data input time	t_{ADD1}			$(2.85 + 2n) t_{CY} - 80$	ns
	t_{ADD2}			$(4 + 2n) t_{CY} - 100$	ns
$\overline{RD} \downarrow \rightarrow$ Data input time	t_{RDD1}			$(2 + 2n) t_{CY} - 100$	ns
	t_{RDD2}			$(2.85 + 2n) t_{CY} - 100$	ns
Read data hold time	t_{RDH}		0		ns
$\overline{RD}$ low-level width	t_{RDL1}		$(2 + 2n) t_{CY} - 60$		ns
	t_{RDL2}		$(2.85 + 2n) t_{CY} - 60$		ns
$\overline{RD} \downarrow \rightarrow \overline{WAIT} \downarrow$ input time	t_{RDWT1}			$0.85t_{CY} - 50$	ns
	t_{RDWT2}			$2t_{CY} - 60$	ns
$\overline{WR} \downarrow \rightarrow \overline{WAIT} \downarrow$ input time	t_{WRWT}			$2t_{CY} - 60$	ns
$\overline{WAIT}$ low-level width	t_{WTL}		$(1.15 + 2n) t_{CY}$	$(2 + 2n) t_{CY}$	ns
Write data setup time	t_{WDS}		$(2.85 + 2n) t_{CY} - 100$		ns
Write data hold time	t_{WDH}		20		ns
$\overline{WR}$ low-level width	t_{WRL}		$(2.85 + 2n) t_{CY} - 60$		ns
ASTB $\downarrow \rightarrow \overline{RD} \downarrow$ delay time	t_{ASTRD}		25		ns
ASTB $\downarrow \rightarrow \overline{WR} \downarrow$ delay time	t_{ASTWR}		$0.85t_{CY} + 20$		ns
In external fetch $\overline{RD} \uparrow \rightarrow$ ASTB $\uparrow$ delay time	t_{RDAST}		$0.85t_{CY} - 10$	$1.15t_{CY} + 20$	ns
In external fetch $\overline{RD} \uparrow \rightarrow$ address hold time	t_{RDADH}		$0.85t_{CY} - 50$	$1.15t_{CY} + 50$	ns
$\overline{RD} \uparrow \rightarrow$ write data output time	t_{RDWD}		40		ns
$\overline{WR} \downarrow \rightarrow$ write data output time	t_{WRWD}		0	50	ns
$\overline{WR} \uparrow \rightarrow$ address hold time	t_{WRADH}		$0.85t_{CY}$	$1.15t_{CY} + 40$	ns
$\overline{WAIT} \uparrow \rightarrow \overline{RD} \uparrow$ delay time	t_{WTRD}		$1.15t_{CY} + 40$	$3.15t_{CY} + 40$	ns
$\overline{WAIT} \uparrow \rightarrow \overline{WR} \uparrow$ delay time	t_{WTWR}		$1.15t_{CY} + 30$	$3.15t_{CY} + 30$	ns

- Remarks**
1. MCS: Bit 0 of the oscillation mode selection register (OSMS)
 2. PCC2-PCC0: Bit 2 to bit 0 of the processor clock control register (PCC)
 3. $t_{CY} = T_{CY}/4$
 4. n indicates the number of waits.

(b) Except When MCS = 1, PCC2 to PCC0 = 000B ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)

Parameter	Symbol	Test Conditions	MIN.	MAX.	Unit
ASTB high-level width	t_{ASTH}		$t_{CY} - 80$		ns
Address setup time	t_{ADS}		$t_{CY} - 80$		ns
Address hold time	t_{ADH}		$0.4t_{CY} - 10$		ns
Address → Data input time	t_{ADD1}			$(3 + 2n) t_{CY} - 160$	ns
	t_{ADD2}			$(4 + 2n) t_{CY} - 200$	ns
$\overline{RD} \downarrow \rightarrow$ Data input time	t_{RDD1}			$(1.4 + 2n) t_{CY} - 70$	ns
	t_{RDD2}			$(2.4 + 2n) t_{CY} - 70$	ns
Read data hold time	t_{RDH}		0		ns
$\overline{RD}$ low-level width	t_{RDL1}		$(1.4 + 2n) t_{CY} - 20$		ns
	t_{RDL2}		$(2.4 + 2n) t_{CY} - 20$		ns
$\overline{RD} \downarrow \rightarrow \overline{WAIT} \downarrow$ input time	t_{RDWT1}			$t_{CY} - 100$	ns
	t_{RDWT2}			$2t_{CY} - 100$	ns
$\overline{WR} \downarrow \rightarrow \overline{WAIT} \downarrow$ input time	t_{WRWT}			$2t_{CY} - 100$	ns
$\overline{WAIT}$ low-level width	t_{WTL}		$(1 + 2n) t_{CY}$	$(2 + 2n) t_{CY}$	ns
Write data setup time	t_{WDS}		$(2.4 + 2n) t_{CY} - 60$		ns
Write data hold time	t_{WDH}		20		ns
$\overline{WR}$ low-level width	t_{WRL}		$(2.4 + 2n) t_{CY} - 20$		ns
ASTB $\downarrow \rightarrow \overline{RD} \downarrow$ delay time	t_{ASTRD}		$0.4t_{CY} - 30$		ns
ASTB $\downarrow \rightarrow \overline{WR} \downarrow$ delay time	t_{ASTWR}		$1.4t_{CY} - 30$		ns
In external fetch $\overline{RD} \uparrow \rightarrow$ ASTB $\uparrow$ delay time	t_{RDAST}		$t_{CY} - 10$	$t_{CY} + 20$	ns
In external fetch $\overline{RD} \uparrow \rightarrow$ address hold time	t_{RDADH}		$t_{CY} - 50$	$t_{CY} + 50$	ns
$\overline{RD} \uparrow \rightarrow$ write data output time	t_{RDWD}		$0.4t_{CY} - 20$		ns
$\overline{WR} \downarrow \rightarrow$ write data output time	t_{WRWD}		0	60	ns
$\overline{WR} \uparrow \rightarrow$ address hold time	t_{WRADH}		t_{CY}	$t_{CY} + 60$	ns
$\overline{WAIT} \uparrow \rightarrow \overline{RD} \uparrow$ delay time	t_{WTRD}		$0.6t_{CY} + 180$	$2.6t_{CY} + 180$	ns
$\overline{WAIT} \uparrow \rightarrow \overline{WR} \uparrow$ delay time	t_{WTWR}		$0.6t_{CY} + 120$	$2.6t_{CY} + 120$	ns

- Remarks**
1. MCS: Bit 0 of the oscillation mode selection register (OSMS)
 2. PCC2-PCC0: Bit 2 to bit 0 of the processor clock control register (PCC)
 3. $t_{CY} = T_{CY}/4$
 4. n indicates the number of waits.

(3) Serial Interface ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V)**(a) Serial Interface Channel 0****(i) 3-wire serial I/O mode ($\overline{SCK0}$... internal clock output)**

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{SCK0}$ cycle time	t_{KCY1}	$V_{DD} = 4.5$ to 5.5 V	800			ns
			1600			ns
$\overline{SCK0}$ high-/low-level width	$t_{KH1},$	$V_{DD} = 4.5$ to 5.5 V	$t_{KCY1}/2-50$			ns
	t_{KL1}		$t_{KCY1}/2-100$			ns
SI0 setup time (to $\overline{SCK0}$ $\uparrow$)	t_{SIK1}	$V_{DD} = 4.5$ to 5.5 V	100			ns
			150			ns
SI0 hold time (from $\overline{SCK0}$ $\uparrow$)	t_{KSI1}		400			ns
$\overline{SCK0} \downarrow \rightarrow$ SO0 output delay time	t_{KSO1}	$C = 100$ pF ^{Note}			300	ns

Note C is the $\overline{SCK0}$, SO0 output line load capacitance.

(ii) 3-wire serial I/O mode ($\overline{SCK0}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{SCK0}$ cycle time	t_{KCY2}	$V_{DD} = 4.5$ to 5.5 V	800			ns
			1600			ns
$\overline{SCK0}$ high-/low-level width	$t_{KH2},$	$V_{DD} = 4.5$ to 5.5 V	400			ns
	t_{KL2}		800			ns
SI0 setup time (to $\overline{SCK0}$ $\uparrow$)	t_{SIK2}		100			ns
SI0 hold time (from $\overline{SCK0}$ $\uparrow$)	t_{KSI2}		400			ns
$\overline{SCK0} \downarrow \rightarrow$ SO0 output delay time	t_{KSO2}	$C = 100$ pF ^{Note}			300	ns
$\overline{SCK0}$ rise, fall time	t_{R2}, t_{F2}				160	ns

Note C is the SO0 output line load capacitance.

(iii) SBI mode ($\overline{\text{SCK0}}$... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK0}}$ cycle time	t_{KCY3}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			3200			ns
$\overline{\text{SCK0}}$ high-/low-level width	$t_{\text{KH3}}, t_{\text{KL3}}$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	$t_{\text{KCY3}}/2-50$			ns
			$t_{\text{KCY3}}/2-150$			ns
SB0, SB1 setup time (to $\overline{\text{SCK0}}$ ↑)	t_{SIK3}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			300			ns
SB0, SB1 hold time (from $\overline{\text{SCK0}}$ ↑)	t_{KSI3}		$t_{\text{KCY3}}/2$			ns
$\overline{\text{SCK0}}$ ↓ → SB0, SB1 output delay time	t_{KSO4}	$R = 1 \text{ k}\Omega,$ $C = 100 \text{ pF}$ ^{Note}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	0	250	ns
				0	1000	ns
$\overline{\text{SCK0}}$ ↑ → SB0, SB1 ↓	t_{KSB}		t_{KCY3}			ns
SB0, SB1 ↓ → $\overline{\text{SCK0}}$ ↓	t_{SBK}		t_{KCY3}			ns
SB0, SB1 high-level width	t_{SBH}		t_{KCY3}			ns
SB0, SB1 low-level width	t_{SBL}		t_{KCY3}			ns

Note R and C are the $\overline{\text{SCK0}}$, SB0, SB1 output line load resistance and load capacitance.

(iv) SBI mode ($\overline{\text{SCK0}}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK0}}$ cycle time	t_{KCY4}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			3200			ns
$\overline{\text{SCK0}}$ high-/low-level width	$t_{\text{KH4}}, t_{\text{KL4}}$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	400			ns
			1600			ns
SB0, SB1 setup time (to $\overline{\text{SCK0}}$ ↑)	t_{SIK4}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			300			ns
SB0, SB1 hold time (from $\overline{\text{SCK0}}$ ↑)	t_{KSI4}		$t_{\text{KCY4}}/2$			ns
$\overline{\text{SCK0}}$ ↓ → SB0, SB1 output delay time	t_{KSO4}	$R = 1 \text{ k}\Omega,$ $C = 100 \text{ pF}$ ^{Note}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	0	300	ns
				0	1000	ns
$\overline{\text{SCK0}}$ ↑ → SB0, SB1 ↓	t_{KSB}		t_{KCY4}			ns
SB0, SB1 ↓ → $\overline{\text{SCK0}}$ ↓	t_{SBK}		t_{KCY4}			ns
SB0, SB1 high-level width	t_{SBH}		t_{KCY4}			ns
SB0, SB1 low-level width	t_{SBL}		t_{KCY4}			ns
$\overline{\text{SCK0}}$ rise, fall time	$t_{\text{R4}}, t_{\text{F4}}$				160	ns

Note R and C are the SB0, SB1 output line load resistance and load capacitance.

(v) 2-wire serial I/O mode ($\overline{\text{SCK0}}$... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK0}}$ cycle time	t_{KCY5}	$R = 1 \text{ k}\Omega$, $C = 100 \text{ pF}$ ^{Note}	1600			ns
$\overline{\text{SCK0}}$ high-level width	t_{KH5}		$t_{\text{KCY5}}/2-160$			ns
$\overline{\text{SCK0}}$ low-level width	t_{KL5}		$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$ $t_{\text{KCY5}}/2-50$			ns
			$t_{\text{KCY5}}/2-100$			ns
SB0, SB1 setup time (to $\overline{\text{SCK0}} \uparrow$)	t_{SIK5}		$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$ 300			ns
			350			ns
SB0, SB1 hold time (from $\overline{\text{SCK0}} \uparrow$)	t_{KSI5}		600			ns
$\overline{\text{SCK0}} \downarrow \rightarrow$ SB0, SB1 output delay time	t_{KSO5}		0		300	ns

Note R and C are the $\overline{\text{SCK0}}$, SB0, SB1 output line load resistance and load capacitance.

(vi) 2-wire serial I/O mode ($\overline{\text{SCK0}}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK0}}$ cycle time	t_{KCY6}		1600			ns
$\overline{\text{SCK0}}$ high-level width	t_{KH6}		650			ns
$\overline{\text{SCK0}}$ low-level width	t_{KL6}		800			ns
SB0, SB1 setup time (to $\overline{\text{SCK0}} \uparrow$)	t_{SIK6}		100			ns
SB0, SB1 hold time (from $\overline{\text{SCK0}} \uparrow$)	t_{KSI6}		$t_{\text{KCY6}}/2$			ns
$\overline{\text{SCK0}} \downarrow \rightarrow$ SB0, SB1 output delay time	t_{KSO6}	$R = 1 \text{ k}\Omega$, $C = 100 \text{ pF}$ ^{Note}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$ 0		300	ns
			0		500	ns
$\overline{\text{SCK0}}$ rise, fall time	$t_{\text{R6}}, t_{\text{F6}}$				160	ns

Note R and C are the SB0, SB1 output line load resistance and load capacitance.

(b) Serial Interface Channel 1

(i) 3-wire serial I/O mode ($\overline{\text{SCK1}}$... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY7}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK1}}$ high-/low-level width	$t_{\text{KH7}}, t_{\text{KL7}}$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	$t_{\text{KCY7}}/2-50$			ns
			$t_{\text{KCY7}}/2-100$			ns
SI1 setup time (to $\overline{\text{SCK1}}$ ↑)	t_{SIK7}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			150			ns
SI1 hold time (from $\overline{\text{SCK1}}$ ↑)	t_{KSI7}		400			ns
$\overline{\text{SCK1}}$ ↓ → SO1 output delay time	t_{KSO7}	$C = 100 \text{ pF}$ ^{Note}			300	ns

Note C is the $\overline{\text{SCK1}}$, SO1 output line load capacitance.(ii) 3-wire serial I/O mode ($\overline{\text{SCK1}}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY8}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK1}}$ high-/low-level width	$t_{\text{KH8}}, t_{\text{KL8}}$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	400			ns
			800			ns
SI1 setup time (to $\overline{\text{SCK1}}$ ↑)	t_{SIK8}		100			ns
SI1 hold time (from $\overline{\text{SCK1}}$ ↑)	t_{KSI8}		400			ns
$\overline{\text{SCK1}}$ ↓ → SO1 output delay time	t_{KSO8}	$C = 100 \text{ pF}$ ^{Note}			300	ns
$\overline{\text{SCK1}}$ rise, fall time	$t_{\text{R8}}, t_{\text{F8}}$				160	ns

Note C is the SO1 output line load capacitance.

(iii) 3-wire serial I/O mode with automatic transmission/reception function ($\overline{\text{SCK1}}$... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY9}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK1}}$ high-/low-level width	$t_{\text{KH9}},$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	$t_{\text{KCY9}}/2-50$			ns
	t_{KL9}		$t_{\text{KCY9}}/2-100$			ns
SI1 setup time (to $\overline{\text{SCK1}}$ ↑)	t_{SIK9}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			150			ns
SI1 hold time (from $\overline{\text{SCK1}}$ ↑)	t_{KSI9}		400			ns
$\overline{\text{SCK1}}$ ↓ → SO1 output delay time	t_{KSO9}	$C = 100 \text{ pF}$ ^{Note}			300	ns
$\overline{\text{SCK1}}$ ↑ → STB ↑	t_{SBD}		$t_{\text{KCY9}}/2-100$		$t_{\text{KCY9}}/2+100$	ns
Strobe signal high-level width	t_{SBW}		$t_{\text{KCY9}}-30$		$t_{\text{KCY9}}+30$	ns
Busy signal setup time (to busy signal detection timing)	t_{BYS}		100			ns
Busy signal hold time (from busy signal detection timing)	t_{BYH}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			150			ns
Busy inactive → $\overline{\text{SCK1}}$ ↓	t_{SPS}				$2t_{\text{KCY9}}$	ns

Note C is the $\overline{\text{SCK1}}$, SO1 output line load capacitance.

(iv) 3-wire serial I/O mode with automatic transmission/reception function ($\overline{\text{SCK1}}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY10}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK1}}$ high-/low-level width	$t_{\text{KH10}},$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	400			ns
	t_{KL10}		800			ns
SI1 setup time (to $\overline{\text{SCK1}}$ ↑)	t_{SIK10}		100			ns
SI1 hold time (from $\overline{\text{SCK1}}$ ↑)	t_{KSI10}		400			ns
$\overline{\text{SCK1}}$ ↓ → SO1 output delay time	t_{KSO10}	$C = 100 \text{ pF}$ ^{Note}			300	ns
$\overline{\text{SCK1}}$ rise, fall time	$t_{\text{R10}}, t_{\text{F10}}$				160	ns

Note C is the SO1 output line load capacitance.

(c) Serial Interface Channel 2

(i) 3-wire serial I/O mode ($\overline{\text{SCK2}}$... internal clock output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK2}}$ cycle time	t_{KCY11}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK2}}$ high-/low-level width	$t_{\text{KH11}},$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	$t_{\text{KCY11}}/2-50$			ns
	t_{KL11}		$t_{\text{KCY11}}/2-100$			ns
SI2 setup time (to $\overline{\text{SCK2}}$ ↑)	t_{SIK11}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	100			ns
			150			ns
SI2 hold time (from $\overline{\text{SCK2}}$ ↑)	t_{KSI11}		400			ns
$\overline{\text{SCK2}}$ ↓ → SO2 output delay time	t_{KSO11}	$C = 100 \text{ pF}$ ^{Note}			300	ns

Note C is the $\overline{\text{SCK2}}$, SO2 output line load capacitance.

(ii) 3-wire serial I/O mode ($\overline{\text{SCK2}}$... external clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
$\overline{\text{SCK2}}$ cycle time	t_{KCY12}	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	800			ns
			1600			ns
$\overline{\text{SCK2}}$ high-/low-level width	$t_{\text{KH12}},$	$V_{\text{DD}} = 4.5 \text{ to } 5.5 \text{ V}$	400			ns
	t_{KL12}		800			ns
SI2 setup time (to $\overline{\text{SCK2}}$ ↑)	t_{SIK12}		100			ns
SI2 hold time (from $\overline{\text{SCK2}}$ ↑)	t_{KSI12}		400			ns
$\overline{\text{SCK2}}$ ↓ → SO2 output delay time	t_{KSO12}	$C = 100 \text{ pF}$ ^{Note}			300	ns
$\overline{\text{SCK2}}$ rise, fall time	$t_{\text{R12}},$ t_{F12}				160	ns

Note C is the SO2 output line load capacitance.


(iii) UART mode (Dedicated baud rate generator output)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Transfer rate		$V_{DD} = 4.5$ to 5.5 V			78125	bps
					39063	bps



(iv) UART mode (External clock input)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
ASCK cycle time	t_{KCY13}	$V_{DD} = 4.5$ to 5.5 V	800			ns
			1600			ns
ASCK high-/low-level width	$t_{KH13},$	$V_{DD} = 4.5$ to 5.5 V	400			ns
	t_{KL13}		800			ns
Transfer rate		$V_{DD} = 4.5$ to 5.5 V			39063	bps
					19531	bps
ASCK rise, fall time	$t_{R13},$ t_{F13}				160	ns



AC Timing Test Point (Excluding X1, XT1 Input)




Clock Timing

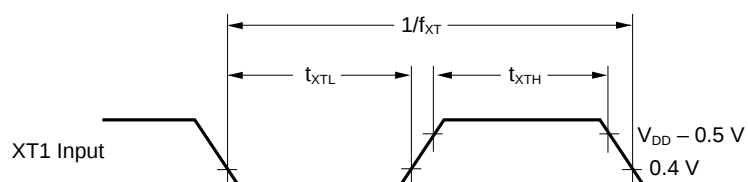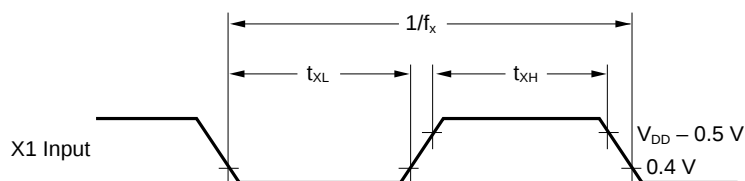


TI Timing

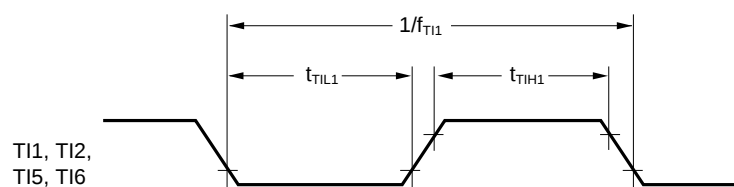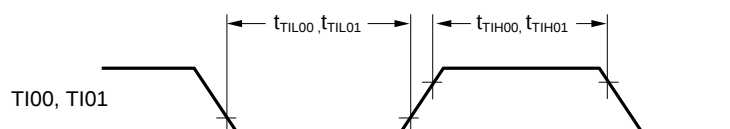

External data access (no wait):

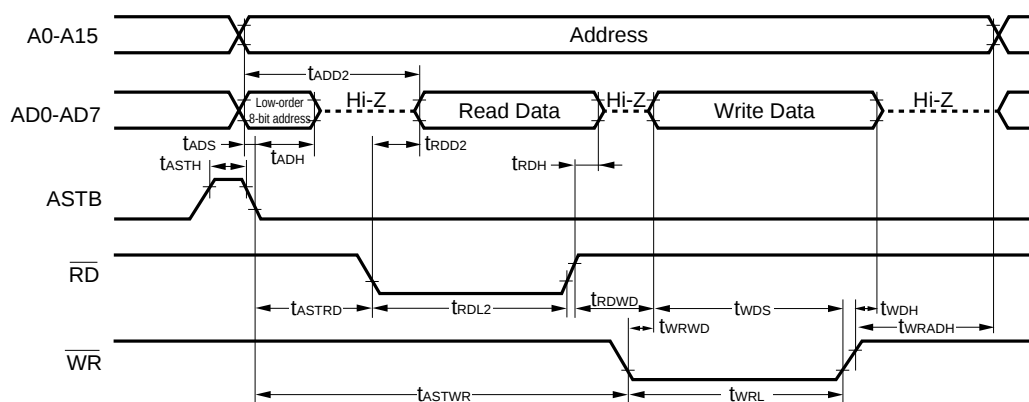


External data access (wait insertion):

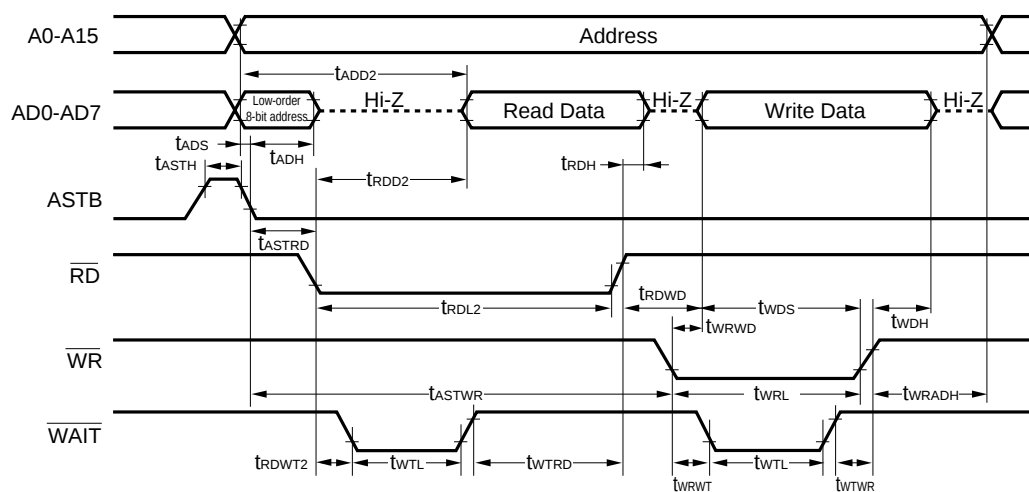


Serial Transfer Timing

3-wire serial I/O mode:

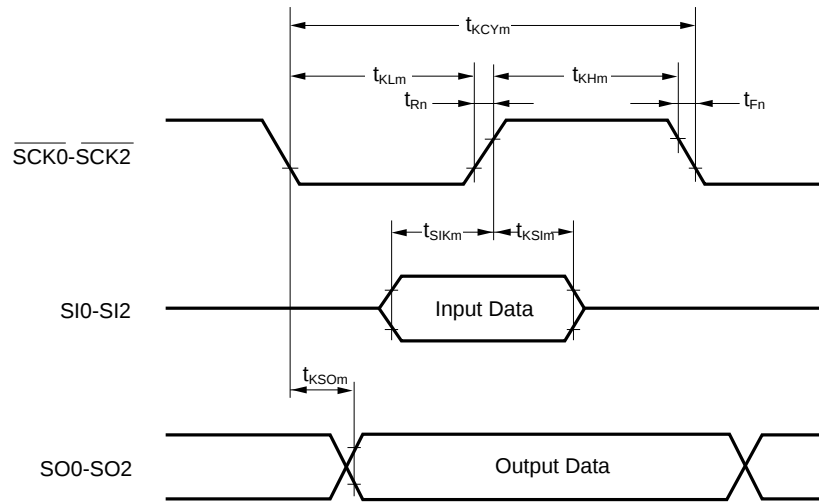


Remark $m = 1, 2, 7, 8, 11, 12$
 $n = 2, 8, 12$


SBI mode (bus release signal transfer):

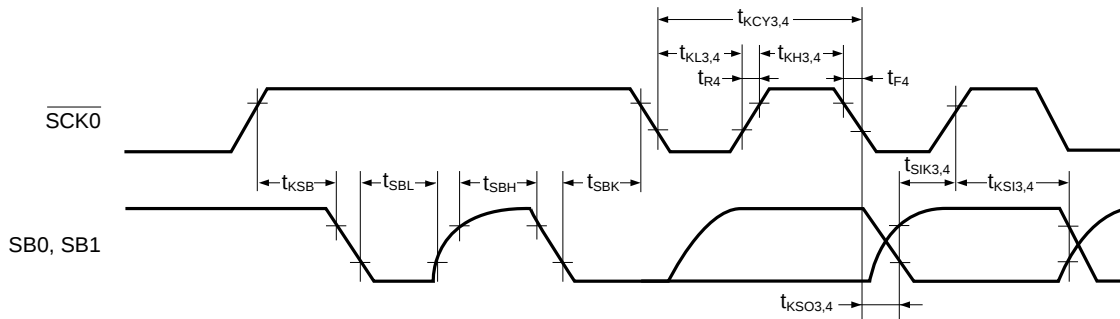


SBI mode (command signal transfer):

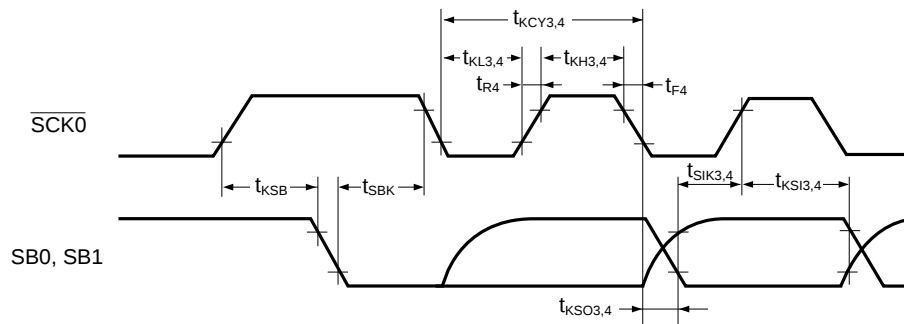


2-wire serial I/O mode:

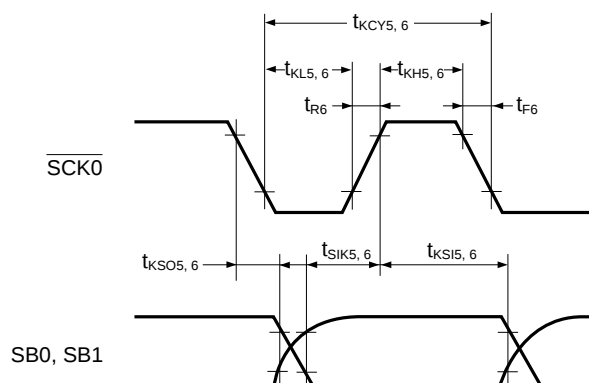

3-wire serial I/O mode with automatic transmission/reception function:

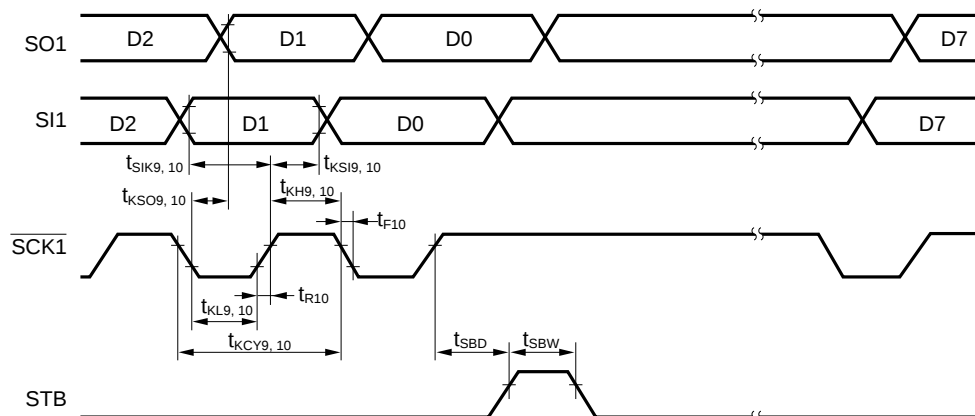


3-wire serial I/O mode with automatic transmission/reception function (busy processing):

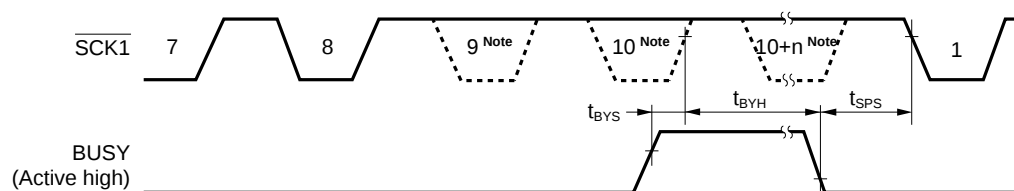

Note The signal is not actually low here, but is represented in this way to show the timing.

UART mode (external clock input):

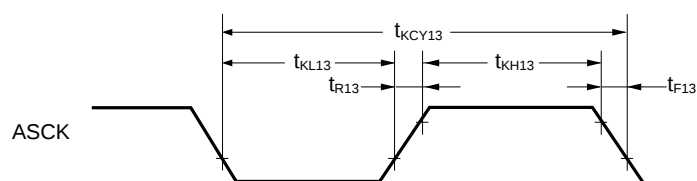

A/D Converter Characteristics ($T_A = -40$ to $+85$ °C, $AV_{DD} = V_{DD} = 2.7$ to 5.5 V, $AV_{SS} = V_{SS} = 0$ V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Resolution			8	8	8	bit
Total error ^{Note}		$2.7\text{ V} - AV_{REF0} - AV_{DD}$			0.6	%
Conversion time	t_{CONV}		19.1		200	μs
Sampling time	t_{SAMP}		$12/f_{xx}$			μs
Analog input voltage	V_{IAN}		AV_{SS}		AV_{REF0}	V
Reference voltage	AV_{REF0}		2.7		AV_{DD}	V
$AV_{REF0}-AV_{SS}$ resistance	RA_{IREF0}		4	14		kΩ

Note Excluding quantization error ($\pm 1/2$ LSB). Shown as a percentage of the full scale value.

Remark f_{xx} : Main system clock frequency (f_x or $f_x/2$)

f_x : Main system clock oscillation frequency

D/A Converter Characteristics ($T_A = -40$ to $+85$ °C, $V_{DD} = 2.7$ to 5.5 V, $AV_{SS} = V_{SS} = 0$ V)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Resolution					8	bit
Total error		$R = 2\text{ M}\Omega$ ^{Note1}			1.2	%
		$R = 4\text{ M}\Omega$ ^{Note1}			0.8	%
		$R = 10\text{ M}\Omega$ ^{Note1}			0.6	%
Settling time		$C = 30\text{ pF}$ ^{Note1}	$4.5\text{ V} - AV_{REF1} - 5.5\text{ V}$		10	μs
			$2.7\text{ V} - AV_{REF1} < 4.5\text{ V}$		15	μs
Output resistor	R_o	Note2		10		kΩ
Analog reference voltage	AV_{REF1}		2.7		V_{DD}	V
$AV_{REF1}-AV_{SS}$ resistance	RA_{IREF1}	DACS0, DACS1 = 55H ^{Note2}	4	8		kΩ

Notes 1. R and C are the D/A converter output pin load resistance and load capacitance.

2. Value for one D/A converter channel.

Remark DACS0, DACS1: D/A conversion value setting registers 0, 1.


Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics (T_A = −40 to +85 °C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Data retention supply voltage	V _{DDDR}		1.8		5.5	V
Data retention supply current	I _{DDDR}	V _{DDDR} = 1.8 V When subsystem clock stopped and feedback resistor disconnected		0.1	10	μA
Release signal setup time	t _{SREL}		0			μs
Oscillation stabilization wait time	t _{WAIT}	Release by $\overline{\text{RESET}}$		2 ¹⁷ /f _x		ms
		Release by interrupt		Note		ms


Note 2¹²/f_{xx} or 2¹⁴/f_{xx}-2¹⁷/f_{xx} can be selected by bit 0-bit 2 (OSTS0-OSTS2) of oscillation stabilization time selection register (OSTS).

Remark f_{xx}: Main system clock frequency (f_x or f_x/2)
f_x: Main system clock oscillation frequency


Data Retention Timing (STOP mode released by $\overline{\text{RESET}}$)

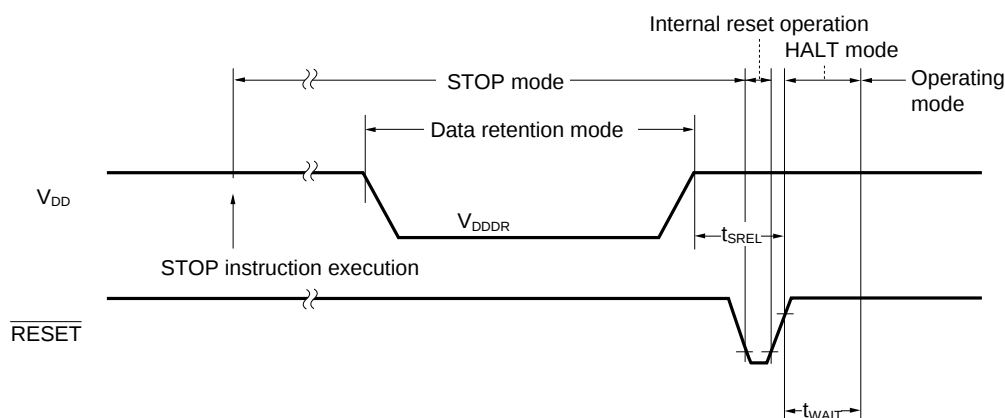


Data Retention Timing (Standby release signal: STOP mode released by interrupt signal)

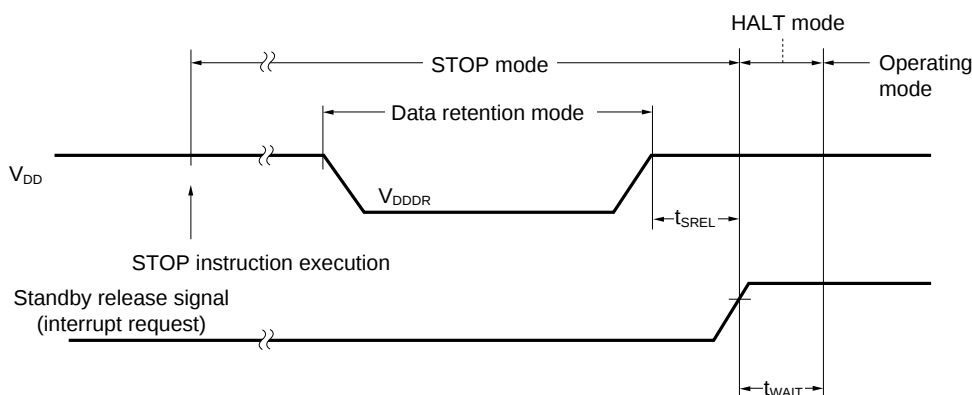

Interrupt Input Timing


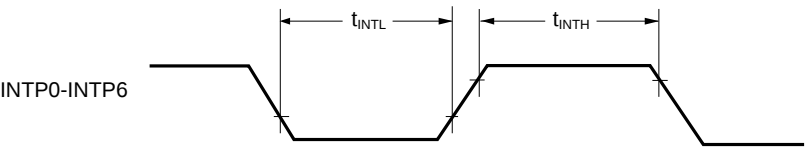


RESET Input Timing

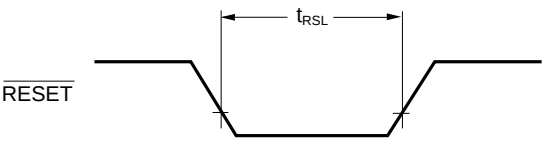

12. PACKAGE DRAWINGS

100 PIN PLASTIC QFP (FINE PITCH) (□14)

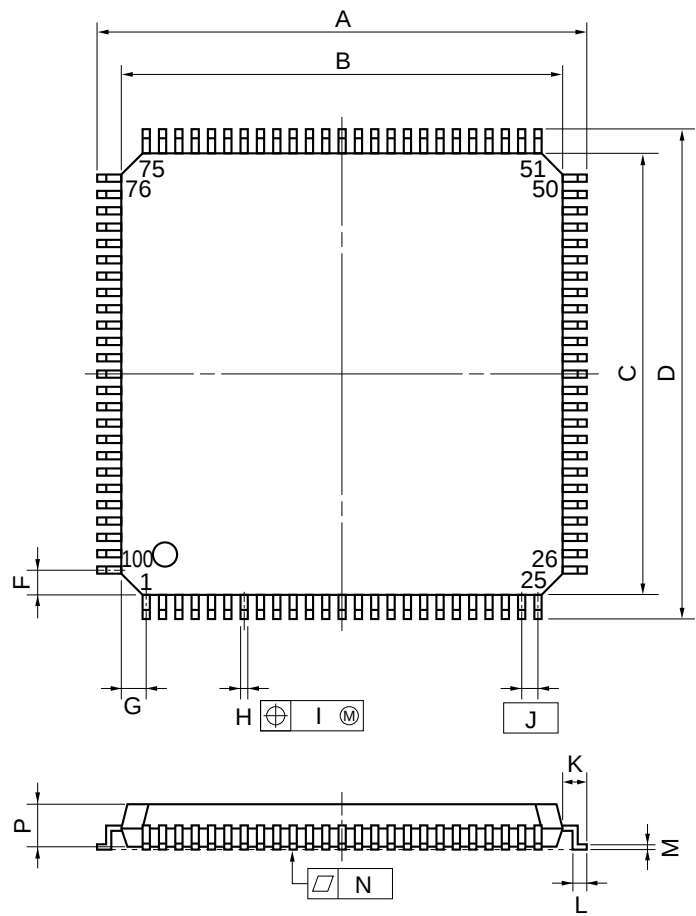

NOTE
Each lead centerline is located within 0.10 mm (0.004 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	16.0±0.2	0.630±0.008
B	14.0±0.2	0.551 ^{+0.009} _{-0.008}
C	14.0±0.2	0.551 ^{+0.009} _{-0.008}
D	16.0±0.2	0.630±0.008
F	1.0	0.039
G	1.0	0.039
H	0.22 ^{+0.05} _{-0.04}	0.009±0.002
I	0.10	0.004
J	0.5 (T.P.)	0.020 (T.P.)
K	1.0±0.2	0.039 ^{+0.009} _{-0.008}
L	0.5±0.2	0.020 ^{+0.008} _{-0.009}
M	0.17 ^{+0.03} _{-0.07}	0.007 ^{+0.001} _{-0.003}
N	0.10	0.004
P	1.45	0.057
Q	0.125±0.075	0.005±0.003
R	5°±5°	5°±5°
S	1.7 MAX.	0.067 MAX.

P100GC-50-7EA-2

Technical drawing of a rectangular lead shield. The main view shows a rectangle with overall dimensions A (width) and D (height). The inner opening has dimensions B (width) and C (height). The lead thickness is indicated by hatching. Corner radii are labeled: 80 and 81 at the top-left, 51 and 50 at the top-right, 31 and 30 at the bottom-right, and 100 and 1 at the bottom-left. A circular hole is located in the lower-left quadrant. Section lines are labeled G , H , I , J , and M . A detail view of the lead end shows a trapezoidal profile with a height S , a width Q , and a $5^\circ \pm 5^\circ$ chamfer angle. A side view at the bottom shows the shield's profile with dimensions P , K , L , and M , and a hatched section labeled N .

Each lead centerline is located within 0.15 mm (0.006 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	23.6±0.4	0.929±0.016
B	20.0±0.2	0.795 ^{+0.009} _{-0.008}
C	14.0±0.2	0.551 ^{+0.009} _{-0.008}
D	17.6±0.4	0.693±0.016
F	0.8	0.031
G	0.6	0.024
H	0.30±0.10	0.012 ^{+0.004} _{-0.005}
I	0.15	0.006
J	0.65 (T.P.)	0.026 (T.P.)
K	1.8±0.2	0.071 ^{+0.008} _{-0.009}
L	0.8±0.2	0.031 ^{+0.009} _{-0.008}
M	0.15 ^{+0.10} _{-0.05}	0.006 ^{+0.004} _{-0.003}
N	0.10	0.004
P	2.7	0.106
Q	0.1±0.1	0.004±0.004
S	3.0 MAX.	0.119 MAX.

13. RECOMMENDED SOLDERING CONDITIONS



It is recommended that the μPD78070A be soldered under the following conditions.

For details on the recommended soldering conditions, refer to information document "**Semiconductor Device Mounting Technology Manual**" (C10535E).

For soldering methods and conditions other than those recommended, please contact your NEC sales representative.

Table 13-1. Soldering Conditions for Surface Mount Devices (1/2)

(1) μPD78070AGC-7EA: 100-pin plastic QFP (Fine pitch) (14 × 14 mm, resin thickness 1.45 mm)

Soldering Method	Soldering Conditions	Symbol
Infrared ray reflow	Package peak temperature: 235 °C, Reflow time: 30 seconds or less (at 210 °C or higher), Number of reflow processes: 2 or less, Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards) < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	IR35-107-2
VPS	Package peak temperature: 215 °C, Reflow time: 40 seconds or less (at 200 °C or higher), Number of reflow processes: 2 or less, Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards) < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	VP15-107-2
Partial heating	Pin temperature: 300°C or below, Flow time: 3 seconds or less (per device side)	—

Note Exposure limit before soldering after the dry pack package is opened. Storage conditions: 25 °C and relative humidity at 65% or less.

Caution Do not use different soldering methods together (except for partial heating method).

Table 13-1. Soldering Conditions for Surface Mount Devices (2/2)

(2) μPD78070AGF-3BA: 100-pin plastic QFP (14 × 20 mm, resin thickness 2.7 mm)

Soldering Method	Soldering Conditions	Symbol
Infrared ray reflow	Package peak temperature: 235 °C, Reflow time: 30 seconds or less (at 210 °C or higher), Number of reflow processes: 2 or less < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	IR35-00-2
VPS	Package peak temperature: 215 °C, Reflow time: 40 seconds or less (at 200 °C or higher), Number of reflow processes: 2 or less < Cautions > (1) Wait for the device temperature to return to normal after the first reflow before starting the second reflow. (2) Do not perform flux cleaning with water after the first reflow.	VP15-00-2
Wave soldering	Solder temperature: 260 °C or below, Flow time: 10 seconds or less, Number of flow processes: 1, Preheating temperature: 120°C max. (package surface temperature)	WS60-00-1
Partial heating	Pin temperature: 300°C or below, Flow time: 3 seconds or less (per device side)	—

Caution Do not use different soldering methods together (except for partial heating method).

APPENDIX A. DEVELOPMENT TOOLS

The following development tools are available to support development of systems using the μPD78070AY.

Language Processing Software

RA78K/0 Note 1, 2, 3, 4	Assembler package common to the 78K/0 series
CC78K/0 Note 1, 2, 3, 4	C compiler package common to the 78K/0 series
DF78078 Note 1, 2, 3, 4	Device file common to the μPD78078 subseries
CC78K/0-L Note 1, 2, 3, 4	C compiler library source file common to the 78K/0 series

Debugging Tools

IE-78000-R	In-circuit emulator common to the 78K/0 series	
IE-78000-R-A Note 8	In-circuit emulator common to the 78K/0 series (for the integrated debugger)	★
IE-78000-R-BK	Break board common to the 78K/0 series	
IE-78078-R-EM	Emulation board common to the μPD78078 subseries	
EP-78064GC-R	Emulation probe common to the μPD78064 subseries	
EP-78064GF-R		
EV-9500GC-100	Adapter mounted on the user system board prepared for 100-pin plastic QFP	
EV-9200GF-100	Socket mounted on the user system board prepared for 100-pin plastic QFP	
SM78K0 Note 5, 6, 7	System simulator common to the 78K/0 series	
ID78K0 Note 4, 5, 6, 7, 8	Integrated debugger for the IE-78000-R-A	★
SD78K/0 Note 1, 2	Screen debugger for the IE-78000-R	
DF78078 Note 1, 2, 5, 6, 7	Device file common to the μPD78078 subseries	

Real-Time OS

RX78K/0 Note 1, 2, 3, 4	Real-time OS used for the 78K/0 series
MX78K0 Note 1, 2, 3, 4	OS used for the 78K/0 series

Notes 1. Based on PC-9800 series (MS-DOS™)

2. Based on IBM PC/AT™ and its compatibles (PC DOS™/IBM DOS™/MS-DOS™)

3. Based on HP9000 series 300™ (HP-UX™)

4. Based on HP9000 series 700™ (HP-UX), SPARCstation™ (SunOS™), and EWS-4800 series (EWS-UX/V)

5. Based on PC-9800 series (MS-DOS + Windows™)

6. Based on IBM PC/AT and its compatibles (PC DOS/IBM DOS/MS-DOS + Windows)

7. Based on NEWS™ (NEWS-OS™)

8. Under development

Remarks 1. Please refer to the **78K/0 Series Selection Guide (IF-1185)** for information on third party development tools.

2. Use the RA78K/0, CC78K/0, SM78K0, ID78K0, SD78K/0 and RX78K/0 in combination with the DF78078.

Fuzzy Inference Development Support System

FE9000 Note1 /FE9200 Note2	Fuzzy knowledge data creation tool
FT9080 Note1 /FT9085 Note3	Translator
FI78K0 Note 1, 3	Fuzzy inference module
FD78K0 Note 1, 3	Fuzzy inference debugger

Notes 1. Based on PC-9800 series (MS-DOS)

2. Based on IBM PC/AT and its compatibles (PC DOS/IBM DOS/MS-DOS + Windows)

3. Based on IBM PC/AT and its compatibles (PC DOS/IBM DOS/MS-DOS)

Remark Please refer to the **78K/0 Series Selection Guide (IF-1185)** for information on third party development tools.

APPENDIX B. RELATED DOCUMENTS

Documents Related to Devices

Document Name	Document No.	
	Japanese	English
μPD78070A, 78070AY User's Manual	IEU-907	U10200E
78K/0 Series User's Manual—Instructions	IEU-849	IEU-1372
78K/0 Series Instruction Table	U10903J	—
78K/0 Series Instruction Set	U10904J	—
μPD78070AY Special Function Register Table	U10133J	—

Documents Related to Development Tools

Document Name		Document No.	
		Japanese	English
RA78K Series Assembler Package	Operation	EEU-809	EEU-1399
	Language	EEU-815	EEU-1404
RA78K Series Structured Assembler Preprocessor		EEU-817	EEU-1402
CC78K Series C Compiler	Operation	EEU-656	EEU-1280
	Language	EEU-655	EEU-1284
CC78K/0 C Compiler Application Note know-how	Programming	EEA-618	EEA-1208
CC78K Series Library Source File		EEU-777	—
IE-78000-R		EEU-810	EEU-1398
IE-78000-R-A		U10057J	U10057E
IE-78000-R-BK		EEU-867	EEU-1427
IE-78078-R-EM		U10775J	EEU-1504
EP-78064		EEU-934	EEU-1522
SM78K0 System Simulator	Reference	EEU-5002	U10181E
SM78K Series System Simulator	External parts user open interface specification	U10092J	U10092E
SD78K/0 Screen Debugger	Introduction	EEU-852	—
PC-9800 Series (MS-DOS) Based	Reference	U10952J	—
SD78K/0 Screen Debugger	Introduction	EEU-5024	EEU-1414
IBM PC/AT (PC DOS) Based	Reference	EEU-993	EEU-1413

Caution The contents of the documents listed above are subject to change without prior notice. Make sure to use the latest edition when starting design.

Documents Related to Embedded Software (User's Manual)

Document Name		Document No.	
		Japanese	English
78K/0 Series Real-time OS	Basic	EEU-912	—
	Installation	EEU-911	—
	Technical	EEU-913	—
78K/0 Series OS MX78K0	Basic	EEU-5010	—
Fuzzy Knowledge Data Creation Tool		EEU-829	EEU-1438
78K/0, 78K/II, and 87AD Series Fuzzy Inference Development Support System Translator		EEU-862	EEU-1444
78K/0 Series Fuzzy Inference Development Support System Fuzzy Inference Module		EEU-858	EEU-1441
78K/0 Series Fuzzy Inference Development Support System Fuzzy Inference Debugger		EEU-921	EEU-1458

Other Documents

Document Name		Document No.	
		Japanese	English
Package Manual		IEI-635	IEI-1213
Semiconductor Device Mounting Technology Manual		C10535J	C10535E
NEC Semiconductor Device Quality Grades		IEI-620	IEI-1209
NEC Semiconductor Device Reliability/Quality Control System		IEM-5068	—
Electrostatic Discharge (ESD) Test		MEM-539	—
Semiconductor Device Quality Assurance Guide		MEI-603	MEI-1202
Microcontroller-Related Product Guide – Third Party Products –		MEI-604	—

Caution The contents of the documents listed above are subject to change without prior notice. Be sure to use the latest edition when starting design.

[MEMO]

NOTES FOR CMOS DEVICES

① PRECAUTION AGAINST ESD FOR SEMICONDUCTORS

Note: Strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred. Environmental control must be adequate. When it is dry, humidifier should be used. It is recommended to avoid using insulators that easily build static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work bench and floor should be grounded. The operator should be grounded using wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with semiconductor devices on it.

② HANDLING OF UNUSED INPUT PINS FOR CMOS

Note: No connection for CMOS device inputs can be cause of malfunction. If no connection is provided to the input pins, it is possible that an internal input level may be generated due to noise, etc., hence causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using a pull-up or pull-down circuitry. Each unused pin should be connected to V_{DD} or GND with a resistor, if it is considered to have a possibility of being an output pin. All handling related to the unused pins must be judged device by device and related specifications governing the devices.

③ STATUS BEFORE INITIALIZATION OF MOS DEVICES

Note: Power-on does not necessarily define initial status of MOS device. Production process of MOS does not define the initial operation status of the device. Immediately after the power source is turned ON, the devices with reset function have not yet been initialized. Hence, power-on does not guarantee out-pin levels, I/O settings or contents of registers. Device is not initialized until the reset signal is received. Reset operation must be executed immediately after power-on for devices having reset function.

FIP and IEBus are trademarks of NEC Corporation.

MS-DOS and Windows are trademarks of Microsoft Corporation.

IBM DOS, PC/AT, and PC DOS are trademarks of IBM Corporation.

HP9000 series 300, HP9000 series 700, and HP-UX are trademarks of Hewlett-Packard Company.

SPARCstation is a trademark of SPARC International, Inc.

SunOS is a trademark of Sun Microsystems, Inc.

NEWS and NEWS-OS are trademarks of Sony Corporation.

The related documents indicated in this publication may include preliminary versions. However, preliminary versions are not marked as such.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

“Standard”, “Special”, and “Specific”. The Specific quality grade applies only to devices developed based on a customer designated “quality assurance program” for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in “Standard” unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.