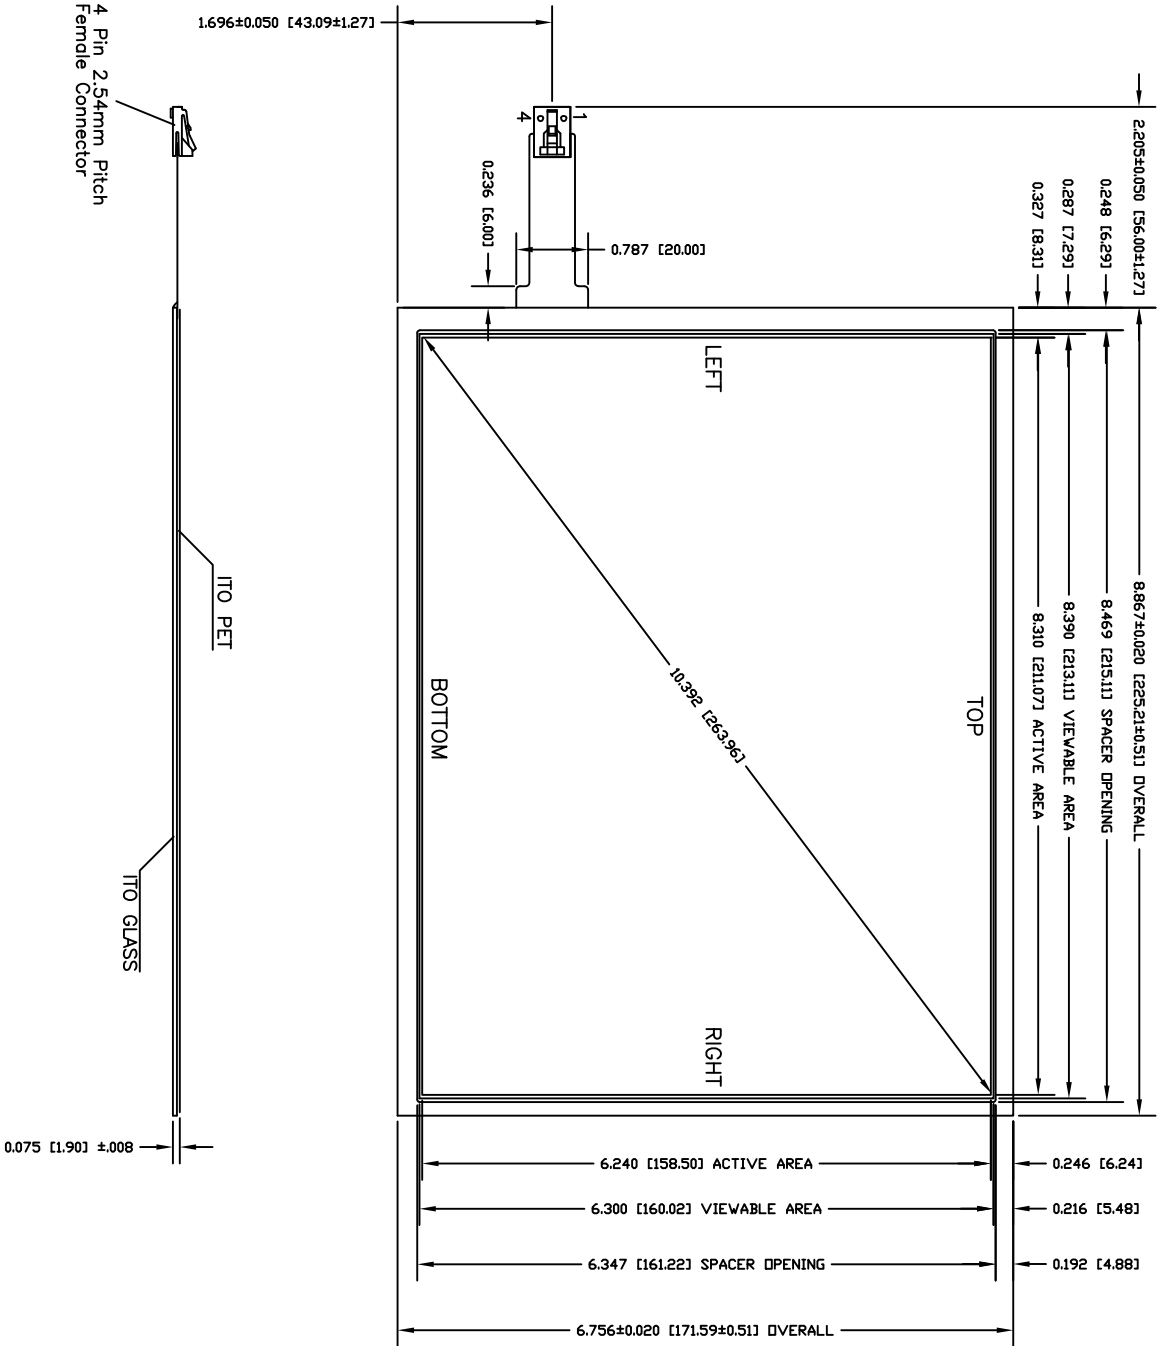


- NOTES:
1. TOLERANCE ± 0.020 UNLESS NOTED OTHERWISE.
 2. TOP CONDUCTIVE LAYER TO HAVE AN ANTI-GLARE HARDCOATED SURFACE.
 3. PIN ONE IS DESIGNATED BY THE NUMERICAL NUMBER 1 BY CONNECTOR END.
 4. PINOUT TO BE AS INDICATED.
 5. TAIL TYPE: IMMERSION GOLD PLATED FPC WITH AMP LATCH HOUSING

BERGQUIST TOUGH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55605			
TITLE: 10.39 DIAGONAL 4-WIRE			
ROHS COMPLIANT			
DRN:	MLR	DATE:	5/30/08
CHKD:	DATE:	TOL:	±0.020
APVD:	DATE:	PART #:	400429
			REV