



*Evaluation Board Document*

**μPG2214TK-EVAL-A**

**Evaluation Board**

- Description
- Insertion Loss of Through Board
- Assembly Drawing

## **Description:**

The uPG2214TK-EVAL-A evaluation board provides a quick and convenient means of evaluating the performance of the NEC uPG2214TK switch. In addition to the device, the board provides DC block capacitors, power supply bypass capacitors, and RF and DC connectors.

A DC block capacitor is required at all RF ports. On this board, two parallel capacitors of 22pF are used for this purpose. This configuration minimizes the mismatch effect associated with the serial capacitors over a wide frequency range. In a real application where the operation frequency range is relatively narrow, one DC block capacitor usually is sufficient. The user should select the appropriate capacitor value according to the operation frequencies and the type of capacitor selected. Generally the performance of the switch circuit is not sensitive, to a certain extent, to the value of DC block capacitors.

A 1000pF DC bypass capacitor is used on all control lines. For high speed applications the user may choose smaller capacitance or no capacitor at all.

### **DC supply connectors:**

P1 is control voltage  $V_{cont1}$ , P2 is  $V_{cont2}$  and pins P3 and P4 are the ground.  $V_{cont1}$  and  $V_{cont2}$  should be connected to separate power supplies to provide the required control logic.

### **RF connectors:**

As indicated on the board, J1 is connected to the OUTPUT1 port, J2 is connected to the OUTPUT2 port and J3 is connected to the INPUT port.

### **Information on Board Material:**

The board material is 20 mil thick Duroid 6002. Its dielectric constant is 2.94.

### **Switch Logic Table:**

The following table lists the logic table for switch states.

<b><math>V_{cont1}</math></b>	<b><math>V_{cont2}</math></b>	<b>INPUT – OUTPUT1</b>	<b>INPUT – OUTPUT2</b>
L	H	ON	OFF
H	L	OFF	ON


### **Insertion Loss of Through Board:**

In assessing the insertion loss of the switch by measuring S21 of the evaluation board, it is necessary to take into account the loss through the connectors and PCB trace. To this end a through board was characterized to determine the board/connector loss. The table below lists the board loss at different frequencies.


<b>INPUT FREQUENCY (GHz)</b>	<b>BOARD LOSS (dB)</b>
0.5	0.053
1.0	0.073
1.5	0.107
2.0	0.120
2.5	0.133
3.0	0.154

NOTES: UNLESS OTHERWISE SPECIFIED.


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED

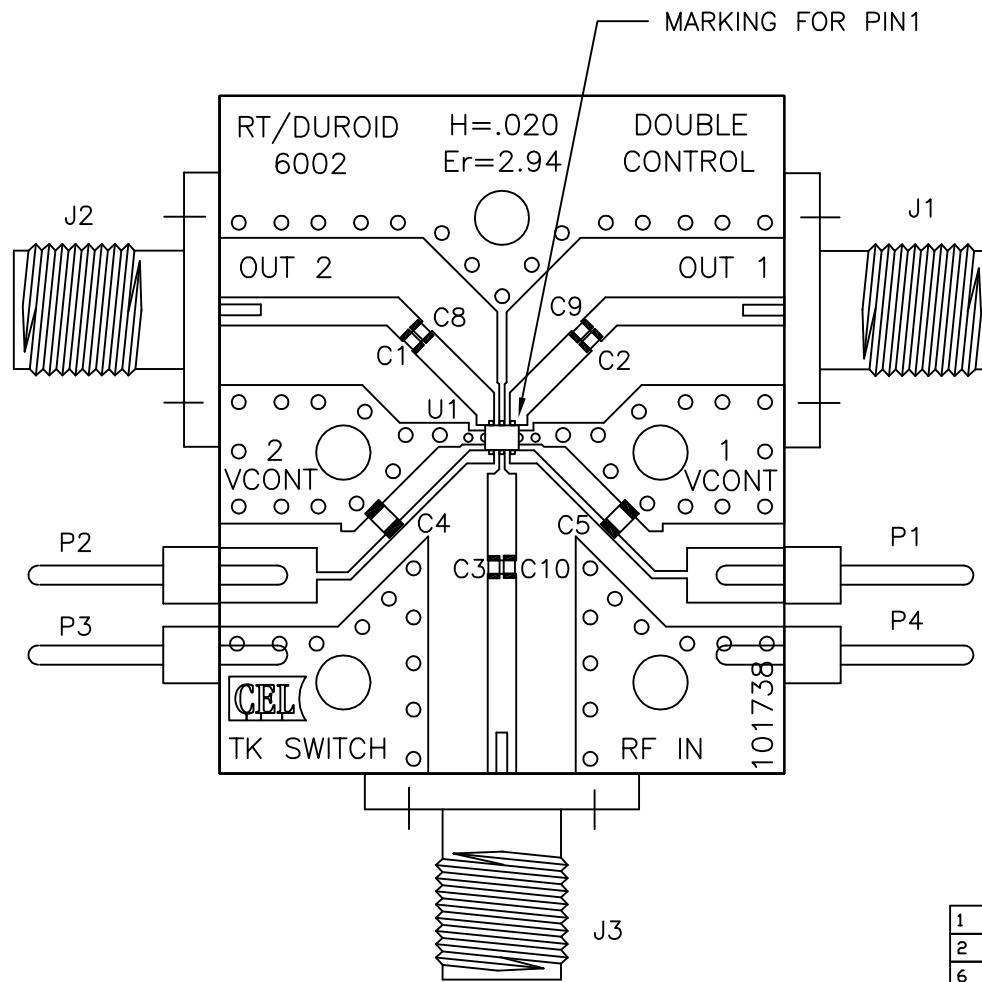

UPG2214TK



MARKING FOR PIN1  
IS ON TOP OF CHIP

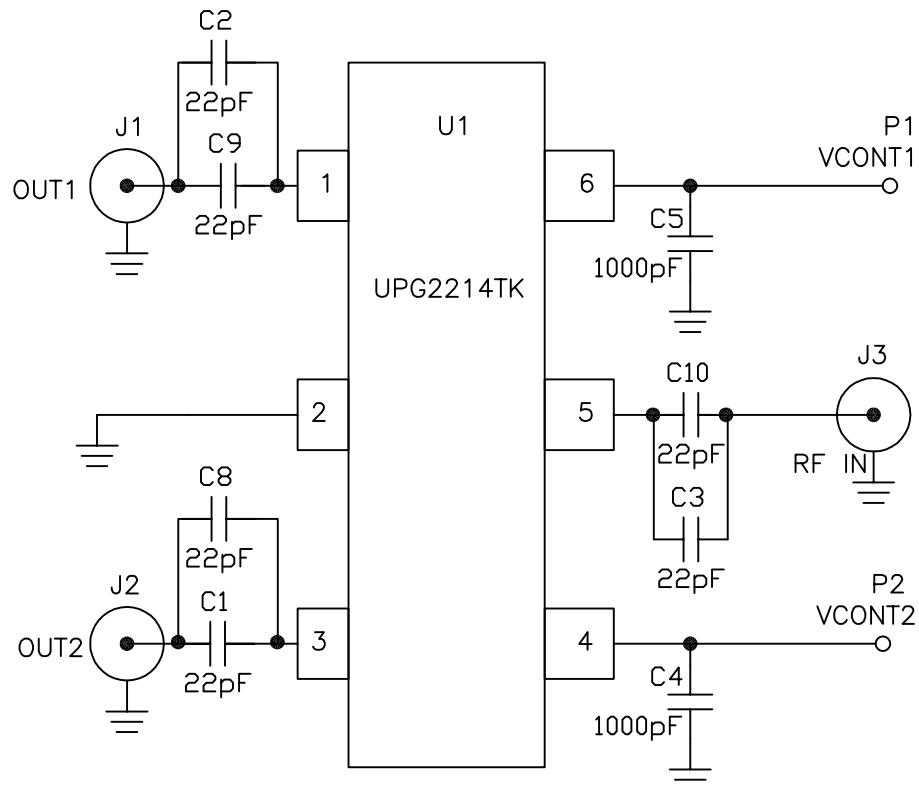

1	UPG2214TK	U1	IC NEC	6
2	GRM1885C1H102JA01B	C4,C5	0603 1000pF CAP MURATA	5
6	CRM1555C1H220JZ01B	C1,C2,C3,C8,C9,C10	0402 22pF CAP MURATA	4
4	2340-6111 TG	P1,P2,P3,P4	PIN HEADER 3M	3
3	5308-2CC	J1,J2,J3	SMA FEMALE CONNECTOR TENSOLITE	2
1	FD-101738	PCB	FABRICATION DRAWING	1
QTY	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL/SPECIFICATION	ITEM NO.

**CEL** CALIFORNIA EASTERN LABS  
4590 PATRICK HENRY DR. SANTA CLARA CA 95054

**TITLE:**  
TK SWITCH/DOUBLE CONTROL  
ASSEMBLY DRAWING

SIZE	FSCM NO.	DWG NO.
C		AD-101738
SCALE	RELEASE DATE	SHEET 1 OF 1