




CHASSIS MOUNT DC-DC CONVERTERS QUARTER BRICK PACKAGE WITH HEATSINK 50 TO 100 WATT 4:1 INPUT RANGE



FEATURES

- * 50-100W Isolated Output
- * 4:1 Wide Input Range
- * Chassis Mount/Din Rail Mount
- * Input Over Voltage Protection
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * CE Mark Meets 2004/108/EEC
- * Safety Meets UL60950-1, EN60950-1, and IEC60950-1
- * UL60950-1 Approval for DC Modules

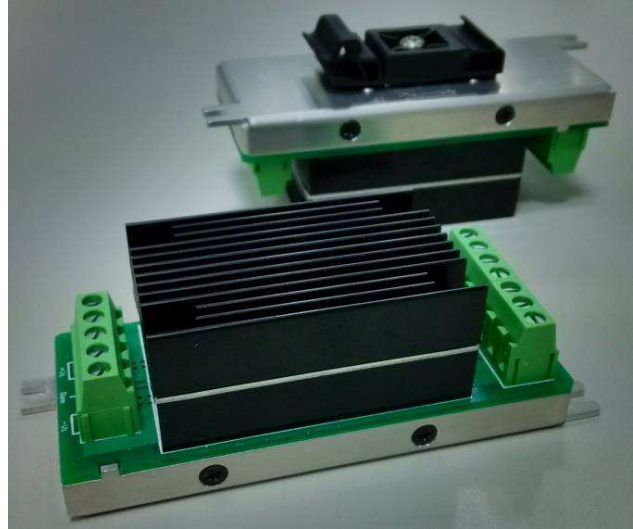

Ordering Information

CHB(E)XXX-	XX	S	XX	N	-XXX	+X-XXXX
Model No.	Nominal Input Voltage		Output Voltage	Remote ON/OFF		Heat Sink Type (Option)
CQE50W CQB75W CQB100W	24: 24VDC 48: 48VDC	Single Output	3V3 : 3.3VDC 05 : 5VDC 12 : 12VDC 15 : 15VDC 24 : 24VDC	None: Positive Logic N: Negative Logic	CM: Chassis Mount DIN: Din Rail Mount	M-C448 M-C421
CQE50W			48 : 48VDC			
CQB100	110 : 110VDC		05 : 5VDC 12 : 12VDC 24 : 24VDC			

Require input an aluminum capacitor connected in the table below.





MODEL NUMBER	INPUT
CQE50W-XXSXX-CM/DIN	220uF/100V for 24Vin Models 47uF/100V for 48Vin Models
CQB75W-XXSXX-CM/DIN	220uF/100V for 24Vin Models
CQB100W-XXSXX-CM/DIN	100uF/100V for 24Vin Models 47uF/100V for 48Vin Models
CQB100-110SXX-CM/DIN	120uF/200V

NOTE:

1. Short JP1 to connect +S and +Vo, JP2 to connect -S and -Vo with local sense.
2. Remove jumper(JP1& JP2),terminal block port +S,-S & Trim can be used to Output Remote Sensing or Output Voltage Adjustment functional(see application note).
3. Thermal resistance is referenced to the application note.
4. Include TVS for input surge voltage protection.
5. Recommend external fuse for input reverse polarity protection (Include shunt diode inside) .

POWER DERATING CURVE

Typical Derating Curves At Nominal Line, Full Load, and natural convection

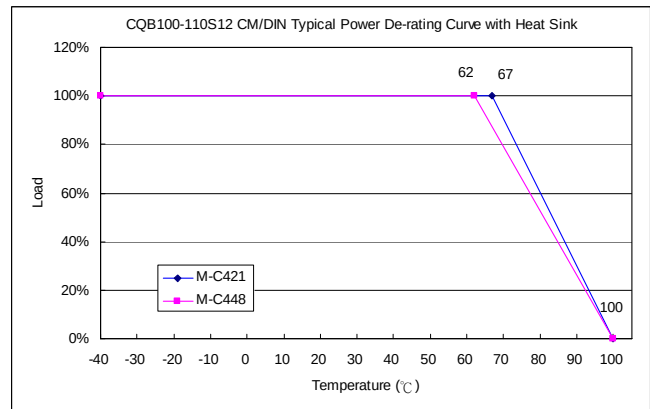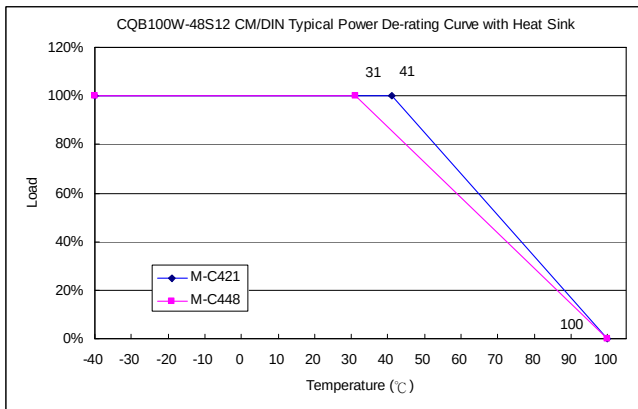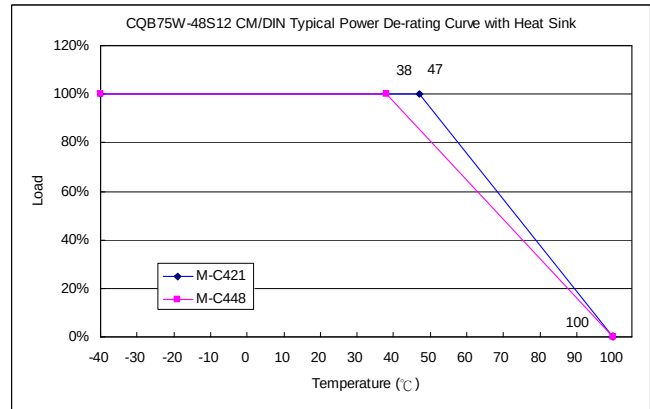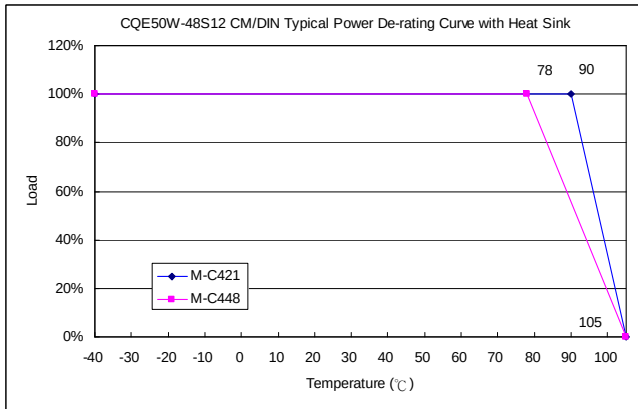

Mechanical Specification



PIN CONNECTIONS			
PIN	FUNCTION	PIN	FUNCTION
1,2	+V Input	10	-Sense
3	ON/OFF	11,12	- V Output
4,5	+V Input	JP1	Short +S& +Vo
6,7	+V Output	JP2	Short -S& -Vo
8	+Sense		
9	Trim		

Suffix -CM (Left Side) / Suffix-DIN(Right Side)

All Dimensions In Inches[mm]

Tolerance Inches:x.xx= ±0.02, x.xxx= ±0.010

Millimeters:x.x= ±0.5, x.xx=±0.25

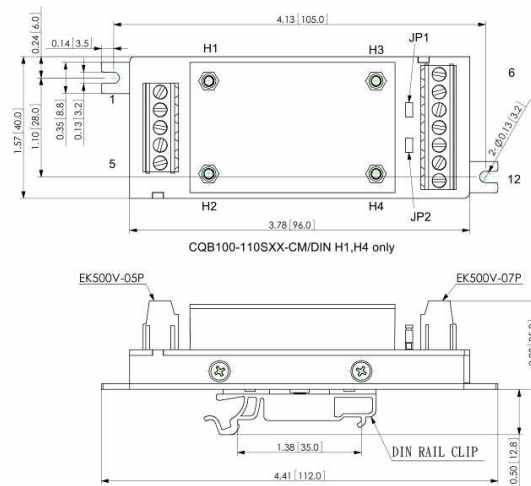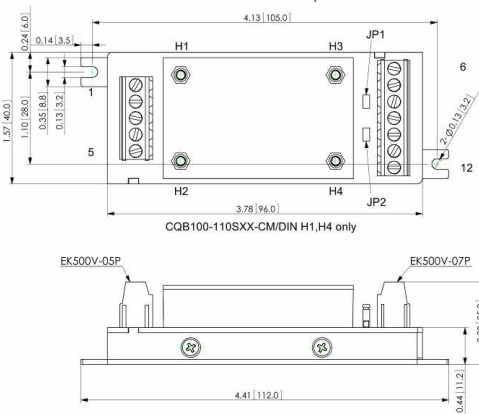

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[CQB100W-48S3V3](#) [CQB100W-48S24N](#) [CQB100W-48S12N](#) [CQB100W-48S3V3N](#) [CQB100W-48S12](#) [CQB100W-48S24](#) [CQB100W-48S15](#) [CQB100W-48S05N](#) [CQB75W-24S3V3](#) [CQB75W-24S05](#) [CQB75W-24S12](#) [CQB75W-24S15](#) [CQB75W-24S24](#) [CQB75W-48S3V3](#) [CQB75W-48S05](#) [CQB75W-48S12](#) [CQB75W-48S15](#) [CQB75W-48S24](#) [CQB100W-48S15N](#) [CQB100W-48S05](#) [CQB100-110S05](#) [CQB100-110S12](#) [CQB100-110S24](#)