



Features

- DSL Triple Outputs: +15V, +3.3V, +1.5V (Independantly Regulated)
- Input Voltage Range: 36V to 75V
- 1500VDC Isolation
- On/Off "Standby" Control
- Current Limit
- Short Circuit Protection (All Outputs)

- Fixed Frequency Operation
- Over-Temperature Shutdown
- Under-Voltage Lockout
- Space Saving Package: 1.6 sq. in. PCB Area (suffix N)
- Solderable Copper Case
- Safety Agency Approvals: UL 60950
CSA C22.2 60950
VDE EN60950

Description

The PT4801 Excalibur™ module is an isolated triple-output DC/DC converter that provides +15V, +3.3V, and +1.5V power supply voltages from a standard (-48V) telecom central office (CO) supply. A typical application is a chip-set for an 8 or 16-channel ADSL/DSL line card, or other mixed signal circuitry. The output voltage combination provides power for a processor core, digital logic, and analog support circuitry. The V_{O2} and V_{O3} outputs are also designed to meet the power-up/down sequencing requirements of popular DSP ICs.

The PT4801 is housed in a space-saving solderable copper case. A heatsink is not required. The vertical configuration occupies only 1.6 in² of PCB area.

Ordering Information

PT4801□ = +15/+3.3/+1.5 Volts

PT Series Suffix (PT1234x)


| Case/Pin Configuration | Order Suffix | Package Code |
|------------------------|--------------|--------------|
| Vertical | N | (ENJ) |
| Horizontal | A | (ENK) |
| SMD | C | (ENL) |

(Reference the applicable package code drawing for the dimensions and PC board layout)

Pin-Out Information

| Pin Function | Pin Function |
|-------------------|--------------------|
| 1 Remote (On/Off) | 11 COM |
| 2 No Pin | 12 V_{O2} Adjust |
| 3 $-V_{IN}$ | 13 No Pin |
| 4 $-V_{IN}$ | 14 V_{O2} |
| 5 N/C | 15 V_{O2} |
| 6 $+V_{IN}$ | 16 COM |
| 7 $+V_{IN}$ | 17 COM |
| 8 No Pin | 18 V_{O3} |
| 9 No Pin | 19 V_{O3} Adjust |
| 10 V_{O1} | 20 No Pin |

Typical Application

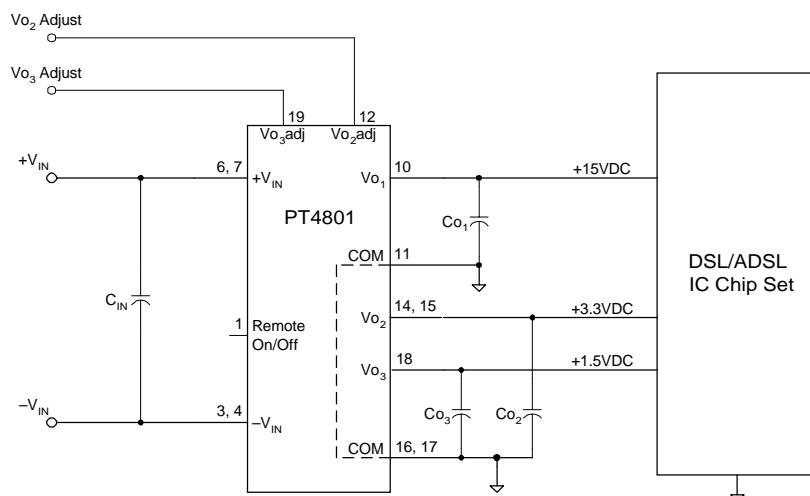

C_{in} = Optional 33 μ F
 C_{O1}/C_{O2} = Optional 10 μ F to 330 μ F per output. (See note 6)

Electrical Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$, $V_{in} = 48\text{V}$, $C_{in} = 0\mu\text{F}$, $C_{out} = 0\mu\text{F}$, and $I_o = I_{o\text{typ}}$)

| Characteristics | Symbols | Conditions | PT4801 SERIES | | | |
|--------------------------------|----------------------------|--|--|----------------------|-------------------|---------------------------------|
| | | | Min | Typ | Max | Units |
| Output Power | P_o | Each output: | V_{o1} (15V) V_{o2} (3.3V) V_{o3} (1.5V) | — — — | 15 6.6 2.25 | 18.75 (1) 9.9 (1) 3.0 (1) |
| | | All three outputs: | — | — | 25 (1) | W |
| Output Current | I_o | | V_{o1} (15V) | 0 | 1.0 | 1.25 |
| | | ($I_{o1} > 0.25\text{A}$) | V_{o2} (3.3V) V_{o3} (1.5V) | 0 0 | 2.0 1.5 | 3.0 (2) 2.0 (2) |
| | | ($I_{o1} \leq 0.25\text{A}$) | V_{o2} (3.3V) V_{o3} (1.5V) | 0 0 | — — | 2.0 (2) 1.5 (2) |
| | | Maximum ($I_{o1} + I_{o2} + I_{o3}$) | — | — | 6.0 (3) | A |
| Input Voltage Range | V_{in} | Continuous | 36 | — | 75 | V |
| | | Surge (1 minute) | — | — | 80 | V |
| Set-point Voltage Tolerance | $V_{o\text{tol}}$ | | V_{o1} V_{o2} V_{o3} | 15.0 3.25 1.45 | — 3.3 1.5 | 15.75 3.35 1.55 |
| Temperature Variation | Reg_{temp} | $-40^\circ \leq T_a \leq +85^\circ\text{C}$, $I_o = I_{o\text{min}}$ | — | ±0.5 | — | % V_o |
| Line Regulation | Reg_{line} | All outputs, Over V_{in} range, $I_o = I_{o\text{typ}}$ | — | 0.5 | 1.0 | % V_o |
| Load Regulation | Reg_{load} | All outputs, $I_o = 10\%$ to 100% $I_{o\text{max}}$ | — | 0.5 | 1.0 | % V_o |
| Total Output Voltage Variation | $\Delta V_{o\text{tot}}$ | Includes set-point, line load, $-40^\circ \leq T_a \leq +85^\circ\text{C}$ | V_{o1} V_{o2} V_{o3} | 15.0 3.2 1.4 | — 3.3 1.5 | 15.75 3.4 1.6 |
| Efficiency | η | $I_{o1} = 0.5\text{A}$, $I_{o2} = 1.0\text{A}$, $I_{o3} = 1.0\text{A}$ $I_{o1} = 1.0\text{A}$, $I_{o2} = 3.0\text{A}$, $I_{o3} = 2.0\text{A}$ | — — | 78 81 | — — | % |
| V_o Ripple (pk-pk) | V_r | 20–20Mz bandwidth, $I_o = I_{o\text{typ}}$ | V_{o1} V_{o2} V_{o3} | — — — | 75 33 30 | 150 50 50 |
| Transient Response | t_{tr} V_{os} | 25% load step from $I_o \geq 0.5I_{o\text{typ}}$ | — | 300 | — | μSec |
| | | V_o over/undershoot | V_{o1} V_{o2} V_{o3} | — — — | 3 100 100 | % V_o mVpp |
| Output Voltage Adjust | $V_{o\text{adj}}$ | | V_{o2} V_{o3} | 3.135 1.425 | — — | 3.465 (4) |
| Switching Frequency | f_s | Over V_{in} and I_o ranges | 550 | 650 | 750 | kHz |
| Under-Voltage Lockout | UVLO | V_{in} increasing V_{in} decreasing | — — | 34 33 | — — | V |
| Remote On/Off (Pin x) | | Referenced to $-V_{in}$ (pin 1) | | | | |
| Input High Voltage | V_{IH} | | | 2.5 | — | 15 (5) |
| Input Low Voltage | V_{IL} | | | —0.2 | — | +0.8 |
| Input Low Current | I_{IL} | | | — | -10 | — |
| Standby Input Current | $I_{in\text{ standby}}$ | pins 1 & 2 connected | — | 8 | 16 | mA |
| Internal Input Capacitance | C_{in} | | — | 0.76 | — | μF |
| External Output Capacitance | C_{o1}, C_{o2}, C_{o3} | | V_{o1} V_{o2} & V_{o3} (each) | 0 0 | — — | 330 (6) 330 (6) |
| Isolation Voltage | | Input–output/input–case | 1500 | — | — | V |
| Capacitance | | Input to output | — | 3000 | — | pF |
| Resistance | | Input to output | 10 | — | — | MΩ |
| Operating Temperature Range | T_a | Over V_{in} Range | —40 | — | +85 (7) | °C |
| Case Temperature | | | | | +100 | °C |
| Over Temperature Protection | OTP | | +125 | — | — | °C |
| Storage Temperature | T_s | — | —40 | — | +125 | °C |
| Mechanical Shock | | Method 2002.3 1 msec, ½ Sine, mounted | — | 500 | — | G's |
| Mil-STD-883D | | | | | | |
| Mechanical Vibration | | Method 2007.2, 20–2000 Hz, Soldered | Suffixes A, C | — | 20 (8) | — |
| Mil-STD-883D | | | | | | G's |
| Weight | — | Vertical/Horizontal | — | 50 | — | grams |
| Flammability | — | Meets UL 94V-O | | | | |


Notes:

- The sum-total power delivered from all three output, V_{o1} , V_{o2} , and V_{o3} cannot exceed 25 watts.
- When the load current from V_{o1} is less than 0.25A, the maximum current available from V_{o2} , and V_{o3} is reduced to 2A and 1.5A respectively.
- The sum-total current from all three outputs V_{o1} , V_{o2} , and V_{o3} cannot exceed 6Adc.
- V_{o3} cannot be adjusted higher than the nominal output voltage. Consult the applicable application note for information on output voltage adjustment.
- The Remote On/Off input has an internal pull-up. If left open circuit the PT4801 will operate when input power is applied. A low-leakage (<100nA) MOSFET is recommended to control this input. The open-circuit voltage is less than 10V. See application notes for interface considerations.
- External output capacitance is not required for proper operation. Up to 100μF of external capacitance may be added to each output to improve the response to load transients. Do not exceed 330μF at any one output. Allowances must be made for load circuit capacitance and the total external capacitor tolerance. Excessive output capacitance will affect converter start up. Low ESR capacitors, including Os-con® and tantalum types, may be used.
- See Safe Operating Area curves, or consult the factory for the appropriate derating.
- See Safe Operating Area curves, or consult the factory for the appropriate derating.


25-W Triple Output Isolated DC/DC
Converter for DSL Applications

PT4801 Characteristic Data (See Note A)


Efficiency vs Output Current

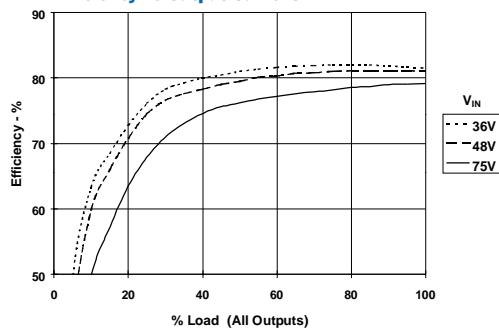


Load Regulation vs Output Current; $V_{O1} = +15V$

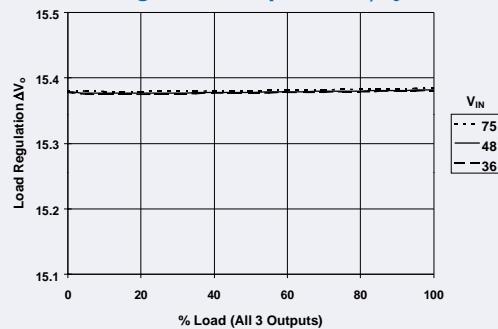


Ripple vs Output Current; @ $V_{in} = 48V$

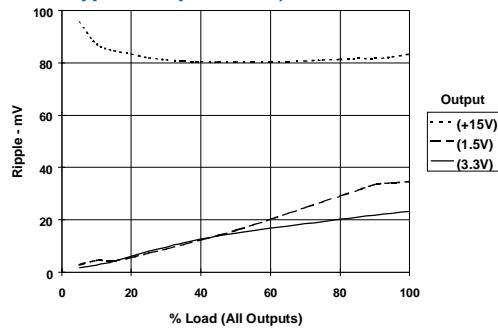


Load Regulation vs Output Current; $V_{O2} = +3.3V$

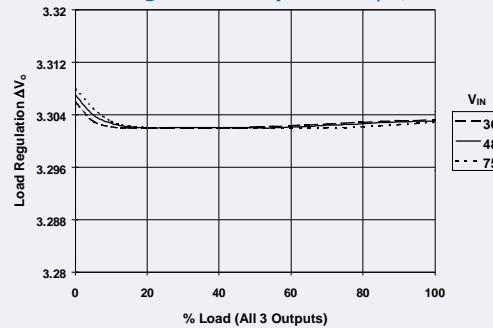

Power Dissipation vs Output Current

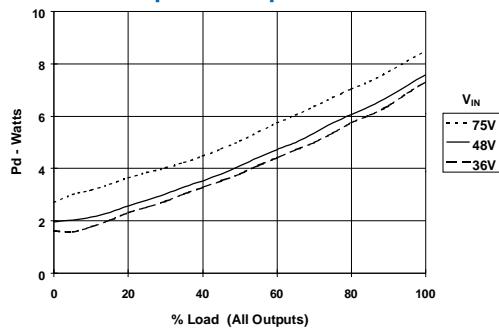


Load Regulation vs Output Current; $V_{O3} = +1.5V$

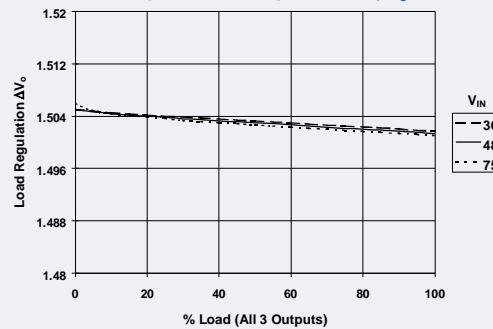

Safe Operating Area, $V_{in} = 48V$ (See Note B)

PT4801 SOA vs Output Power

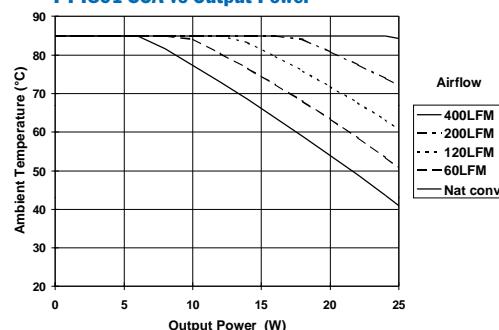

Note A: All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.
Note B: SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

Using the Remote On/Off Control on the PT4801 Triple-Output Voltage DC/DC Converter

The three output voltages of the PT4801 triple-output DC/DC converter may be simultaneously disabled using the *Remote On/Off* control. This control is used in applications that require power-up/shutdown sequencing, or wherever there is a requirement to control the on/off status of the module with external circuitry.

On/off control of the PT4801 is provided by pin 1. If pin 1 is left open-circuit the regulator operates normally, and provides a regulated output at all three outputs, V_{O1} (pin 10), V_{O2} (pins 14, 15), and V_{O3} (pin 18), whenever a valid input voltage is applied to $\pm V_{in}$. If a low voltage is then applied to pin 1, the module's output will be disabled and the input current it draws will drop to a typical value of 8mA. The *Remote On/Off* input may also be used to hold the module's output in the 'off' state during the period that input power is applied. The input is ideally controlled using an open-collector (or open-drain) discrete transistor (See Figure 1)³.

Table 1 Remote On/Off Control Parameters^{1,2}


| Parameter | Min | Typ | Max |
|----------------------|-------|-----|------------------|
| Enable (V_{IH}) | 2.5V | — | 15V ³ |
| Disable (V_{IL}) | -0.1V | — | 0.8V |

Notes:

1. The *Remote On/Off* input uses $-V_{in}$ (pins 3 & 4) as a ground reference, and cannot be directly controlled from circuitry referenced to the isolated output $\pm V_o$.
2. The internal circuitry comprises of a high impedance (3 μ A -10 μ A) current source. The open-circuit voltage is less than 10V.
3. A low-leakage MOSFET (<100nA) is recommended. A pull-up resistor is not required, but may be necessary to ensure that the *Remote On/Off* pin exceeds V_{IH} (min) (see Table 1). *Do not* use a pull-up resistor to the $+V_{in}$ input, or drive the pin above V_{IH} (max).
4. The PT4801 converter incorporates an "Under Voltage Lockout" (UVLO) function. This function will override the *Remote On/Off* control until the input voltage applied to $\pm V_{in}$, is above the UVLO threshold. Consult the data sheet specifications for the on/off input voltage thresholds.
5. Keep the on/off transition to less than 1ms. This prevents erratic operation of the converter, whereby the output voltage may drift un-regulated between 0V and the rated output voltage during power-up.


6. In Figure 1, Q_1 is a low-threshold MOSFET. The components R_g and C_{gs} are added to improve noise immunity.

Figure 1

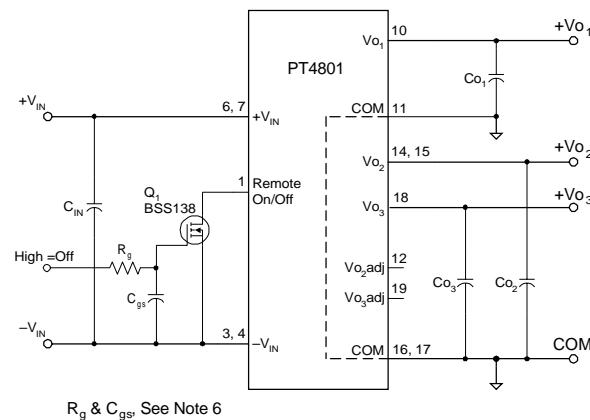

Power-Up Sequence: Turning Q_1 in Figure 1 off, removes the low-voltage signal at pin 1 and enables the outputs of the PT4801 converter. After a delay of about 5ms, the V_{O1} output will begin to rise first. This is closely followed by V_{O2} , and V_{O3} , which are internally sequenced to rise in unison. The total power-up time is less than 25ms and is relatively independent of load, and temperature. Figure 2 shows waveforms of all three output voltages, V_{O1} , V_{O2} , and V_{O3} following Q_1 turning off. The turn off of Q_1 corresponds to the fall in the applied V_{gs} . The waveforms were measured with a 48V input voltage.

Figure 2

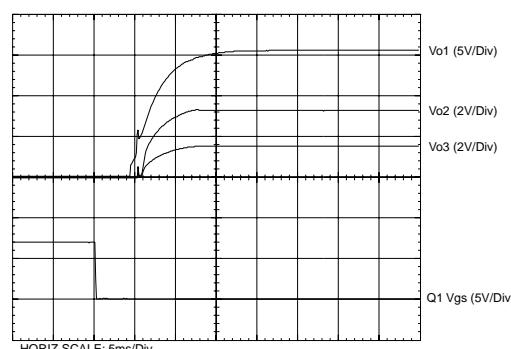

Adjusting the Output Voltage of the PT4801 Triple-Output DC/DC Converter

The low-voltage outputs from the PT4801 triple-output DC/DC converter, V_{O2} (3.3V) and V_{O3} (1.5V), can be independently adjusted from the factory trimmed preset value. Note that the primary use of this feature is for margin testing of the on-board supply voltages. A permanent increase in output voltage is not advised ¹. Also, due to design limitations, V_{O3} cannot be adjusted higher than its nominal value.

To adjust each output, a single external resistor is added to the circuit in either the “Adjust Up” or “Adjust Down” position (See Figure 1) ². Table 1 gives the allowable adjustment range for each output as V_a (min) and V_a (max).

V_{O2} Adjust Up: Add a resistor R_2 between pin 12 (V_{O2} Adj), and pin 11 (COM) ¹.

V_{O2} Adjust Down: Add a resistor (R_1) between pin 12 (V_{O2} Adj), and pin 14 (Vo₂).

V_{O3} Adjust Up: V_{O3} cannot be adjusted higher.

V_{O3} Adjust Down: Add a resistor (R_3) between pin 19 (V_{O3} Adj), and pin 18 (V_{O3}).

Refer to Figure 1 and Table 2 for both the placement and value of the adjust resistor.

Notes:

1. The high-side adjust range of the V_{O2} output may be limited by the input voltage and/or the load current status of all three outputs. This situation would most likely be encountered when V_{O1} is lightly loaded and either V_{O2} or V_{O3} is operating close to full load.
2. Use only a single 1% resistor in either the (R_1) or R_2 location to adjust V_{O2} , and in the (R_3) location to adjust V_{O3} . Place the resistor as close to the ISR as possible.
3. Never connect capacitors to either of the output adjust control pins. Any capacitance added to these control pins will affect the stability of the respective regulated output.

The adjust up and adjust down resistor values can be calculated using the following formulas. Be sure to select the correct formula parameter from Table 1 for the output being adjusted.

$$(R_1) \text{ or } (R_3) = \frac{R_o(V_a - V_r)}{(V_o - V_a)} - R_s \text{ k}\Omega$$

$$R_2 = \frac{R_o \cdot V_r}{(V_a - V_o)} - R_s \text{ k}\Omega$$

Where V_o = Original output voltage
 V_a = Adjusted output voltage
 V_r = Reference voltage (Table 1)
 R_o = Multiplier resistor (Table 1)
 R_s = Series resistance (Table 1)

Figure 1

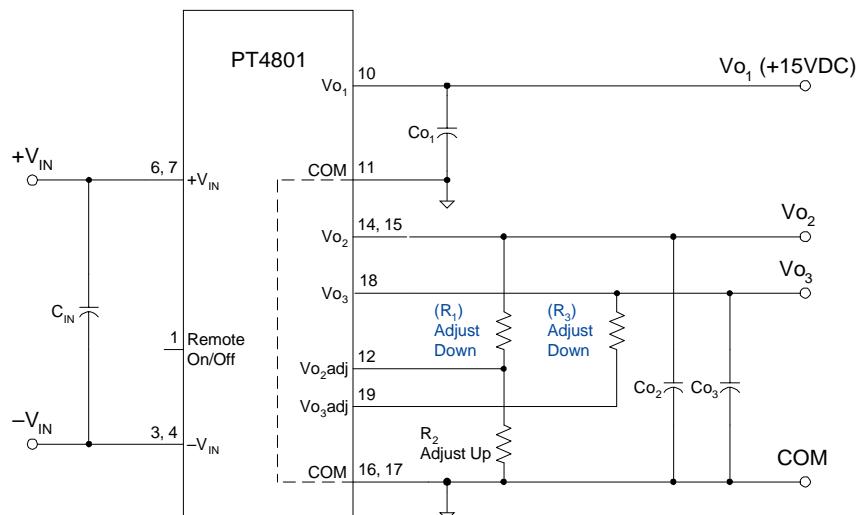


Table 1**ADJUSTMENT RANGE AND FORMULA PARAMETERS**

| Vo₂ Bus | Vo₃ Bus |
|------------------------------|---------------------------|
| Adj. Resistor (R1)/R2 | (R3) |
| Vo(nom) | 3.3V |
| V_a(min) | 3.135V |
| V_a(max) | 3.465V * |
| V_r | 1.225V |
| R_o (V-kΩ) | 11.0 |
| R_s (kΩ) | 40.2 |
| | 5.36 |

* See Note 1

Table 2**ADJUSTMENT RESISTOR VALUES**

| Vo₁ Bus | Vo₂ Bus | Adj. Resistor (R1)/R2 | Adj. Resistor (R3) |
|---------------------------|---------------------------|------------------------------|-----------------------------|
| Vo(nom) | Vo(nom) | V_a(req'd) | V_a(req'd) |
| 3.135 | 1.5V | (87.1)kΩ | 1.425 |
| 3.15 | | (101.0)kΩ | 1.44 |
| 3.165 | | (118.0)kΩ | 1.455 |
| 3.18 | | (139.0)kΩ | 1.47 |
| 3.195 | | (166.0)kΩ | 1.485 |
| 3.21 | | (202.0)kΩ | 1.5 |
| 3.225 | | (253.0)kΩ | |
| 3.24 | | (329.0)kΩ | |
| 3.255 | | (456.0)kΩ | |
| 3.27 | | (710.0)kΩ | |
| 3.285 | | | |
| 3.3 | | | |
| 3.315 | | | |
| 3.33 | | 409.0kΩ | |
| 3.345 | | 259.0kΩ | |
| 3.36 | | 184.0kΩ | |
| 3.375 | | 139.0kΩ | |
| 3.39 | | 110.0kΩ | |
| 3.405 | | 88.1kΩ | |
| 3.42 | | 72.1kΩ | |
| 3.435 | | 59.6kΩ | |
| 3.45 | | 49.6kΩ | |
| 3.465 | | 41.5kΩ | |

R₁/R₃ = (Blue), R₂/R₄ = Black

VDE Approved Installation Instructions (Installationsanleitung)

Nennspannung (Rated Voltage): PT4801 36 to 72 Vdc, Transient to 80Vdc

Nennaufnahme (Rated Input): PT4801 1.5 Adc

Nennleistung (Rated Power): 25 Watts Maximum

Ausgangsspannung (Sec. Voltage): PT4801 Series
PT4801, +15/ +3.3/ +1.5 Vdc, 1.25 Adc/ 3.0 Adc/ 2.0 Adc

Ausgangstrom (Sec. Current): Maximum total current is 6.0 Adc or 25 Watts
oder (or)

Ausgangsleistung (Sec. Power):

Angabe der Umgebungstemperatur

(Information on ambient temperature): +85 °C maximum

Besondere Hinweise (Special Instructions):

Es ist vorzusehen, daß die Spannungsversorgung in einer Endanwendung über eine isolierte Sekundaerschaltung bereit gestellt wird. Die Eingangsspannung der Spannungsversorgungsmodule muss eine verstärkte Isolierung von der Wechselstromquelle aufweisen.

Die Spannungsversorgung muss gemäß den Gehäuse-, Montage-, Kriech- und Luftstrecken-, Markierungs- und Trennanforderungen der Endanwendung installiert werden. Bei Einsatz eines TNV-3-Einganges muss die SELV-Schaltung ordnungsgemäß geerdet werden.

(The power supply is intended to be supplied by isolated secondary circuitry in an end use application. The input power to these power supplies shall have reinforced insulation from the AC mains.

The power supply shall be installed in compliance with the enclosure, mounting, creepage, clearance, casualty, markings, and segregation requirements of the end-use application. When the input is TNV-3, the SELV circuitry must be reliably grounded.)

Offenbach,

VDE Prüf- und Zertifizierungsinstitut
Abteilung / Department TD

(Jürgen Bärwinkel)

Ort / Place:

Datum / Date:

J. Bärwinkel 12/12/01
(Stempel und Unterschrift des Herstellers / Stamp
and signature of the manufacturer)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265