



## General Purpose Transistors

### NPN Silicon



**BCX70GLT1**  
**BCX70JLT1**  
**BCX70KLT1**



**CASE 318-08, STYLE 6**  
**SOT-23 (TO-236AB)**

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	45	Vdc
Collector-Base Voltage	$V_{CBO}$	45	Vdc
Emitter-Base Voltage	$V_{EBO}$	5.0	Vdc
Collector Current — Continuous	$I_C$	200	mAdc

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board <sup>(1)</sup> $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C}/\text{W}$
Total Device Dissipation Alumina Substrate, <sup>(2)</sup> $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	$T_J, T_{\text{Stg}}$	-55 to +150	$^\circ\text{C}$

#### DEVICE MARKING

BCX70GLT1 = AG; BCX70JLT1 = AJ; BCX70KLT1 = AK

#### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>				
Collector-Emitter Breakdown Voltage ( $I_C = 2.0 \text{ mAdc}$ , $I_E = 0$ )	$V_{(\text{BR})\text{CEO}}$	45	—	Vdc
Emitter-Base Breakdown Voltage ( $I_E = 1.0 \mu\text{Adc}$ , $I_C = 0$ )	$V_{(\text{BR})\text{EBO}}$	5.0	—	Vdc
Collector Cutoff Current ( $V_{CE} = 32 \text{ Vdc}$ ) ( $V_{CE} = 32 \text{ Vdc}$ , $T_A = 150^\circ\text{C}$ )	$I_{\text{CES}}$	— —	20 20	nAdc $\mu\text{Adc}$
Emitter Cutoff Current ( $V_{EB} = 4.0 \text{ Vdc}$ , $I_C = 0$ )	$I_{\text{EBO}}$	—	20	nAdc

1. FR-5 =  $1.0 \times 0.75 \times 0.062$  in.

2. Alumina =  $0.4 \times 0.3 \times 0.024$  in. 99.5% alumina.

Thermal Clad is a trademark of the Bergquist Company

# BCX70GLT1 BCX70JLT1 BCX70KLT1

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
<b>ON CHARACTERISTICS</b>				
DC Current Gain ( $I_C = 10 \mu\text{A}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ )	$h_{FE}$	—	—	—
	BCX70G	40	—	—
	BCX70J	100	—	—
	BCX70K	—	—	—
( $I_C = 2.0 \text{ mA}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ )	BCX70G	120	220	—
	BCX70J	250	460	—
	BCX70K	380	630	—
( $I_C = 50 \text{ mA}/\text{dc}$ , $V_{CE} = 1.0 \text{ V}/\text{dc}$ )	BCX70G	60	—	—
	BCX70J	90	—	—
	BCX70K	100	—	—
Collector-Emitter Saturation Voltage ( $I_C = 50 \text{ mA}/\text{dc}$ , $I_B = 1.25 \text{ mA}/\text{dc}$ ) ( $I_C = 10 \text{ mA}/\text{dc}$ , $I_B = 0.25 \text{ mA}/\text{dc}$ )	$V_{CE(\text{sat})}$	—	0.55	$\text{V}/\text{dc}$
	—	—	0.35	—
Base-Emitter Saturation Voltage ( $I_C = 50 \text{ mA}/\text{dc}$ , $I_B = 1.25 \text{ mA}/\text{dc}$ ) ( $I_C = 50 \text{ mA}/\text{dc}$ , $I_B = 0.25 \text{ mA}/\text{dc}$ )	$V_{BE(\text{sat})}$	0.7	1.05	$\text{V}/\text{dc}$
	0.6	0.85	—	—
Base-Emitter On Voltage ( $I_C = 2.0 \text{ mA}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ )	$V_{BE(\text{on})}$	0.55	0.75	$\text{V}/\text{dc}$

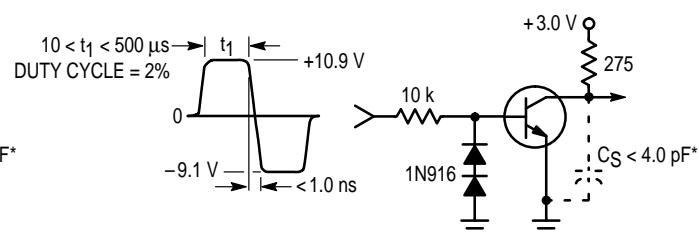
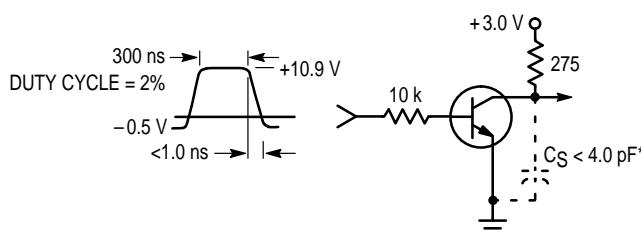
## SMALL-SIGNAL CHARACTERISTICS

Current-Gain — Bandwidth Product ( $I_C = 10 \mu\text{A}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ , $f = 100 \text{ MHz}$ )	$f_T$	125	—	MHz
Output Capacitance ( $V_{CB} = 10 \text{ V}/\text{dc}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ )	$C_{obo}$	—	4.5	$\text{pF}$
Small-Signal Current Gain ( $I_C = 2.0 \text{ mA}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ , $f = 1.0 \text{ kHz}$ )	$h_{fe}$	125	250	—
	BCX70G	250	500	—
	BCX70J	350	700	—
Noise Figure ( $I_C = 0.2 \mu\text{A}/\text{dc}$ , $V_{CE} = 5.0 \text{ V}/\text{dc}$ , $R_S = 2.0 \text{ k}\Omega$ , $f = 1.0 \text{ kHz}$ , $\text{BW} = 200 \text{ Hz}$ )	NF	—	6.0	dB

## SWITCHING CHARACTERISTICS

Turn-On Time ( $I_C = 10 \mu\text{A}/\text{dc}$ , $I_{B1} = 1.0 \mu\text{A}/\text{dc}$ )	$t_{on}$	—	150	ns
Turn-Off Time ( $I_{B2} = 1.0 \mu\text{A}/\text{dc}$ , $V_{BB} = 3.6 \text{ V}/\text{dc}$ , $R_1 = R_2 = 5.0 \text{ k}\Omega$ , $R_L = 990\Omega$ )	$t_{off}$	—	800	ns

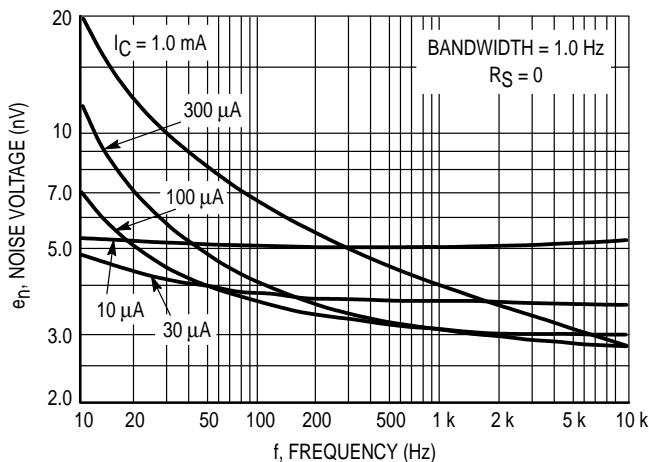
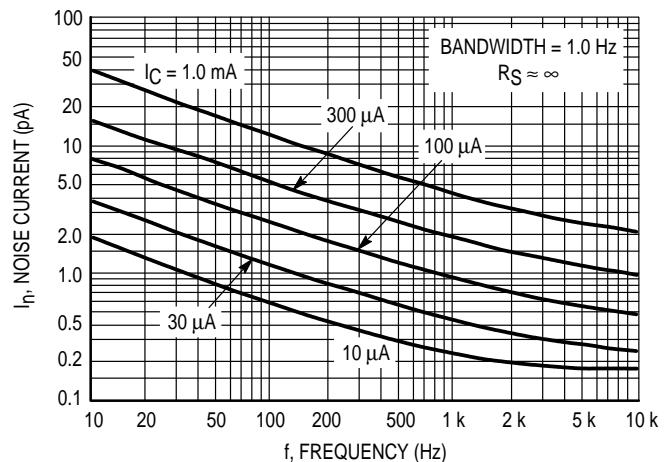
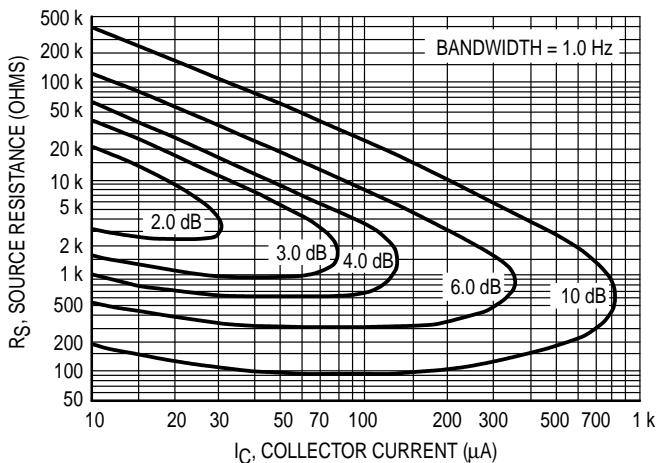
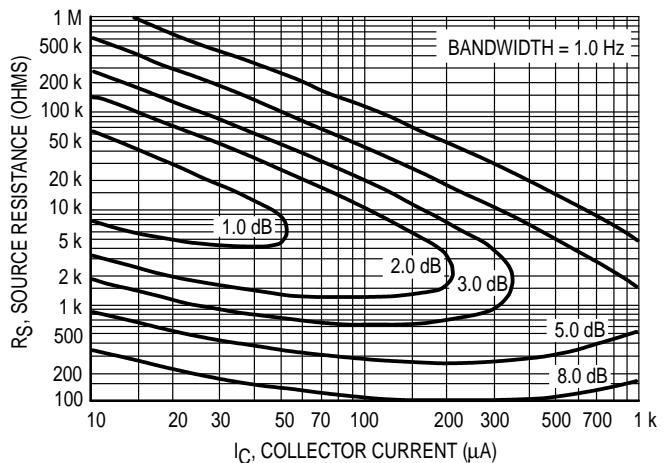
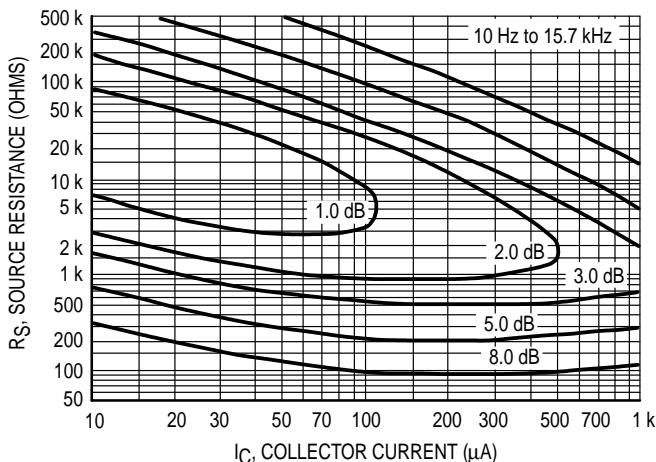
## EQUIVALENT SWITCHING TIME TEST CIRCUITS



\*Total shunt capacitance of test jig and connectors

Figure 1. Turn-On Time

Figure 2. Turn-Off Time

**TYPICAL NOISE CHARACTERISTICS**
 $(V_{CE} = 5.0 \text{ Vdc}, T_A = 25^\circ\text{C})$ 

**Figure 3. Noise Voltage**

**Figure 4. Noise Current**
**NOISE FIGURE CONTOURS**
 $(V_{CE} = 5.0 \text{ Vdc}, T_A = 25^\circ\text{C})$ 

**Figure 5. Narrow Band, 100 Hz**

**Figure 6. Narrow Band, 1.0 kHz**

**Figure 7. Wideband**

Noise Figure is defined as:

$$NF = 20 \log_{10} \left( \frac{e_n^2 + 4KTR_S + I_n^2 R_S^2}{4KTR_S} \right)^{1/2}$$

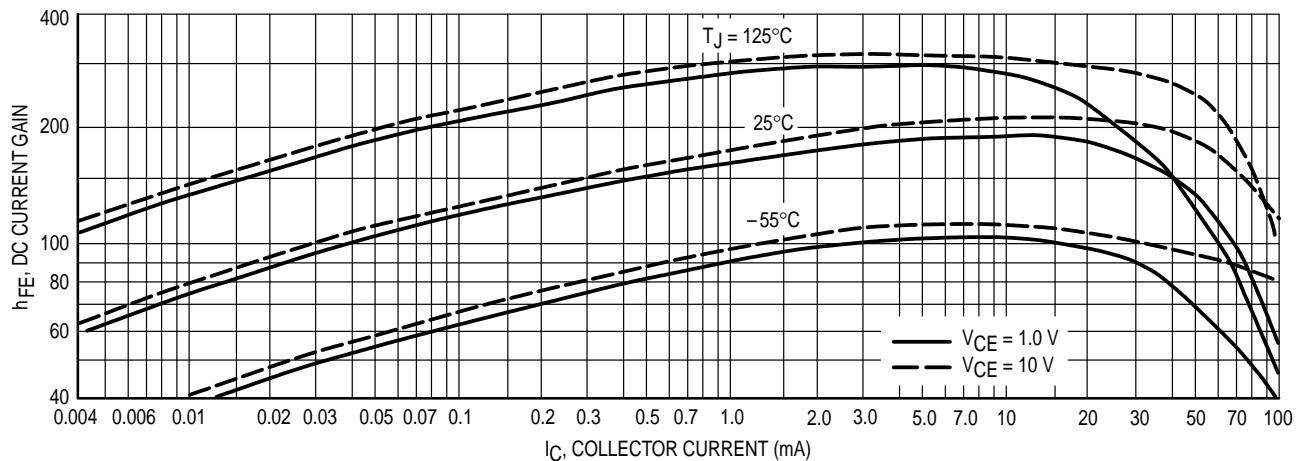
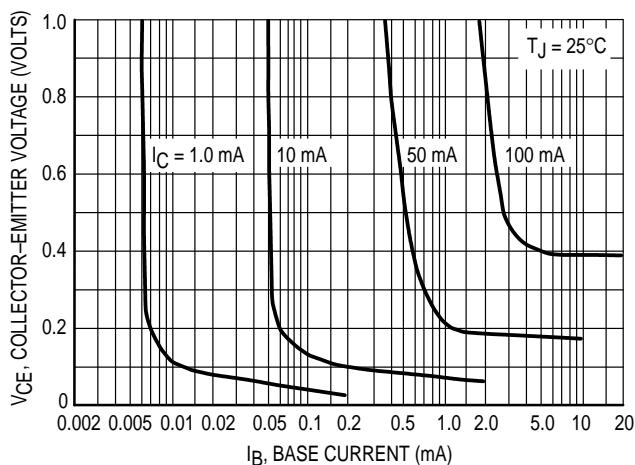
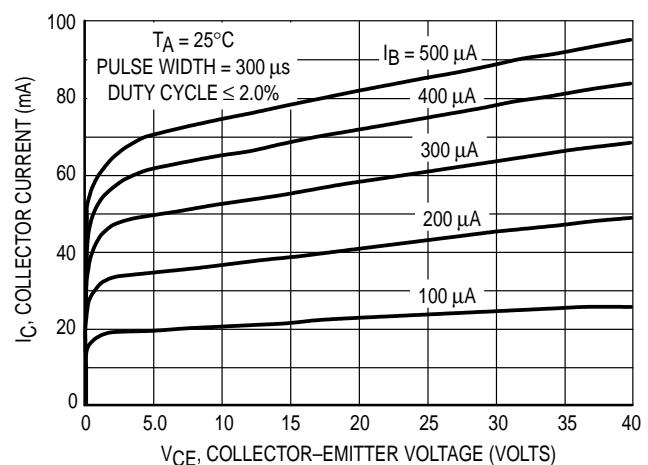
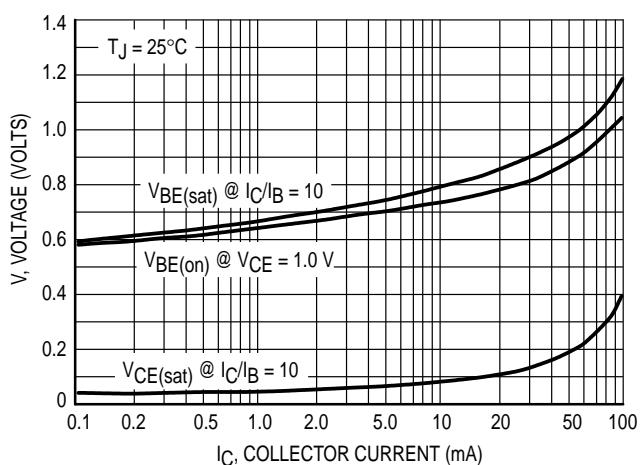
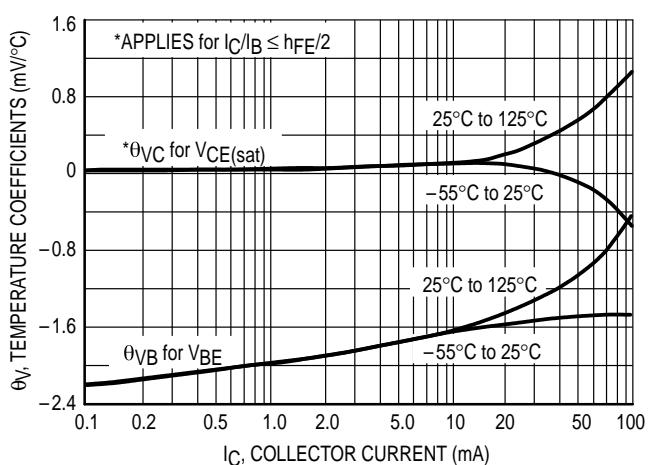
$e_n$  = Noise Voltage of the Transistor referred to the input. (Figure 3)

$I_n$  = Noise Current of the Transistor referred to the input. (Figure 4)

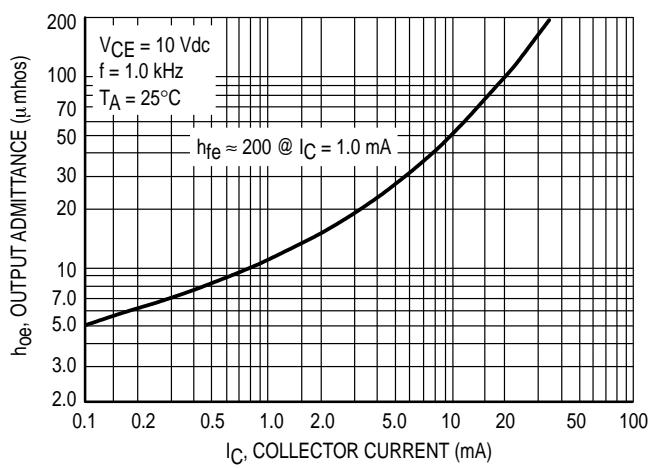
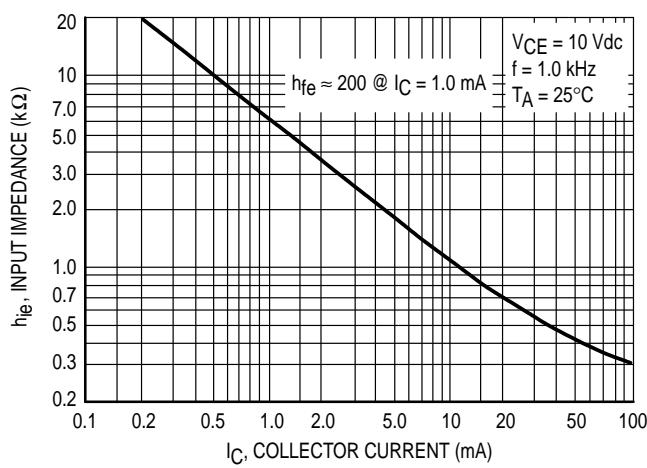
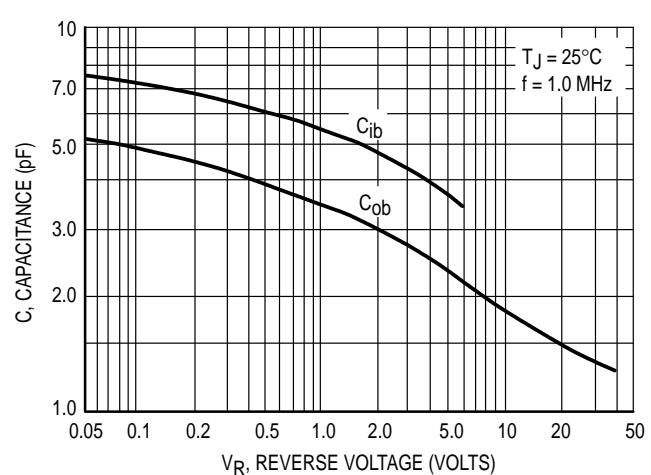
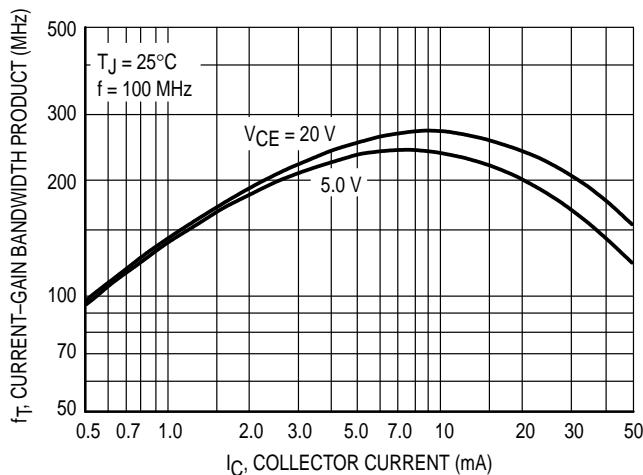
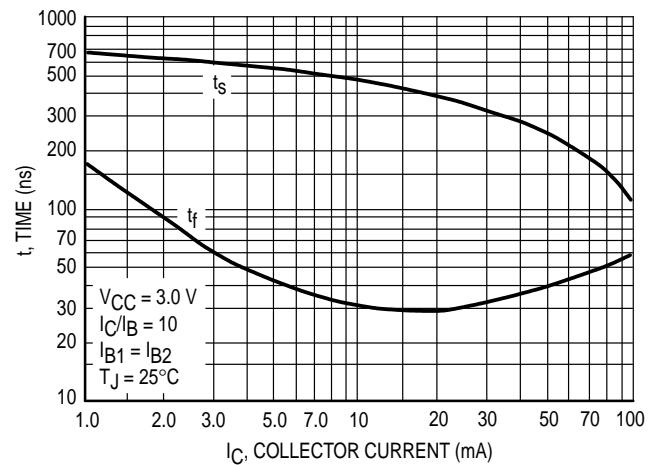
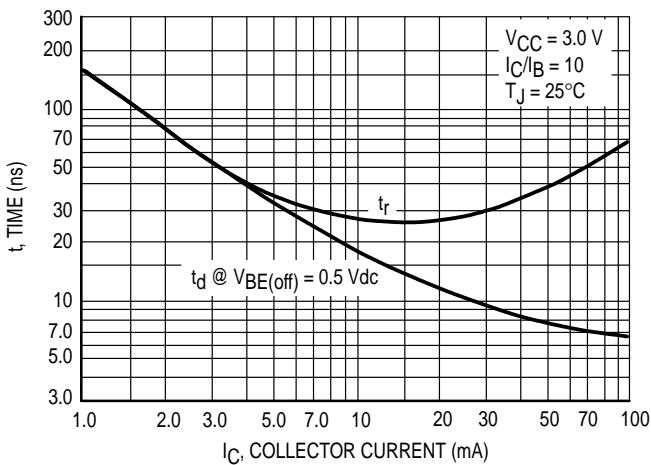
$K$  = Boltzman's Constant ( $1.38 \times 10^{-23} \text{ J}^\circ\text{K}$ )

$T$  = Temperature of the Source Resistance ( $^\circ\text{K}$ )

$R_S$  = Source Resistance (Ohms)

**TYPICAL STATIC CHARACTERISTICS**

**Figure 8. DC Current Gain**

**Figure 9. Collector Saturation Region**

**Figure 10. Collector Characteristics**

**Figure 11. "On" Voltages**

**Figure 12. Temperature Coefficients**

**BCX70GLT1 BCX70JLT1 BCX70KLT1**  
**TYPICAL DYNAMIC CHARACTERISTICS**



## BCX70GLT1 BCX70JLT1 BCX70KLT1

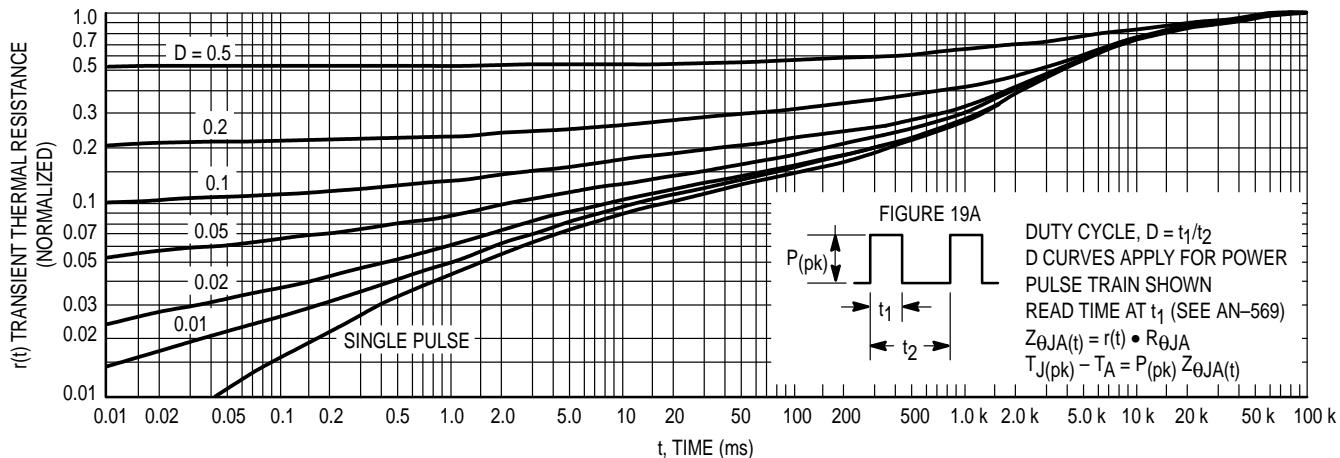


Figure 19. Thermal Response

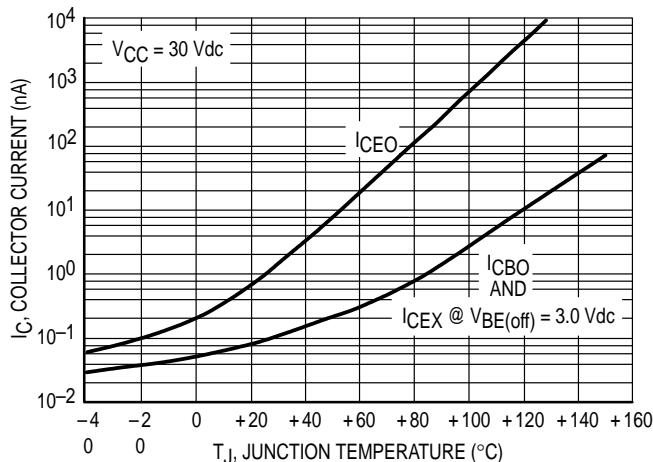


Figure 19A.

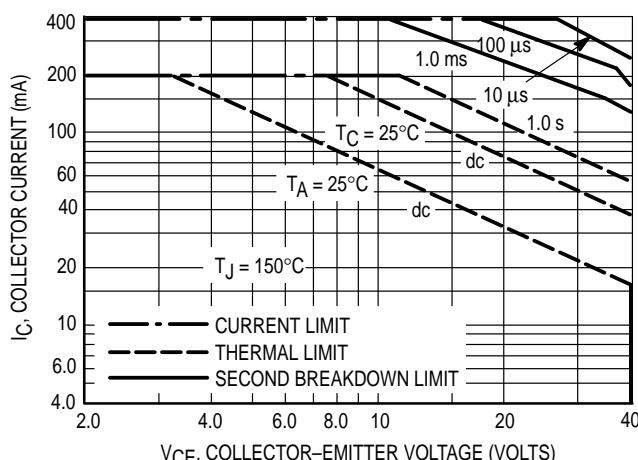


Figure 20.

### DESIGN NOTE: USE OF THERMAL RESPONSE DATA

A train of periodical power pulses can be represented by the model as shown in Figure 19A. Using the model and the device thermal response the normalized effective transient thermal resistance of Figure 19 was calculated for various duty cycles.

To find  $Z_{\theta JA}(t)$ , multiply the value obtained from Figure 19 by the steady state value  $R_{\theta JA}$ .

Example:

The MPS3904 is dissipating 2.0 watts peak under the following conditions:

$$t_1 = 1.0 \text{ ms}, t_2 = 5.0 \text{ ms. (D = 0.2)}$$

Using Figure 19 at a pulse width of 1.0 ms and D = 0.2, the reading of  $r(t)$  is 0.22.

The peak rise in junction temperature is therefore

$$\Delta T = r(t) \times P_{(pk)} \times R_{\theta JA} = 0.22 \times 2.0 \times 200 = 88^{\circ}\text{C}.$$

For more information, see AN-569.

The safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

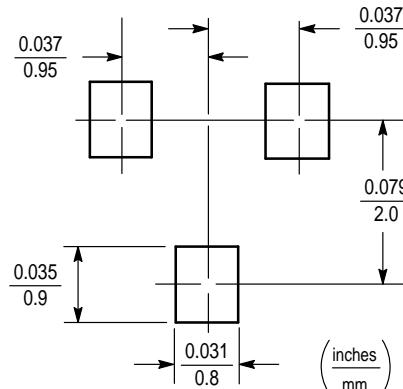
The data of Figure 20 is based upon  $T_{J(pk)} = 150^{\circ}\text{C}$ ;  $T_C$  or  $T_A$  is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided  $T_{J(pk)} \leq 150^{\circ}\text{C}$ .  $T_{J(pk)}$  may be calculated from the data in Figure 19. At high case or ambient temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

## **INFORMATION FOR USING THE SOT-23 SURFACE MOUNT PACKAGE**

## MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection.

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.



SOT-23

## SOT-23 POWER DISSIPATION

The power dissipation of the SOT-23 is a function of the pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by  $T_J(\max)$ , the maximum rated junction temperature of the die,  $R_{\theta JA}$ , the thermal resistance from the device junction to ambient, and the operating temperature,  $T_A$ . Using the values provided on the data sheet for the SOT-23 package,  $P_D$  can be calculated as follows:

$$P_D = \frac{T_J(\max) - T_A}{R_{\theta,IA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature  $T_A$  of 25°C, one can calculate the power dissipation of the device which in this case is 225 milliwatts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{556^\circ\text{C/W}} = 225 \text{ milliwatts}$$

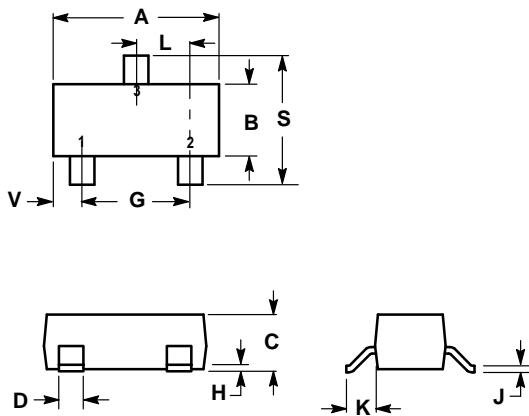
The 556°C/W for the SOT-23 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 225 milliwatts. There are other alternatives to achieving higher power dissipation from the SOT-23 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.

## SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
  - The delta temperature between the preheat and soldering should be 100°C or less.\*
  - When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.
  - The soldering temperature and time shall not exceed 260°C for more than 10 seconds.
  - When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
  - After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
  - Mechanical stress or shock should not be applied during cooling.

\* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

**BCX70GLT1 BCX70JLT1 BCX70KLT1****PACKAGE DIMENSIONS**

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0046	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0180	0.0236	0.45	0.60
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.0984	2.10	2.50
V	0.0177	0.0236	0.45	0.60

STYLE 6:  
 PIN 1. BASE  
 2. Emitter  
 3. Collector

**CASE 318-08  
 ISSUE AE  
 SOT-23 (TO-236AB)**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA/EUROPE:** Motorola Literature Distribution;  
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609  
**INTERNET:** <http://Design-NET.com>

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

