


TA8122AN, TA8122AF, TA8123AN, TA8123AF

3V AV / FM 1CHIP TUNER IC

TA8122AN/AF and TA8123AN/AF are the AM/FM 1Chip Tuner ICs, which are designed for Portable Radios and 3V Headphone Radios.

FEATURES

- Built-in
FM F/E, AM/FM IF and FM ST DET
- AM Detector Coil, FM IFT and IF Coupling Condenser are not needed.
- For adopting Ceramic Discriminator and Ceramic Resonator, it is not necessary to adjust the FM Quad Detector Circuit and FM ST DET VCO Circuit.
- S curve characteristics of FM detection output in TA8122AN/AF and TA8123AN/AF are reverse to each other.
 - TA8122AN/AF : Reverse characteristic
 - TA8123AN/AF : Normal characteristic
- Compact Package
 - TA8122AN/23AN : Shrink DIP 24 pin (1.78mm pitch)
 - TA8122AF/23AF : Mini Flat Package 24 pin
- Operating Supply Voltage Range
 $V_{CC} = 1.8 \sim 7.0V$ ($T_a = 25^\circ C$)

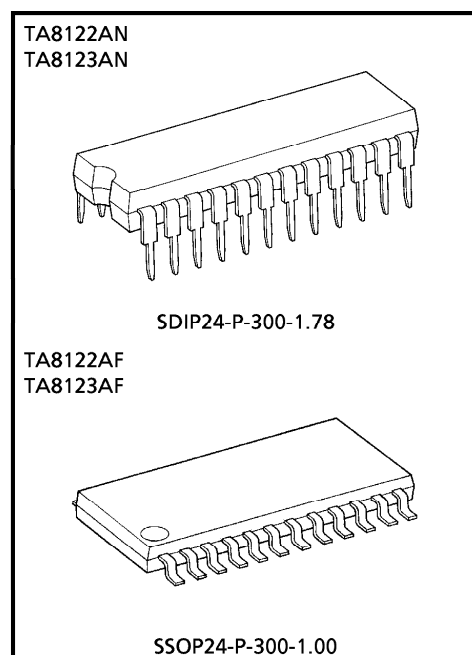


Weight
 SDIP24-P-300-1.78 : 1.2g (Typ.)
 SSOP24-P-300-1.00 : 0.31g (Typ.)

961001EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

BLOCK DIAGRAM

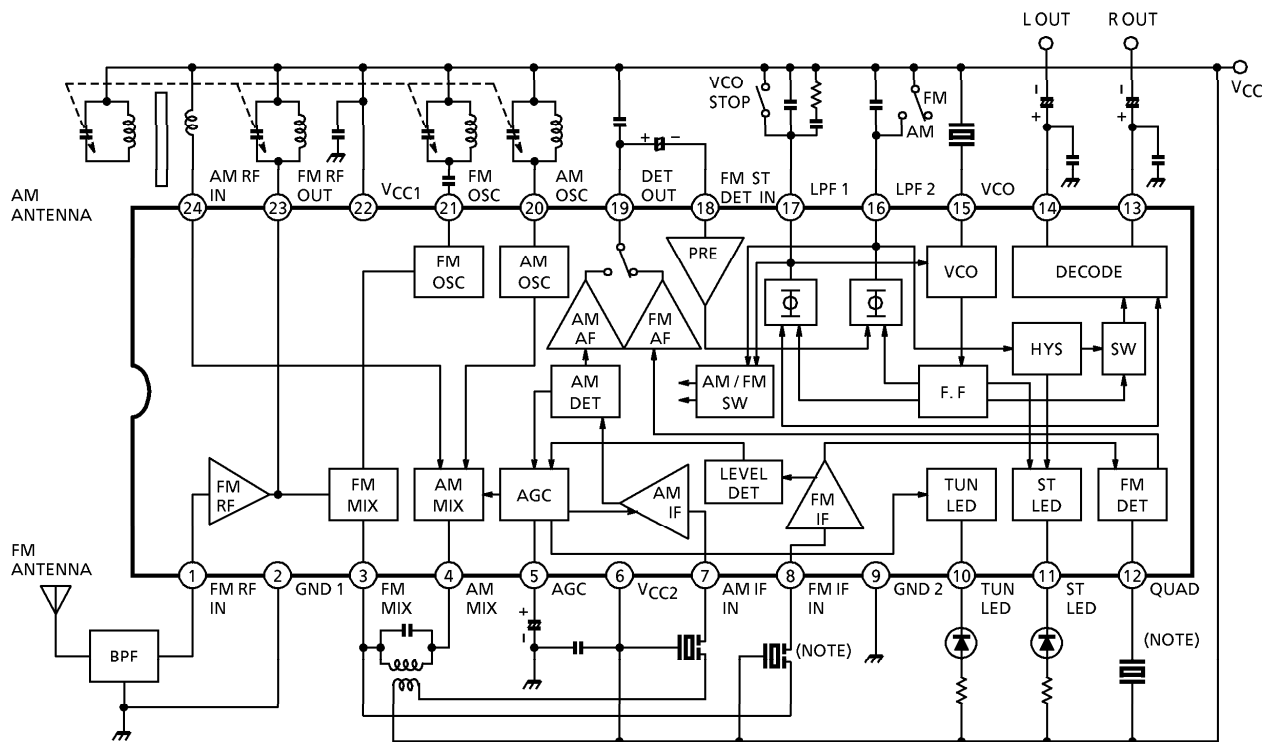

(Note)
We recommend the kit of the ceramic filter and the ceramic resonator which are shown in the table as below.
It is necessary to meet the center frequency of the ceramic filter and the ceramic resonator, otherwise there are some cases that the characteristics get worse.






KIT NAME	COMBINATION			
	CERAMIC FILTER	Q'ty	CERAMIC RESONATOR	Q'ty
KMFC403-Z	SFE10.7MA5-Z	2	CDA10.7MG16-Z	1
KMFC411-Z	SFE10.7MA5-Z	1	CDA10.7MG16-Z	1
KMFC422-Z	SFE10.7MA2-Z	2	CDA10.7MG16-Z	1
KMFC435-Z	SFE10.7MA5L-Z	2	CDA10.7MG16-Z	1
KMFC445-Z	SFE10.7MA5L-Z	1	CDA10.7MG16-Z	1





MANUFACTURER : MURATA MFG. CO., LTD

EXPLANATION OF TERMINALS

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (AT NO SIGNAL)	
			AM	FM
1	FM-RF IN		0	0.7
2	GND1 (GND For RF Stage)	—	0	0
3	FM MIX		2.3	1.8
4	AM MIX		2.3	1.8
5	AGC (AM AGC)		0	0
6	VCC2 (VCC For IF/MPX Stage)	—	3.0	3.0

PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (AT NO SIGNAL)	
			AM	FM
7	AM IF IN		3.0	3.0
8	FM IF IN		3.0	3.0
9	GND2 (GND For IF / MPX Stage)	—	0	0
10	TUN LED (Tuning LED)		—	—
11	ST LED (Stereo LED)		—	—
12	QUAD (FM QUAD. Detector)		2.4	2.1

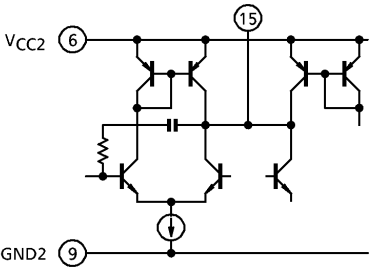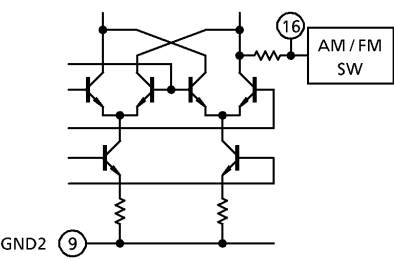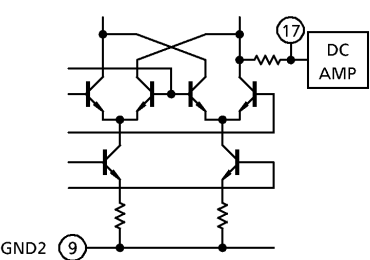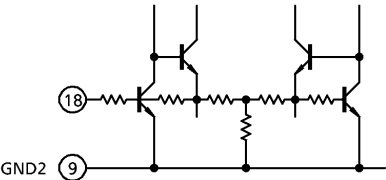PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (AT NO SIGNAL)	
			AM	FM
13 14	R-OUT (R-ch Output) L-OUT (L-ch Output)		1.0	1.0
15	VCO		2.5	2.5 (VCO stop mode)
16	LPF2 - LPF Terminal For Synchronous Detector - Bias Terminal For AM / FM SW Circuit $V_{16} = V_{CC} \rightarrow \text{AM}$ $V_{16} = \text{Open} \rightarrow \text{FM}$		3.0	2.2 (VCO stop mode) 2.7
17	LPF1 LPF Terminal For Phase Detector VCO Stop Terminal $V_{17} = V_{CC} \rightarrow \text{VCO Stop}$		2.7	2.2
18	FM ST DET IN		0.7	0.7

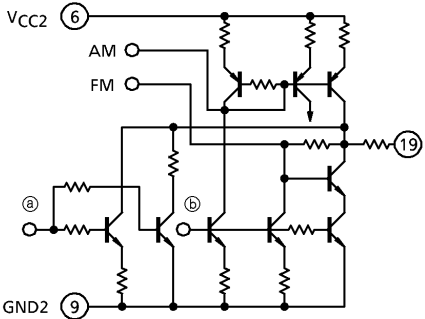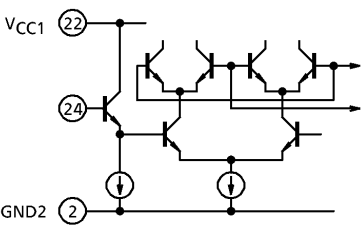PIN No.	CHARACTERISTIC	INTERNAL CIRCUIT	DC VOLTAGE (V) (AT NO SIGNAL)	
			AM	FM
19	DET OUT	 (a) LOW→FM, HIGH→AM (b) LOW→AM, HIGH→FM	1.5	1.2
20	AM OSC		3.0	3.0
21	FM OSC		3.0	3.0
22	VCC1 (VCC For RF Stage)	—	3.0	3.0
23	FM RF OUT	cf. pin①	3.0	3.0
24	AM RF IN		3.0	3.0

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage		V _{CC}	8	V
LED Current		I _{LED}	10	mA
LED Voltage		V _{LED}	8	V
Power	TA8122AN / 23AN	P _D (Note)	1200	mW
Dissipation	TA8122AF / 23AF		400	
Operating Temperature		T _{opr}	– 25~75	°C
Storage Temperature		T _{stg}	– 55~150	°C

Note : Derated above 25°C in the proportion of 9.6mW/°C for TA8122AN / 23AN and of 3.2mW/°C for TA8122AF / 23AF

ELECTRICAL CHARACTERISTICS


Unless otherwise specified,

$T_a = 25^\circ\text{C}$, $V_{CC} = 3\text{V}$, F/E : $f = 83\text{MHz}$, $f_m = 1\text{kHz}$
 FM IF : $f = 10.7\text{MHz}$, $\Delta f = \pm 22.5\text{kHz}$, $f_m = 1\text{kHz}$
 AM : $f = 1\text{MHz}$, $\text{MOD} = 30\%$, $f_m = 1\text{kHz}$
 FM ST DET : $f_m = 1\text{kHz}$


CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current		$I_{CC}(\text{FM})$	1	$V_{in} = 0$, FM mode	—	14.0	18.5	mA
		$I_{CC}(\text{AM})$	1	$V_{in} = 0$, AM mode	—	6.0	8.3	
F/E	Input Limiting Voltage	$V_{in}(\text{lim.})$	1	-3dB limiting	—	14.0	—	$\text{dB}\mu\text{V EMF}$
	Local OSC Voltage	V_{OSC}	2	$f_{OSC} = 72.3\text{MHz}$	70	105	140	mV_{rms}
	Input Limiting Voltage	$V_{in}(\text{lim.})$ IF	1	-3dB limiting	39	44	49	$\text{dB}\mu\text{V EMF}$
FM IN	Recovered Output Voltage	V_{OD}	1	$V_{in} = 80\text{dB}\mu\text{V EMF}$	55	80	110	mV_{rms}
	Signal To Noise Ratio	S/N	1	$V_{in} = 80\text{dB}\mu\text{V EMF}$	—	70	—	dB
	Total Harmonic Distortion	THD	1	$V_{in} = 80\text{dB}\mu\text{V EMF}$	—	0.4	—	%
	AM Rejection Ratio	AMR	1	$V_{in} = 80\text{dB}\mu\text{V EMF}$	—	50	—	dB
	LED ON Sensitivity	V_L	1	$I_L = 1\text{mA}$	43	48	53	$\text{dB}\mu\text{V EMF}$
AM	Gain	G_V	1	$V_{in} = 23\text{dB}\mu\text{V EMF}$	20	40	80	mV_{rms}
	Recovered Output Voltage	V_{OD}	1	$V_{in} = 60\text{dB}\mu\text{V EMF}$	50	60	100	mV_{rms}
	Signal To Noise Ratio	S/N	1	$V_{in} = 60\text{dB}\mu\text{V EMF}$	—	44	—	dB
	Total Harmonic Distortion	THD	1	$V_{in} = 60\text{dB}\mu\text{V EMF}$	—	1.0	—	%
	LED ON Sensitivity	V_L	1	$I_L = 1\text{mA}$	19	24	29	$\text{dB}\mu\text{V EMF}$
Pin ^{①⑨} Output Resistance		R_{19}	1	FM mode	—	0.75	—	$\text{k}\Omega$
				AM mode	—	12.5	—	

CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
FM ST DET	Input Resistance		R _{IN}	—	—	—	24	—	kΩ	
	Output Resistance		R _{OUT}	—	—	—	5	—		
	Max. Composite Signal Input Voltage		V _{in} (MAX.) STEREO	1	L + R = 90%, P = 10% f _m = 1kHz, THD = 3%		—	350	—	mV _{rms}
	Separation		Sep.	1	L + R =	f _m = 100Hz	—	42	—	dB
					135mV _{rms}	f _m = 1kHz	35	42	—	
					P = 15mV _{rms}	f _m = 10kHz	—	42		
	Total Harmonic Distortion	Monaural	THD (MONAURAL)	1	V _{in} = 150mV _{rms}		—	0.2	—	%
		Stereo	THD (STEREO)		L + R = 135mV _{rms} , P = 15mV _{rms}		—	0.2	—	
	Voltage Gain		G _V (FM ST DET)	1	V _{in} = 150mV _{rms}		− 5	− 3	− 1	dB
	Channel Balance		C.B.	1	V _{in} = 150mV _{rms}		− 2	0	2	
	Stereo LED Sensitivity	ON	V _L (ON)	1	Pilot Input		—	8	15	mV _{rms}
		OFF	V _L (OFF)				2	6	—	
	Stereo LED Hysteresis		V _H	1	To LED turn off from LED turn on		—	2	—	mV _{rms}
Capture Range		C.R.	1	P = 15mV _{rms}		—	1.3	—	%	
Signal To Noise Ratio		S / N	1	V _{in} = 150mV _{rms}		—	70	—	dB	

TEST CIRCUIT 1

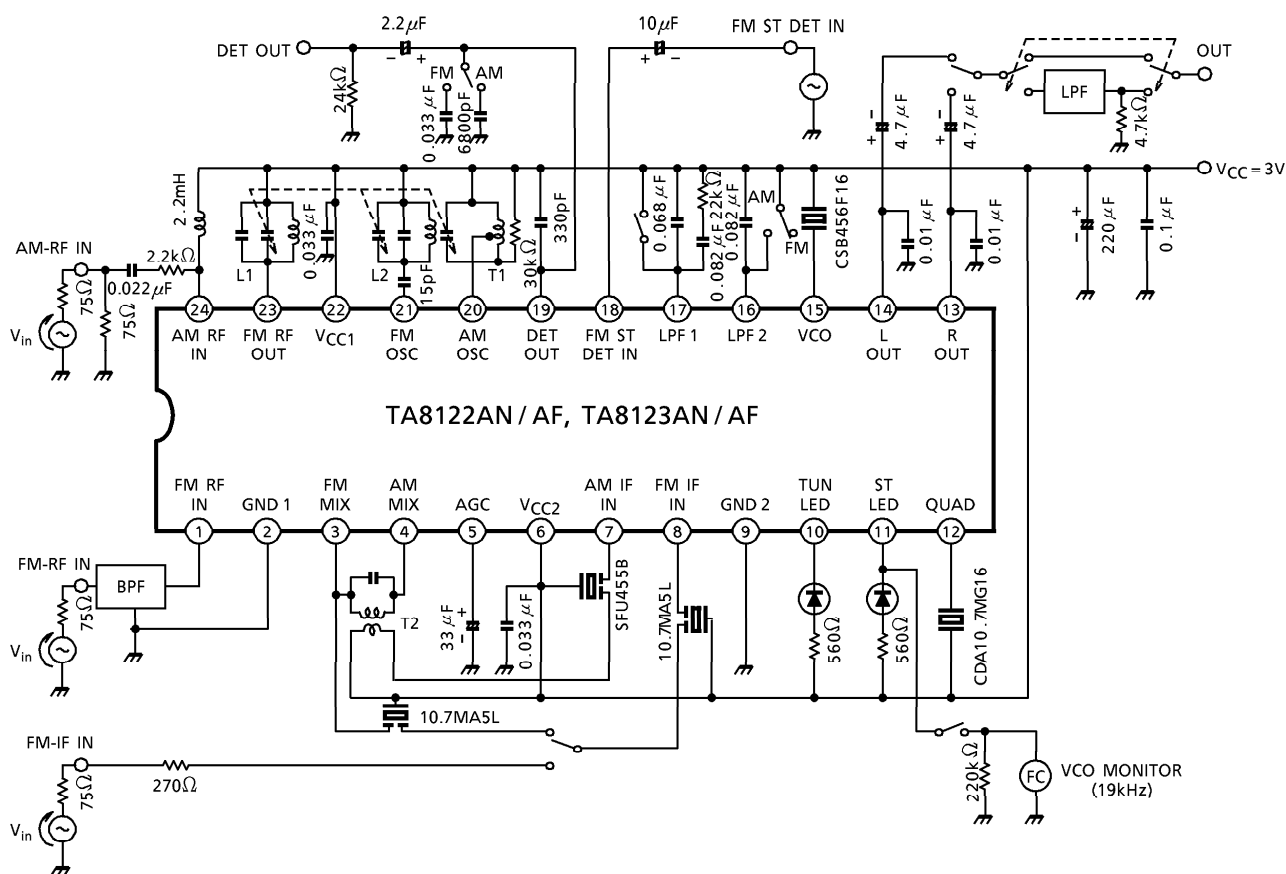

TEST CIRCUIT 2

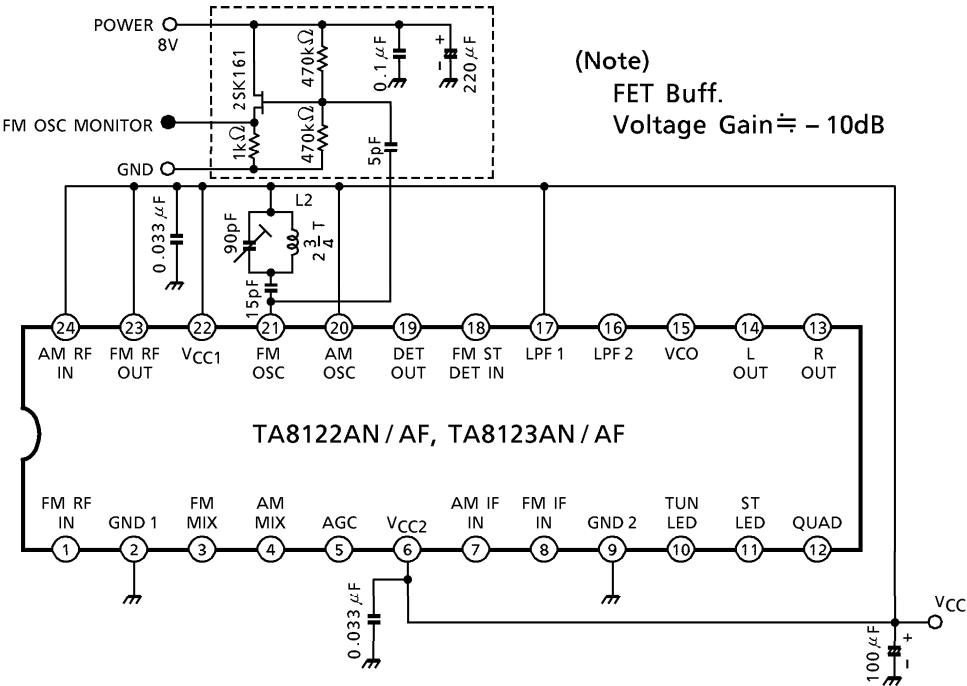


COIL DATA


COIL No.	TEST FREQ.	L (μ H)	C ₀ (pF)	Q ₀	TURNS					WIRE (mm ϕ)	REFERENCE
					1-2	2-3	1-3	1-4	4-6		
L ₁ FM RF	100MHz	—	—	100	—	—	—	2 $\frac{1}{2}$	—	0.5UEW	⑤ 53T-037-202
L ₂ FM OSC	100MHz	—	—	100	—	—	2 $\frac{3}{4}$	—	—	0.5UEW	⑤ 0258-244
T ₁ AM OSC	796kHz	288	—	115	13	73	—	—	—	0.08UEW	⑤ 4147-1356-038
T ₂ AM IFT	455kHz	—	180	120	—	—	180	—	15	0.08UEW	⑤ 2150-2162-165

⑤ : SUMIDA ELECTRIC CO., LED.


L₁ : FM RF




L₂ : FM OSC



T₁ : AM OSC




T₂ : AM IFT















FM DETECTION CIRCUIT

For the FM detection circuit, detection coil is able to use instead of ceramic discriminator.
Recommended circuit and recommended coil are as follows.
In this case, please take care that $V_{in} (lim.)$ falls a little.

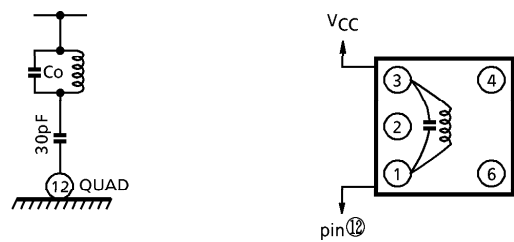


TEST FREQUENCY	C _o (pF)	Q _o	TURNS				WIRE (mmϕ)	REF
			1-2	2-3	1-3	4-6		
10.7MHz	100	100	—	—	12	—	0.12UEW	SUMIDA ELECTRIC CO., LTD 2153-4095-189 or Equivalent

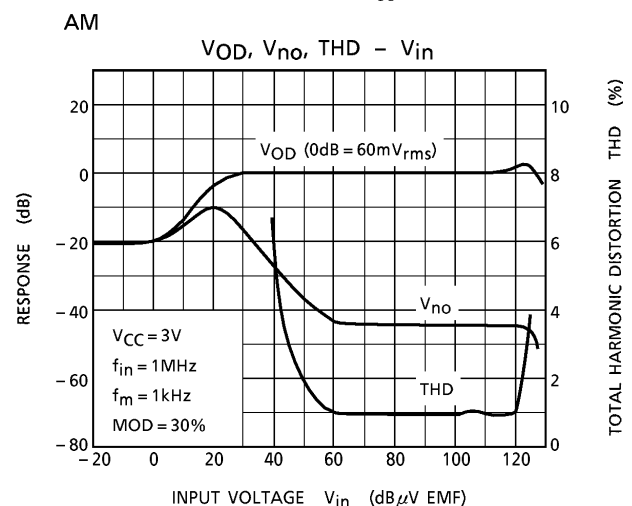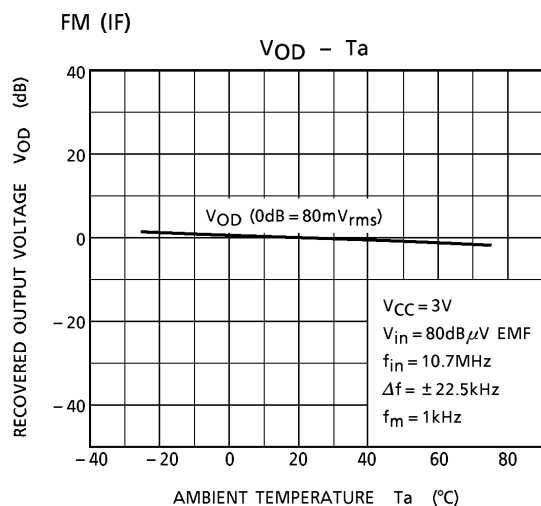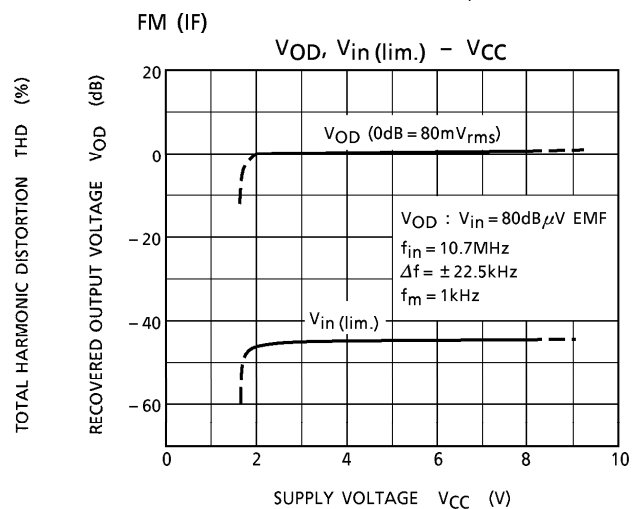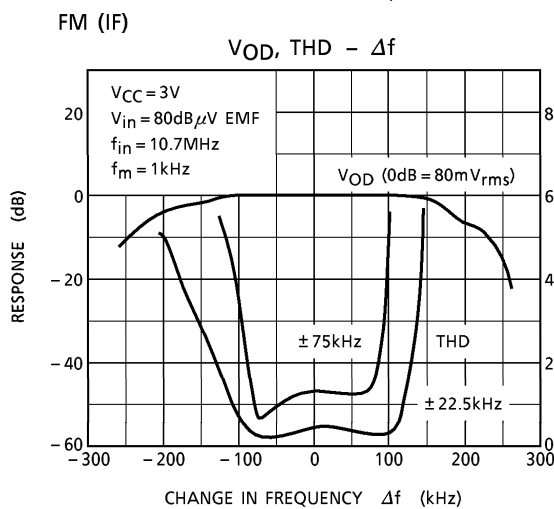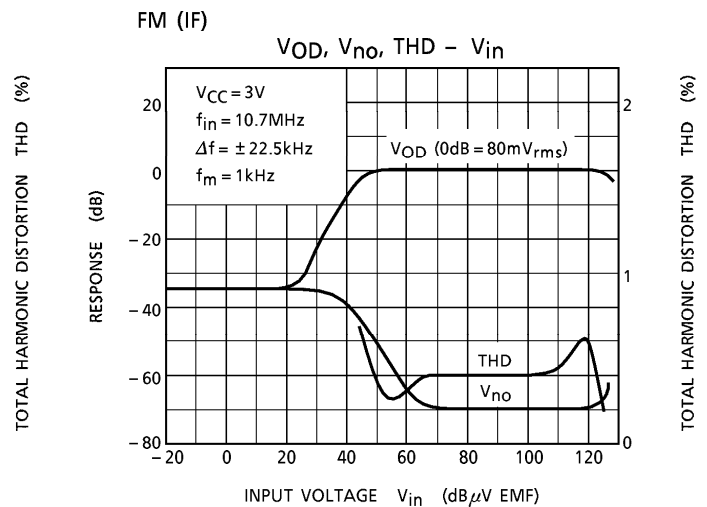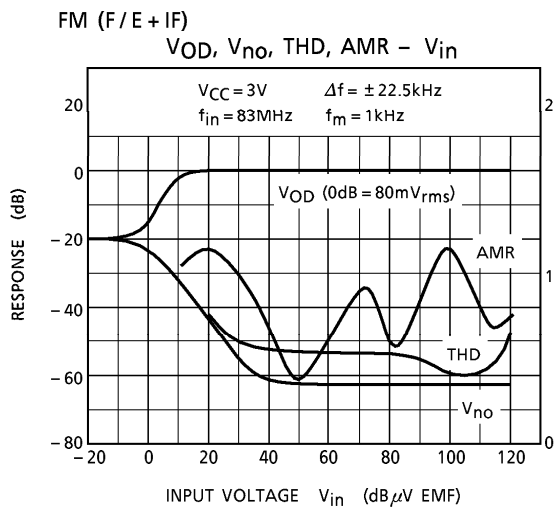


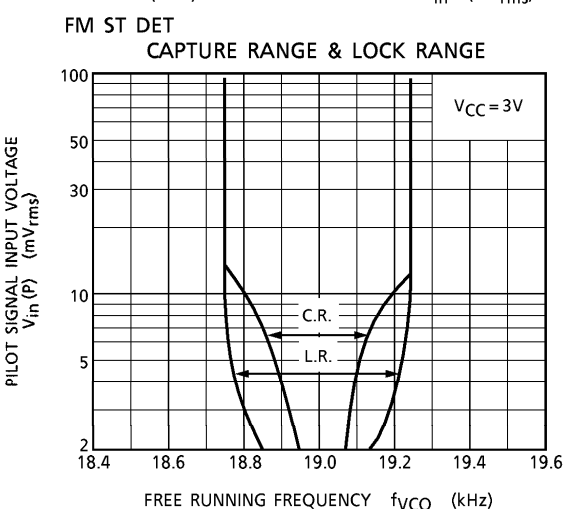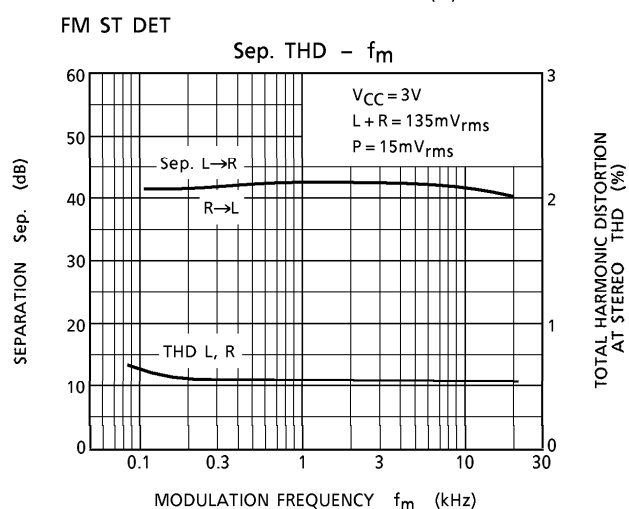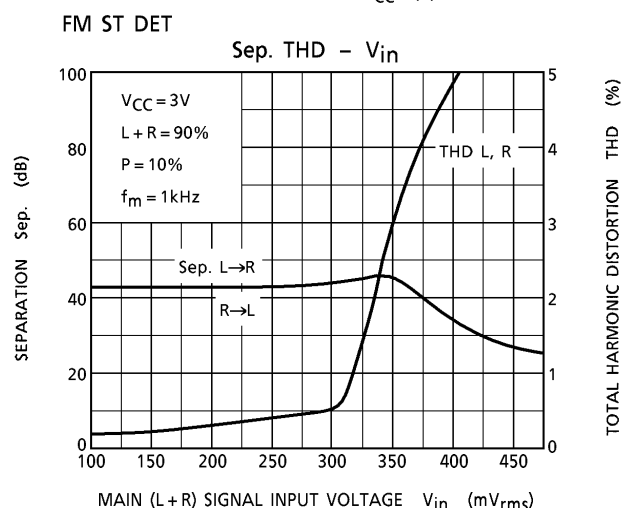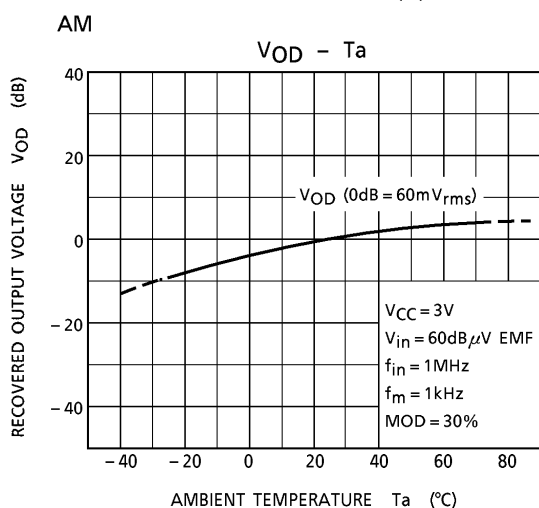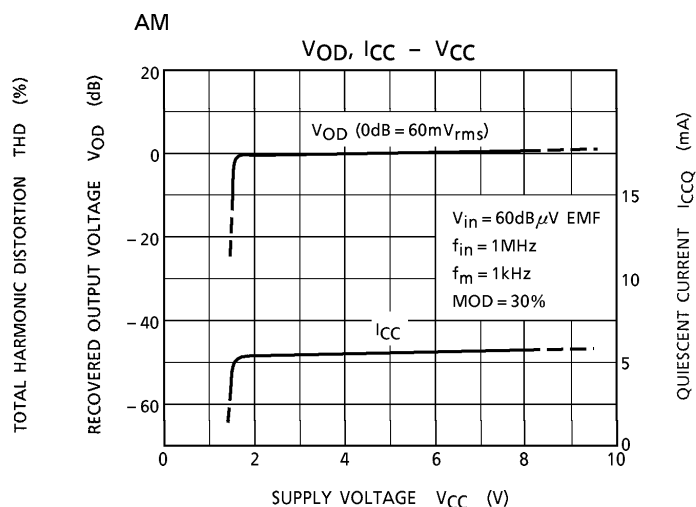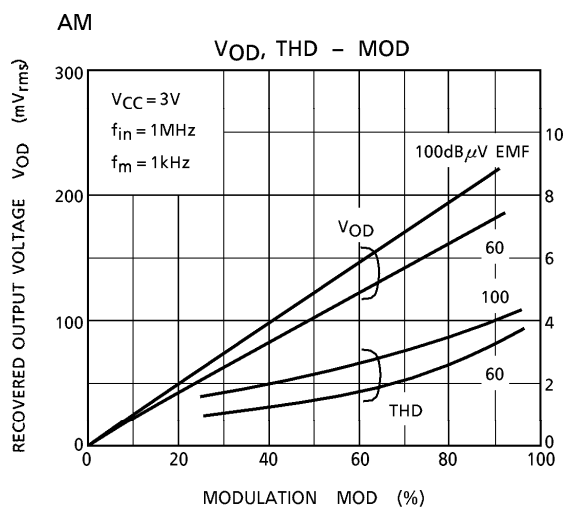


FM ST DET

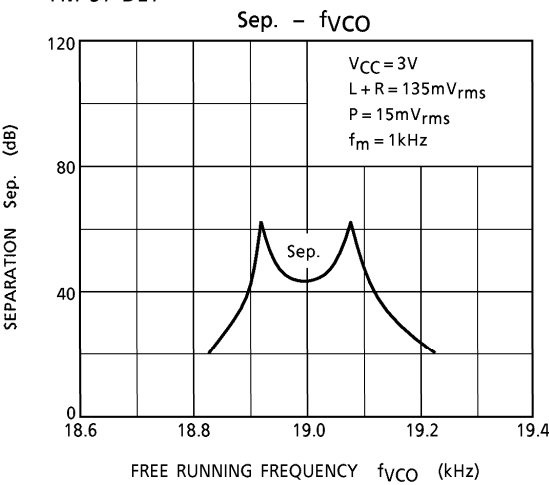

FM ST DET

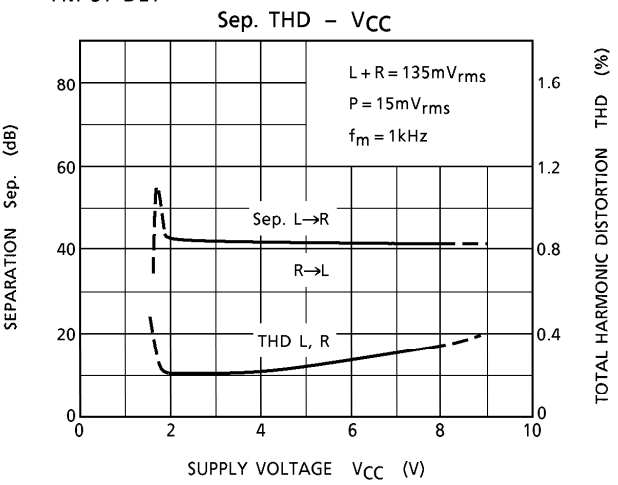


FM ST DET

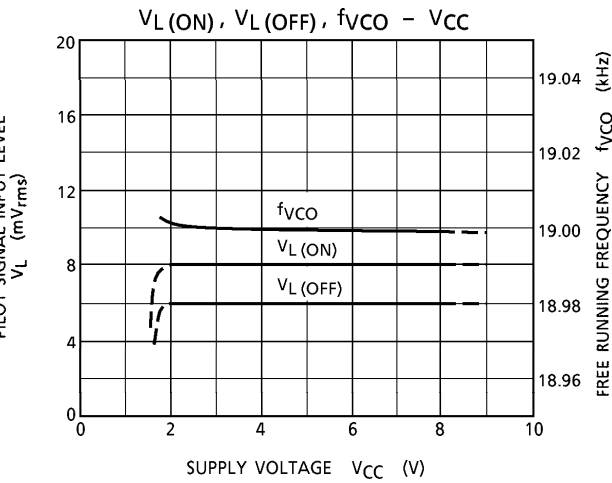

OUTLINE DRAWING
SDIP24-P-300-1.78


Unit : mm

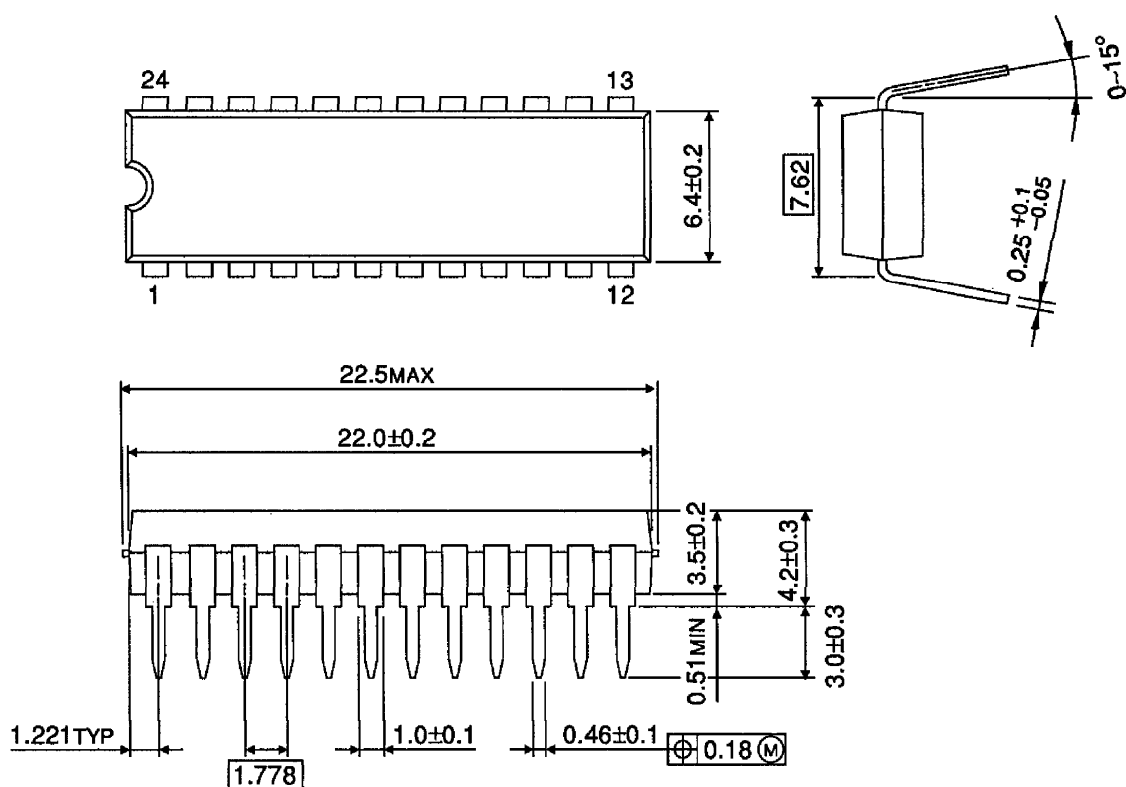

Weight : 1.2g (Typ.)

OUTLINE DRAWING
SSOP24-P-300-1.00

Unit : mm

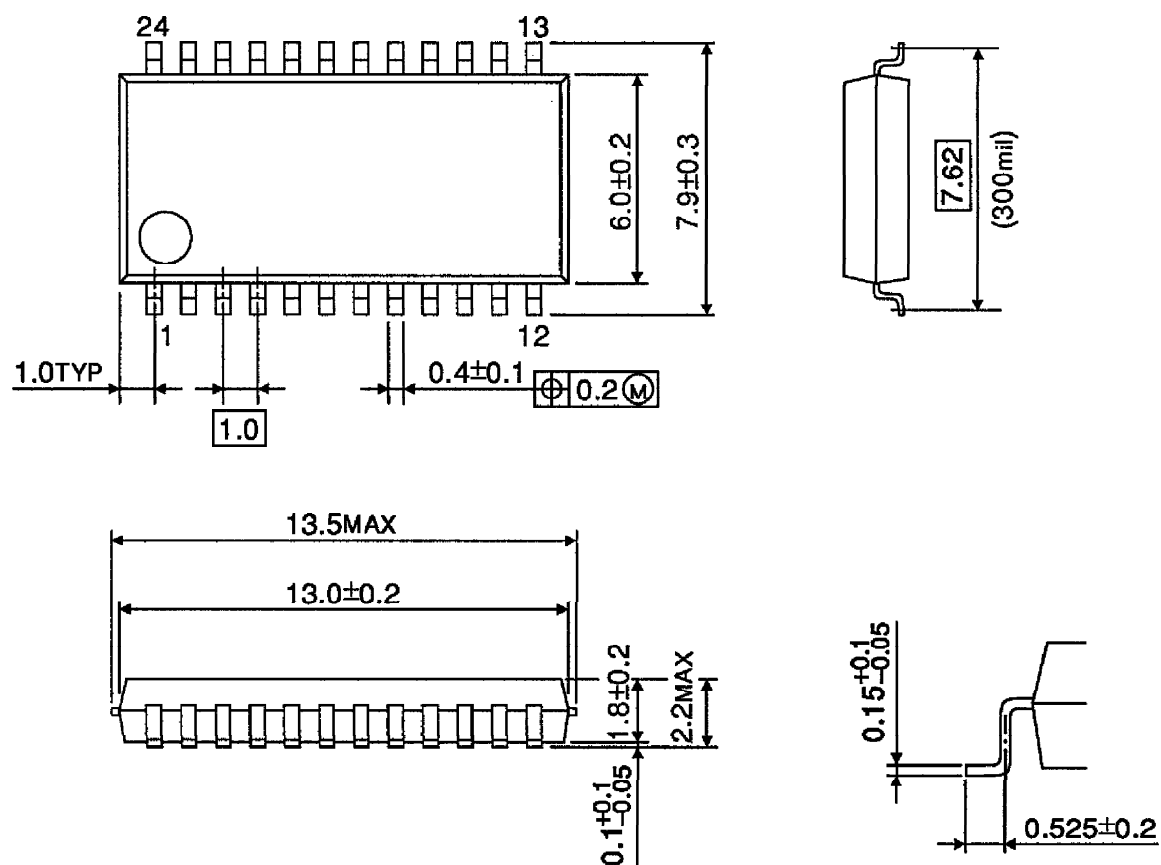

Weight : 0.31g (Typ.)