

Headphone amplifier for CD-ROMs

BH3541F / BH3544F

The BH3541F and BH3544F are digital-source dual headphone amplifiers. The BH3541F has a fixed gain of 0dB and the BH3544F has a fixed gain of 6dB so that external gain setting is unnecessary. Both the BH3541F and BH3544F have internal mute functions so that prevention of the popping sound when power is turned on and off is greatly simplified. Also, these ICs are equipped with thermal shutdown circuits to prevent damage from short circuits.

Product name	Fixed gain
BH3541F	0dB
BH3544F	6dB

●Applications

Devices that use the headphone output from CD-ROMs, CDs, MDs, personal computers, notebook computers, camcorders, etc.

●Features

- 1) Internal mute function to prevent popping sounds when the power is turned on and off.
- 2) Built-in thermal shutdown circuit (150°C) to prevent damage to the IC if a short circuit occurs.
- 3) Compact SOP8 pin package.

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Applied voltage	V _{Max}	7.0	V
Power dissipation	Pd	450 *	mW
Operating temperature	T _{opr}	-25 ~ +75	°C
Storage temperature	T _{stg}	-55 ~ +125	°C


*Reduced by 4.5mW for each increase in Ta of 1°C over 25°C.

●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V _{cc}	2.8	—	6.5	V

Optical disc ICs

●Block diagram

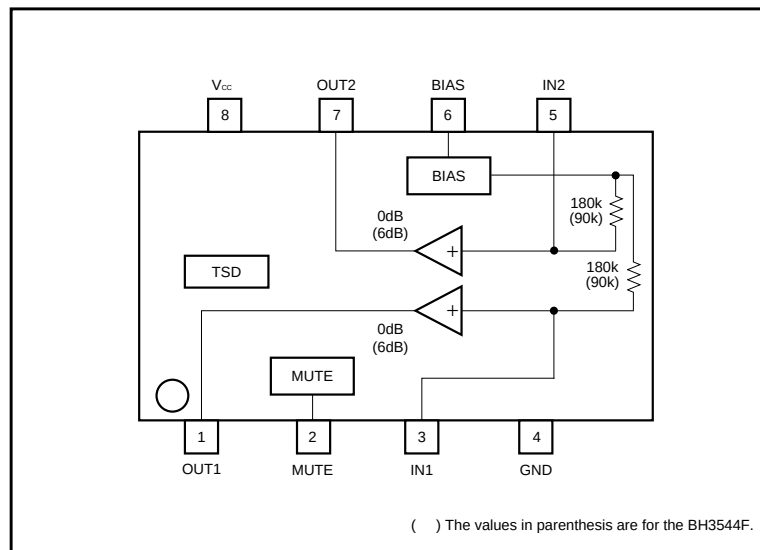

Optical disc ICs


●Pin descriptions

Pin No.	Pin name	I / O	Pin voltage	Internal equivalent circuit	Function
1	OUT1	O	2.1V		Output pin
7	OUT2	O	2.1V (V _{CC} =5V)		
2	MUTE	I	0.1V (When open)		Mute control pin (set to low for prevention of popping noise when power is turned on and off). Operating : High Muting : Low (open)
3	IN1	I	2.1V		Input pin
5	IN2	I	2.1V (V _{CC} =5V)		
6	BIAS	I / O	2.1V (V _{CC} =5V)		Bias pin (the external 47μF capacitor also serves as the anti-pop time constant, therefore make the proper considerations be changing it).
4	GND	I	—	—	—
8	V _{CC}	I	—	—	—

Optical disc ICs

● **Electrical characteristics** (unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{V}$, $R_L = 32\Omega$, BH3541F : $V_{IN} = 0\text{dBV}$, BH3544F : $V_{IN} = -6\text{dBV}$, and $f = 1\text{kHz}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	I_Q	4	7	10	mA	$V_{IN}=0\text{Vrms}$
Mute pin control voltage	V_{TM}	0.3	0.7	1.6	V	—
Voltage gain	G_{VC}	—	—	—	—	—
		—	—	—	—	—
Voltage gain difference between channels	ΔG_{VC}	—	—	—	—	—
Total harmonic distortion	THD	—	0.02	0.1	%	$BW=20\sim 20\text{kHz}$
Rated output 1	P_{O1}	25	31	—	mW	$R_L=32\Omega$, THD < 0.1%
Rated output 2	P_{O2}	50	62	—	mW	$R_L=16\Omega$, THD < 0.1%
Output noise voltage	V_{NO}	—	—93	—85	dBV	$BW=20\sim 20\text{kHz}$, $R_g=0\Omega$
Channel separation	CS	82	90	—	dB	$R_g=0\Omega$
Mute attenuation	ATT	70	80	—	dB	$R_g=0\Omega$
Ripple rejection	RR	50	57	—	dB	$f_{RR}=100\text{Hz}$, $V_{RR}=-20\text{dBV}$

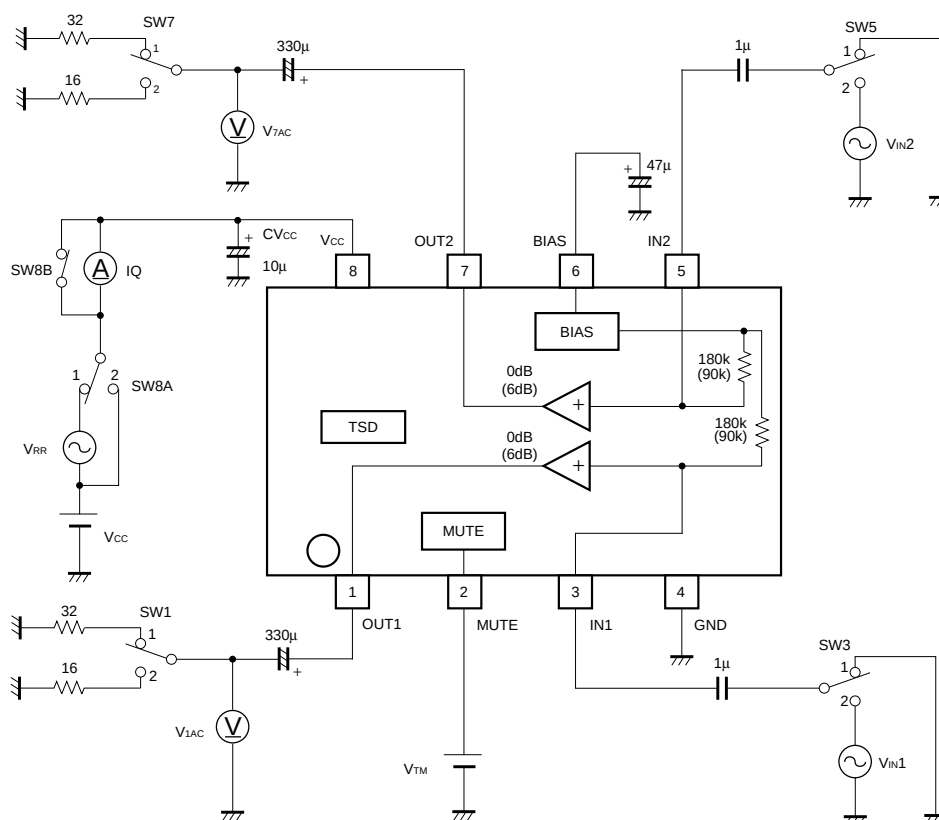● **Measurement circuit**

() The values in parenthesis are for the BH3544F.

Fig.1

Optical disc ICs


●Measurement conditions

Signal	SW table						Monitor	Conditions
	SW1	SW3	SW5	SW7	SW8A	SW8B		
I _Q	1	1	1	1	2	OFF	I _Q	—
V _{TM}	—	—	—	—	—	—	—	—
G _{VC}	1	2	2	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1/2} =0dBV (V _{IN1/2} =-6dBV), V _{TM} =1.6V
ΔG _{VC}	—	—	—	—	—	—	—	GVC1-GVC2
THD	1	2	2	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1/2} =0dBV (V _{IN1/2} =-6dBV), V _{TM} =1.6V
P _{O1}	1	2	2	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1/2} =0dBV (V _{IN1/2} =-6dBV), V _{TM} =1.6V
P _{O2}	2	2	2	2	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1/2} =0dBV (V _{IN1/2} =-6dBV), V _{TM} =1.6V
V _{NO}	1	1	1	1	2	ON	V1AC, V2AC	—
CS	1	1	2	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN2} =0dBV (V _{IN2} =-6dBV), V _{TM} =1.6V
	1	2	1	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1} =0dBV (V _{IN1} =-6dBV), V _{TM} =1.6V
ATT	1	2	2	1	2	ON	V1AC, V2AC	f _{in} =1kHz, V _{IN1/2} =0dBV (V _{IN1/2} =-6dBV), V _{TM} =0.3VB
RR	1	1	1	1	1	ON	V1AC, V2AC	V _{RR} =-20dBV, f _{RR} =100Hz

*() The values in parenthesis are for the BH3544F.

●Circuit operation

Rising edge timing

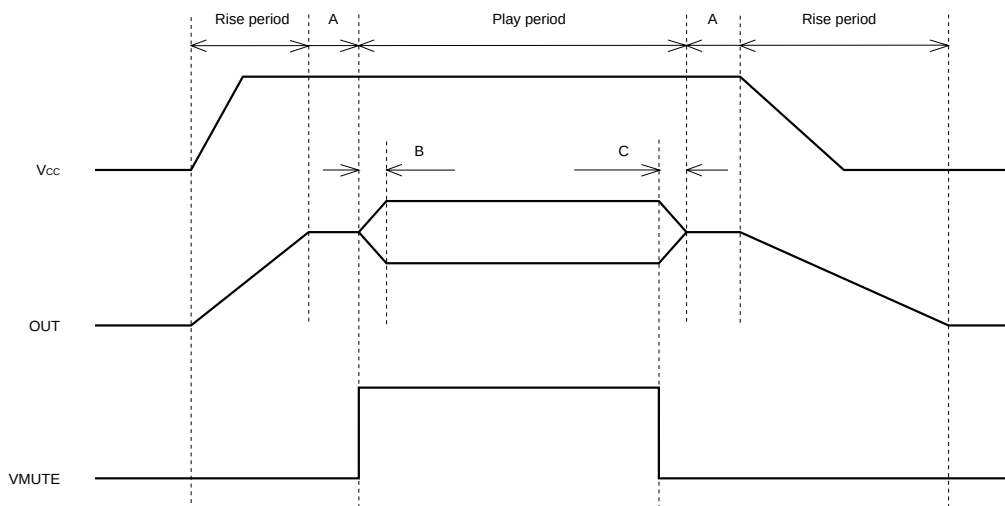

A : MUTE period (use with MUTE = Low to prevent the popping noise when the power is turned on and off).

B : MUTE release time (used to prevent the popping noise at the release of MUTE with the external C2 and R2, and therefore possesses a time constant, so be careful of the timing).

C : MUTE start time (also possesses a time constant like the MUTE release time).

H : Active
 L : Mute

Fig.2

$$G_{VC} = 6 + 20 \log (90k\Omega / (90k\Omega + R3)) \quad [dB]$$

Optical disc ICs

●Operation notes

The application example is recommended by ROHM, but before use in your application, be sure to carefully confirm electrical characteristics.

Also, for use with different circuit constants for the external circuits, be sure to leave a sufficient margin for fluctuations in characteristics in the external components and ROHM ICs in not only the static characteristics, but also the transient characteristics as well.

●Electrical characteristic curves

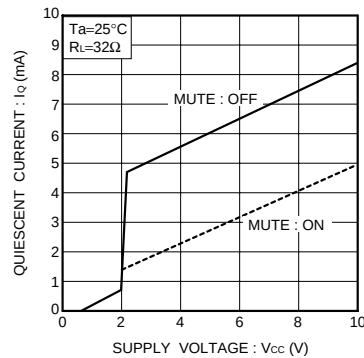


Fig.3 Quiescent current vs. power supply voltage

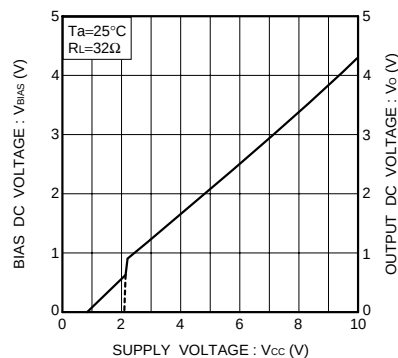


Fig.4 Pin DC current vs. power supply voltage

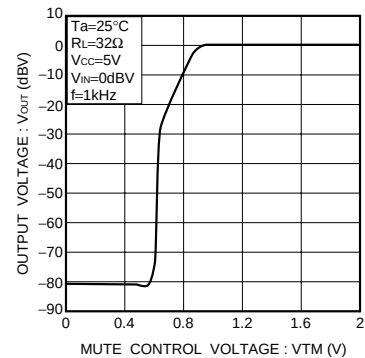


Fig.5 Output voltage vs. MUTE control voltage

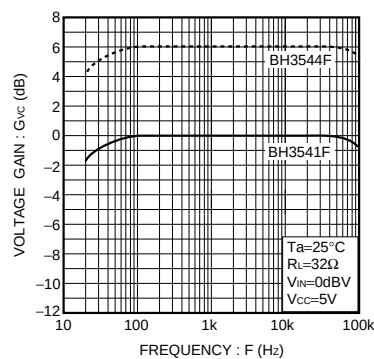


Fig.6 Voltage gain vs. frequency

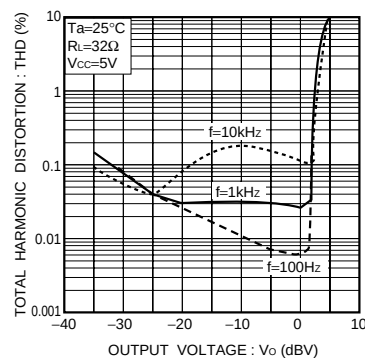


Fig.7 Total harmonic distortion vs. output voltage (I)

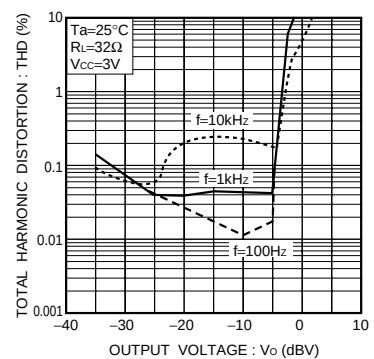


Fig.8 Total harmonic distortion vs. output voltage (II)

Optical disc ICs

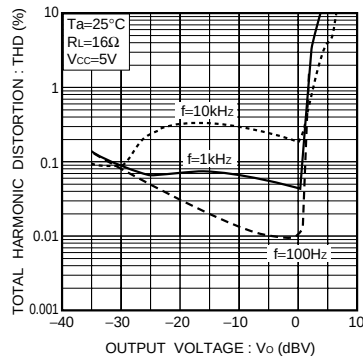


Fig.9 Total harmonic distortion vs. output voltage (III)

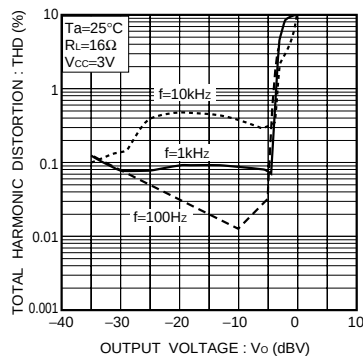


Fig.10 Total harmonic distortion vs. output voltage (IV)

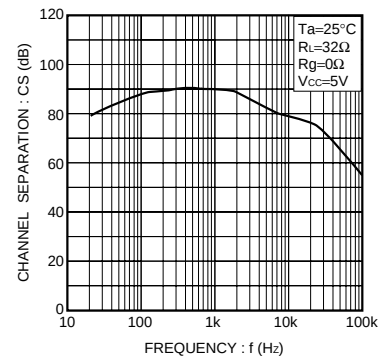


Fig.11 Channel separation vs. frequency

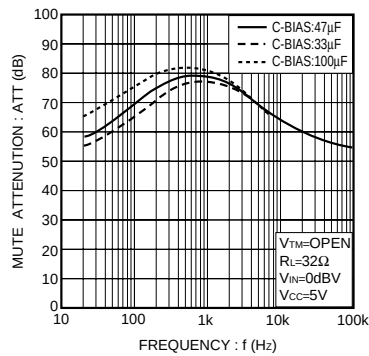


Fig.12 MUTE attenuation vs. frequency

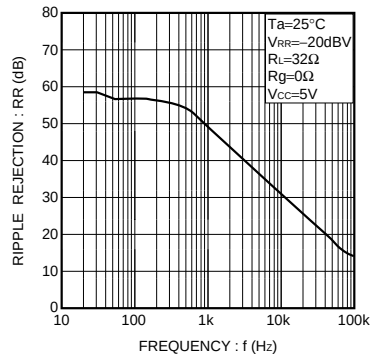


Fig.13 Ripple rejection vs. frequency

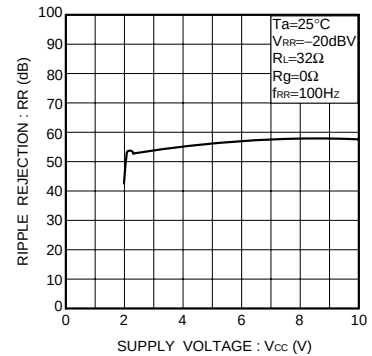


Fig.14 Ripple rejection vs. power supply voltage

●External dimensions (Units : mm)

