

EVALUATION KIT
AVAILABLE**MAXIM****Precision, High-Bandwidth Op Amp****MAX9622****General Description**

The MAX9622 op amp features rail-to-rail output and 50MHz GBW at just 1mA supply current. At power-up, this device autocalibrates its input offset voltage to less than 100 μ V. It operates from a single-supply voltage of 2.0V to 5.25V.

The MAX9622 is available in a tiny 2mm x 2mm, 5-pin SC70 package and is rated over the -40°C to +125°C automotive temperature range.

Applications

Power Modules
Automotive Power Supplies
ADC Drivers for Industrial Systems
Instrumentation
Filters


Features

- ◆ 50MHz UGBW
- ◆ Low Input Voltage Offset Voltage (100 μ V max)
- ◆ Input Common-Mode Voltage Range Extends Below Ground
- ◆ Wide 2.0V to 5.25V Supply Range
- ◆ Low 1mA Supply Current

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX9622AXK+T	-40°C to +125°C	5 SC70	AUA

+Denotes a lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.

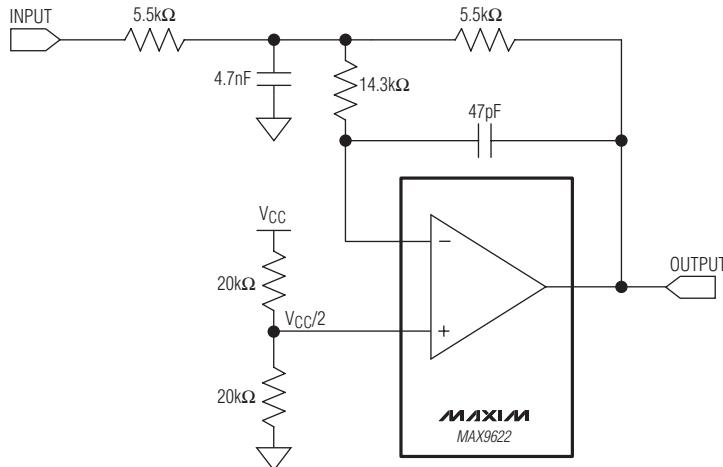Typical Application Circuit

USING THE MAX9622 AS A LOWPASS BESSEL FILTER (CORNER FREQUENCY = 100kHz).

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Precision, High-Bandwidth Op Amp

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V _{CC} to GND).....	-0.3V to +5.5V
All Other Pins.....	(GND - 0.3V) to (V _{CC} + 0.3V)
Short-Circuit Duration to GND or V _{CC}	1s
Continuous Input Current (any pins).....	±20mA
Thermal Limits (Note 1)	
Continuous Power Dissipation (T _A = +70°C)	
5-Pin SC70 (derate 3.1mW/°C above +70°C)	245.4mW

Operating Temperature Range.....	-40°C to +125°C
Junction Temperature	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C
Soldering Temperature (reflow)	+260°C

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maxim-ic.com/thermal-tutorial.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = 5V, V_{IN+} = V_{IN-} = 0V, R_L = 10kΩ to V_{CC}/2, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
POWER SUPPLY						
Supply Voltage Range	V _{CC}	Guaranteed by PSRR	2	5.25		V
Supply Current	I _{CC}	No load	TA = +25°C	1	1.5	mA
			-40°C ≤ T _A ≤ +125°C		2.1	
Power-Supply Rejection Ratio	PSRR	TA = +25°C	97	126		dB
		-40°C ≤ T _A ≤ +125°C	93			
Power-Up Time	t _{ON}			3		ms
DC SPECIFICATIONS						
Input Offset Voltage	V _{OS}	After power-up autocalibration	8	100		µV
		-40°C ≤ T _A ≤ +125°C	8	3000		
Input Offset Voltage Drift	ΔV _{OS}		3			µV/°C
Input Bias Current	I _B	TA = +25°C	62	150		nA
		-40°C ≤ T _A ≤ +125°C		320		
Input Offset Current	I _{OS}	TA = +25°C	3	12		nA
		-40°C ≤ T _A ≤ +125°C		30		
Input Common-Mode Range	V _{CMP}	Guaranteed by CMRR, T _A = -40°C to +125°C	-0.1	V _{CC} - 1.3		V
Common-Mode Rejection Ratio	CMRR	TA = +25°C	87	121		dB
		-40°C ≤ T _A ≤ +125°C	80			
Large-Signal Gain	A _{VOL}	400mV ≤ V _{OUT} ≤ V _{CC} - 400mV	TA = +25°C	91	103	dB
			-40°C ≤ T _A ≤ +125°C	84		
		400mV ≤ V _{OUT} ≤ V _{CC} - 400mV, R _L = 1kΩ to V _{CC} /2	TA = +25°C	77	89	
			-40°C ≤ T _A ≤ +125°C	69		
Output Voltage Swing	V _{OH} - V _{OC}	R _L = 10kΩ to V _{CC} /2		60		mV
		R _L = 10kΩ to V _{CC} /2		60		
		R _L = 10kΩ to GND, T _A = +25°C		40		
		R _L = 10kΩ to GND		48		
Short-Circuit Current	I _{SC}	(Note 3)		80		mA

Precision, High-Bandwidth Op Amp

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = 5V$, $V_{IN+} = V_{IN-} = 0V$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$.)
(Note 2)







PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
AC SPECIFICATIONS						
Gain-Bandwidth Product	GBW		50			MHz
Large-Signal Bandwidth	BWL _S	$V_{OUT} = 2V_{P-P}$	3			MHz
Slew Rate	SR	$V_{OUT} = 2V_{P-P}$, 10% to 90%	20			V/ μ s
Settling Time	ts	To 0.1%, $V_{OUT} = 2V_{P-P}$, $C_L = 10pF$	200			ns
Total Harmonic Distortion	THD	$f = 10kHz$, $V_{OUT} = 2V_{P-P}$	90			dB
Input Voltage Noise Density	E _N	$f = 10kHz$	13			nV/ \sqrt{Hz}
Input Current Noise Density	I _N	$f = 10kHz$	3			pA/ \sqrt{Hz}

Note 2: The device is 100% production tested at $T_A = +25^\circ C$. Temperature limits are guaranteed by design.

Note 3: Guaranteed by design.

Typical Operating Characteristics

($V_{CC} = 5V$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = +25^\circ C$, unless otherwise noted.)




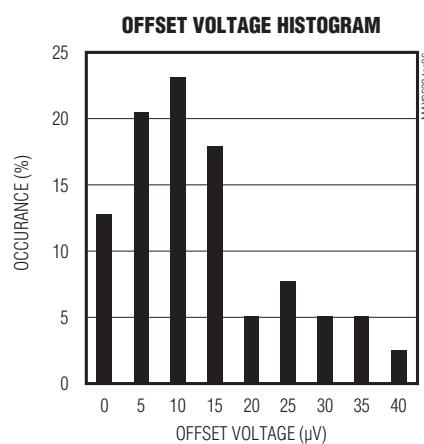
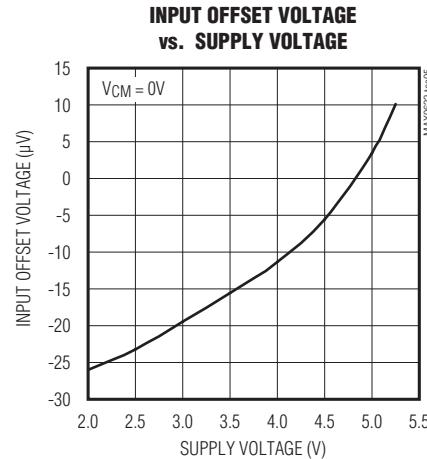
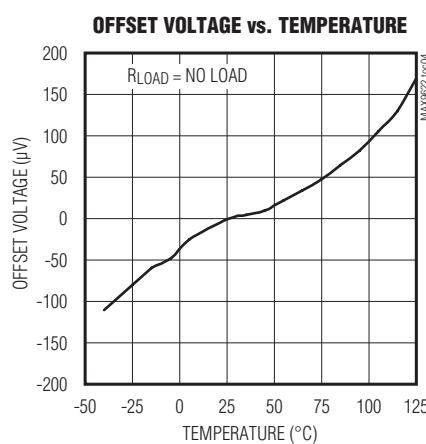
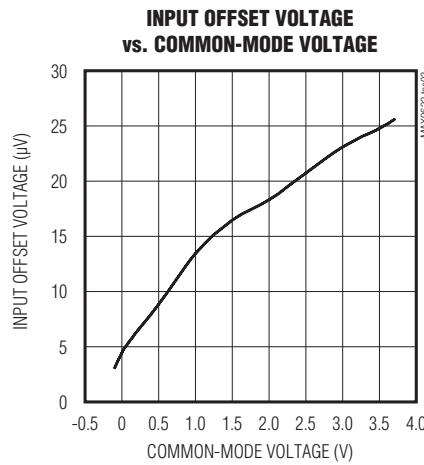
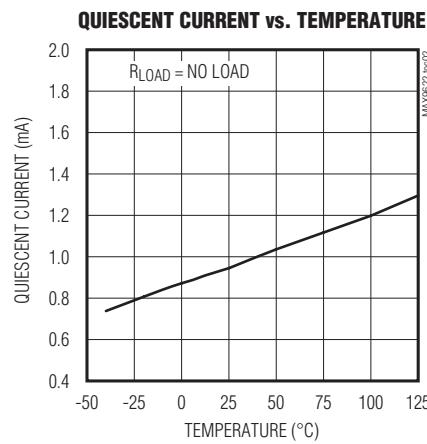
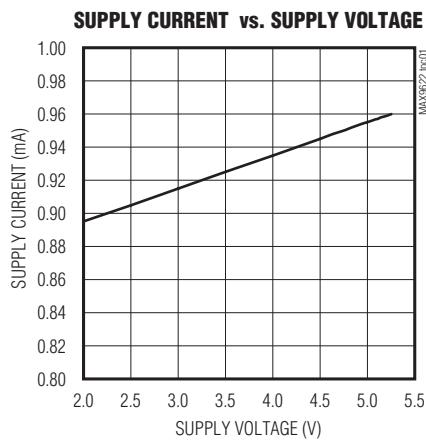


Precision, High-Bandwidth Op Amp

MAX9622

Typical Operating Characteristics (continued)







($V_{CC} = 5V$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

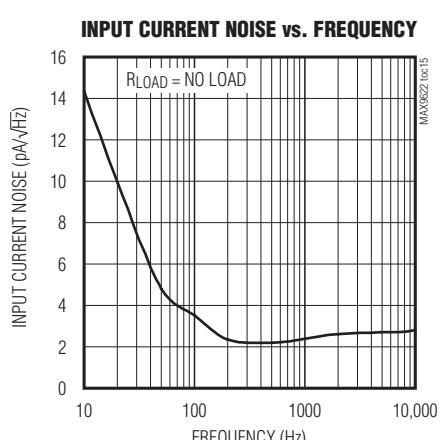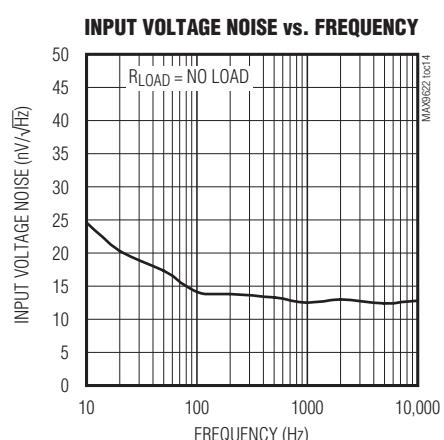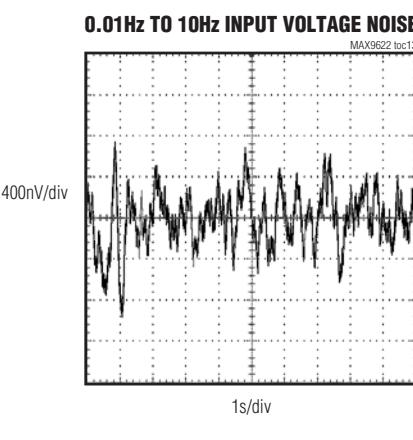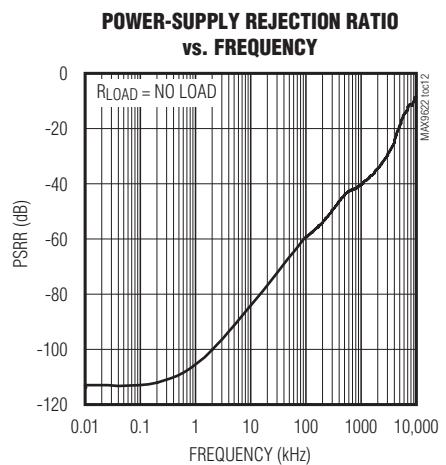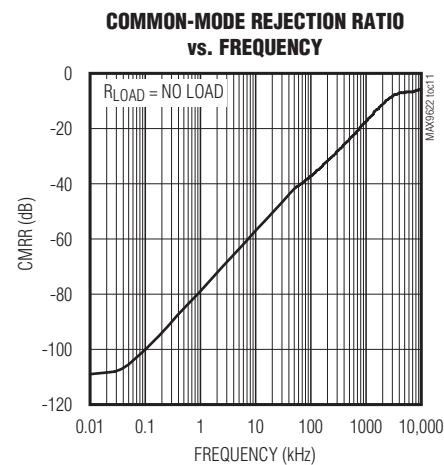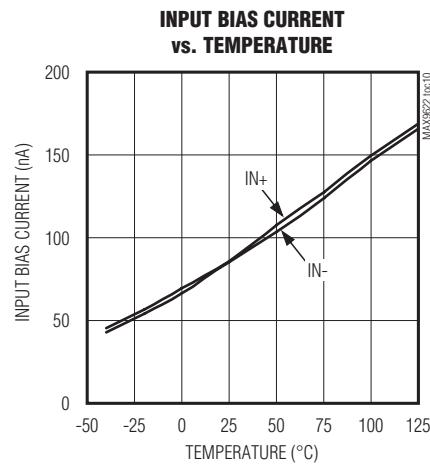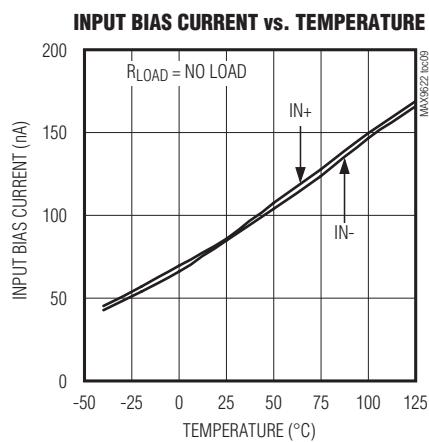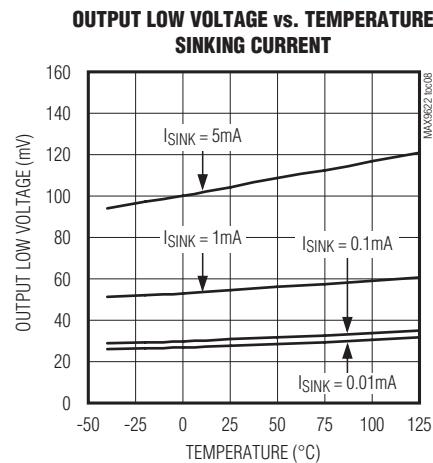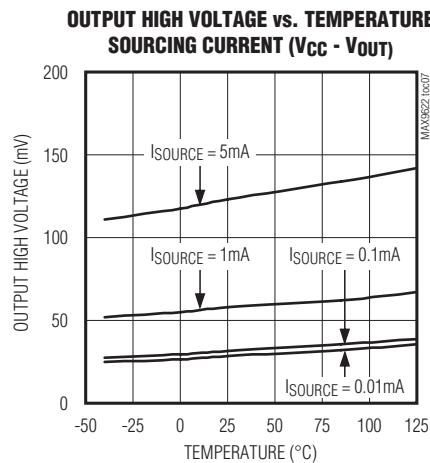

Precision, High-Bandwidth Op Amp

Typical Operating Characteristics (continued)






($V_{CC} = 5V$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

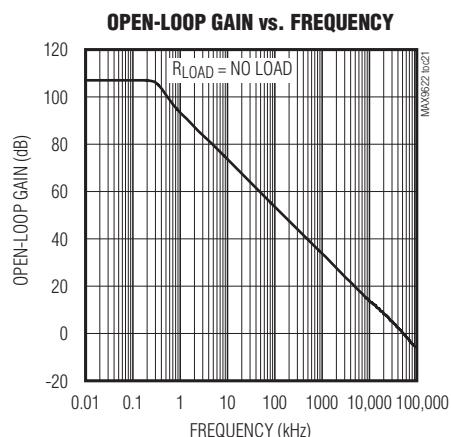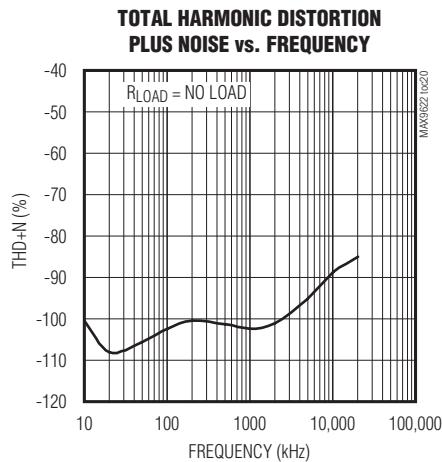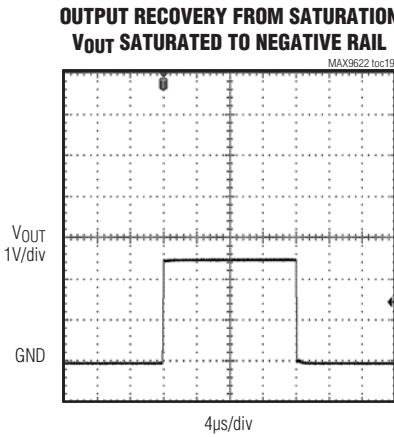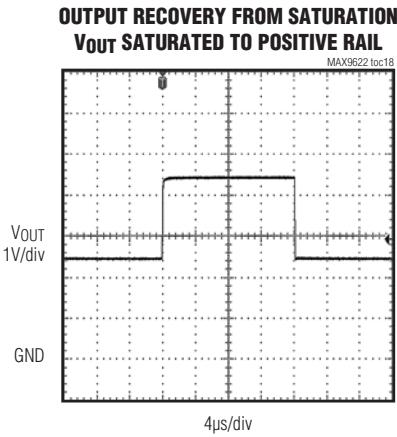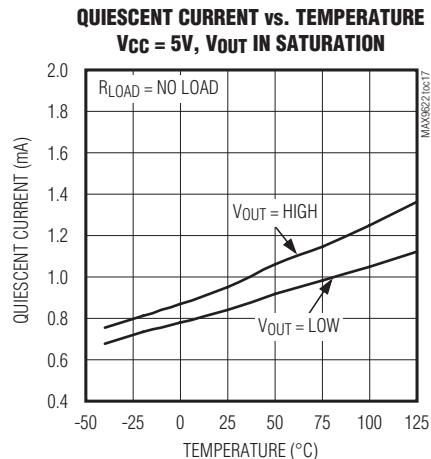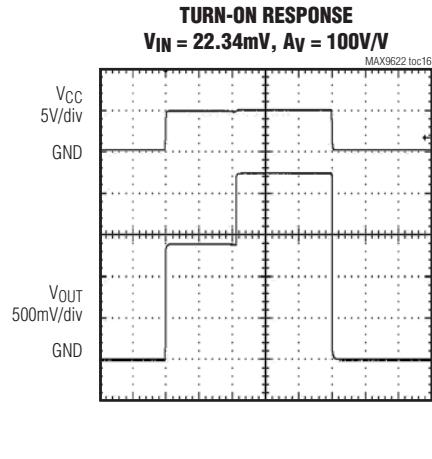

Precision, High-Bandwidth Op Amp

Typical Operating Characteristics (continued)


($V_{CC} = 5V$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = +25^\circ C$, unless otherwise noted.)

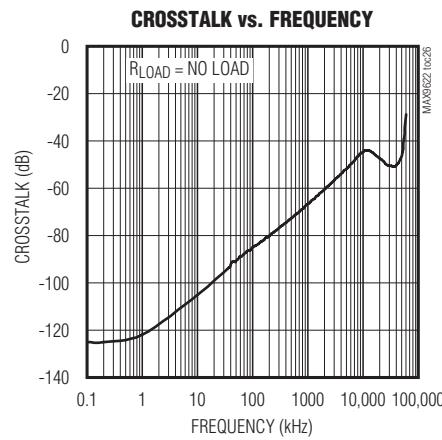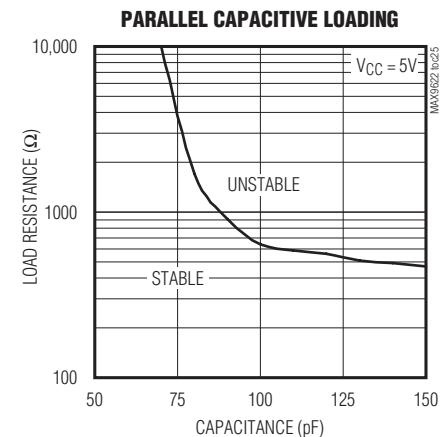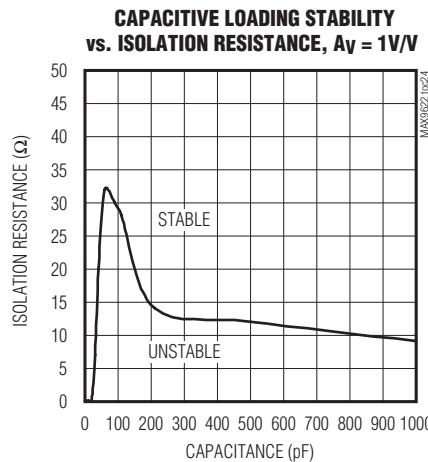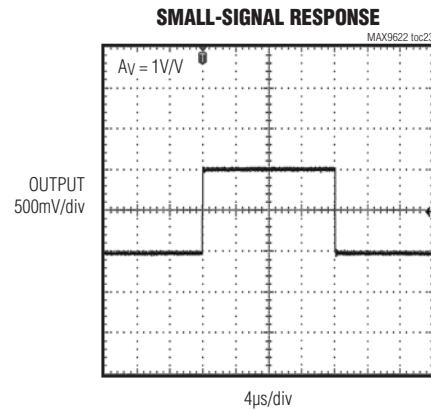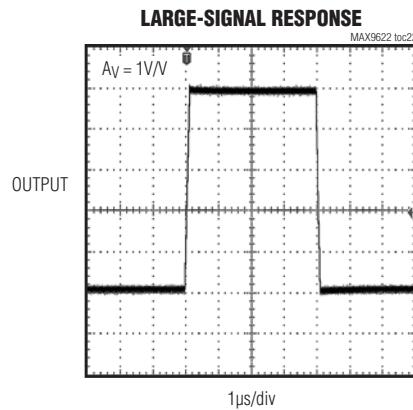

Precision, High-Bandwidth Op Amp

Pin Configuration

TOP VIEW



Pin Description

PIN	NAME	FUNCTION
1	IN+	Positive Input
2	GND	Ground
3	IN-	Negative Input
4	OUT	Output
5	VCC	Positive Power Supply. Bypass with a 0.1 μ F capacitor to ground.

Precision, High-Bandwidth Op Amp

Detailed Description

The MAX9622 is a power-efficient, high-speed op amp ideal for capturing fast edges in a wide variety of signal processing applications.

It precisely calibrates its VOS on power-up to eliminate the effects of package stresses, power supplies, and temperature.

Applications Information

Power-Up Autotrim

The MAX9622 features power-up autotrimming that allows the devices to achieve less than $100\mu\text{V}$ of input offset voltage. The startup sequence takes approximately 4ms to complete after the supply voltage exceeds an internal threshold of 1.8V. During this time, the inputs and outputs are connected to an auxiliary amplifier that has an input offset of 5mV (typ). As soon as the autotrimming is completed, the inputs and outputs switch from the auxiliary amplifier to the calibrated amplifier. The calibration settings hold until the supply voltage drops below an internal threshold of 1.4V. This could be used to recalibrate the amplifier. The supply current of the part increases to about 2.5mA during the power-up autotrim period. Use good supply decoupling with low ESR capacitors.

Active Filters

The MAX9622 is ideal for a wide variety of active filter circuits that make use of their wide output voltage swings and large bandwidth capabilities. The *Typical Application Circuit* shows a multiple feedback active filter circuit example with a 100kHz corner frequency. At low frequencies, the amplifier behaves like a simple low-distortion inverting amplifier gain = -1, while its high bandwidth gives excellent stopband attenuation above its corner frequency. See the *Typical Application Circuit*.

Input Differential Voltage Protection

During normal op-amp operation, the inverting and non-inverting inputs of the MAX9622 are at essentially the same voltage. However, either due to fast input voltage transients or due to loss of negative feedback, these pins can be forced to different voltages. Internal back-to-back diodes and series resistors protect input-stage transistors from large input differential voltages (see Figure 2). IN+ and IN- can survive any voltage between the power-supply rails.

This op amp has been designed to exhibit no phase inversion to overdriven inputs.

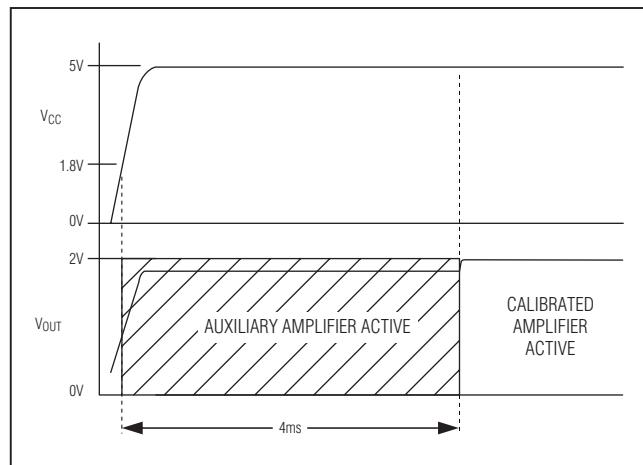


Figure 1. Autotrim Timing Diagram

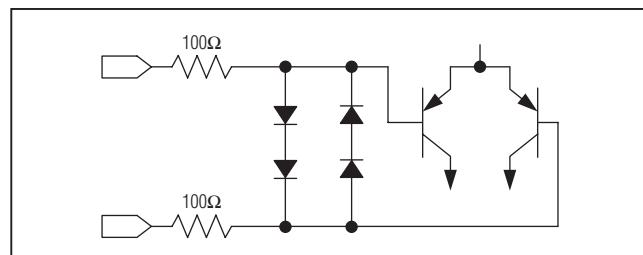


Figure 2. Input Protection Circuit

Precision, High-Bandwidth Op Amp


Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
5 SC70	X5+1	21-0076	90-0188

MAX9622

SC70-5LEPS

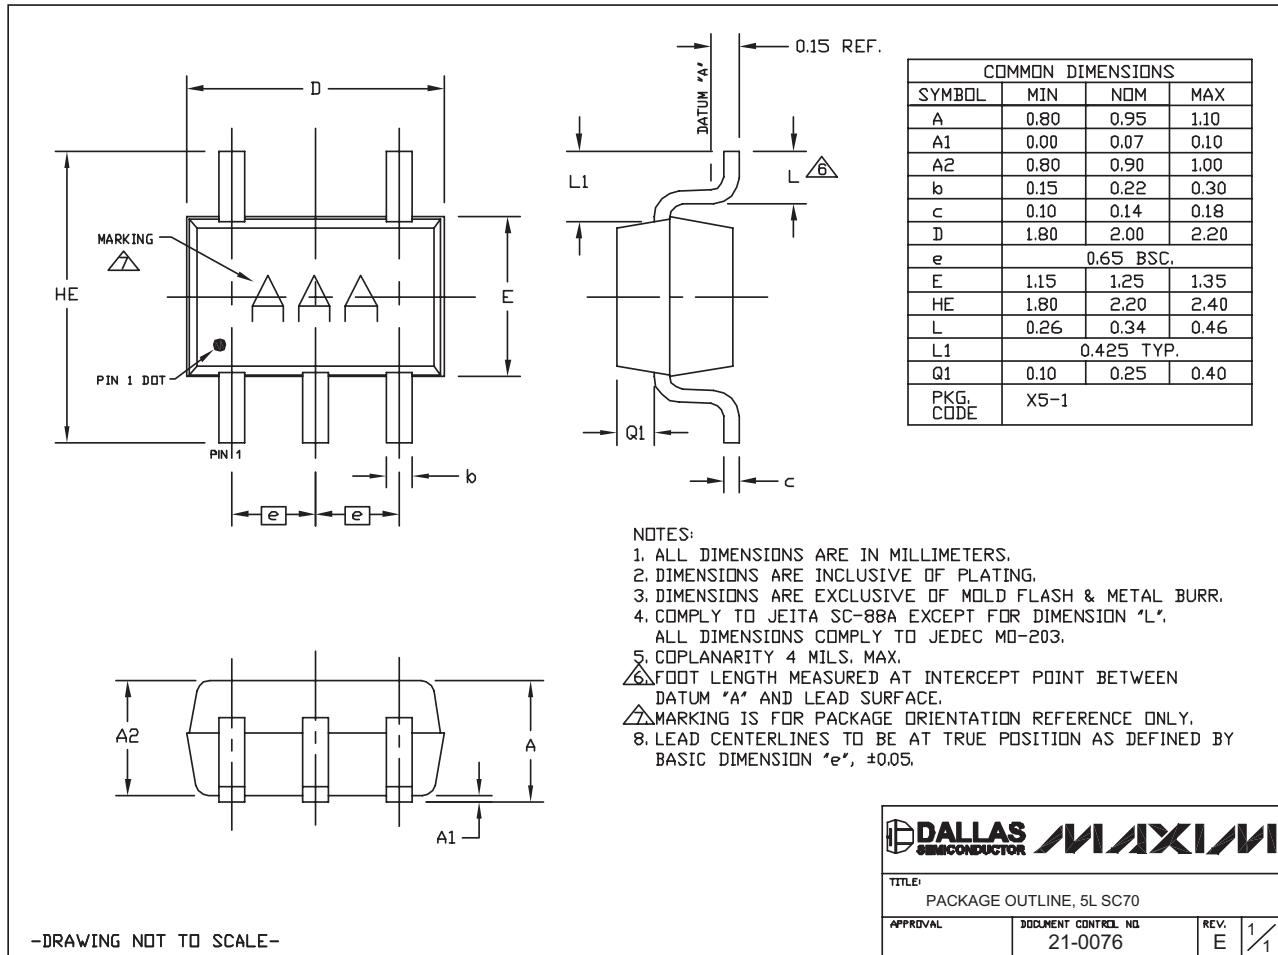

	DALLAS SEMICONDUCTOR	MAXIM
TITLE: PACKAGE OUTLINE, 5L SC70		
APPROVAL	DOCUMENT CONTROL NO. 21-0076	REV. E 1/1

Precision, High-Bandwidth Op Amp

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	9/10	Initial release	—

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2010 Maxim Integrated Products

Maxim is a registered trademark of Maxim Integrated Products, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maxim Integrated:](#)

[MAX9622AXK+T](#)