


1VR Detector Switches

Type: **ESE16**




■ Features

- External Dimensions: 2.2 mm×3.35 mm (Height:1.5 mm)
- Light operating force: 250 mN or less
- Auto mounting supported: Can be mounted by standard nozzles

■ Recommended Applications

- Detection of media in portable electronic equipment (Mobile phones / Digital still cameras / Camcorders)

■ Explanation of Part Numbers

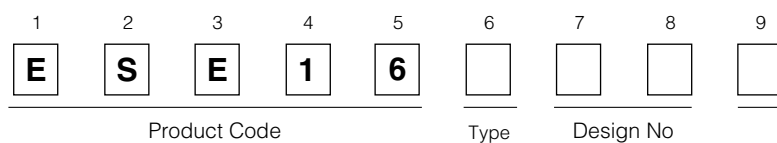

■ Specifications

Rating	50 μ A 3 Vdc to 10 mA 5 Vdc (Resistive load)
Contact Resistance	500 m Ω max. (Initial)
Insulation Resistance	10 M Ω min. (100 Vdc)
Dielectric Withstanding Voltage	100 Vac for 1 minute
Operating Force	250 mN max.
Mounting Height	1.5 mm
Poles and Throws	1-pole 1-throw
Full Travel (Pushing distance)	1.5 mm (1.0 mm)
Operating Life	50000 cycles min.
Temperature Range	-10 °C to +60 °C
Heat Resistance	+70 °C for 96 hours
Low Temperature Resistance	-25 °C for 96 hours
Humidity Resistance	+40 °C 90 % to 95 % RH for 96 hours
Minimum Quantity/Packing Unit	4000 pcs. Embossed Taping (Reel Pack)
Quantity/Carton	24000 pcs.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

01 Mar. 2014

■ Dimensions in mm (not to scale)


ESE16

1-pole 1-throw

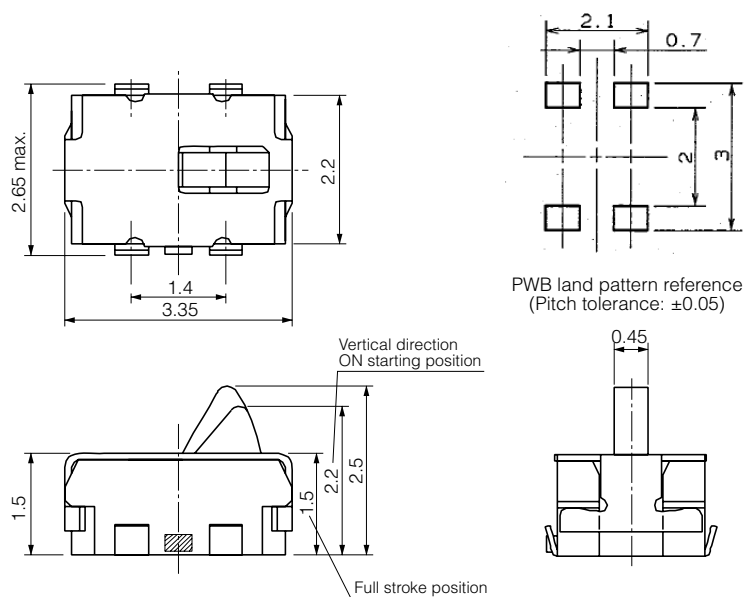

■ Circuit Diagram

1-pole 1-throw (N.O)

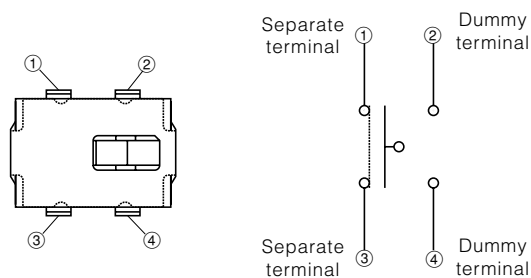


■ Packaging Specifications

Standard Reel Dimensions in mm (not to scale)

Taping Reel

Embossed Carrier Taping

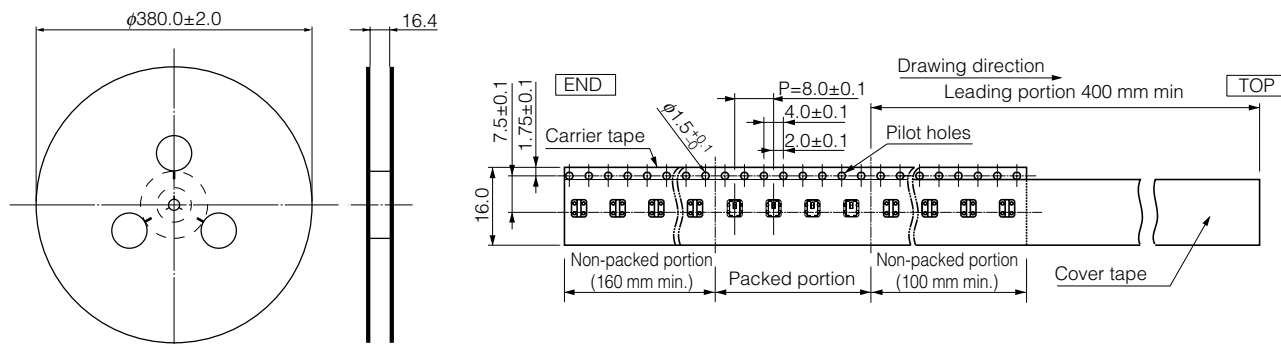

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

01 Mar. 2014