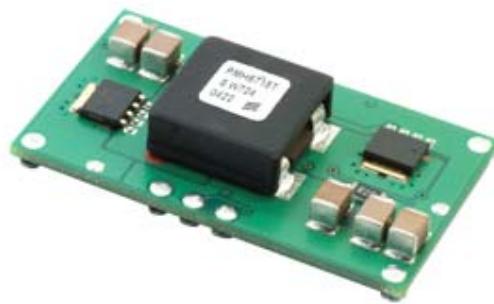


PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Key Features

- 18A output current
- 10.8-13.2V input voltage range
- Output voltages from 0.8V up to 5.5V
- Industry standard POLA™ compatible
- 38.1 x 22.1 x 9.00 mm (1.50 x 0.87 x 0.354 in.)
- High efficiency, up to. 95%
- Auto Track™ sequencing pin
- More than 3.8 million hours MTBF

**General Characteristics**

- Operating temperature: -40°C to 85°C
- Input under voltage protection
- Start up into a pre-biased output safe
- Output short-circuit protection
- Over temperature protection
- On/Off inhibit control
- Margin up/down control
- Output voltage sense
- Wide output voltage adjust function
- Highly automated manufacturing ensures quality
- ISO 9001/14001 certified supplier

Safety Approvals**Design for Environment**

Meets requirements in high-temperature lead-free soldering processes.

Contents

General Information	2
Safety Specification	3
Absolute Maximum Ratings	4
Product Program	
0.8-1.8 V/18 A	
0.8 V/18 A Electrical Specification	5
1.0 V/18 A Electrical Specification	8
1.2 V/18 A Electrical Specification	11
1.5 V/18 A Electrical Specification	14
1.8 V/18 A Electrical Specification	17
1.2-5.5 V/18 A	
1.2 V/18 A Electrical Specification	20
1.5 V/18 A Electrical Specification	23
1.8 V/18 A Electrical Specification	26
2.5 V/18 A Electrical Specification	29
3.3 V/18 A Electrical Specification	32
5.0 V/18 A Electrical Specification	35
EMC Specification	37
Operating Information	37
Thermal Consideration	40
Connections	41
Mechanical Information	42
Soldering Information	44
Delivery Information	46
Product Qualification Specification	47

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

General Information

Ordering Information

See Contents for individual product ordering numbers.

Option	Suffix	
Through hole pin	P	PMH8918LP
SMD pin	S	PMH8918LS
SMD pin, leadfree reflow temperature capable	R	PMH8918LSR

Reliability

The Mean Time Between Failure (MTBF) is calculated at full output power and an operating ambient temperature (T_A) of +40°C. Different methods could be used to calculate the predicted MTBF and failure rate which may give different results. Ericsson Power Modules currently uses Telcordia SR332.

Predicted MTBF for the series is:

- 3.87 million hours according to Telcordia SR332, issue 1, Black box technique.

Telcordia SR332 is a commonly used standard method intended for reliability calculations in IT&T equipment. The parts count procedure used in this method was originally modelled on the methods from MIL-HDBK-217F, Reliability Predictions of Electronic Equipment.

It assumes that no reliability data is available on the actual units and devices for which the predictions are to be made, i.e. all predictions are based on generic reliability parameters.

Compatibility with RoHS requirements

The products are compatible with the relevant clauses and requirements of the RoHS directive 2002/95/EC and have a maximum concentration value of 0.1% by weight in homogeneous materials for lead in other applications other than lead in solder, lead in high melting temperature type solder, lead in glass of electronics components, lead in electronic ceramic parts and lead as an alloying element in copper containing up to 4% lead by weight, mercury, hexavalent chromium, PBB and PBDE and of 0.01% by weight in homogeneous materials for cadmium.

Exemptions in the RoHS directive utilized in the products:

- Lead as an alloying element in copper alloy containing up to 4% lead by weight (used in connection pins made of Brass)
- Lead in high melting temperature type solder (used to solder the die in semiconductor packages)
- Lead in glass of electronics components and in electronic ceramic parts (e.g. fill material in chip resistors)
- Lead in solder for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission as well as network management for telecommunication
(Note: the products are manufactured in lead-free soldering processes and the lead present is only located in the terminal plating finishes on some components)

Quality Statement

The products are designed and manufactured in an industrial environment where quality systems and methods like ISO 9000, 6σ (sigma), and SPC are intensively in use to boost the continuous improvements strategy. Infant mortality or early failures in the products are screened out and they are subjected to an ATE-based final test. Conservative design rules, design reviews and product qualifications, plus the high competence of an engaged work force, contribute to the high quality of our products.

Warranty

Warranty period and conditions are defined in Ericsson Power Modules General Terms and Conditions of Sale.

Limitation of Liability

Ericsson power Modules does not make any other warranties, expressed or implied including any warranty of merchantability or fitness for a particular purpose (including, but not limited to, use in life support applications, where malfunctions of product can cause injury to a person's health or life).

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Safety Specification

General information

Ericsson Power Modules DC/DC converters and DC/DC regulators are designed in accordance with safety standards IEC/EN/UL60950, *Safety of Information Technology Equipment*.

IEC/EN/UL60950 contains requirements to prevent injury or damage due to the following hazards:

- Electrical shock
- Energy hazards
- Fire
- Mechanical and heat hazards
- Radiation hazards
- Chemical hazards

On-board DC-DC converters are defined as component power supplies. As components they cannot fully comply with the provisions of any Safety requirements without "Conditions of Acceptability". It is the responsibility of the installer to ensure that the final product housing these components complies with the requirements of all applicable Safety standards and Directives for the final product.

Component power supplies for general use should comply with the requirements in IEC60950, EN60950 and UL60950 "Safety of information technology equipment".

There are other more product related standards, e.g. IEEE802.3af "Ethernet LAN/MAN Data terminal equipment power", and ETS300132-2 "Power supply interface at the input to telecommunications equipment; part 2: DC", but all of these standards are based on IEC/EN/UL60950 with regards to safety.

Ericsson Power Modules DC/DC converters and DC/DC regulators are UL60950 recognized and certified in accordance with EN60950.

The flammability rating for all construction parts of the products meets requirements for V-0 class material according to IEC 60695-11-10.

The products should be installed in the end-use equipment, in accordance with the requirements of the ultimate application. Normally the output of the DC/DC converter is considered as SELV (Safety Extra Low Voltage) and the input source must be isolated by minimum Double or Reinforced Insulation from the primary circuit (AC mains) in accordance with IEC/EN/UL60950.

Isolated DC/DC converters

It is recommended that a slow blow fuse with a rating twice the maximum input current per selected product be used at the input of each DC/DC converter. If an input filter is used in the circuit the fuse should be placed in front of the input filter.

In the rare event of a component problem in the input filter or in the DC/DC converter that imposes a short circuit on the input source, this fuse will provide the following functions:

- Isolate the faulty DC/DC converter from the input power source so as not to affect the operation of other parts of the system.
- Protect the distribution wiring from excessive current and power loss thus preventing hazardous overheating.

The galvanic isolation is verified in an electric strength test. The test voltage (V_{iso}) between input and output is 1500 Vdc or 2250 Vdc for 60 seconds (refer to product specification).

Leakage current is less than 1 μ A at nominal input voltage.

24 V DC systems

The input voltage to the DC/DC converter is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.

48 and 60 V DC systems

If the input voltage to Ericsson Power Modules DC/DC converter is 75 Vdc or less, then the output remains SELV (Safety Extra Low Voltage) under normal and abnormal operating conditions.

Single fault testing in the input power supply circuit should be performed with the DC/DC converter connected to demonstrate that the input voltage does not exceed 75 Vdc.

If the input power source circuit is a DC power system, the source may be treated as a TINV2 circuit and testing has demonstrated compliance with SELV limits and isolation requirements equivalent to Basic Insulation in accordance with IEC/EN/UL60950.

Non-isolated DC/DC regulators

The input voltage to the DC/DC regulator is SELV (Safety Extra Low Voltage) and the output remains SELV under normal and abnormal operating conditions.


PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Absolute Maximum Ratings

Characteristics		min	typ	max	Unit
T_{ref}	Operating Temperature (see Thermal Consideration section)	-40	85		°C
T_S	Storage temperature	-40	125		°C
V_I	Input voltage	10.8	12.0	13.2	V
V_{inh}	Inhibit On/Off pin voltage (see Operating Information section)	Positive logic option	$V_{in}-0.5$	Open	V
		Negative logic option	N/A	N/A	V
V_{adj}	Adjust pin voltage (see Operating Information section)	N/A	N/A	N/A	V

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics. If exposed to stress above these limits, function and performance may degrade in an unspecified manner.

Fundamental Circuit Diagram

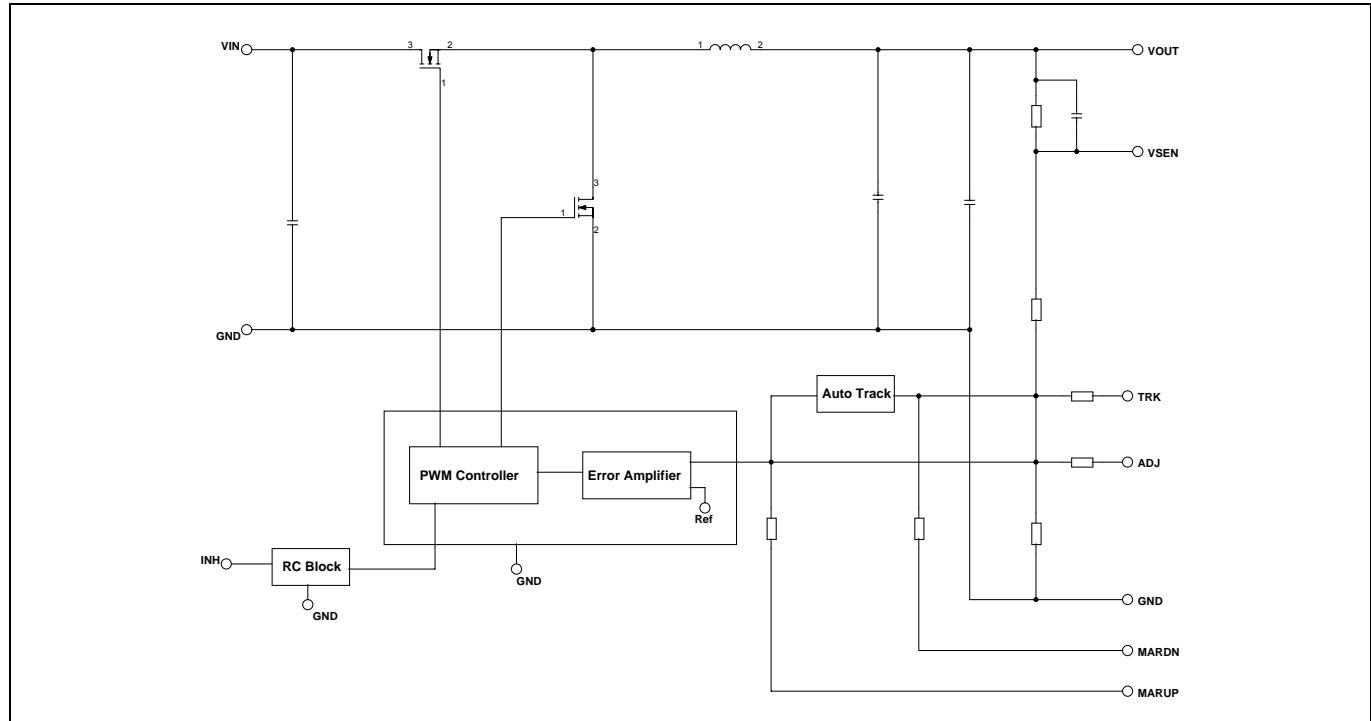

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

0.8 V/18 A Electrical Specification

PMH 8318T

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V, $R_{adj} = \text{open}$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		14.4	W	
η	Efficiency	50 % of max I_O	81.3		%	
		max I_O	77.4			
P_d	Power Dissipation	max I_O	4.3	4.8	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0$ V	550		mW	
P_{RC}	Input standby power	$V_I = 12.0$ V (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0$ V, max I_O	1.6		A	
f_s	Switching frequency	0-100% of max I_O	200	250	300	kHz

V_{OI}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O	0.784	0.800	0.816	V
V_O	Output voltage tolerance band	10-100% of max I_O	0.776		0.824	V
	Idling voltage	$I_O = 0$		0.798		V
	Line regulation	max I_O		± 5		mV
	Load regulation	$V_I = 12.0$ V, 0-100% of max I_O		± 5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0$ V, Load step 50-100-50 % of max I_O , $di/dt = 1$ A/ μs , see Note 1		± 80		mV
t_{tr}	Load transient recovery time			20		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		0.8		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			13.6		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1$ A		190		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.2		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		70		μs
		$I_O = 0.1$ A		3.0		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \text{max } T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{OI}		1%		V_O

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


0.8 V/18 A Typical Characteristics

PMH 8318T


Efficiency

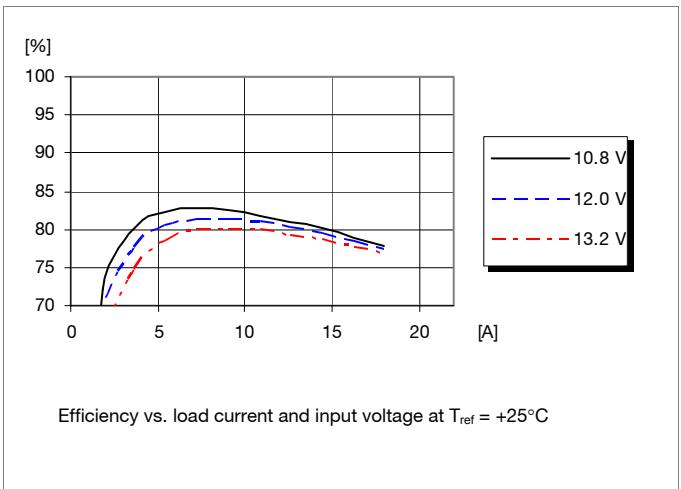Efficiency vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$


Power Dissipation

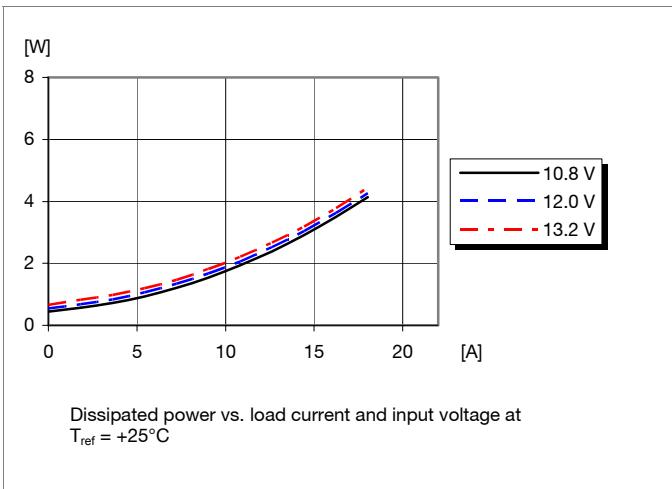Dissipated power vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$

Output Current Derating

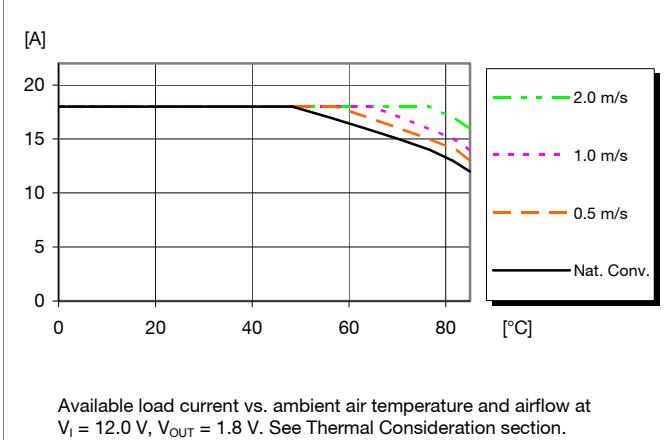Available load current vs. ambient air temperature and airflow at $V_i = 12.0 \text{ V}$, $V_{out} = 1.8 \text{ V}$. See Thermal Consideration section.

Output Characteristics

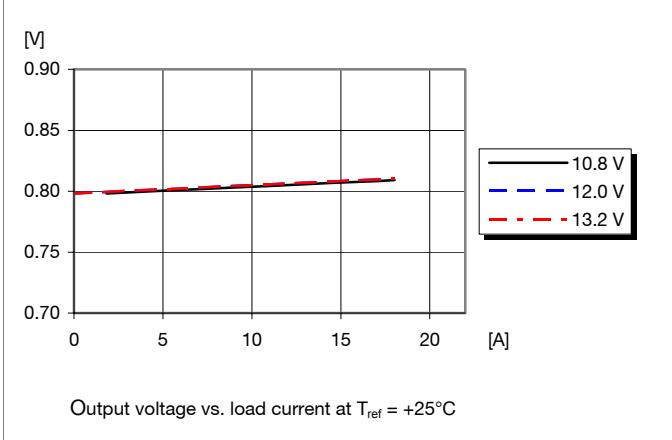
Output voltage vs. load current at $T_{ref} = +25^\circ\text{C}$

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

0.8 V/18 A Typical Characteristics

PMH 8318T


Start-up

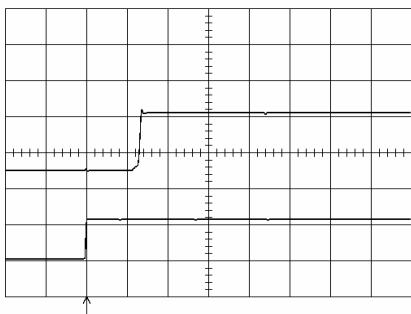

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div..


Shut-down

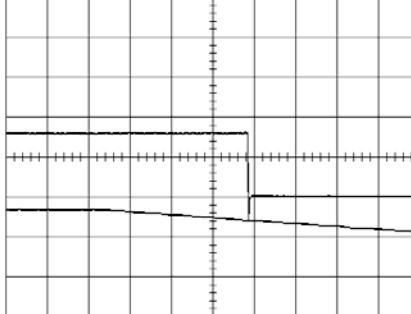

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div..


Output Ripple & Noise

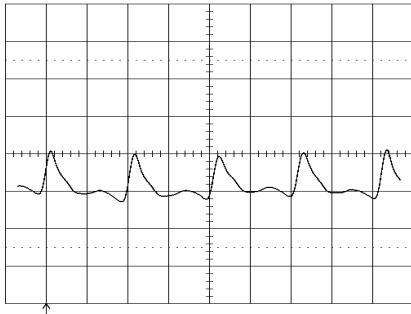

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

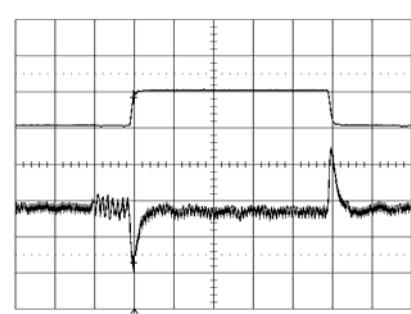

Output voltage response to load current step-change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.

Top trace: output voltage (50mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div..

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.0 V/18 A Electrical Specification

PMH 8318T

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V, $R_{adj} = 32.4$ k Ω , unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.





Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		10.8		13.2	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	8.8	9.2		V
V_{lon}	Turn-on input voltage	Increasing input voltage		9.7	10.4	V
C_I	Internal input capacitance			30		μF
P_O	Output power		0		18	W
η	Efficiency	50 % of max I_O		84.3		%
		max I_O		80.9		
P_d	Power Dissipation	max I_O		4.3	4.8	W
P_{il}	Input idling power	$I_O = 0$, $V_I = 12.0$ V		570		mW
P_{RC}	Input standby power	$V_I = 12.0$ V (turned off with INHIBIT)		60		mW
I_S	Static Input current	$V_I = 12.0$ V, max I_O		1.9		A
f_s	Switching frequency	0-100% of max I_O	200	250	300	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O	0.980	1.000	1.020	V
V_O	Output voltage tolerance band	10-100% of max I_O	0.970		1.030	V
	Idling voltage	$I_O = 0$		0.996		V
	Line regulation	max I_O		± 5		mV
	Load regulation	$V_I = 12.0$ V, 0-100% of max I_O		± 5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0$ V, Load step 50-100-50 % of max I_O , $di/dt = 1$ A/ μs , see Note 1		± 100		mV
t_{tr}	Load transient recovery time			20		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.2		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			14.0		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1$ A		250		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.5		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		80		μs
		$I_O = 0.1$ A		2.8		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, $\max I_O$, V_O		1%		V_O

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

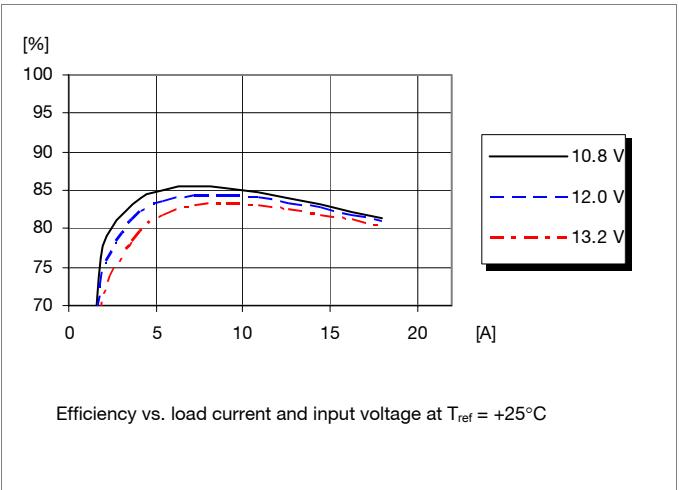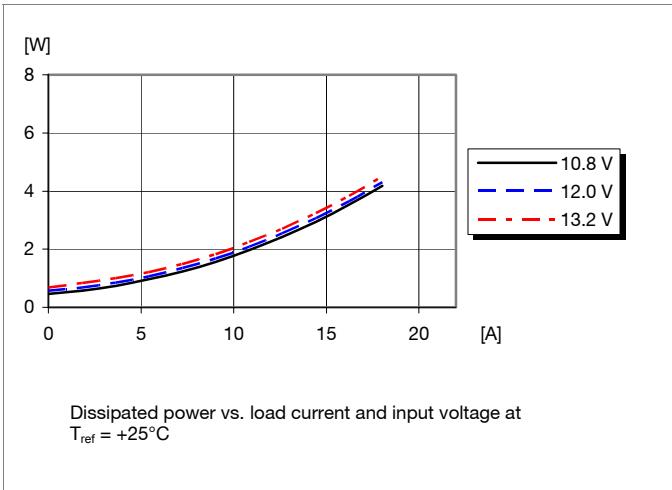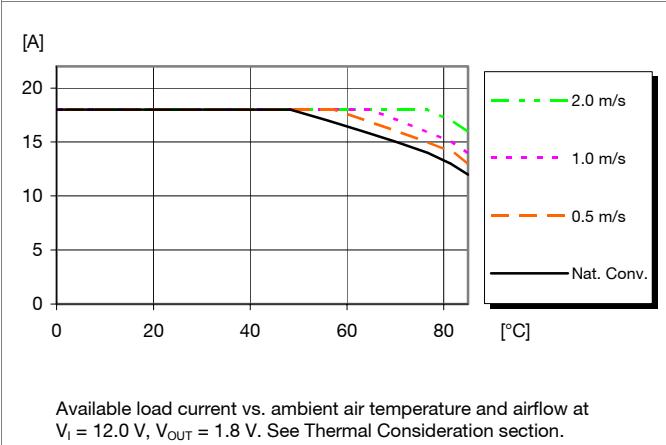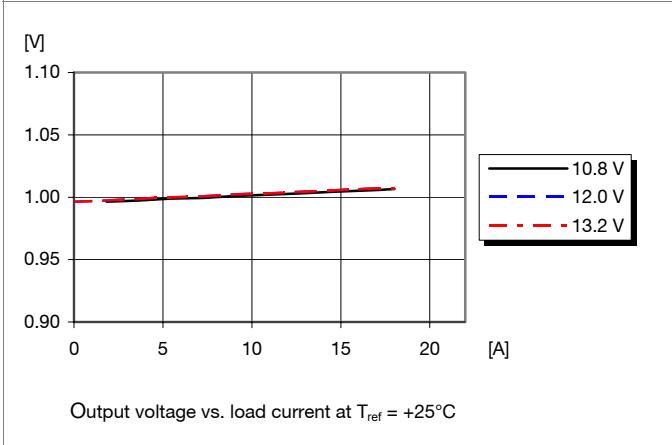
1.0 V/18 A Typical Characteristics**PMH 8318T****Efficiency**Efficiency vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$ **Power Dissipation**Dissipated power vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$ **Output Current Derating**Available load current vs. ambient air temperature and airflow at $V_i = 12.0 \text{ V}$, $V_{out} = 1.8 \text{ V}$. See Thermal Consideration section.**Output Characteristics**Output voltage vs. load current at $T_{ref} = +25^\circ\text{C}$

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.0 V/18 A Typical Characteristics

PMH 8318T


Start-up

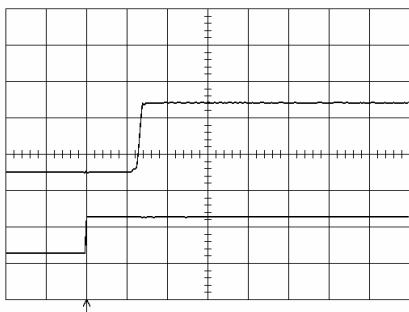

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div..


Shut-down

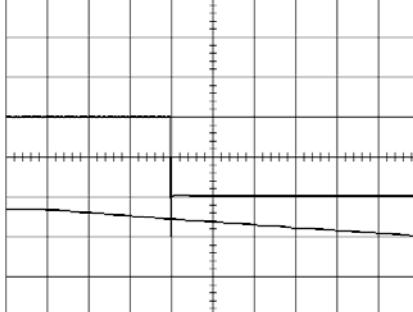

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div..


Output Ripple & Noise

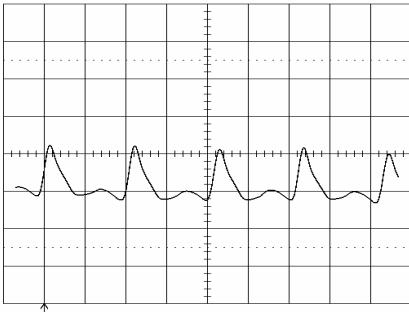

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

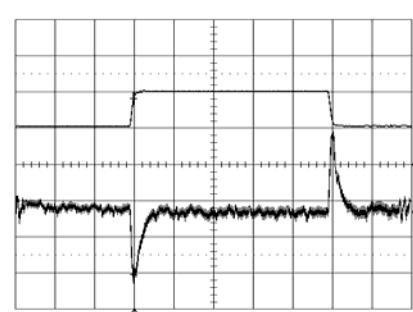

Output voltage response to load current step-change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.

Top trace: output voltage (50mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div..

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.2 V/18 A Electrical Specification

PMH 8318T

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 12.1\text{ k}\Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\text{max } I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		21.6	W	
η	Efficiency	50 % of max I_O	86.2		%	
		max I_O	83.0			
P_d	Power Dissipation	max I_O	4.5	5.0	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	610		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	2.2		A	
f_s	Switching frequency	0-100% of max I_O	200	250	300	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	1.176	1.200	1.224	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.164		1.236	V
	Idling voltage	$I_O = 0$		1.198		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±100		mV
t_{tr}	Load transient recovery time			20		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.6		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			14.8		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1\text{ A}$		320		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.6		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		90		μs
		$I_O = 0.1\text{ A}$		4.5		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \text{max } T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		1%		V_O

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


1.2 V/18 A Typical Characteristics

PMH 8318T


Efficiency

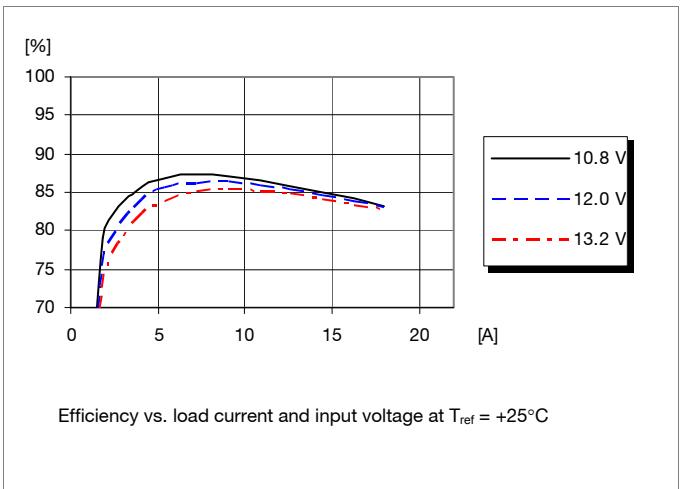


Power Dissipation

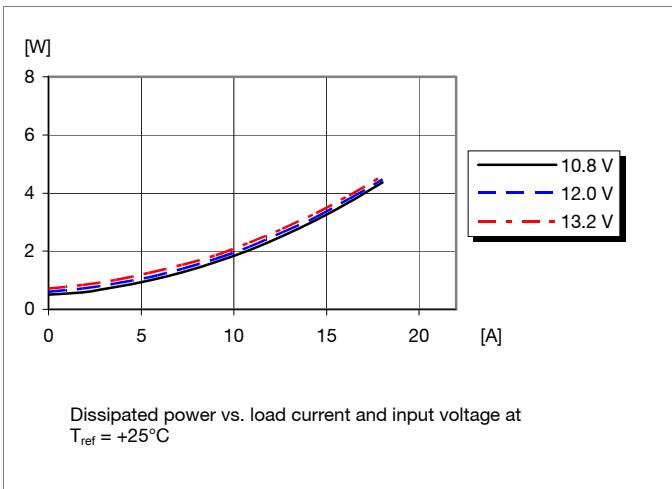

Output Current Derating

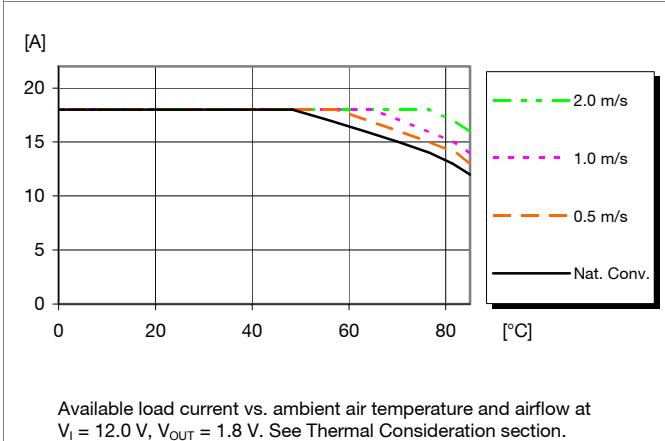

Output Characteristics

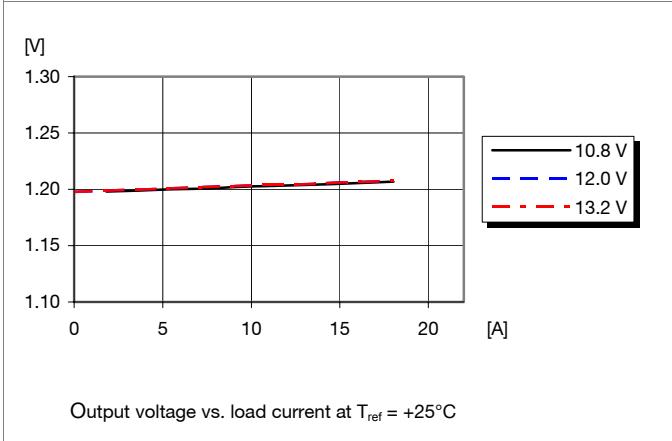


PMH 8000 series

POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.2 V/18 A Typical Characteristics

PMH 8318T


Start-up

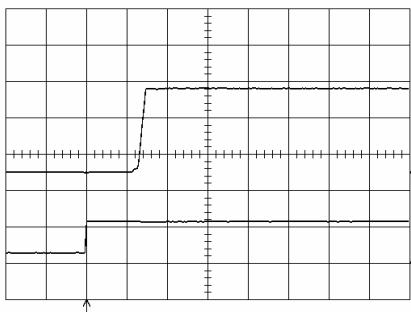

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

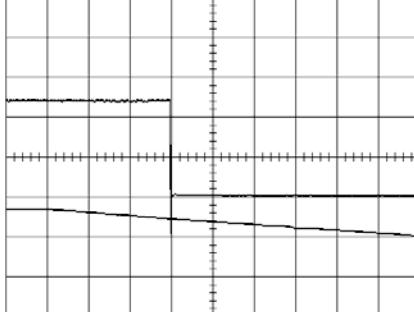

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

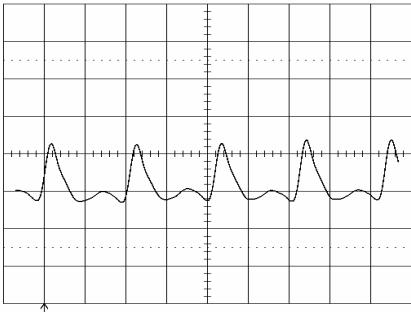

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

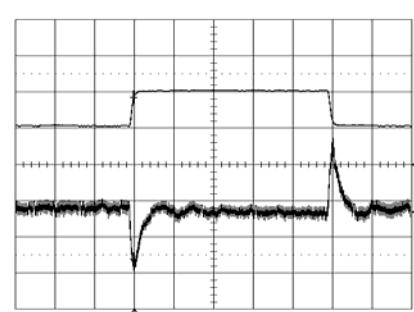

Output voltage response to load current step-change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0$ V.

Top trace: output voltage (50mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.5 V/18 A Electrical Specification

PMH 8318T

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 3.57\text{ k}\Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\text{max } I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		27	W	
η	Efficiency	50 % of max I_O	88.2		%	
		max I_O	85.3			
P_d	Power Dissipation	max I_O	4.7	5.2	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	500		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	2.6		A	
f_s	Switching frequency	0-100% of max I_O	200	250	300	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	1.470	1.500	1.530	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.455		1.545	V
	Idling voltage	$I_O = 0$		1.496		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±90		mV
t_{tr}	Load transient recovery time			20		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.8		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			14.6		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1\text{ A}$		480		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.8		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		90		μs
		$I_O = 0.1\text{ A}$		5.7		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \text{max } T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		1%		V_O


Note 1: Output filter according to Ripple & Noise section

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W


1.5 V/18 A Typical Characteristics

PMH 8318T


Efficiency

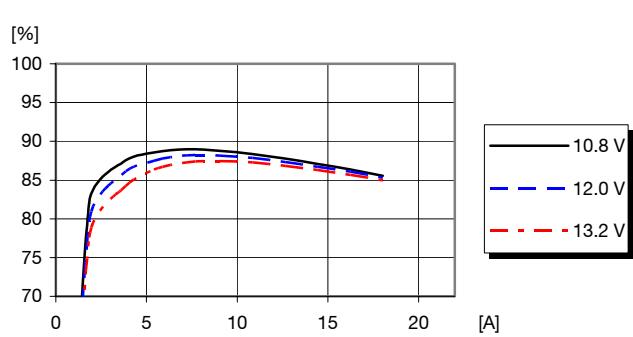Efficiency vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$


Power Dissipation

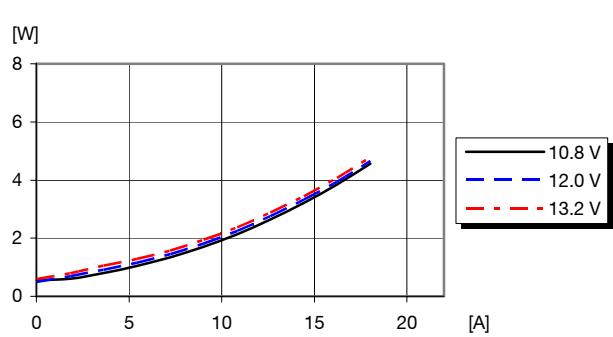Dissipated power vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$

Output Current Derating

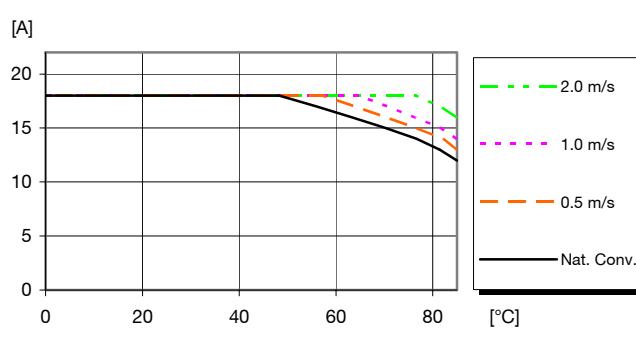Available load current vs. ambient air temperature and airflow at $V_i = 12.0 \text{ V}$, $V_{out} = 1.8 \text{ V}$. See Thermal Consideration section.

Output Characteristics

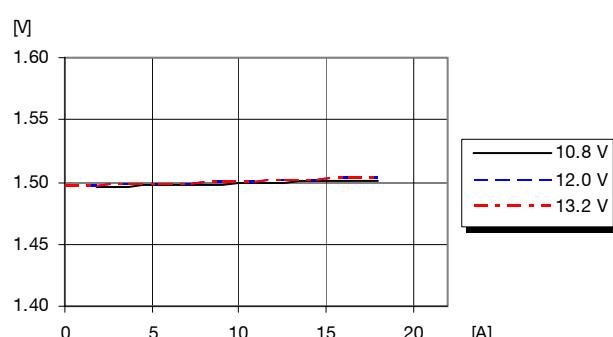
Output voltage vs. load current at $T_{ref} = +25^\circ\text{C}$

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.5 V/18 A Typical Characteristics

PMH 8318T


Start-up

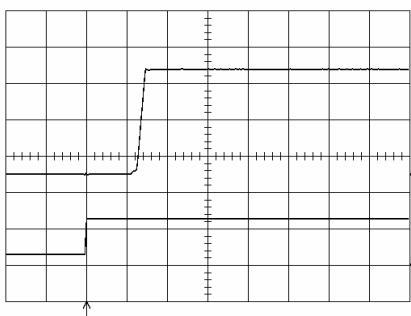

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

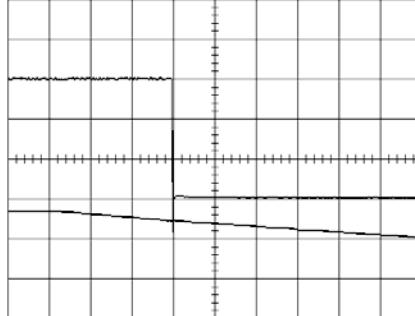

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

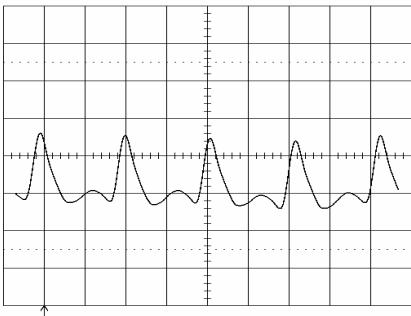

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V. Time scale: 2 $\mu\text{s}/\text{div.}$

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

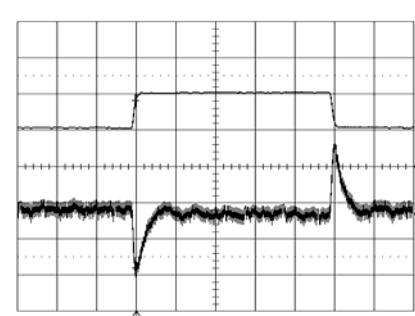

Output voltage response to load current step-change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0$ V.

Top trace: output voltage (50mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div..

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.8 V/18 A Electrical Specification

PMH 8318T

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 130\ \Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		32.4	W	
η	Efficiency	50 % of max I_O	89.5		%	
		max I_O	86.9			
P_d	Power Dissipation	max I_O	4.9	5.4	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	710		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	3.1		A	
f_s	Switching frequency	0-100% of max I_O	200	250	300	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	1.764	1.800	1.836	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.746		1.854	V
	Idling voltage	$I_O = 0$		1.795		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±100		mV
t_{tr}	Load transient recovery time			20		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		2.1		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			15.0		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		50		μs
		$I_O = 1\text{ A}$		640		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.9		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		100		μs
		$I_O = 0.1\text{ A}$		5.1		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}		1%		V_O

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


1.8 V/18 A Typical Characteristics

PMH 8318T


Efficiency

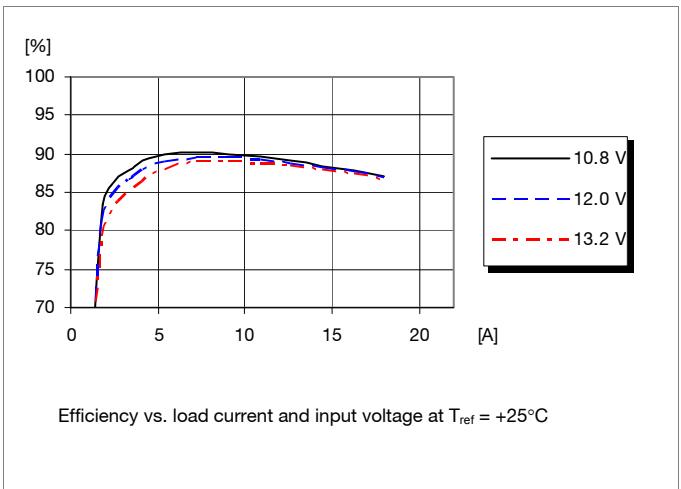


Power Dissipation

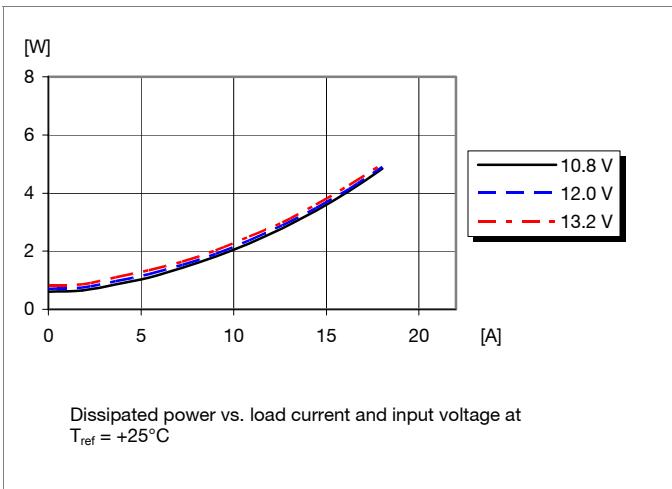

Output Current Derating

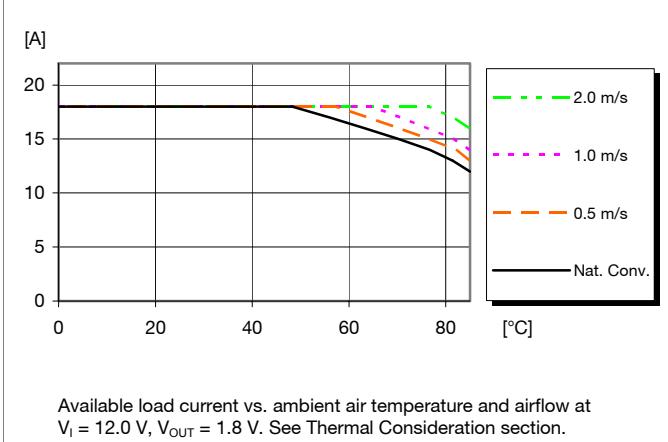

Output Characteristics

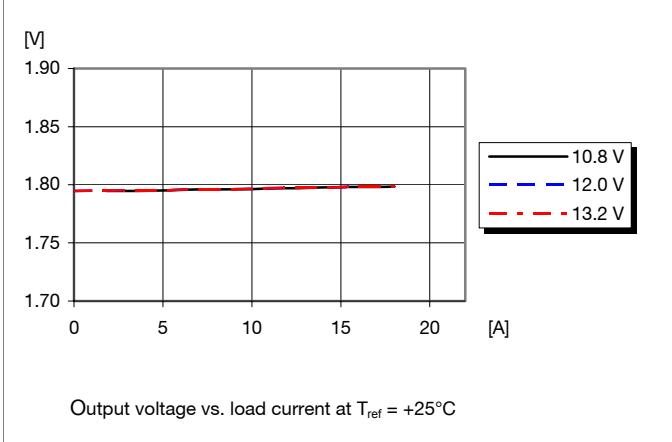


PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.8 V/18 A Typical Characteristics

PMH 8318T


Start-up

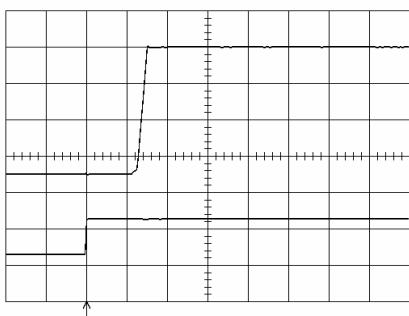

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

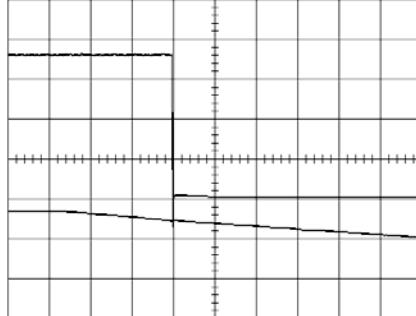

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

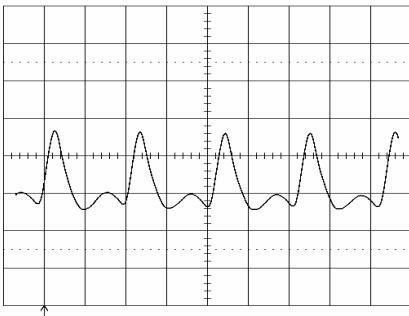

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

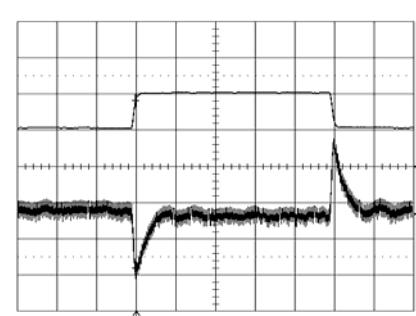

Output voltage response to load current step-change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0$ V.

Top trace: output voltage (50mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.2 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V, $R_{adj} = \text{open}$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		21.6	W	
η	Efficiency	50 % of max I_O	83.8		%	
		max I_O	79.9			
P_d	Power Dissipation	max I_O	5.5	6.0	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0$ V	670		mW	
P_{RC}	Input standby power	$V_I = 12.0$ V (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0$ V, max I_O	2.3		A	
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz

V_{OI}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O	1.176	1.200	1.224	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.164		1.236	V
	Idling voltage	$I_O = 0$		1.200		V
	Line regulation	max I_O		± 5		mV
	Load regulation	$V_I = 12.0$ V, 0-100% of max I_O		± 5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0$ V, Load step 50-100-50 % of max I_O , $di/dt = 1$ A/ μs , see Note 1		± 60		mV
t_{tr}	Load transient recovery time			30		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.1		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			13.2		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1$ A		500		μs
t_{inh}	INHIBIT start-up time	Max I_O		12.2		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		90		μs
		$I_O = 0.1$ A		4.4		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \text{max } T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{OI}	$V_O < 2.5$; 32		mVp-p	$\% V_O$
			$V_O > 2.5$; 1			





Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006

POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB

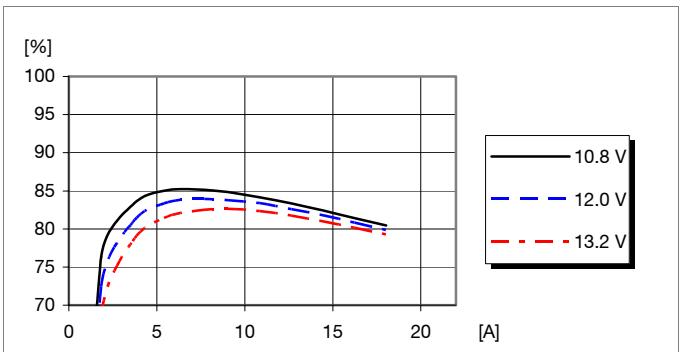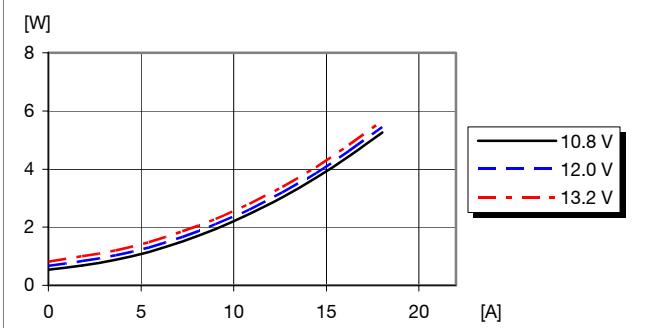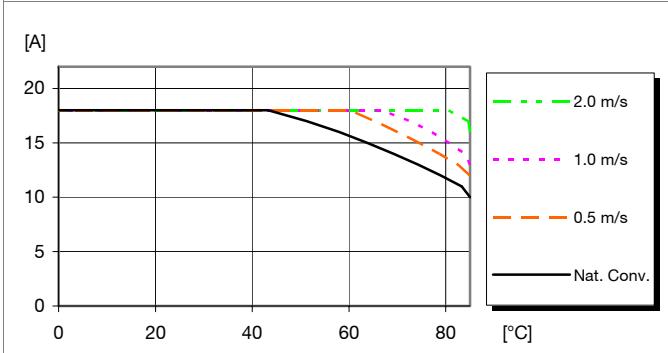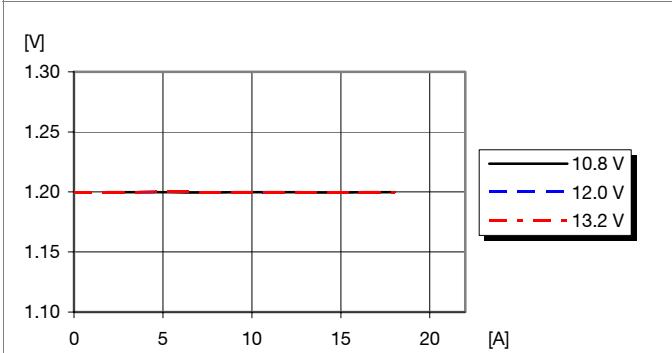
1.2 V/18 A Typical Characteristics**PMH 8918L****Efficiency**Efficiency vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$ **Power Dissipation**Dissipated power vs. load current and input voltage at $T_{ref} = +25^\circ\text{C}$ **Output Current Derating**Available load current vs. ambient air temperature and airflow at $V_1 = 12.0 \text{ V}$, $V_{OUT} = 5.0 \text{ V}$. See Thermal Consideration section.**Output Characteristics**Output voltage vs. load current at $T_{ref} = +25^\circ\text{C}$

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.2 V/18 A Typical Characteristics

PMH 8918L


Start-up

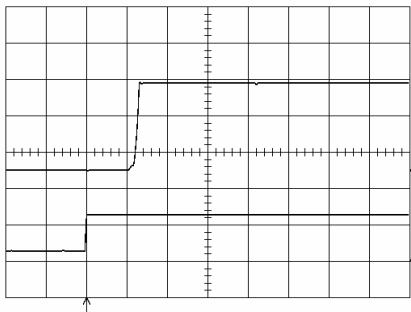

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

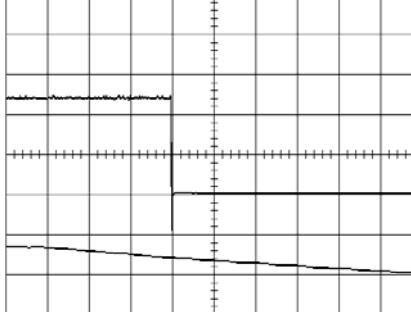

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (1.0 V/div.).
Bottom trace: input voltage (2 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

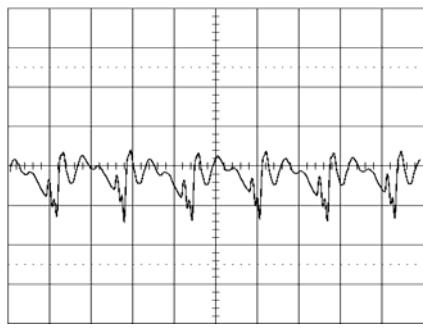

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

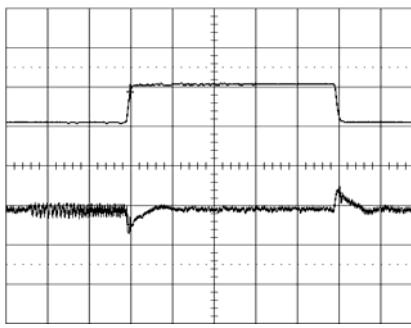

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0$ V.

Top trace: output voltage (100mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.5 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 24.3\text{ k}\Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics		Conditions	min	typ	max	Unit
V_I	Input voltage range		10.8		13.2	V
V_{loff}	Turn-off input voltage	Decreasing input voltage	8.8	9.2		V
V_{lon}	Turn-on input voltage	Increasing input voltage		9.7	10.4	V
C_I	Internal input capacitance			30		μF
P_O	Output power		0		27	W
η	Efficiency	50 % of max I_O		86.4		%
		max I_O		83.1		
P_d	Power Dissipation	max I_O		5.5	6.0	W
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$		700		mW
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)		60		mW
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O		2.7		A
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	1.470	1.500	1.530	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.455		1.545	V
	Idling voltage	$I_O = 0$		1.501		V
	Line regulation	max I_O		± 5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		± 5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		± 60		mV
t_{tr}	Load transient recovery time			30		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.4		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			13.9		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		40		μs
		$I_O = 1\text{ A}$		650		μs
t_{inh}	INHIBIT start-up time	Max I_O		12.5		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		90		μs
		$I_O = 0.1\text{ A}$		5.6		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}	$V_O \leq 2.5$; 32			mVp-p
				$V_O > 2.5$; 1		% V_O

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


1.5 V/18 A Typical Characteristics

PMH 8918L


Efficiency

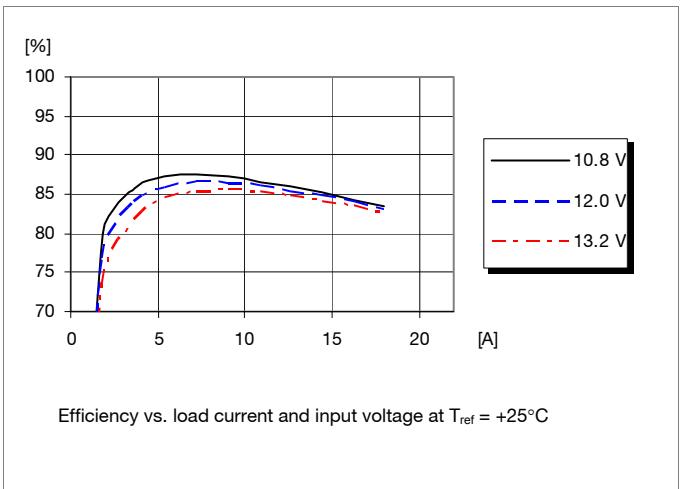


Power Dissipation

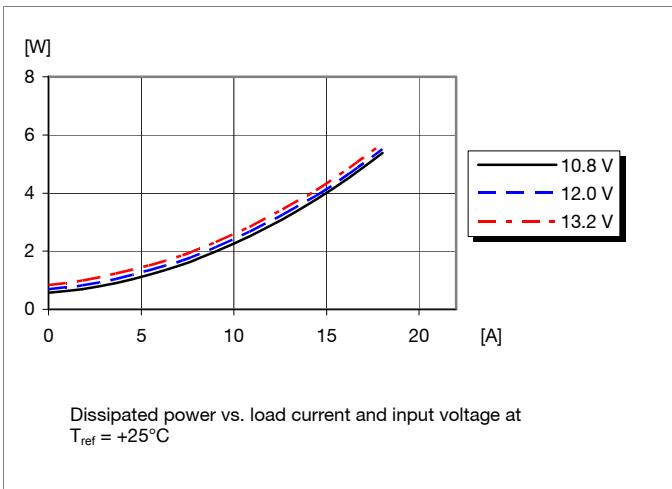


Output Current Derating

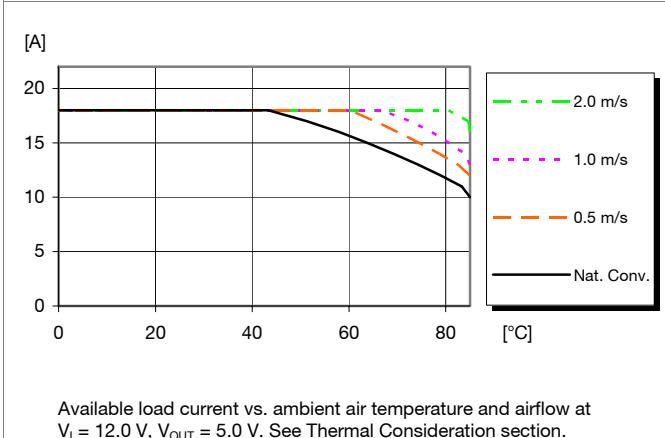

Output Characteristics

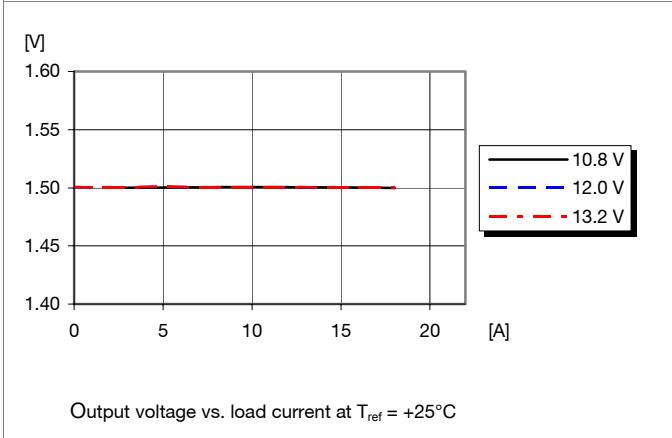


PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

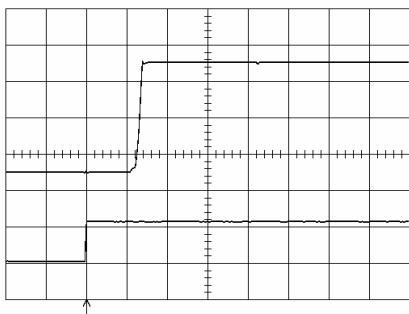1.5 V/18 A Typical Characteristics**PMH 8918L****Start-up**


Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.

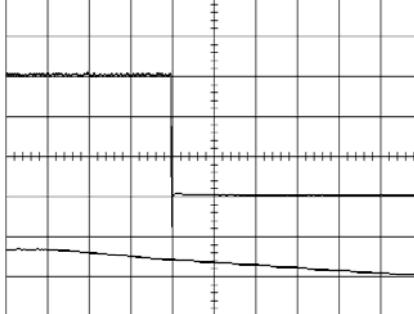Shut-down


Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.

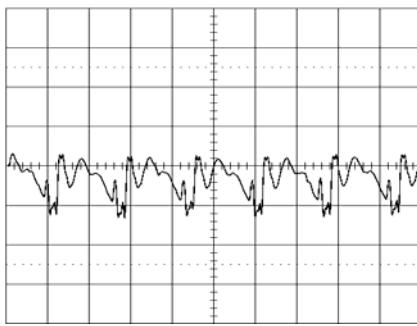Output Ripple & Noise

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

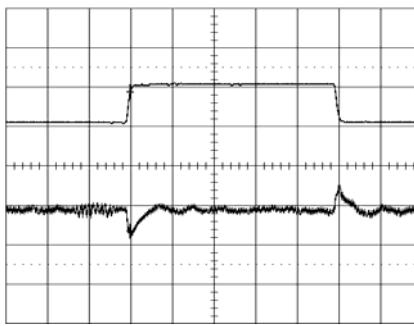Output Load Transient Response

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.

Top trace: output voltage (100mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

1.8 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V, $R_{adj} = 11.5$ k Ω , unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O , unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		32.4	W	
η	Efficiency	50 % of max I_O	88.2		%	
		max I_O	85.1			
P_d	Power Dissipation	max I_O	5.7	6.2	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0$ V	740		mW	
P_{RC}	Input standby power	$V_I = 12.0$ V (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0$ V, max I_O	3.2		A	
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz


V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0$ V, max I_O	1.764	1.800	1.836	V
V_O	Output voltage tolerance band	10-100% of max I_O	1.746		1.854	V
	Idling voltage	$I_O = 0$		1.801		V
	Line regulation	max I_O		± 5		mV
	Load regulation	$V_I = 12.0$ V, 0-100% of max I_O		± 5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0$ V, Load step 50-100-50 % of max I_O , $di/dt = 1$ A/ μs , see Note 1		± 70		mV
t_{tr}	Load transient recovery time			30		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.5		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			13.6		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		50		μs
		$I_O = 1$ A		780		μs
t_{inh}	INHIBIT start-up time	Max I_O		12.8		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		100		μs
		$I_O = 0.1$ A		6.0		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}	$V_O \leq 2.5$; 32		mVp-p	% V_O
				$V_O > 2.5$; 1		

Note 1: Output filter according to Ripple & Noise section


1.8 V/18 A Typical Characteristics

PMH 8918L


Efficiency

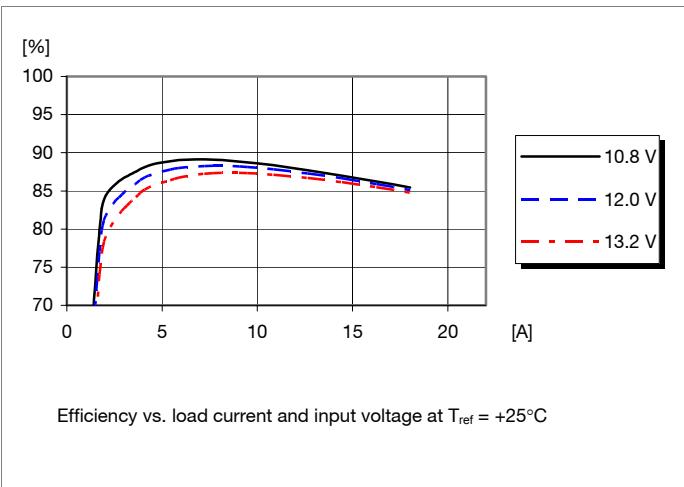


Power Dissipation

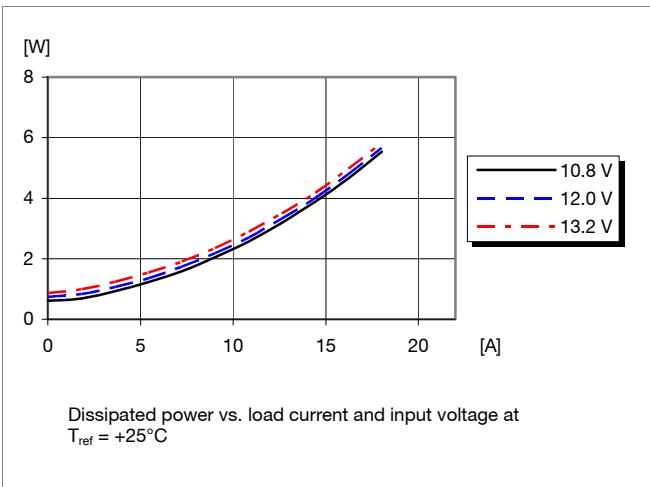

Output Current Derating

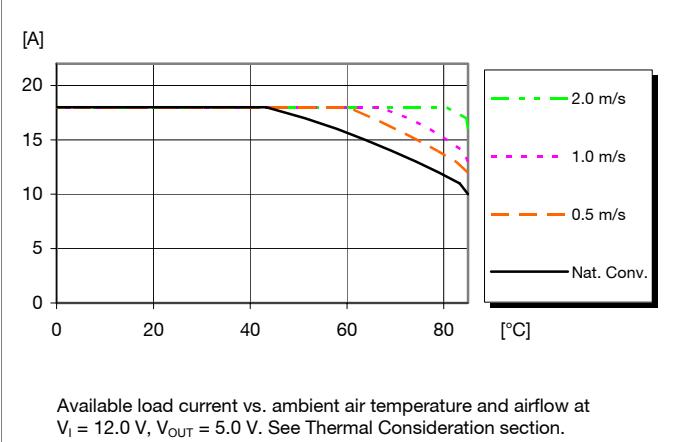

Output Characteristics

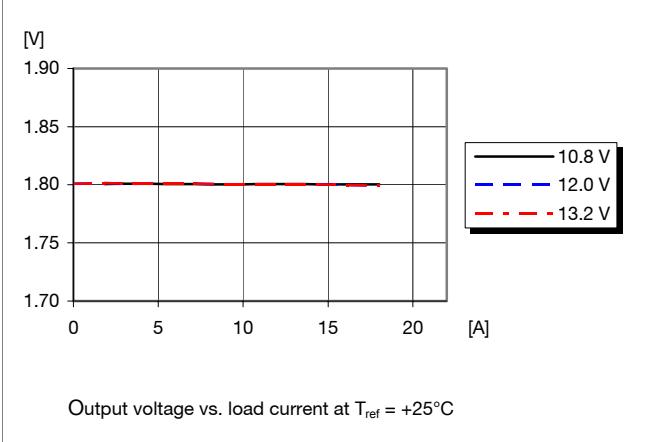


PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

1.8 V/18 A Typical Characteristics

PMH 8918L


Start-up

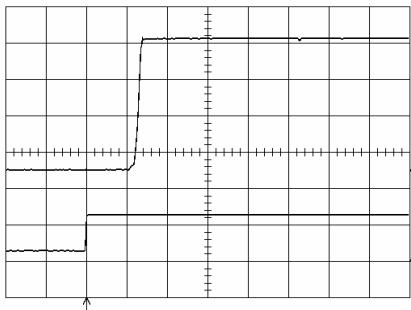

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

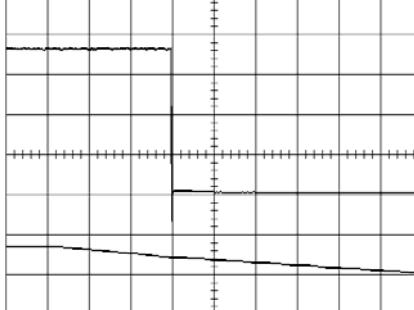

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (0.5 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

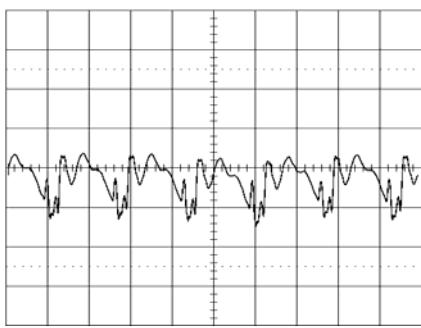

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

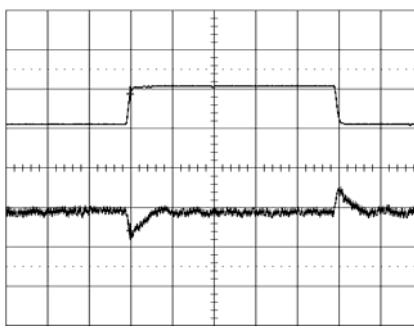

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.

Top trace: output voltage (100mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

2.5 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 4.32\text{ k}\Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		45	W	
η	Efficiency	50 % of max I_O	90.7		%	
		max I_O	88.3			
P_d	Power Dissipation	max I_O	6.0	6.5	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	830		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	4.3		A	
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	2.450	2.500	2.550	V
V_O	Output voltage tolerance band	10-100% of max I_O	2.425		2.575	V
	Idling voltage	$I_O = 0$		2.501		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±80		mV
t_{tr}	Load transient recovery time			40		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		1.8		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			14.1		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		60		μs
		$I_O = 1\text{ A}$		1130		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.2		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		110		μs
		$I_O = 0.1\text{ A}$		7.2		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}	$V_O \leq 2.5$; 32		mVp-p	% V_O
				$V_O > 2.5$; 1		

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


2.5 V/18 A Typical Characteristics

PMH 8918L


Efficiency

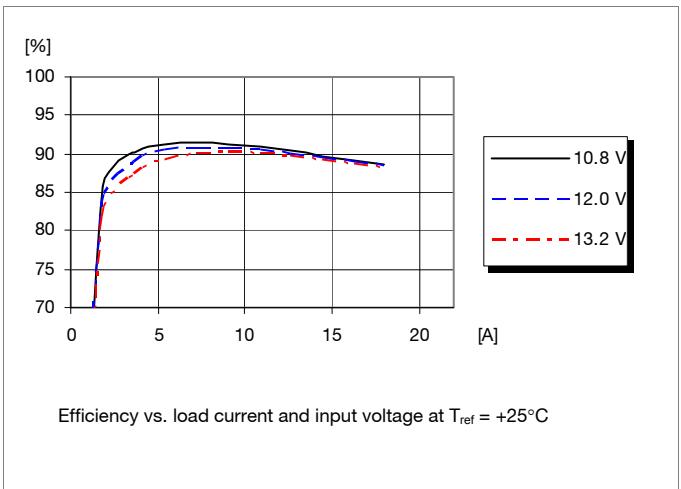


Power Dissipation

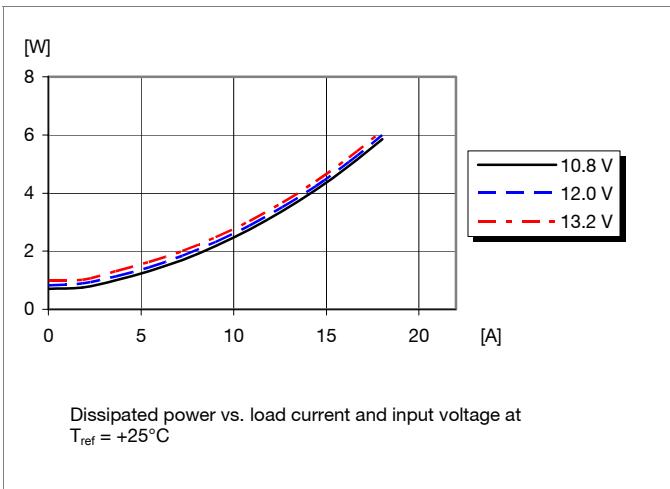


Output Current Derating

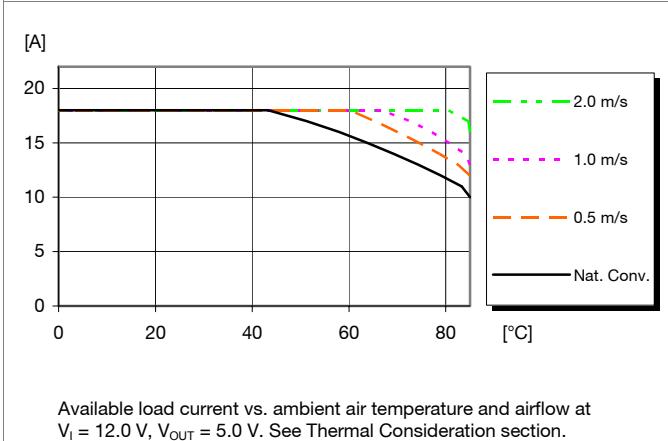

Output Characteristics

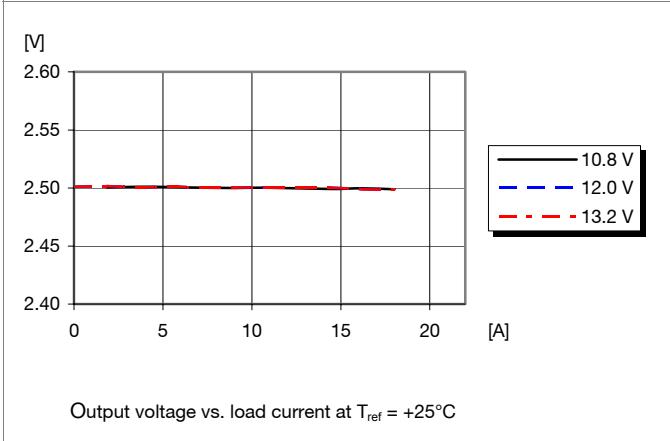


PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

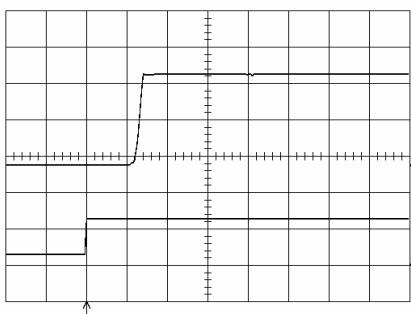2.5 V/18 A Typical Characteristics**PMH 8918L****Start-up**


Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (1.0 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.

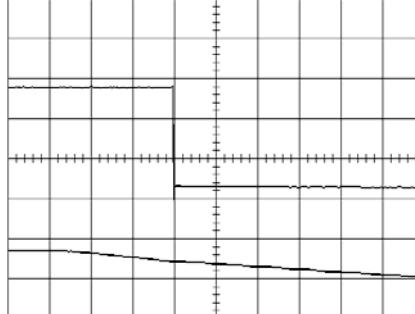Shut-down


Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (2.0 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.

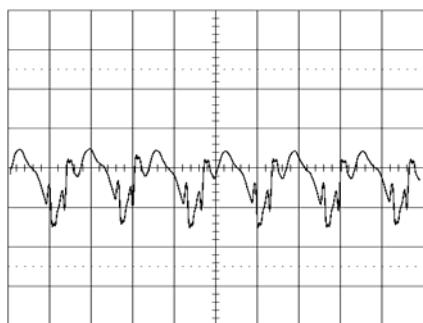Output Ripple & Noise

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

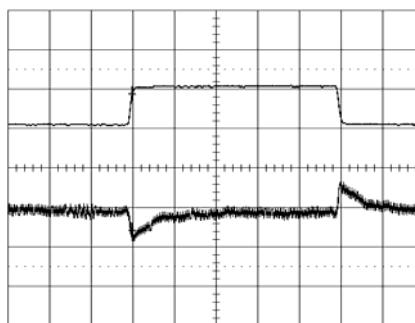Output Load Transient Response

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.

Top trace: output voltage (100mV/div.).
Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

3.3 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 2.00\text{ k}\Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		59.4	W	
η	Efficiency	50 % of max I_O	92.4		%	
		max I_O	90.3			
P_d	Power Dissipation	max I_O	6.4	6.9	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	960		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	5.5		A	
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	3.234	3.300	3.366	V
V_O	Output voltage tolerance band	10-100% of max I_O	3.201		3.399	V
	Idling voltage	$I_O = 0$		3.300		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±80		mV
t_{tr}	Load transient recovery time			40		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		3.8		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			16.5		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		70		μs
		$I_O = 1\text{ A}$		1510		μs
t_{inh}	INHIBIT start-up time	Max I_O		13.7		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		120		μs
		$I_O = 0.1\text{ A}$		9.6		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}	$V_O \leq 2.5$; 32		mVp-p	% V_O
				$V_O > 2.5$; 1		

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


3.3 V/18 A Typical Characteristics

PMH 8918L


Efficiency

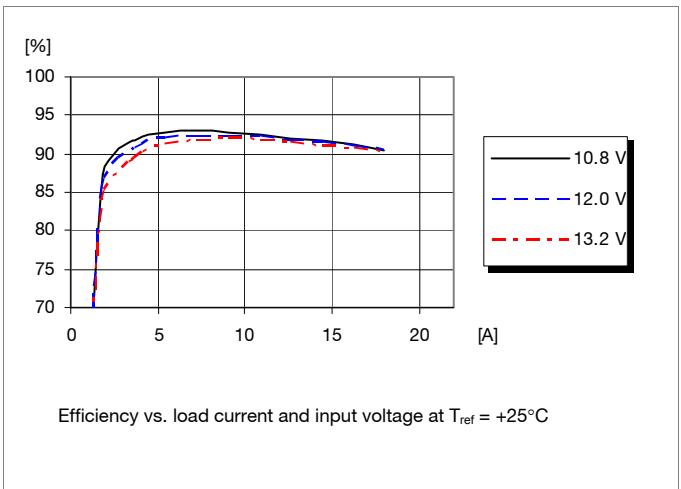


Power Dissipation

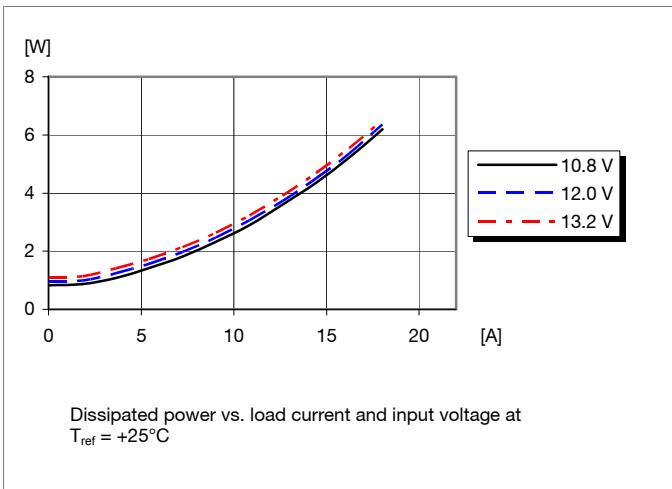

Output Current Derating

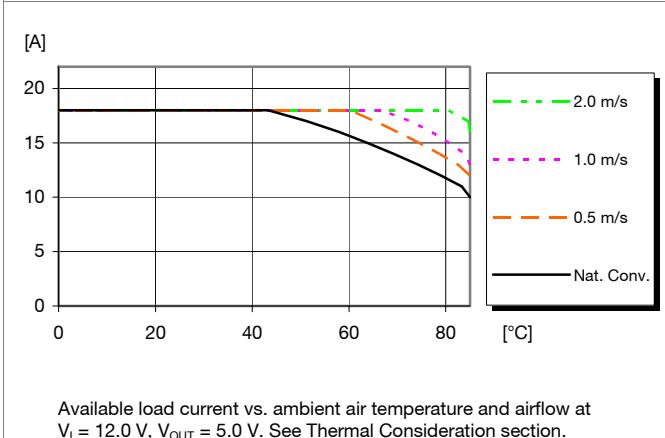

Output Characteristics

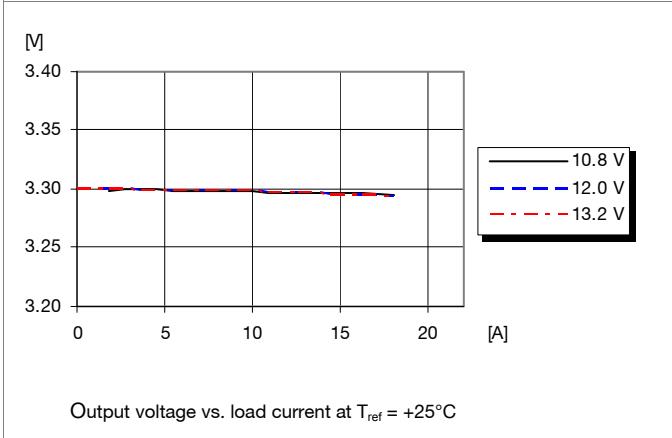


PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

3.3 V/18 A Typical Characteristics

PMH 8918L


Start-up

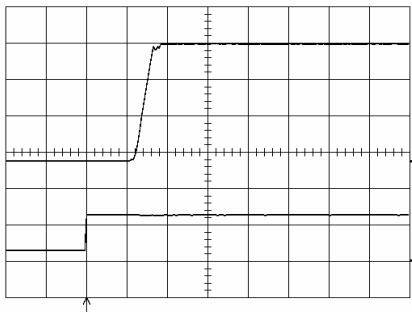

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (1.0 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

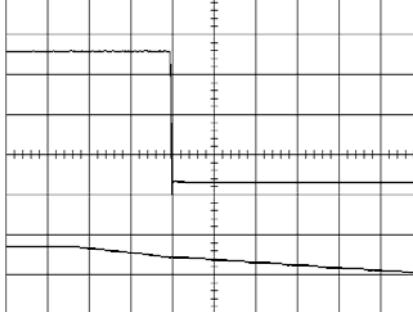

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V.

Top trace: output voltage (1.0 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

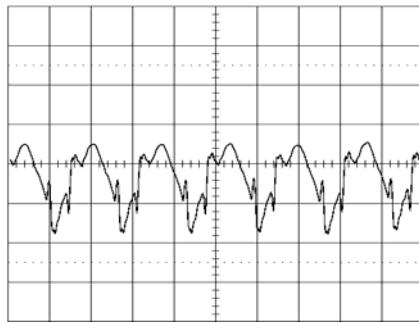

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18$ A resistive load,
 $V_i = 12.0$ V. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

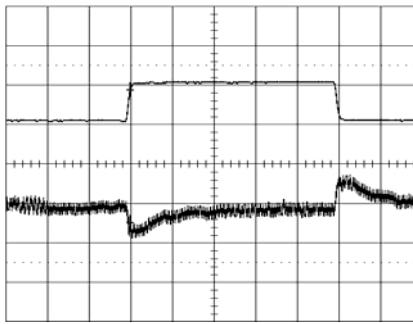

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0$ V.

Top trace: output voltage (100mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

5.0 V/18 A Electrical Specification

PMH 8918L

 $T_{ref} = -40$ to $+85^\circ\text{C}$, $V_I = 10.8$ to 13.2 V , $R_{adj} = 280\ \Omega$, unless otherwise specified under Conditions.Typical values given at: $T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, $\max I_O$, unless otherwise specified under Conditions.Additional $C_{in} = 560\text{ }\mu\text{F}$ and $C_{out} = 330\text{ }\mu\text{F}$. See Operating Information section for selection of capacitor types.

Connect the sense pin, where available, to the output pin.

Characteristics	Conditions	min	typ	max	Unit	
V_I	Input voltage range	10.8		13.2	V	
V_{loff}	Turn-off input voltage	8.8	9.2		V	
V_{lon}	Turn-on input voltage		9.7	10.4	V	
C_I	Internal input capacitance		30		μF	
P_O	Output power	0		90	W	
η	Efficiency	50 % of max I_O	94.3		%	
		max I_O	92.8			
P_d	Power Dissipation	max I_O	7.0	7.5	W	
P_{li}	Input idling power	$I_O = 0$, $V_I = 12.0\text{ V}$	1150		mW	
P_{RC}	Input standby power	$V_I = 12.0\text{ V}$ (turned off with INHIBIT)	60		mW	
I_S	Static Input current	$V_I = 12.0\text{ V}$, max I_O	8.1		A	
f_s	Switching frequency	0-100% of max I_O	260	320	380	kHz

V_{Oi}	Output voltage initial setting and accuracy	$T_{ref} = +25^\circ\text{C}$, $V_I = 12.0\text{ V}$, max I_O	4.900	5.000	5.100	V
V_O	Output voltage tolerance band	10-100% of max I_O	4.850		5.150	V
	Idling voltage	$I_O = 0$		5.009		V
	Line regulation	max I_O		±5		mV
	Load regulation	$V_I = 12.0\text{ V}$, 0-100% of max I_O		±5		mV
V_{tr}	Load transient voltage deviation	$V_I = 12.0\text{ V}$, Load step 50-100-50 % of max I_O , $di/dt = 1\text{ A}/\mu\text{s}$, see Note 1		±70		mV
t_{tr}	Load transient recovery time			40		μs
t_r	Ramp-up time (from 10-90 % of V_O)	max I_O		3.0		ms
t_s	Start-up time (from V_I connection to 90% of V_O)			15.6		ms
t_f	Vin shutdown fall time. (From V_I off to 10% of V_O)	Max I_O		110		μs
		$I_O = 1\text{ A}$		2380		μs
t_{inh}	INHIBIT start-up time	Max I_O		14.4		ms
	INHIBIT shutdown fall time (From INHIBIT off to 10% of V_O)	Max I_O		160		μs
		$I_O = 0.1\text{ A}$		14.4		ms
I_O	Output current		0		18	A
I_{lim}	Current limit threshold	$T_{ref} < \max T_{ref}$		30		A
V_{Oac}	Output ripple & noise	See ripple & noise section, max I_O , V_{Oi}	$V_O \leq 2.5$; 32		mVp-p	% V_O
				$V_O > 2.5$; 1		

Note 1: Output filter according to Ripple & Noise section

PMH 8000 series

EN/LZT 146 324 R1B April 2006


POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

© Ericsson Power Modules AB


5.0 V/18 A Typical Characteristics

PMH 8918L


Efficiency

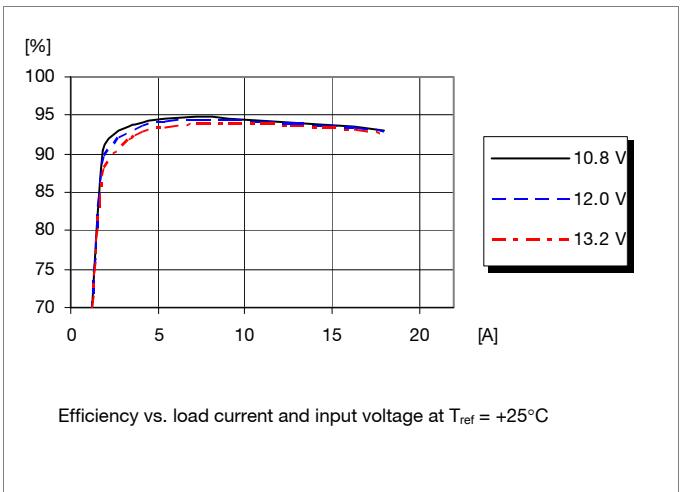


Power Dissipation

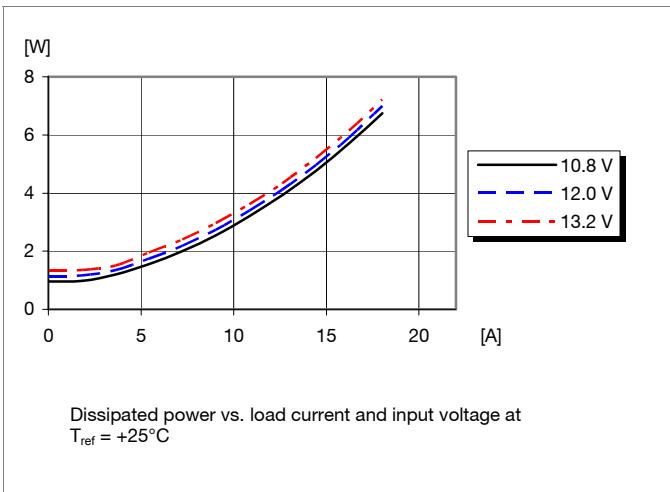

Output Current Derating

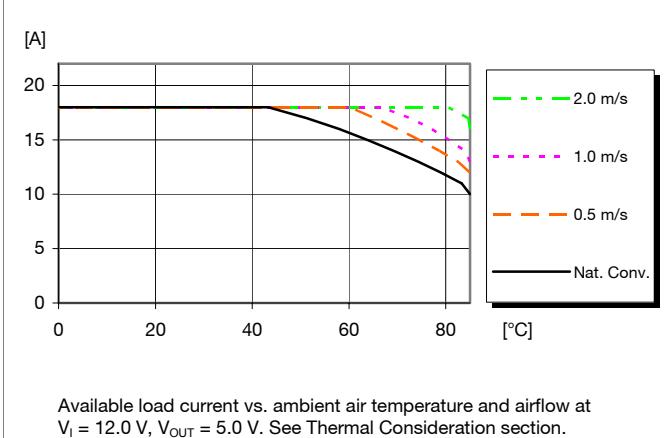

Output Characteristics

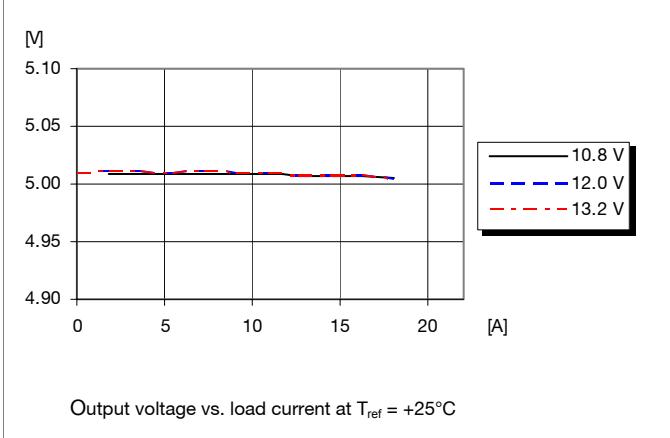


PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

5.0 V/18 A Typical Characteristics

PMH 8918L


Start-up

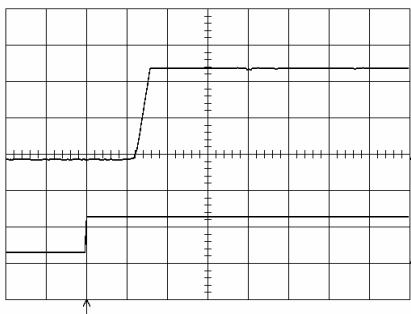

Start-up enabled by connecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (2.0 V/div.).
Bottom trace: input voltage (10 V/div.).
Time scale: 10 ms/div.


Shut-down

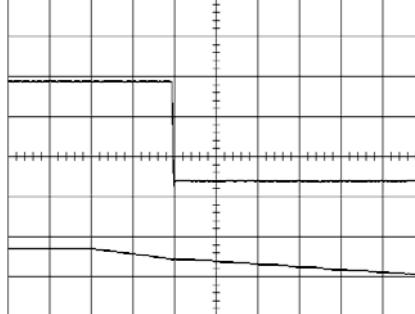

Shut-down enabled by disconnecting V_i at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$.

Top trace: output voltage (2.0 V/div.). Bottom trace: input voltage (10 V/div.).
Time scale: 5.0 ms/div.


Output Ripple & Noise

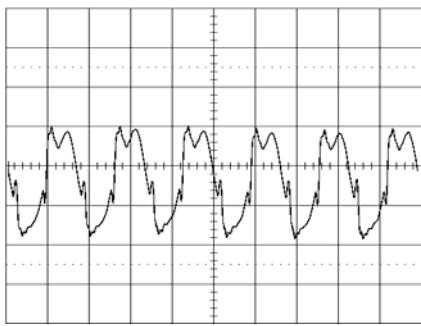

Output voltage ripple (20mV/div.) at:
 $T_{ref} = +25^\circ\text{C}$, $I_o = 18 \text{ A}$ resistive load,
 $V_i = 12.0 \text{ V}$. Time scale: 2 $\mu\text{s}/\text{div}$.

See the filter in the Output ripple and noise section (EMC Specification).

Output Load Transient Response

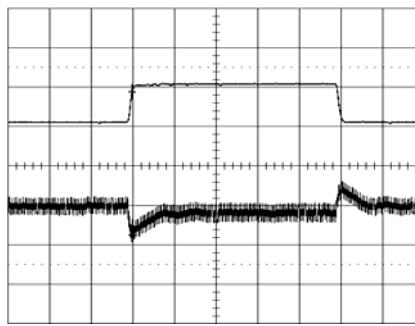

Output voltage response to load current step- change (9-18-9 A) at:
 $T_{ref} = +25^\circ\text{C}$, $V_i = 12.0 \text{ V}$.


Top trace: output voltage (100mV/div.). Bottom trace: load current (10 A/div.).
Time scale: 0.1 ms/div.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--


EMC Specification

Conducted EMI measured according to test set-up.
The fundamental switching frequency is 320 kHz for PMH 8918L @ $V_i = 12$ V, max I_o and 250 kHz for PMH 8318T @ $V_i = 12$ V, max I_o .

Conducted EMI Input terminal value (typ)

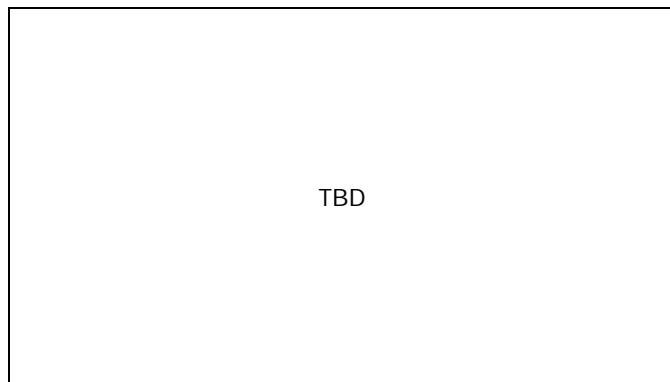

EMI without filter

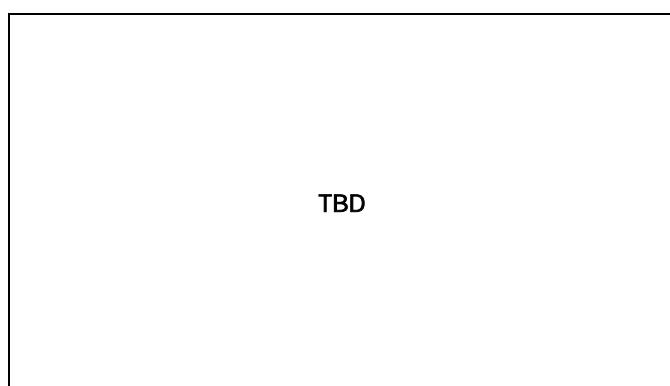

Test set-up


Layout recommendation

The radiated EMI performance of the DC/DC regulator will depend on the PCB layout and ground layer design. It is also important to consider the stand-off of the DC/DC regulator. If a ground layer is used, it should be connected to the output of the DC/DC regulator and the equipment ground or chassis.

A ground layer will increase the stray capacitance in the PCB and improve the high frequency EMC performance.

Output ripple and noise

Output ripple and noise measured according to figure below. See Design Note 022 for detailed information.

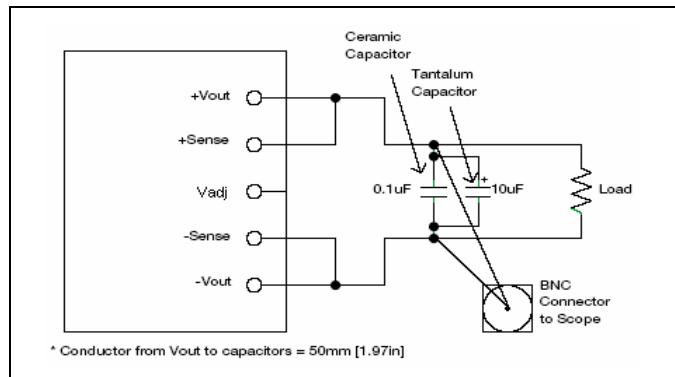

Operating information

Extended information for POLA products is found in Application Note POLA.


Input Voltage

The input voltage range 10.8 to 13.2 Vdc makes the product easy to use in intermediate bus applications when powered by a regulated bus converter.

Turn-off Input Voltage

The DC/DC regulators monitor the input voltage and will turn on and turn off at predetermined levels. The minimum hysteresis between turn on and turn off input voltage is 50mV.

Remote Control (RC) Inhibit



The products are fitted with a remote control function referenced to the primary negative input connection (- In), positive logic. The INHIBIT function allows the regulator to be turned on/off by an external device like a semiconductor or mechanical switch. The INHIBIT pin has an internal pull up resistor to + In.

The regulator will turn on when the input voltage is applied with the INHIBIT pin open. Turn off is achieved by connecting the INHIBIT pin to the - In. To ensure safe turn off, the voltage difference between INHIBIT pin and the - In pin shall be less than 0.6V. The regulator will restart automatically when this connection is opened.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

External Capacitors

Input capacitors:

The recommended input capacitors are determined by the 560 μ F minimum capacitance and 800 mArms minimum ripple current rating.

Output capacitors (optional):

The recommended output capacitance of 330 μ F will allow the module to meet its transient response specification as defined in the electrical specification.

When using one or more non-ceramic capacitors, the calculated equivalent ESR should be no lower than 4 m Ω (7m Ω using the manufacturer's maximum ESR for a single capacitor).

Input And Output Impedance

The impedance of both the input source and the load will interact with the impedance of the DC/DC regulator. It is important that the input source has low characteristic impedance. The regulators are designed for stable operation without external capacitors connected to the input or output. The performance in some applications can be enhanced by addition of external capacitance as described under External Decoupling Capacitors. If the input voltage source contains significant inductance, the addition of a 100 μ F capacitor across the input of the regulator will ensure stable operation. The capacitor is not required when powering the DC/DC regulator from an input source with an inductance below 10 μ H.

External Decoupling Capacitors

When powering loads with significant dynamic current requirements, the voltage regulation at the point of load can be improved by addition of decoupling capacitors at the load. The most effective technique is to locate low ESR ceramic and electrolytic capacitors as close to the load as possible, using several parallel capacitors to lower the effective ESR. The ceramic capacitors will handle high-frequency dynamic load changes while the electrolytic capacitors are used to handle low frequency dynamic load changes. Ceramic capacitors will also reduce any high frequency noise at the load.

It is equally important to use low resistance and low inductance PCB layouts and cabling.


External decoupling capacitors will become part of the control loop of the DC/DC regulator and may affect the stability margins. As a "rule of thumb", 100 μ F/A of output current can be added without any additional analysis. The ESR of the capacitors is a very important parameter. Power Modules guarantee stable operation with a verified ESR value of >10 m Ω across the output connections.

For further information please contact your local Ericsson Power Modules representative.

Output Voltage Adjust (V_{adj})

The DC/DC regulators have an Output Voltage Adjust pin (V_{adj}). This pin can be used to adjust the output voltage above or below Output voltage initial setting.

To increase or decrease the voltage the resistor should be connected between the V_{adj} pin and GND pin. The resistor value of the Output voltage adjust function is according to information given under the Output section for the respective product.

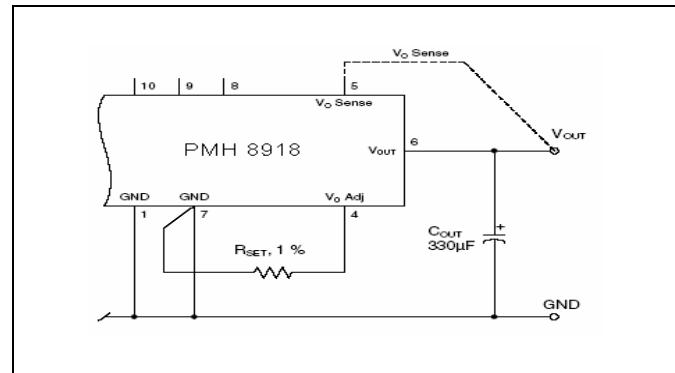

Parallel Operation

Two regulators may be paralleled for redundancy if the total power is equal or less than P_o max. It is not recommended to parallel the regulators without using external current sharing circuits.

Remote Sense

The DC/DC regulators have remote sense that can be used to compensate for voltage drops between the output and the point of load. The sense traces should be located close to the PCB ground layer to reduce noise susceptibility. The remote sense circuitry will compensate for up to 0.3v voltage drop between output pins and the point of load.

If the remote sense is not needed +Sense should be left open.

Over Temperature Protection (OTP)

The PMH and PMJ family regulators are protected from thermal overload by an internal over temperature shutdown circuit.

When the internal temperature exceeds the OTP threshold, the regulator will shut down. The DC/DC regulator will make continuous attempts to start up (soft-start mode) and resume normal operation automatically when the temperature has dropped >10°C below the temperature threshold.

Over Current Protection (OCP)

The regulators include current limiting circuitry for protection at continuous overload.

The output voltage will decrease towards zero for output currents in excess of the over-current threshold. The regulator

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

will resume normal operation after removal of the overload. The load distribution should be designed for the maximum output short circuit current specified. The current limit operation is a "hick up" mode current limit.

Soft-start Power Up

From the moment a valid input voltage is applied, the soft-start control introduces a short time-delay (typically 5-10 ms) before allowing the output voltage to rise. The initial rise in input current when the input voltage first starts to rise is the charge current drawn by the input capacitors. Power-up is complete within 15 ms.

Auto-Track™ Function

Auto-Track was designed to simplify the amount of circuitry required to make the output voltage from each module power up and power down in sequence. The sequencing of two or more supply voltages during power up is a common requirement for complex mixed-signal applications, that use dual-voltage VLSI ICs such as DSPs, micro-processors and ASICs.

Margin Up/Down controls

These controls allow the input voltage to be momentarily adjusted, either up or down, by a nominal 5 %. This provides a convenient method for dynamically testing the operation of the load circuit over its supply margin or range. It can also be used to verify the function of supply voltage supervisors.

Pre-Bias Startup Capability

This often occurs in complex digital systems when current from another power source is backfed through a dual-supply logic component, such as FPGA or ASIC. The PMH(3.3/5.0V Vin) incorporate synchronous rectifiers, but will not sink current during startup, or whenever the Inhibit pin is held low. However, to ensure satisfactory operation of this function, certain conditions must be maintained.

Thermal Consideration

General

The regulators are designed to operate in different thermal environments and sufficient cooling must be provided to ensure reliable operation. Cooling is achieved mainly by conduction, from the pins to the host board, and convection, which is dependant on the airflow across the regulator. Increased airflow enhances the cooling of the regulator.

The Output Current Derating graph found in the Output section for each model provides the available output current vs. ambient air temperature and air velocity at $V_{in} = 12$ V.


The DC/DC regulator is tested on a 254 x 254 mm, 35 μ m (1 oz), 8-layer test board mounted vertically in a wind tunnel with a cross-section of 305 x 305 mm.

Proper cooling of the DC/DC regulator can be verified by measuring the temperature at positions P1, P2 and P3. The temperature at these positions should not exceed the max values provided in the table below.

Note that the max value is the absolute maximum rating (non destruction) and that the electrical Output data is guaranteed up to $T_{ref} + 85^\circ C$.

See Design Note 019 for further information.

Position	Device	Designation	max value
P ₁	Pcb		125° C(L)/ 130° C(T)
P ₂	Mosfet	T_{ref}	125° C(L)/ 130° C(T)
P ₃	Inductor		130° C(L&T)

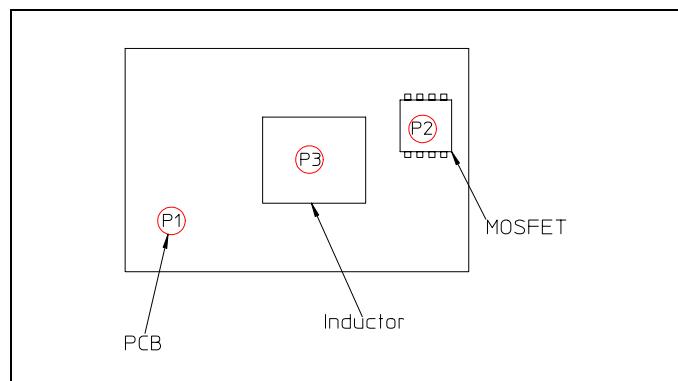

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Thermal Consideration continued


Definition of reference temperature (T_{ref})

The reference temperature is used to monitor the temperature limits of the product. Temperatures above maximum T_{ref} are not allowed and may cause degradation or permanent damage to the product. T_{ref} is also used to define the temperature range for normal operating conditions. T_{ref} is defined by the design and used to guarantee safety margins, proper operation and high reliability of the module.

Ambient Temperature Calculation

TBD

Connections

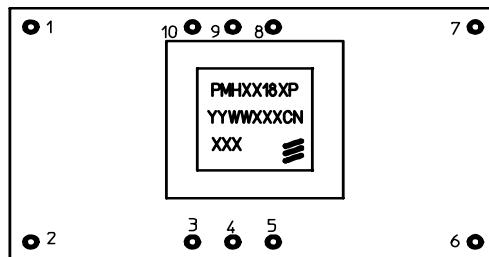

TOP VIEW

Pin	Designation	Function
1	GND	Common ground connection for the V_{in} and V_{out} power connections.
2	V_{in}	The positive input voltage power node to the module.
3	Inhibit	Applying a low-level ground signal to this input disables the module's output.
4	V_o Adjust	A 0.1 W 1% resistor must be directly connected between this pin and pin 7(GND) to set the output voltage.
5	V_o Sense	The sense input allows the regulation circuit to compensate for voltage drop between the module and the load.
6	V_{out}	The regulated positive power output with respect to the GND node.
7	GND	Common ground connection for the V_{in} and V_{out} power connections.
8	Track	This is an analog control input that enables the output voltage to follow an external voltage.
9	Margin Down	When this input is asserted to GND, the output voltage is decreased by 5% from the nominal.
10	Margin Up	When this input is asserted to GND, the output voltage is increased by 5%.


PMH 8000 series

EN/LZT 146 324 R1B April 2006

POL regulator, Input 10.8-13.2 V, Output 18 A/99 W


© Ericsson Power Modules AB

Mechanical Information (Surface mount version)

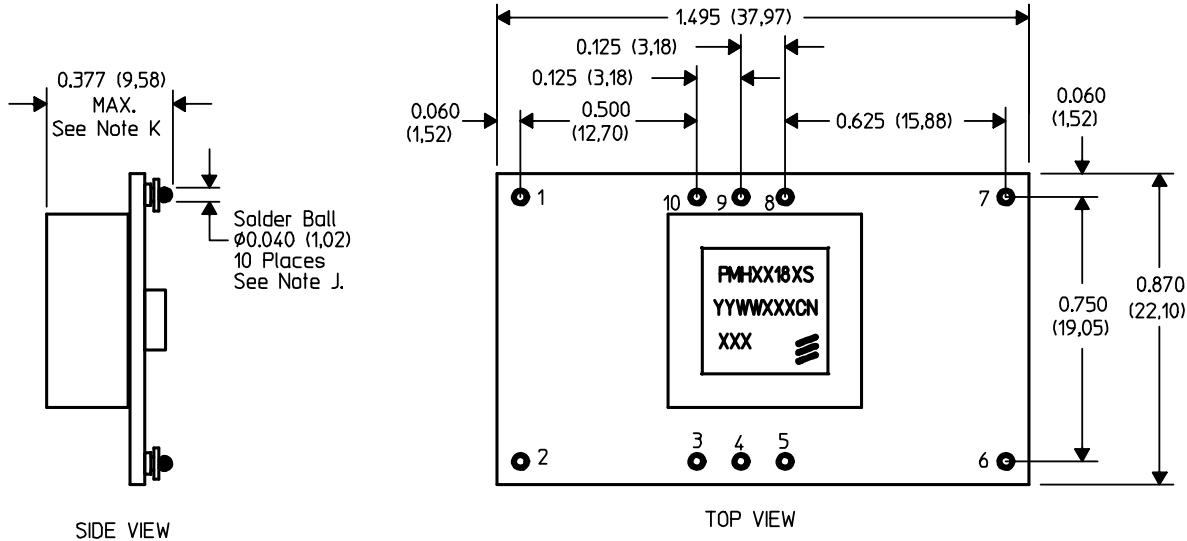

SIDE VIEW

TOP VIEW

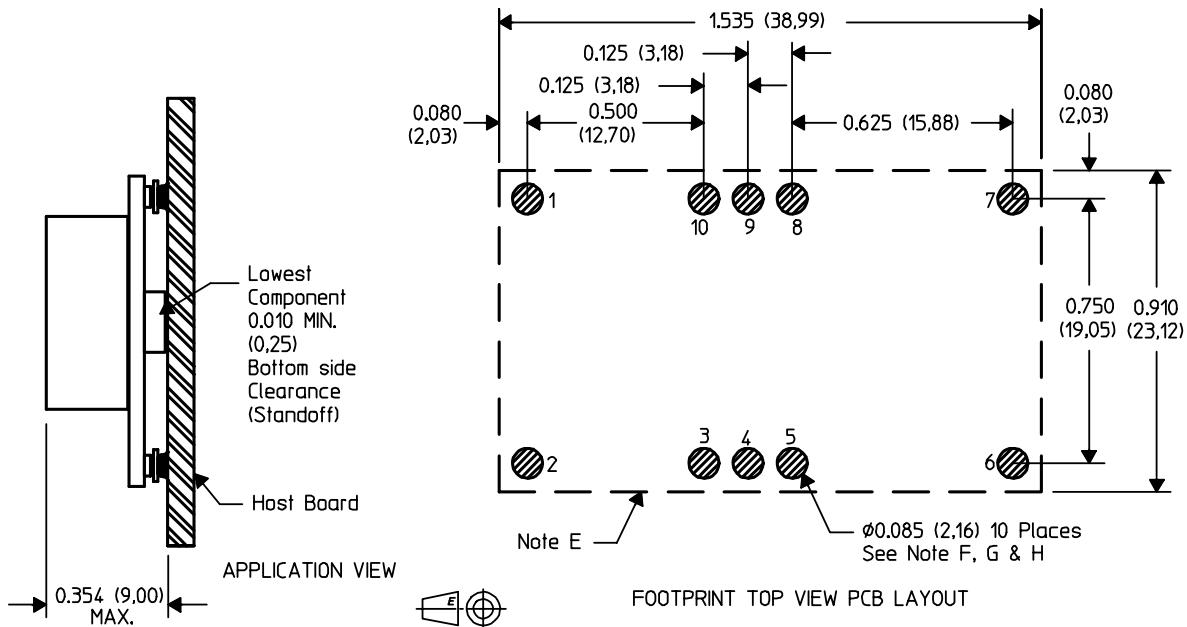

APPLICATION VIEW

FOOTPRINT TOP VIEW PCB LAYOUT


NOTES: A. All linear dimensions are in inches (mm).
 B. This drawing is subject to change without notice.
 C. 2 place decimals are ± 0.030 (± 0.76 mm).
 D. 3 place decimals are ± 0.010 (± 0.25 mm).
 E. Recommended keep out area for user components.
 F. Power pin connection should utilize four or more vias to the interior power plane of 0.025 (0.63) I.D. per input, ground and output pin (or the electrical equivalent).
 G. Paste screen opening: 0.080 (2.03) to 0.085 (2.16).
 Paste screen thickness: 0.006 (0.15).

H. Pad type: Solder mask defined.
 J. All pins: Material - Copper Alloy
 Plating - $10\mu\text{m}$ Tin over $4\mu\text{m}$ Nickel
 Solder Ball - See product data sheet.
 K. Dimension prior to reflow solder.
 MECHANICAL DATA FOR THE PMH DC/DC REGULATOR
 Weight: 7.8 g
 Use recommended footprint and solder recommendations together with solder reflow recommendations to ensure a reliable interconnection.

PMH 8000 series
POL regulator, Input 10.8-13.2 V, Output 18 A/99 W

EN/LZT 146 324 R1B April 2006
© Ericsson Power Modules AB

Mechanical Information (Through hole mount version)

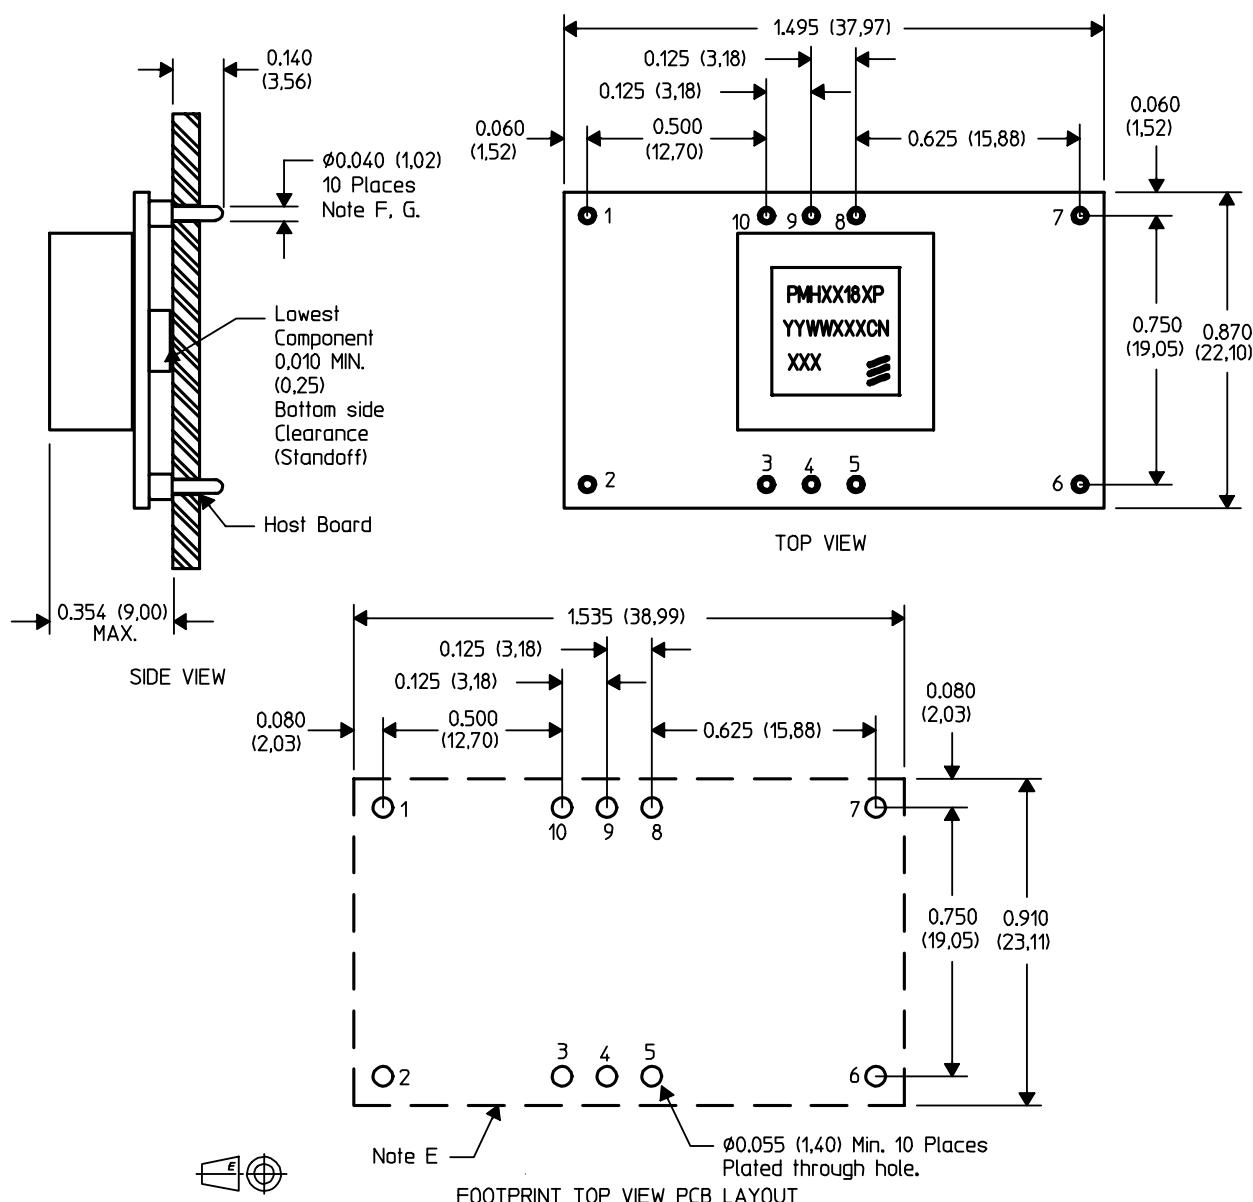

NOTES:

- A. All linear dimensions are in inches (mm).
- B. This drawing is subject to change without notice.
- C. 2 place decimals are ± 0.030 (± 0.76 mm).
- D. 3 place decimals are ± 0.010 (± 0.25 mm).
- E. Recommended keep out area for user components.
- F. Pins are $0.040"$ (1.02) diameter with $0.070"$ (1.78) diameter standoff shoulder.
- G. All pins: Material - Copper Alloy
Plating - $10\mu m$ Tin over $4\mu m$ Nickel

MECHANICAL DATA FOR THE PMH DC/DC REGULATOR
Weight: 8.2 g
Use recommended footprint and solder recommendations
together with solder reflow recommendations to ensure
a reliable interconnection.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--


Soldering Information - Surface mounting

The surface mount version of the product is intended for convection or vapor phase reflow Pb-free processes. To achieve a good and reliable soldering result, make sure to follow the recommendations from the solder paste supplier, to use state-of-the-art reflow equipment and reflow profiling techniques as well as the following guidelines.

A no-clean flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC regulator. The cleaning residues may affect long time reliability and isolation voltage.

Minimum pin temperature recommendations

Pin number 9 is chosen as reference location for the minimum pin temperature recommendations since this will be the coolest solder joint during the reflow process.

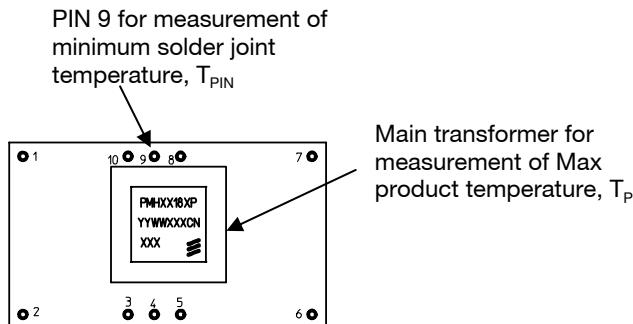

SnPb solder processes

For Pb solder processes, a pin temperature (T_{PIN}) in excess of the solder melting temperature, (T_L , +183 °C for Sn63/Pb37) for more than 30 seconds, and a peak temperature of +210 °C is recommended to ensure a reliable solder joint.

Lead-free (Pb-free) solder processes

For Pb-free solder processes, a pin temperature (T_{PIN}) in excess of the solder melting temperature (T_L , +217 to +221 °C for Sn/Ag/Cu solder alloys) for more than 30 seconds, and a peak temperature of +235 °C on all solder joints is recommended to ensure a reliable solder joint.

Maximum regulator temperature requirements

To avoid damage or performance degradation of the product, the reflow profile should be optimized to avoid excessive heating. The maximum product temperature shall be monitored by attaching a thermocoupler to the top of the main transformer.

A sufficiently extended preheat time is recommended to ensure an even temperature across the host PCB, for both small and large devices. To reduce the risk of excessive heating is also recommended to reduce the time in the reflow zone as much as possible.

SnPb solder processes(PENDING)

For conventional SnPb solder processes, the product is qualified for MSL 1 according to IPC/JEDEC standard J-STD-020C.


During reflow, T_P must not exceed +225 °C at any time.

Lead-free (Pb-free) solder processes

For Pb-free solder processes, the product is qualified for MSL 3 according to IPC/JEDEC standard J-STD-020C.

During reflow, T_P must not exceed +260 °C at any time.

Temperature

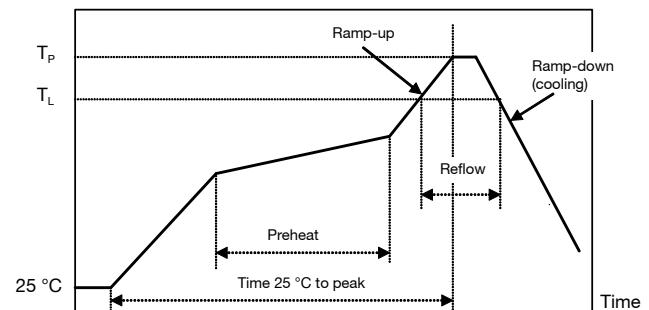

Profile features	Sn/Pb eutectic assembly	Pb-free assembly
Average ramp-up rate	3 °C/s max	3 °C/s max
Solder melting temperature (typical)	T_L +183 °C	+221 °C
Peak product temperature	T_P +225 °C	+260 °C
Average ramp-down rate	6 °C/s max	6 °C/s max
Time 25 °C to peak temperature	6 minutes max	8 minutes max

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Soldering Information – Through Hole Mounting

The through hole mount version of the product is intended for through hole mounting in a PCB. When wave soldering is used, the temperature on the pins is specified to maximum 260 °C for maximum 10 seconds.

Maximum preheat rate of 4 °C/s and temperature of max 150 °C is suggested. When hand soldering, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean (NC) flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--



Delivery package information for SMD

The products are delivered in antistatic trays (Jedec standard) or in antistatic carrier tape (EIA standard).

Tray specifications	
Material	PET
Surface resistance	10E3 to 10E5 ohms/square
Bake ability	The trays can not be baked.
Tray capacity	20 products /tray
Box capacity	100 products/box)
Weight	220 g/full tray

Carrier tape specifications

Material	Polystyrene
Surface resistance	< 10E5 ohms/square
Bake ability	The tape can not be baked.
Tape width	56 mm [2.205 inch]
Pocket pitch	32 mm [1.26 inch]
Pocket depth	9.57 mm [0.377 inch]
Reel diameter	380 mm [15 inch]
Reel capacity	200 products /reel
Box capacity	200 products (1 reels/box)
Weight	2.0 kg/full reel

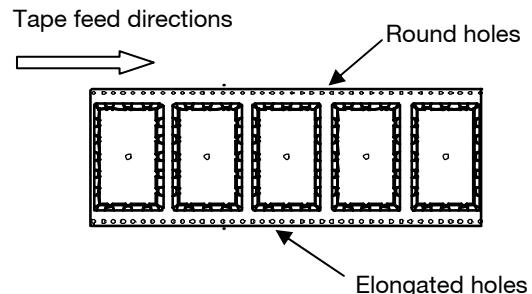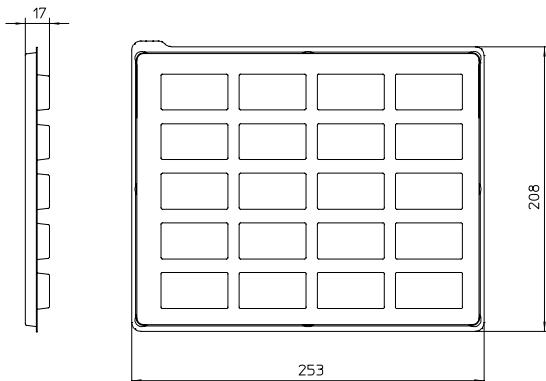

Dry pack information

The products are delivered in trays or tape & reel. These inner shipment containers are dry packed in standard moisture barrier bags according to IPC/JEDEC standard J-STD-033A (Handling, packing, shipping and use of moisture/reflow sensitivity surface mount devices).

Using products in high temperature Pb-free soldering processes requires dry pack storage and handling. In case the products have been stored in an uncontrolled environment and no longer can be considered dry, the modules must be baked according to the referred IPC/JEDEC standard.

PMH 8000 series POL regulator, Input 10.8-13.2 V, Output 18 A/99 W	EN/LZT 146 324 R1B April 2006 © Ericsson Power Modules AB
---	--

Product Qualification Specification

Characteristics			
Visual inspection	JESD22-B101		
Temperature cycling	JESD22-A104-B	Dwell time Transfer time Temperature range Number of cycles	30 min 0-1 min -40 °C to +125 °C 300 cycles
High temperature storage life	JESD22-A103-B	Temperature Duration	125 °C 1000 h
Cold (in operation)	IEC 68-2-1, test Ad	Temperature T _A Duration	-45 °C 72 h
Lead integrity	JESD22-B105-C	Test condition A Weight Duration	1000 g 30 s
Solder ability(not apply to through hole version)	IEC 68-2-54	Solder immersion depth Duration of immersion (F _C time) T _A (time for onset of wetting) Time to F _B Wetting Strength F _B Stability F _C /F _B	1 mm 15 s <4 s 8 s >100 mN/m >0.8
Steady State Temperature Humidity Bias Life Test	JESD22-A101-B	Temperature Humidity Duration Input Voltage	+85 °C 85 % RH 1000 hours Maximum
Mechanical shock	JESD22-B104-B	Peak acceleration Duration Number of shocks	200 g 1.5 ms 5 in each of two directions of three axes
Vibration, variable freq	JESD22-B103-B	Frequency range Acceleration amplitude	10-1000 Hz 10 g or displacement amplitude 1.0 mm
Random vibration	JESD22-B103-B	Frequency Acceleration density	2-500 Hz 0.008-0.2 g ² /Hz
Operational life test		Temperature Load ON OFF Test duration	85 °C Maximum 9 min 3 min 1000 h
Moisture reflow sensitivity classification test	J-STD-020C	SnPb eutectic MSL 1	225 °C
		Pb free MSL 3	260 °C
Resistance to cleaning agents	IEC 68-2-45 Xa Method 2	Water Glycol ether Isopropyl alcohol	+55 ±5 °C +35 ±5 °C +35 ±5 °C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ericsson Power Modules:](#)

[PMH8318TP](#) [PMH8318TS](#) [PMH8318TSR](#) [PMH8918LP](#) [PMH8918LSR](#) [PMH8918LS](#)