

Smart Highside Power Switch

Features

- Clamp of negative voltage at output
- Short-circuit protection
- Current limitation
- Thermal shutdown
- Diagnostic feedback
- Open load detection in ON-state
- CMOS compatible input
- **Electrostatic Discharge (ESD)** protection
- Loss of ground and loss of V_{bb} protection¹⁾
- Reverse battery protection
- Undervoltage and overvoltage shutdown with auto-restart and hysteresis

Product Summary

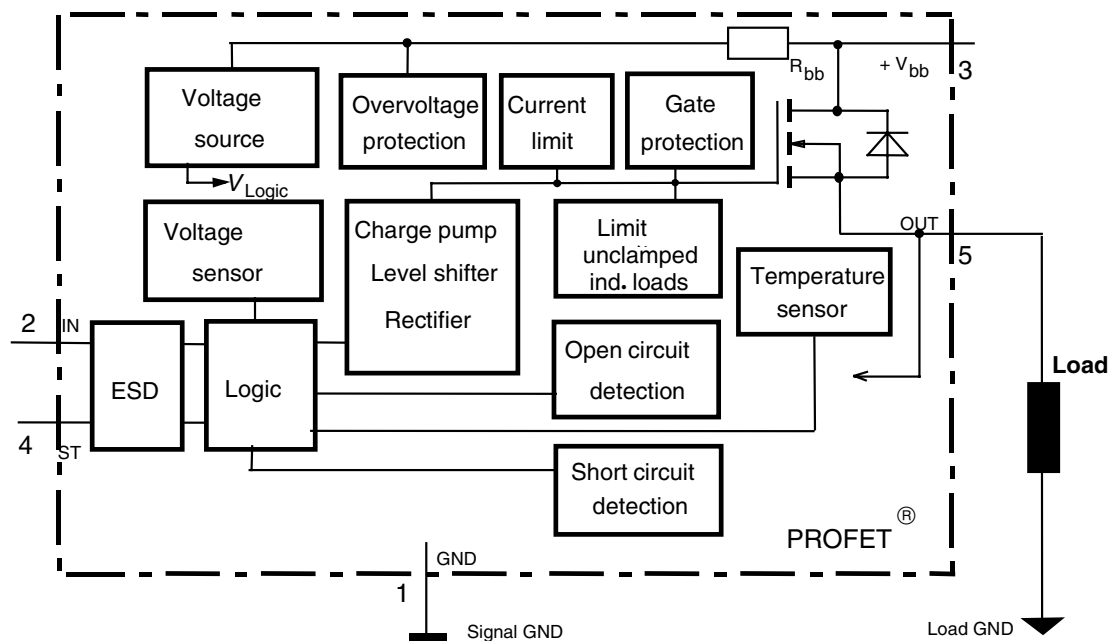
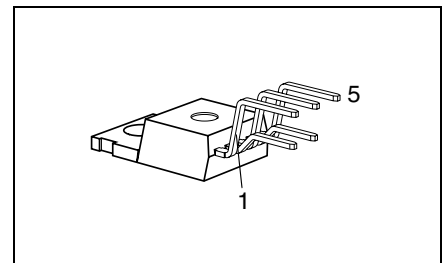
$V_{bb}-V_{OUT}$ Avalanche Clamp	50	V
V_{bb} (operation)	4.5 ... 32	V
V_{bb} (reverse)	-32	V
R_{ON}	38	mΩ
$I_L(lim)$	36	A
$I_L(ISO)$	11	A

Application

- μ C compatible power switch with diagnostic feedback for 12 V and 24 V DC grounded loads
- All types of resistive, inductive and capacitive loads
- Replaces electromechanical relays and discrete circuits

General Description

N channel vertical power FET with charge pump, ground referenced CMOS compatible input and diagnostic fault feedback, integrated in Smart SIPMOS® chip on chip technology. Fully protected by embedded protection functions.



¹⁾ Additional external diode required for charged inductive loads

Pin	Symbol		Function
1	GND	-	Logic ground
2	IN	I	Input, activates the power switch in case of logical high signal
3	Vbb	+	Positive power supply voltage, the tab is shorted to this pin
4	ST	S	Diagnostic feedback, low on failure
5	OUT (Load, L)	O	Output to the load

Maximum Ratings at $T_j = 25\text{ °C}$ unless otherwise specified

Parameter	Symbol	Values	Unit	
Supply voltage (overvoltage protection see page 3)	V_{bb}	54	V	
Load current (Short-circuit current, see page 4)	I_L	self-limited	A	
Operating temperature range	T_j	-40 ...+150	°C	
Storage temperature range	T_{stg}	-55 ...+150		
Power dissipation (DC)	P_{tot}	125	W	
Inductive load switch-off energy dissipation	E_{AS}	1.7	J	
Electrostatic discharge capability (ESD)	V_{ESD}	2.0	kV	
Input voltage (DC)	V_{IN}	-10 ... +16	V	
Current through input pin (DC)	I_{IN}	±5.0	mA	
Current through status pin (DC)	I_{ST}	±5.0		
see internal circuit diagrams page 6...				
Thermal resistance	chip - case:	R_{thJC}	≤ 1	K/W
	chip - ambient:	R_{thJA}	≤ 75	

Electrical Characteristics

Parameter and Conditions at $T_j = 25\text{ °C}$, $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

Load Switching Capabilities and Characteristics

On-state resistance (pin 3 to 5) $I_L = 2\text{ A}$ $T_j = 25\text{ °C}$ $T_j = 150\text{ °C}$	R_{ON}	--	30 55	38 70	mΩ
Nominal load current (pin 3 to 5) ISO Proposal: $V_{ON} = 0.5\text{ V}$, $T_C = 85\text{ °C}$	$I_{L(ISO)}$	9	11	--	A
Output current (pin 5) while GND disconnected or GND pulled up, see diagram page 7	$I_{L(GNDhigh)}$	--	--	1	mA
Turn-on time to 90% V_{OUT} : Turn-off time to 10% V_{OUT} : $R_L = 12\text{ Ω}$	t_{on} t_{off}	50 10	160 --	260 60	μs
Slew rate on 10 to 30% V_{OUT} , $R_L = 12\text{ Ω}$	dV/dt_{on}	0.4	--	2	V/μs
Slew rate off 70 to 40% V_{OUT} , $R_L = 12\text{ Ω}$	$-dV/dt_{off}$	1	--	4	V/μs

Operating Parameters

Operating voltage $T_j = -40...+150\text{ °C}$	$V_{bb(on)}$	4.5	--	32	V
Undervoltage shutdown $T_j = -40...+150\text{ °C}$	$V_{bb(under)}$	2.4	--	4.5	V
Undervoltage restart $T_j = -40...+150\text{ °C}$	$V_{bb(u\text{ rst})}$	--	--	4.5	V
Undervoltage restart of charge pump see diagram page 11	$V_{bb(ucp)}$	--	6.5	7.5	V
Undervoltage hysteresis $\Delta V_{bb(under)} = V_{bb(u\text{ rst})} - V_{bb(under)}$	$\Delta V_{bb(under)}$	--	0.2	--	V
Overvoltage shutdown $T_j = -40...+150\text{ °C}$	$V_{bb(over)}$	32	--	46	V
Overvoltage restart $T_j = -40...+150\text{ °C}$	$V_{bb(o\text{ rst})}$	32	--	--	V
Overvoltage hysteresis $T_j = -40...+150\text{ °C}$	$\Delta V_{bb(over)}$	--	0.2	--	V
Overvoltage protection ²⁾ $I_{bb} = 4\text{ mA}$ $T_j = -40...+150\text{ °C}$	$V_{bb(AZ)}$	50	57	--	V
Standby current (pin 3) $V_{IN} = 0$ $T_j = -40...+25\text{ °C}$ $T_j = 150\text{ °C}$	$I_{bb(off)}$	-- --	12 18	25 60	μA
Operating current (Pin 1) ³⁾ , $V_{IN} = 5$	I_{GND}	--	1.1	--	mA

²⁾ see also $V_{ON(CL)}$ in table protection functions and circuit diagram page 7. Measured without load.

³⁾ Add I_{ST} , if $I_{ST} > 0$

Parameter and Conditions at T _j = 25 °C, V _{bb} = 12 V unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Protection Functions					
Overload current limit (pin 3 to 5) T _j =-40...+150°C	I _{L(lim)}	19	36	57	A
Short circuit shutdown delay after input pos. slope V _{ON} > V _{ON(SC)} , T _j =-40..+150°C: min value valid only, if input "low" time exceeds 30 μs	t _{d(SC)}	80	--	400	μs
Output clamp (inductive load switch off) at V _{OUT} = V _{bb} - V _{ON(CL)}	V _{ON(CL)}	--	50	--	V
Short circuit shutdown detection voltage (pin 3 to 5)	V _{ON(SC)}	--	8.3	--	V
Thermal overload trip temperature	T _{jt}	150	--	--	°C
Thermal hysteresis	ΔT _{jt}	--	10	--	K
Inductive load switch-off energy dissipation ⁴⁾ , T _{j Start} = 150 °C V _{bb} = 12 V: V _{bb} = 24 V:	E _{AS} E _{Load12} E _{Load24}	--	--	1.7 1.3 1.0	J
Reverse battery (pin 3 to 1) ⁵⁾	-V _{bb}	--	--	32	V
Integrated resistor in V _{bb} line	R _{bb}	--	120	--	Ω

Diagnostic Characteristics

Open load detection current (on-condition,)	$T_j = 25\dots150\text{ °C}$: $T_j = -40\text{ °C}$:	$I_L(OL)$	10 10	-- --	500 600	mA
Leakage output current (off-condition)		$I_{L(off)}$	--	6	--	μA

4) While demagnetizing load inductance, dissipated energy in PROFET is $E_{AS} = \int V_{ON(CL)} * i_L(t) dt$, approx.
 $E_{AS} = \frac{1}{2} * L * I_L^2 * (\frac{V_{ON(CL)}}{V_{ON(CL)} - V_{bb}})$, see diagramm page 8

5) Reverse load current (through intrinsic drain-source diode) is normally limited by the connected load.
 Reverse current I_{GND} of $\approx 0.3\text{ A}$ at $V_{bb} = -32\text{ V}$ through the logic heats up the device. Time allowed under these condition is dependent on the size of the heatsink. Reverse I_{GND} can be reduced by an additional external GND-resistor (150 Ω). Input and Status currents have to be limited (see max. ratings page 2 and circuit page 7).

Parameter and Conditions at T _j = 25 °C, V _{bb} = 12 V unless otherwise specified		Symbol	Values			Unit
			min	typ	max	
Input and Status Feedback ⁶⁾						
Input resistance see circuit page 6		R _I	--	10	--	kΩ
Input turn-on threshold voltage	 T _j = -40...+150°C:	V _{IN(T+)}	1.5	--	2.4	V
Input turn-off threshold voltage	 T _j = -40...+150°C:	V _{IN(T-)}	1.0	--	--	V
Input threshold hysteresis		Δ V _{IN(T)}	--	0.5	--	V
Off state input current (pin 2)	V _{IN} = 0.4 V:	I _{IN(off)}	1	--	30	μA
On state input current (pin 2)	V _{IN} = 3.5 V:	I _{IN(on)}	10	25	50	
Status valid after input slope (short circuit)	T _j = -40 ... +150°C:	t _{d(ST SC)}	80	200	400	μs
Status valid after input slope (open load)	T _j = -40 ... +150°C:	t _{d(ST)}	350	--	1600	μs
Status output (open drain)						
Zener limit voltage	T _j = -40...+150°C, I _{ST} = +1.6 mA:	V _{ST(high)}	5.4	6.1	6.9	V
ST low voltage	T _j = -40...+150°C, I _{ST} = +1.6 mA:	V _{ST(low)}	--	--	0.4	
Status voltage while V _{bb} < 2.4 V	T _j = 25 ... +150°C:	V _{ST}	--	--	1.0	V
I _{ST} = 500 μA	T _j = 40°C:				1.2	

⁶⁾ If a ground resistor R_{GND} is used, add the voltage drop across this resistor. Internal Z-diode typ. 6.1 V, see maximum ratings page 2, circuit page 7


Truth Table

	Input-level	Output level	Status			
			432 D2	432 E2/F2	432 I2	430 K2
Normal operation	L	L	H	H	H	H
	H	H	H	H	H	H
Open load	L	7)	H	H	L	H
	H	H	L	L	H	L
Short circuit to GND	L	L	H	H	H	8)
	H	L	L	L	L	L
Short circuit to V _{bb}	L	H	H	H	L	H
	H	H	H (L ⁹⁾)	H (L ⁹⁾)	H	H (L ⁹⁾)
Overtemperature	L	L	L	L	L	L
	H	L	L	L	L	L
Undervoltage	L	L	L ¹⁰⁾	H	L ¹⁰⁾	L ¹¹⁾
	H	L	L ¹⁰⁾	H	L ¹⁰⁾	L ¹¹⁾
Overvoltage	L	L	L	H	L	L
	H	L	L	H	L	L


L = "Low" Level

H = "High" Level

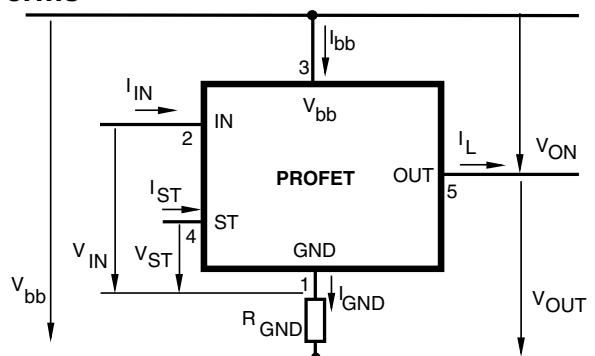Terms




Input circuit (ESD protection)

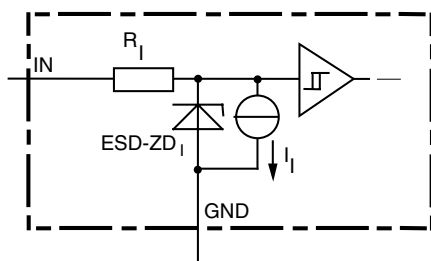

ESD zener diodes are not designed for continuous current

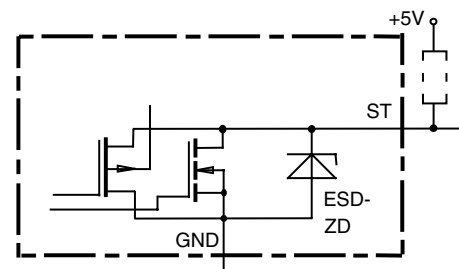
Status output



ESD zener diodes are not designed for continuous current


Short Circuit detection

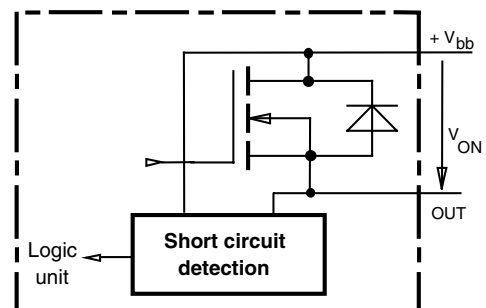Fault Condition: V_{ON} > 8.3 V typ.; IN high




- 7) Power Transistor off, high impedance
- 8) The short circuit signal from last ON state is latched until next turn-on, see timing diagram page 9
- 9) Low resistance short V_{bb} to output may be detected by no-load-detection
- 10) No current sink capability during undervoltage shutdown
- 11) Current sink capability see page 5

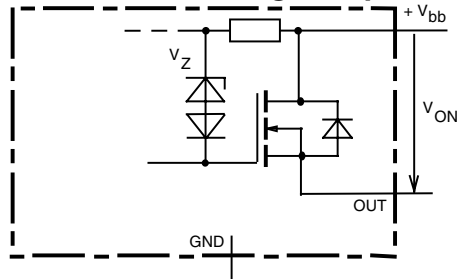Inductive and overvoltage output clamp



V_{ON} clamped to 50 V typ.

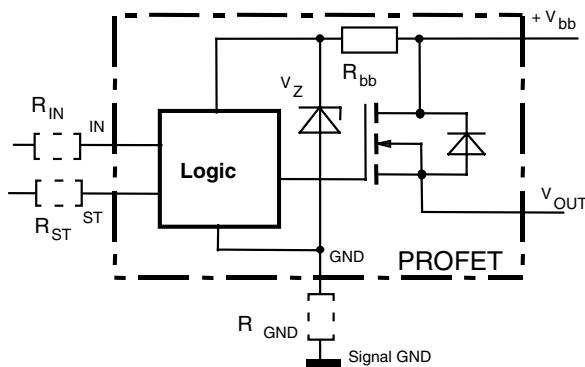
Overvolt. and reverse batt. protection




R_{bb} 120 Ω typ., V_Z 57 V typ., add R_{GND} , R_{IN} , R_{ST} for extended protection

Open-load detection

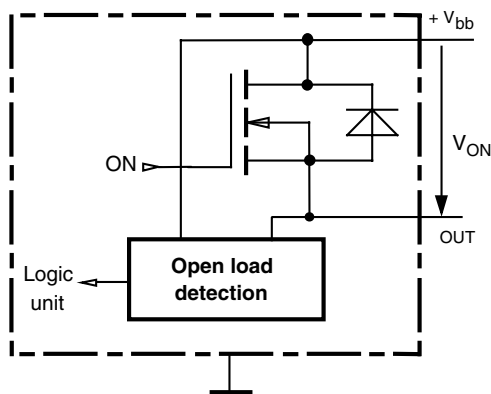Fault Condition: $V_{ON} < R_{ON} \cdot I_{L(OL)}$; IN high




GND disconnect

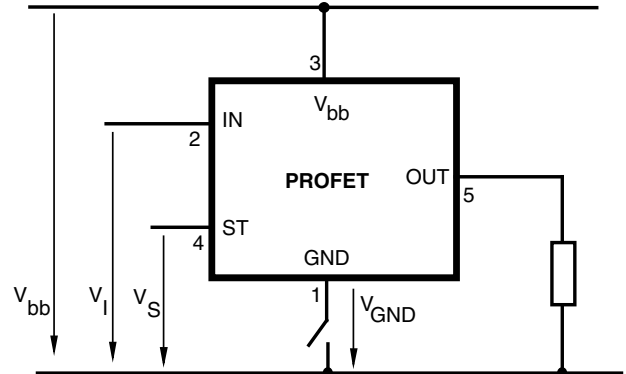


Any kind of load. In case of Input=high $V_{OUT} \approx V_I - V_{IN(T+)}$
Due to $V_{GND} > 0$, no V_S = low signal available.

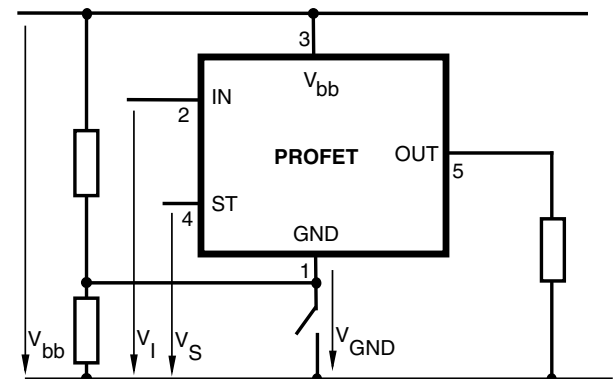
GND disconnect with GND pull up




Any kind of load. If $V_{GND} > V_I - V_{IN(T+)}$ device stays off
Due to $V_{GND} > 0$, no V_S = low signal available.

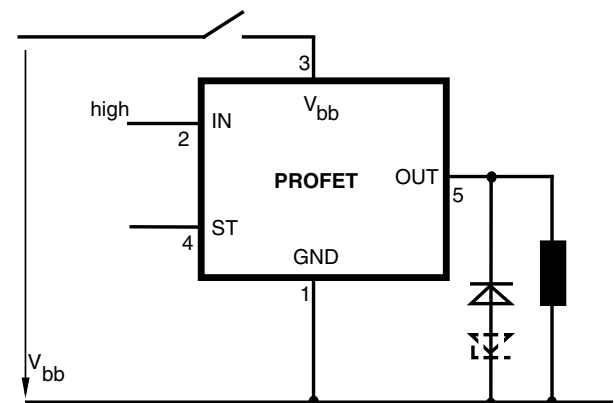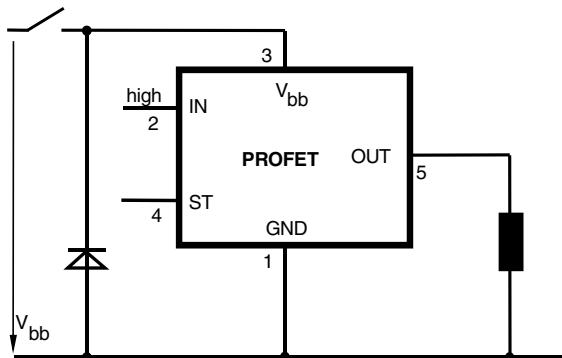Vbb disconnect with charged inductive load





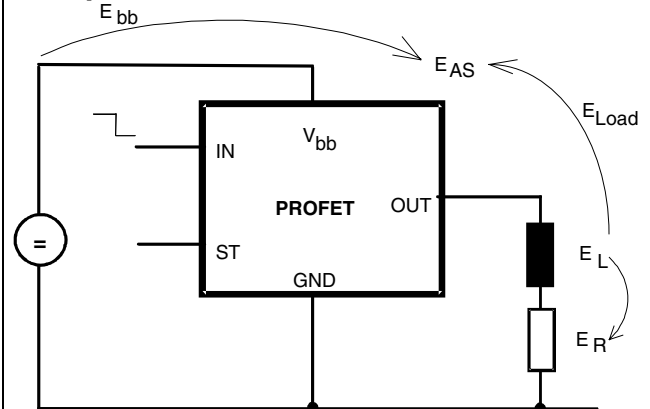Inductive Load switch-off energy dissipation



Energy dissipated in PROFET $E_{AS} = E_{bb} + E_L - E_R$.

$$E_{Load} < E_L, E_L = \frac{1}{2} * L * I_L^2$$

Timing diagrams

Figure 1a: V_{bb} turn on, :

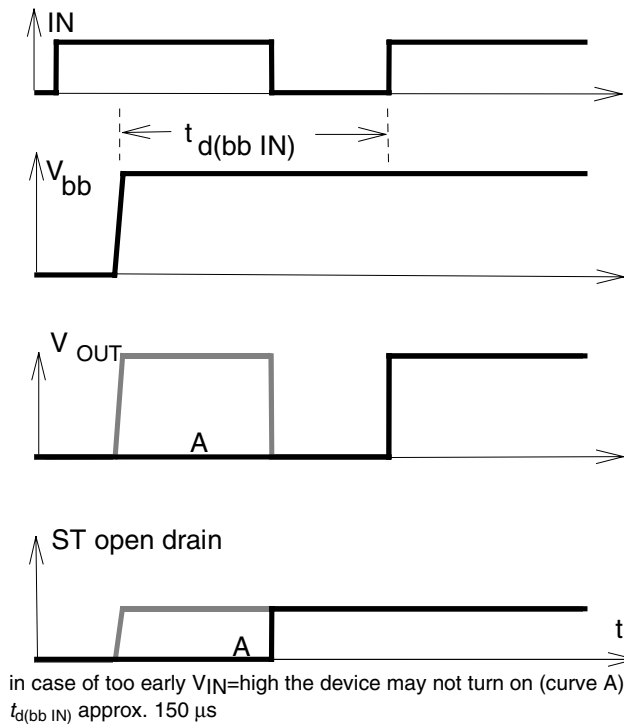


Figure 2a: Switching a lamp,

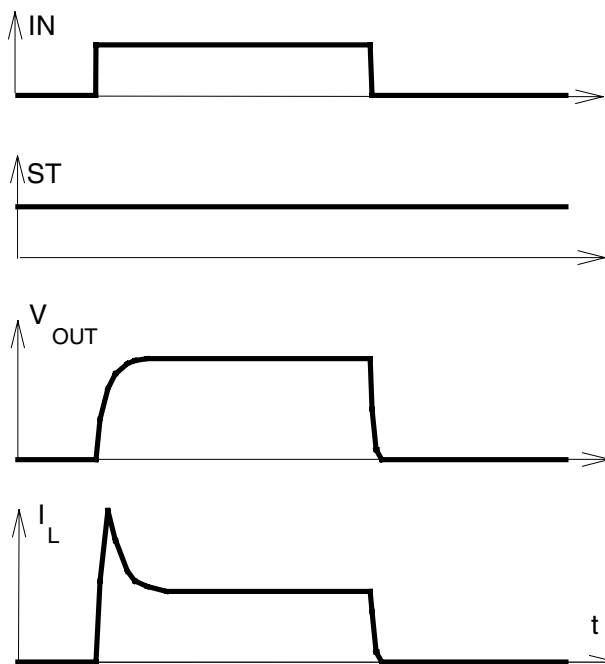


Figure 2b: Switching an inductive load

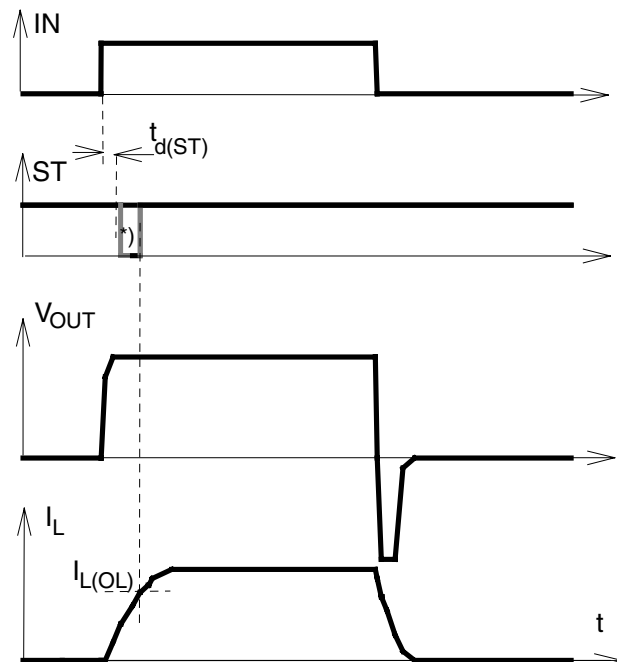


Figure 3a: Turn on into short circuit,

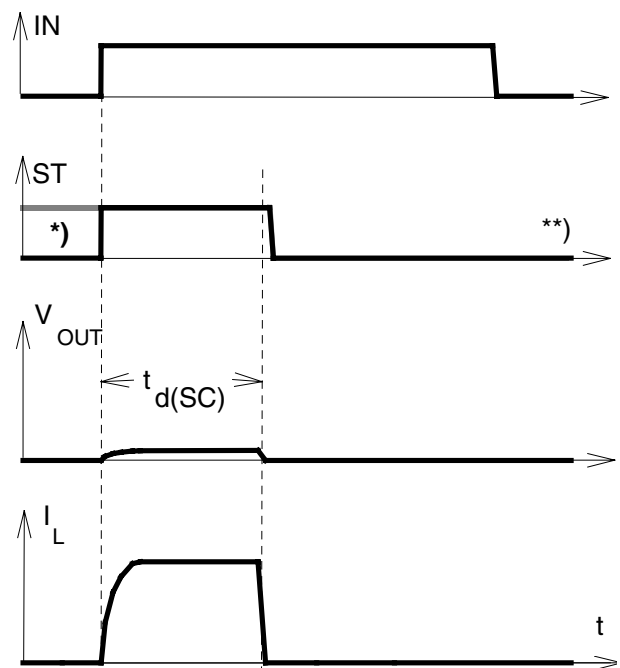


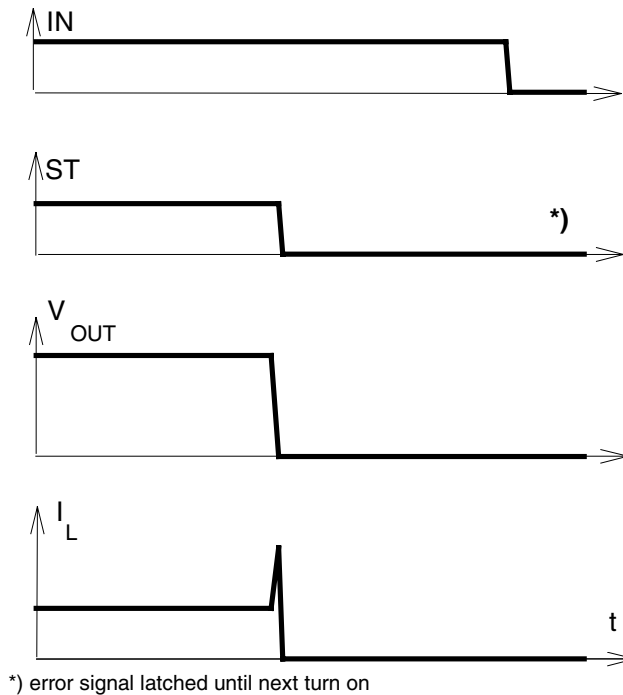
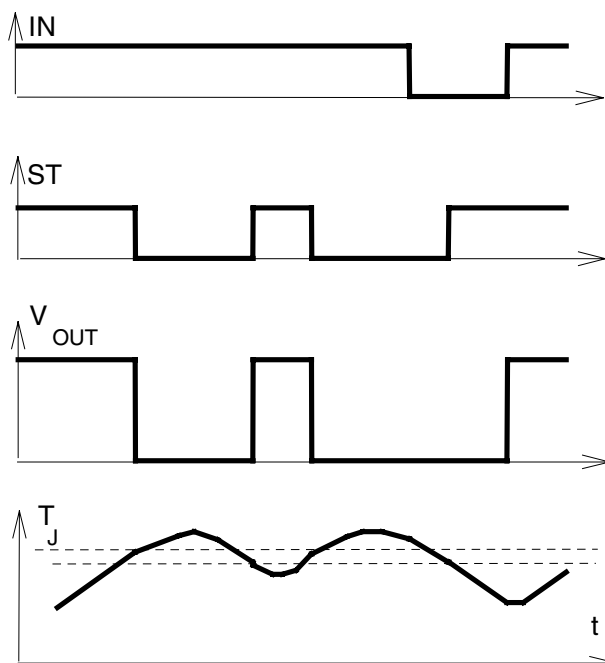
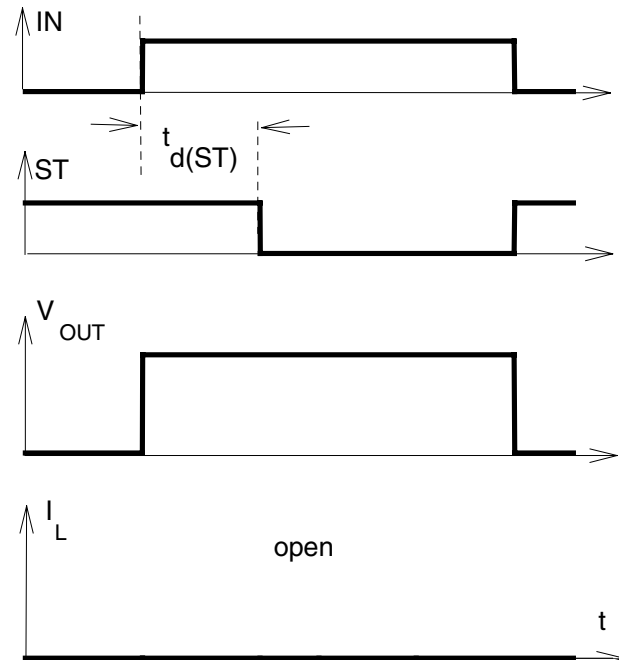
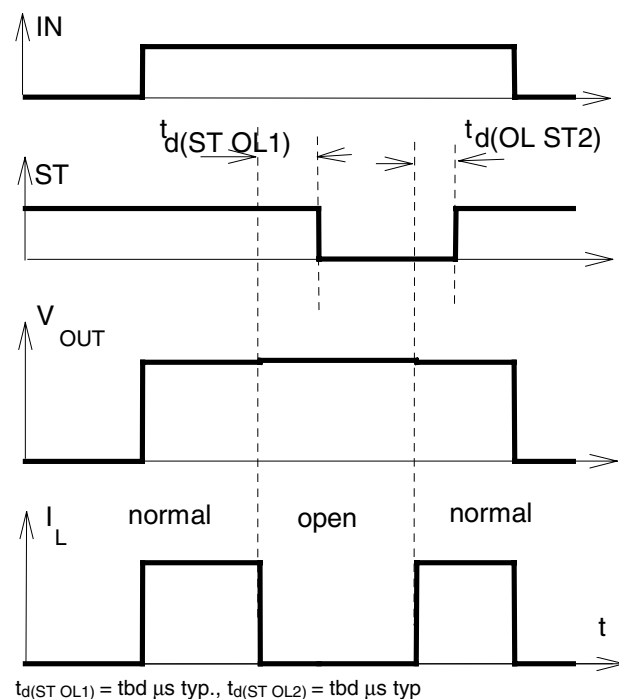
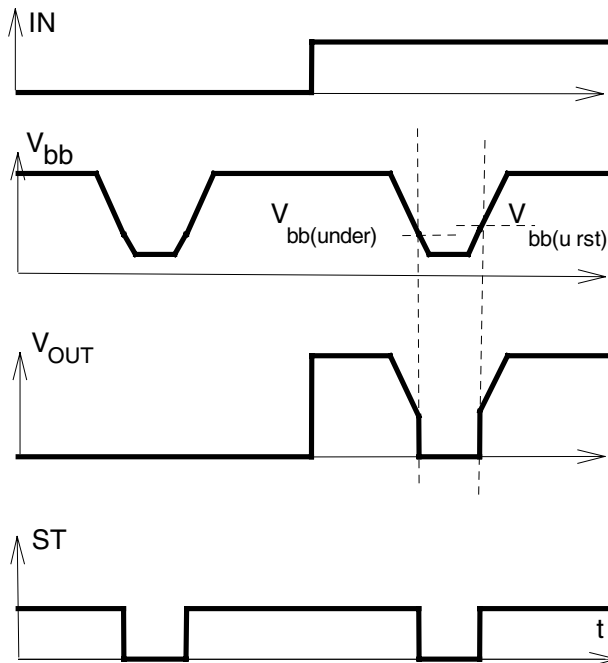
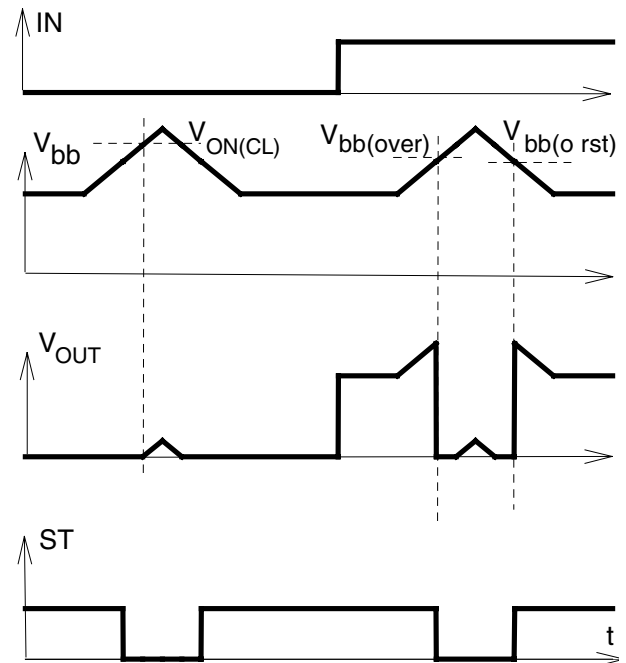
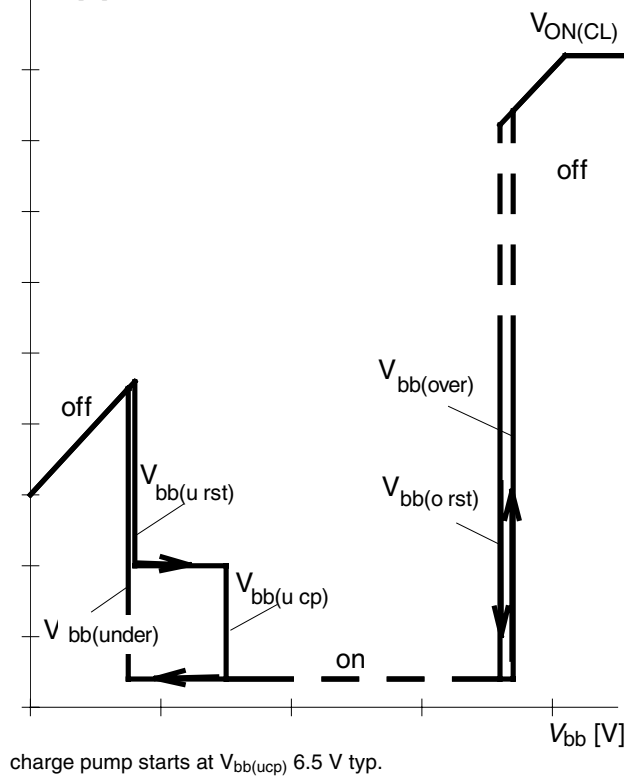
Figure 3b: Short circuit while on:

Figure 4a: Overtemperature:
Reset if $T_j < T_{jt}$

Figure 5a: Open load: detection in ON-state, turn on/off to open load

Figure 5b: Open load: detection in ON-state, open load occurs in on-state


Figure 6a: Undervoltage:

Figure 7a: Overvoltage:

Figure 6b: Undervoltage restart of charge pump
 V_{ON} [V]


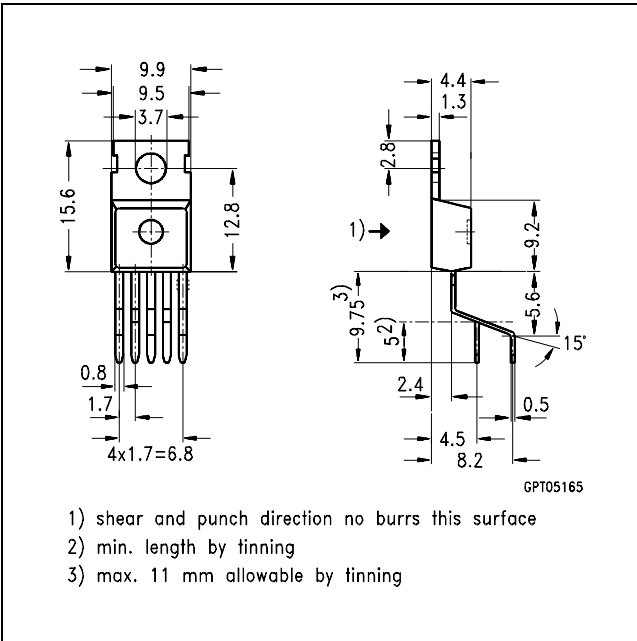
Package and Ordering Code

All dimensions in mm

Standard TO-220 AB/5

Ordering code


BTS430K2	Q67060-S6200-A2
----------	-----------------



TO-220 AB/5, OPTION E3043

Ordering code


BTS430K2 E3043	Q67060-S6200-A3
----------------	-----------------

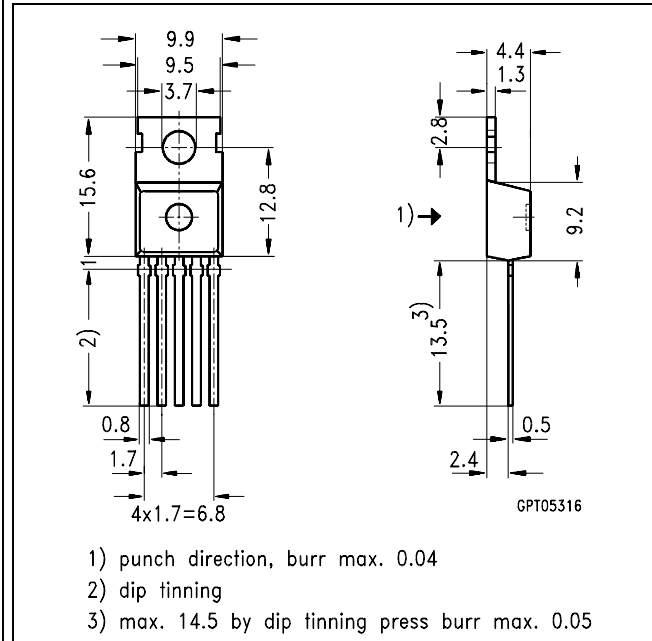

SMD TO-220 AB/5, OPTION E3122

Ordering code

BTS430K2 E3122A	T&R: Q67060-S6200-A4
-----------------	----------------------

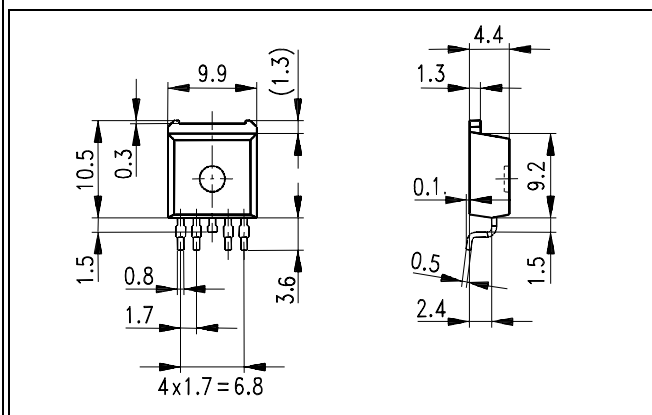

Changed since 04/96

Case E3122A drawing changed

Edition 1996

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
D-81541 München, Germany**

**© Infineon Technologies AG 2000.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.