



Siemens Matsushita Components

SAW Components Low Loss Filter

B4839
282,00 MHz

Data Sheet


Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM, PCN, PCS systems
- Ceramic SMD package
- Very small size

Terminals

- Gold-plated Ni


Ceramic package QCC8C

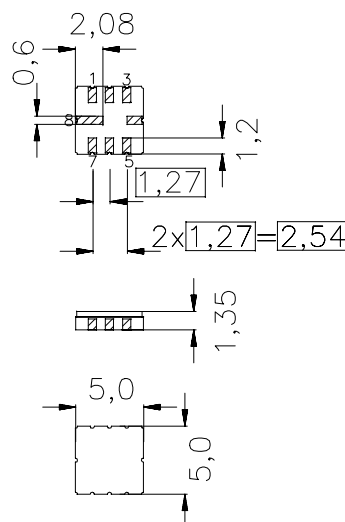

Dimensions in mm, approx. weight 0,10 g

Pin configuration

1,2	Input, balanced
5,6	Output, balanced
7	External coil
3,4,8	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4839	B39281-B4839-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-20 / +75	°C
Storage temperature range	T_{stg}	-35 / +85	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm



Siemens Matsushita Components

SAW Components Low Loss Filter

B4839
282,00 MHz

Data Sheet

Characteristics

Operating temperature: $T = -20$ to $+75^{\circ}\text{C}$
Terminating source impedance: $Z_S = 1000\ \Omega \parallel -1,1\ \text{pF}$
Terminating load impedance: $Z_L = 1000\ \Omega \parallel -1,1\ \text{pF}$

		min.	typ.	max.	
Nominal frequency	f_N	—	282,00	—	MHz
Minimum insertion attenuation (Including losses in baluns and matching network)	α_{\min}	4,0	5,2	6,0	dB
Amplitude ripple (p-p) $f_N - 67,5\ \text{kHz} \quad \dots \quad f_N + 67,5\ \text{kHz}$	$\Delta\alpha$	—	0,3	1,5	dB
Group delay ripple (p-p) $f_N - 80,0\ \text{kHz} \quad \dots \quad f_N + 80,0\ \text{kHz}$	$\Delta\tau$	—	0,8	1,8	μs
Relative attenuation (relative to α_{\min})	α_{rel}				
$f_N - 20,00\ \text{MHz} \quad \dots \quad f_N - 5,00\ \text{MHz}$		45	47	—	dB
$f_N - 5,00\ \text{MHz} \quad \dots \quad f_N - 1,60\ \text{MHz}$		40	47	—	dB
$f_N - 1,60\ \text{MHz} \quad \dots \quad f_N - 0,80\ \text{MHz}$		35	45	—	dB
$f_N - 0,80\ \text{MHz} \quad \dots \quad f_N - 0,60\ \text{MHz}$		35	45	—	dB
$f_N - 0,60\ \text{MHz} \quad \dots \quad f_N - 0,40\ \text{MHz}$		18	38	—	dB
$f_N + 0,40\ \text{MHz} \quad \dots \quad f_N + 0,60\ \text{MHz}$		18	29	—	dB
$f_N + 0,60\ \text{MHz} \quad \dots \quad f_N + 0,80\ \text{MHz}$		35	37	—	dB
$f_N + 0,80\ \text{MHz} \quad \dots \quad f_N + 1,60\ \text{MHz}$		35	39	—	dB
$f_N + 1,60\ \text{MHz} \quad \dots \quad f_N + 5,00\ \text{MHz}$		40	50	—	dB
$f_N + 5,00\ \text{MHz} \quad \dots \quad f_N + 20,00\ \text{MHz}$		45	53	—	dB
Impedance within the passband					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1000 \parallel 1,1	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1000 \parallel 1,1	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ¹⁾	TC_f	—	0,031	—	ppm/ K^2
Frequency inversion point	T_0	—	25	—	$^{\circ}\text{C}$

¹⁾ Temperature dependence of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$




Siemens Matsushita Components

SAW Components Low Loss Filter

B4839
282,00 MHz

Data Sheet

Test matching network to 50 Ω (element values depend on PCB layout):

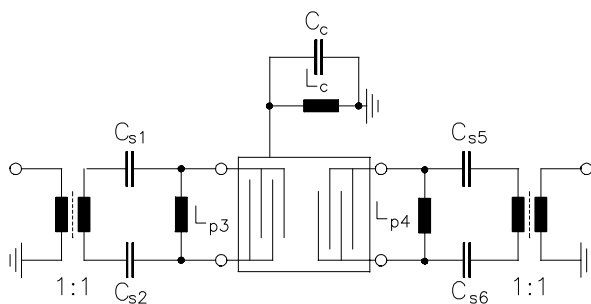

$$C_{s1} = C_{s6} = 3,9\text{pF}$$

$$C_{s2} = C_{s5} = 5,6\text{pF}$$

$$L_{p3} = L_{p4} = 68\text{nH}$$

$$L_c = 68\text{nH} \parallel 1,5\text{pF}$$



Siemens Matsushita Components

SAW Components Low Loss Filter

B4839
282,00 MHz

Data Sheet

Transfer function (normalized)

