

# FAN7544


## Simple Ballast Controller

### Features


- Low Start-up and Operating Current : 140μA, 6.5mA
- Under Voltage Lock Out With 1.9V of Hysteresis
- 600mA of Totem Pole Output with High State Clamp
- Trimmed 1.5% Internal Bandgap Reference
- Programmable Preheat Time & Frequency
- Programmable Run Frequency
- High Accuracy Oscillator

### Descriptions

The FAN7544 provides simple and high performance electronic ballast control functions. The FAN7544 is optimized for electronic ballast requiring a minimum board area, by reducing component counts and lowering power dissipation. The features include programmable preheating time and frequency and programmable run frequency. The initial preheating time and frequency can be adjusted according to the types of lamps using the CPH, CT and RPH. Output gate driver circuit clamps power MOSFET gate voltage to the supply voltage.

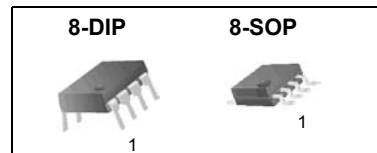


### Internal Block Diagram

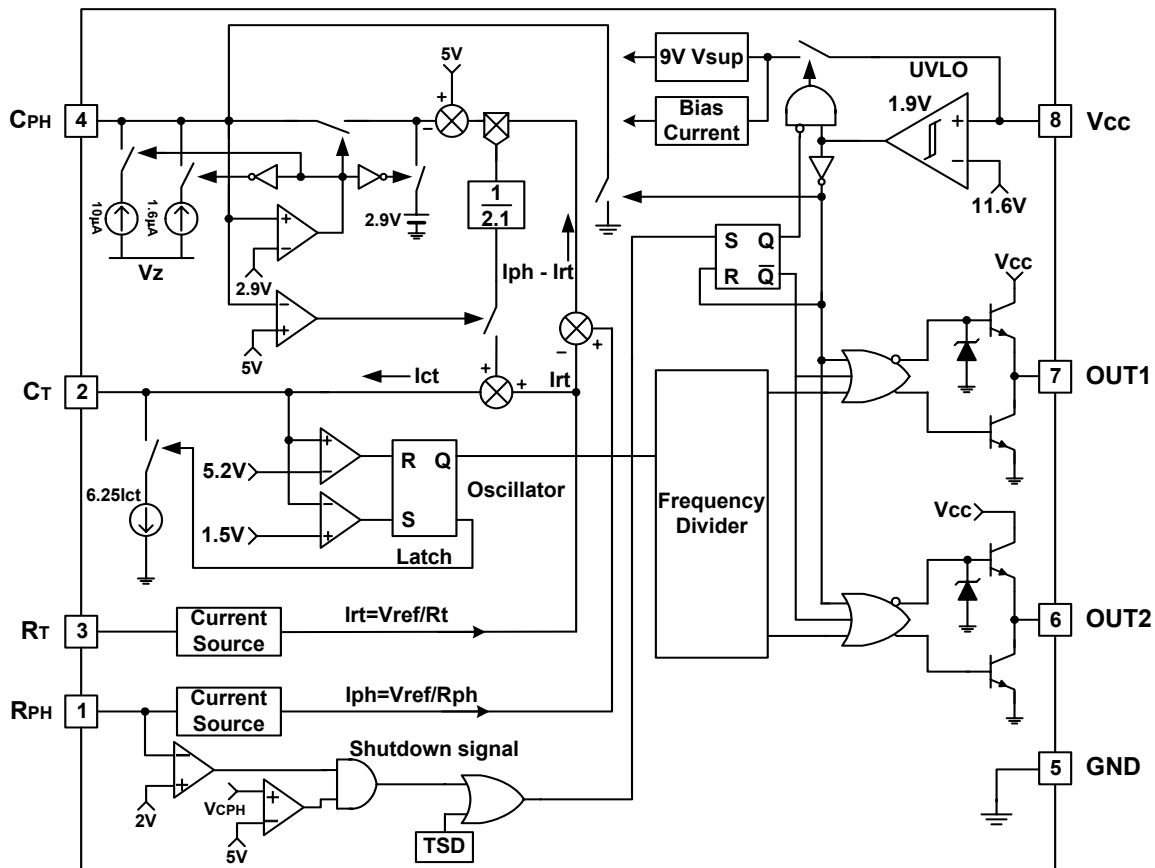

Rev. 1.0.0

## Pin Assignments

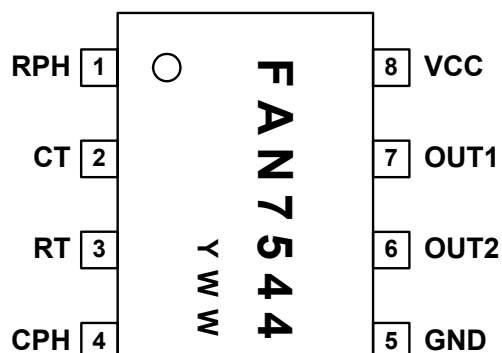

YWW : Work Week Code

## Pin Definitions

| Pin Number | Pin Name | Pin Function Description           |
|------------|----------|------------------------------------|
| 1          | RPH      | Preheat frequency set resistor     |
| 2          | CT       | Oscillator frequency set capacitor |
| 3          | RT       | Oscillator frequency set resistor  |
| 4          | CPH      | Preheat time set capacitor         |
| 5          | GND      | Ground                             |
| 6          | OUT2     | Gate drive output 2                |
| 7          | OUT1     | Gate drive output 1                |
| 8          | VCC      | Supply voltage                     |

## Absolute Maximum Ratings

| Parameter                               |       | Symbol                            | Value      | Unit |
|-----------------------------------------|-------|-----------------------------------|------------|------|
| Supply Voltage                          |       | V <sub>CC</sub>                   | 30         | V    |
| Peak Drive Output Current               |       | I <sub>OH</sub> , I <sub>OL</sub> | ±600       | mA   |
| Output Drive Clamping Diode Current     |       | I <sub>clamp</sub>                | ±10        | mA   |
| CPH, CT, RT, and RPH Pins Input Voltage |       | V <sub>IN</sub>                   | -0.3 to 6  | V    |
| Operating Temperature Range             |       | T <sub>opr</sub>                  | -25 to 125 | °C   |
| Storage Temperature Range               |       | T <sub>stg</sub>                  | -65 to 150 | °C   |
| Power Dissipation                       | 8-DIP | P <sub>d</sub>                    | 0.8        | W    |
|                                         | 8-SOP |                                   | 0.5        |      |
| Thermal Resistance (Junction-to-Air)    | 8-DIP | R <sub>θja</sub>                  | 100        | °C/W |
|                                         | 8-SOP |                                   | 165        |      |

## Temperature Characteristics (-25°C ≤ Ta ≤ 125°C)

| Parameter                                           | Symbol    | Value | Unit |
|-----------------------------------------------------|-----------|-------|------|
| Temperature Stability for Operating Frequency (fos) | Δfos(Typ) | 3     | %    |

## Electrical Characteristics

Unless otherwise specified, for typical values  $V_{CC}=15V$ ,  $T_a=25^{\circ}C$ , For Min/Max values  $T_a$  is the operating ambient temperature range with  $-25^{\circ}C \leq T_a \leq 125^{\circ}C$  and  $12.7V \leq V_{CC} \leq 30V$

| Parameter                                                | Symbol              | Conditions                                                    | Min. | Typ. | Max. | Unit        |
|----------------------------------------------------------|---------------------|---------------------------------------------------------------|------|------|------|-------------|
| <b>UNDER VOLTAGE LOCK OUT SECTION</b>                    |                     |                                                               |      |      |      |             |
| Start Threshold Voltage                                  | $V_{TH(st)}$        | $V_{CC}$ Increasing                                           | 10.5 | 11.6 | 12.7 | V           |
| UVLO Hysteresis                                          | $H_{Y(st)}$         | -                                                             | 1.4  | 1.9  | 2.4  | V           |
| <b>SUPPLY CURRENT SECTION</b>                            |                     |                                                               |      |      |      |             |
| Start Up Supply Current                                  | $I_{ST}$            | $V_{CC} < V_{TH(st)}$                                         | -    | 0.14 | 0.2  | mA          |
| Operating Supply Current                                 | $I_{CC}$            | Output not switching                                          | -    | 6.5  | 10   | mA          |
| Dynamic Operating Supply Current                         | $I_{DCC}$           | 50kHz, $C_L = 1nF$                                            | -    | 8    | 12   | mA          |
| <b>OSCILLATOR SECTION</b>                                |                     |                                                               |      |      |      |             |
| CPH Pin Charging Current 1                               | $I_{CPHL}$          | $V_{CPH}=2V$                                                  | 1.3  | 1.6  | 1.9  | $\mu A$     |
| CPH Pin Charging Current 2                               | $I_{CPHH}$          | $V_{CPH}=4V$                                                  | 7    | 10   | 13   | $\mu A$     |
| CPH Pin Clamp Voltage                                    | $V_{CLAMP}$         | -                                                             | 4.8  | 5.6  | 6.4  | V           |
| Preheating Frequency                                     | $f_{PH}$            | $V_{CPH}=0V$ ,<br>$R_{PH}=47k\Omega$ , $C_T=470pF$            | 70   | 81.5 | 93   | kHz         |
| Preheating Dead Time                                     | $t_{pd}$            | $V_{CPH}=0V$ ,<br>$R_{PH}=47k\Omega$ , $C_T=470pF$            | 0.8  | 1.3  | 1.8  | $\mu s$     |
| Operating Frequency                                      | $f_{OS}$            | $V_{CPH}=Open$ ,<br>$R_T=80k\Omega$ , $C_T=470pF$             | 45.5 | 50   | 54.5 | kHz         |
| Operating Dead Time                                      | $t_{OD}$            | $V_{CPH}=Open$ ,<br>$R_T=80k\Omega$ , $C_T=470pF$             | 1.6  | 2.0  | 2.4  | $\mu s$     |
| CT Threshold Voltage <sup>(note1)</sup>                  | $\Delta V_{CT}$     | $T_a=25^{\circ}C$                                             | 3.2  | 3.7  | 4.2  | V           |
| CT Charging Current                                      | $I_{CHG}$           | -                                                             | 170  | 220  | 270  | $\mu A$     |
| CT Discharging Current                                   | $I_{DIS}$           | -                                                             | 0.9  | 1.15 | 1.4  | mA          |
| Temperature Stability <sup>(Note1)</sup>                 | $\Delta f/\Delta T$ | $-25^{\circ}C \leq T_a \leq 125^{\circ}C$ ,<br>$V_{CC} = 25V$ | -    | 1    | 3    | %           |
| Voltage Stability                                        | $\Delta f/\Delta V$ | $12.7V \leq V_{CC} \leq 30V$ , $T_a=25^{\circ}C$              | -    | -    | 3    | %           |
| <b>OUTPUT SECTION</b>                                    |                     |                                                               |      |      |      |             |
| Gate Driver Source Current <sup>(note1)</sup>            | $I_{OSOURCE}$       | $V_{OUT}=0V$                                                  | -    | 500  | -    | mA          |
| Gate Driver Sink Current <sup>(note1)</sup>              | $I_{OSINK}$         | $V_{OUT}=14.6V$                                               | -    | 500  | -    | mA          |
| Rising Time <sup>(Note1)</sup>                           | $t_r$               | $C_L=1nF$ , $V_{CC}=15V$ , $T_a=25^{\circ}C$                  | -    | 130  | 170  | ns          |
| Falling Time <sup>(Note1)</sup>                          | $t_f$               | $C_L=1nF$ , $V_{CC}=15V$ , $T_a=25^{\circ}C$                  | -    | 50   | 100  | ns          |
| Maximum Output Voltage                                   | $V_{omax}$          | $V_{CC} = 25V$                                                | 13   | 15   | 17   | V           |
| Output Voltage With UVLO Activated                       | $V_{omin}$          | $V_{CC} = 5V$ , $I_O = 100\mu A$                              | -    | -    | 1    | V           |
| <b>PROTECTION SECTION</b>                                |                     |                                                               |      |      |      |             |
| Shutdown Sink Current <sup>(note1)</sup>                 | $I_{SD}$            | $R_{PH}=47k\Omega$                                            | -    | 0.6  | -    | mA          |
| Latch Mode Quiescent Current                             | $I_{LATCH}$         | $V_{CC} = 15V$                                                | -    | 0.36 | 0.57 | mA          |
| Thermal Shutdown Junction Temperature <sup>(Note1)</sup> | $T_{SD}$            | -                                                             | -    | 150  | -    | $^{\circ}C$ |

**Note:**

1. These parameters, although guaranteed, are not 100% tested in production.

## Typical Characteristics

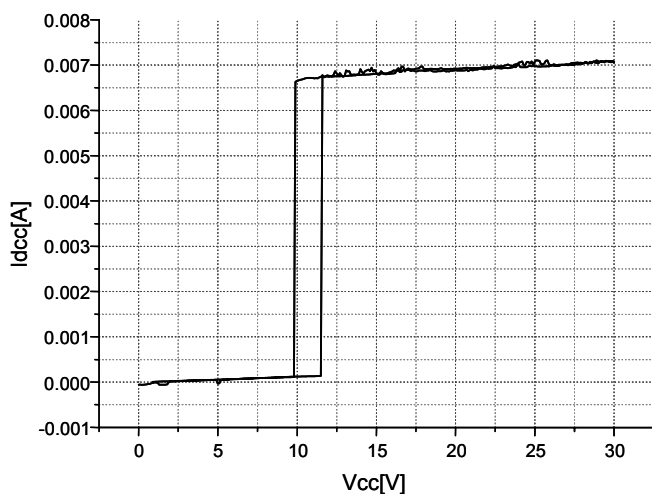


Figure 1. UVLO

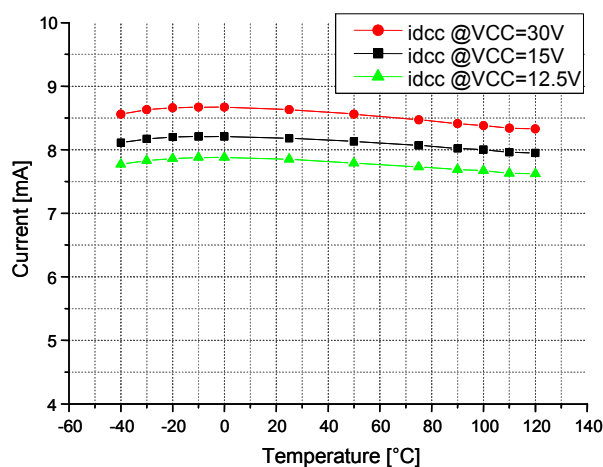


Figure 2. Dynamic Operating Current

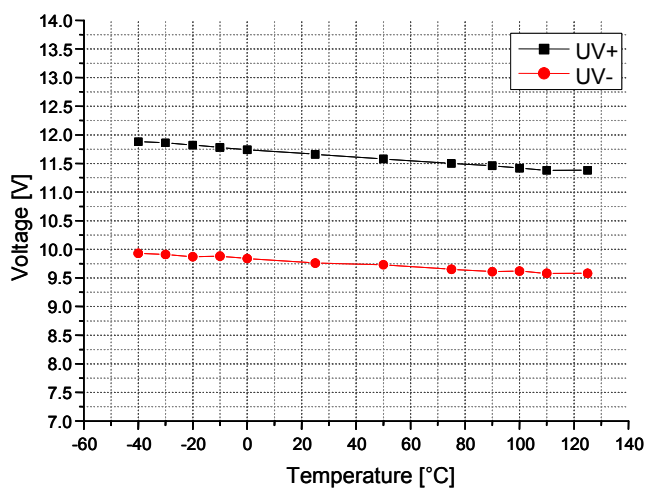


Figure 3. UVLO Hysteresis

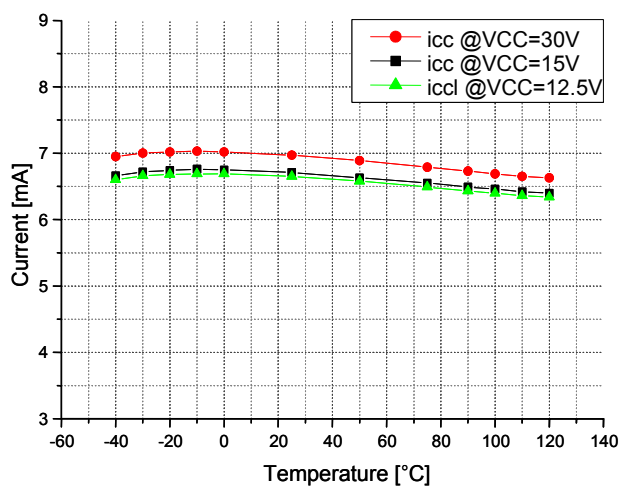


Figure 4. Operating Current





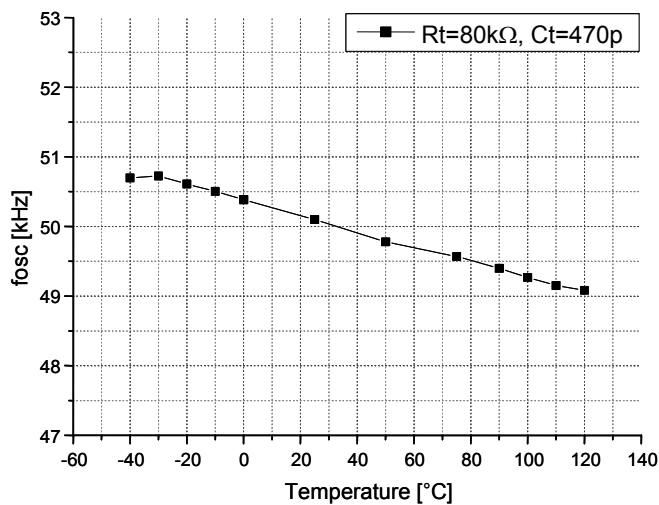



Figure 5. Switching Frequency

## Typical Characteristics(Con't)

Figure 6. Preheating Frequency,  $C_T = 470pF$ Figure 7. Switching Frequency,  $C_T = 470pF$ Figure 8. Preheating Frequency,  $C_T = 1nF$ Figure 9. Switching Frequency,  $C_T = 1nF$

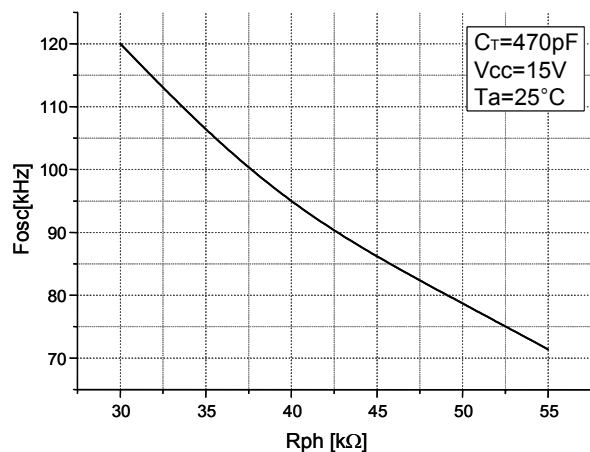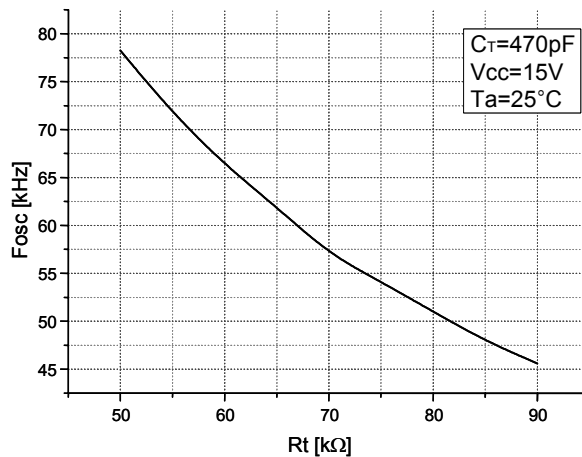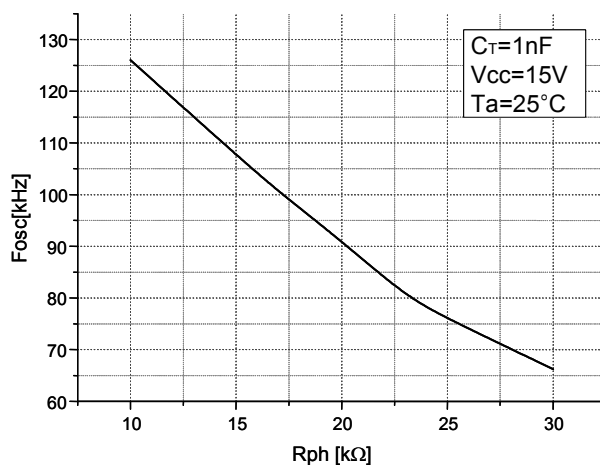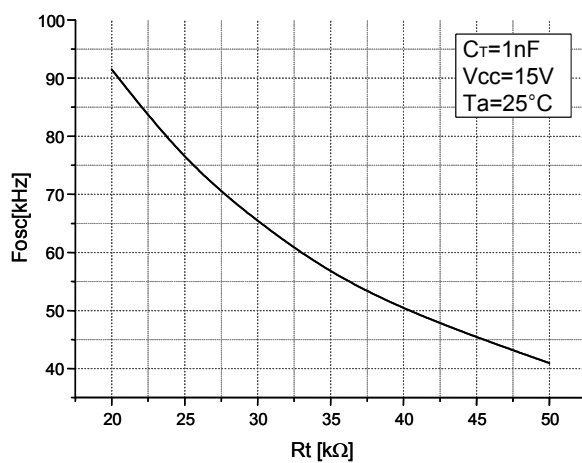

## Operating Mode

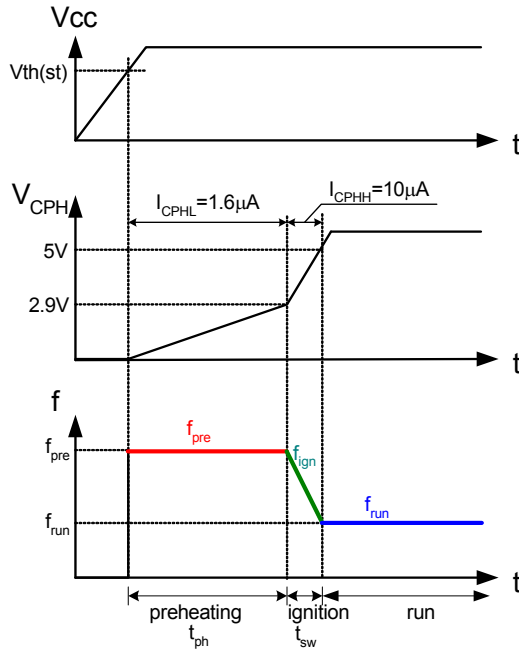

$0V < V_{CPH} < 2.9V$  ; **Preheating Frequency**

$$i_{CT} = I_{RT} + \frac{I_{PH} - I_{RT}}{(5V - 2.9V)}(5V - 2.9V) = I_{PH}$$

$2.9V \leq V_{CPH} < 5V$  ; **Frequency Sweep**

$$i_{CT} = I_{RT} + \frac{I_{PH} - I_{RT}}{(5V - 2.9V)}(5V - V_{CPH})$$

$V_{CPH} \geq 5V$  ; **Run Frequency**

$$i_{CT} = I_{RT}$$

Figure 12. Timing Diagram

The FAN7544 has three operating mode as was shown in the figure 12.

### 1) Preheating Mode

The preheating mode is defined as the IC's internal status is in when the lamp filaments are being heated to correct emission temperature. This is necessary for maximizing lamp life and reducing the required ignition voltage. As soon as the Vcc exceeds the UVLO high threshold, the preheating time set-up capacitor, CPH starts to be charged by the internal 1.6μA current source until the VCPH reaches 2.9V. From 0V to 2.9V of the VCPH after the VCPH start to be charged, the switching frequency throughout the preheating mode is determined by CT and RPH and the preheating time is decided by the CPH and the 1.6μA current source. ( $\Delta T_{PRE} = CPH \times 2.9V / 1.6\mu A$ )

### 2) Ignition mode

The ignition mode is defined as the IC's internal status is in when a high voltage is established across the lamp necessary for igniting the lamp. When the VCPH exceeds 2.9V, the FAN7544 enters the ignition mode, and moves to the run mode when the VCPH exceeds 5V. In this period, the internal 10μA current source charges the external preheating timing capacitor(CPH) in order to increase noise immunity with sharp slop of the VCPH. The ignition time is decided CPH and internal 10μA current source( $\Delta T_{IGN} = CPH \times \Delta V_{CPH2} / I_{CPHH}$ ). In this mode, the switching frequency is determined by CT, RPH and RT because the ICT is decided by the following equation.

$$I_{CT} = I_{RT} + \frac{I_{RPH} - I_{RT}}{2.1}(5V - V_{CPH})$$

### 3) Run Mode

After the lamp has successfully ignited, the FAN7544 enters run mode. The run mode is defined as the IC's internal status is in when the lamp is being driven with a normal power level after the lamp is discharged. The run mode switching frequency is determined by the timing resistor RT and timing capacitor CT. As soon as the VCPH exceeds 5V, the protection masking mode is disable and the IC can enter the protection mode.


## Protection Mode

If the voltage at the RPH pin decreases below 2V during the run mode, the FAN7544 enters the protection mode and all gate drive outputs(OUT1 & OUT2) are latched off in the low state and the VCPH is decreased to 0V. To exit the protection mode, the Vcc must go down below the UVLO low threshold.



# Application Circuit

<32W×2 Lamps Ballast>

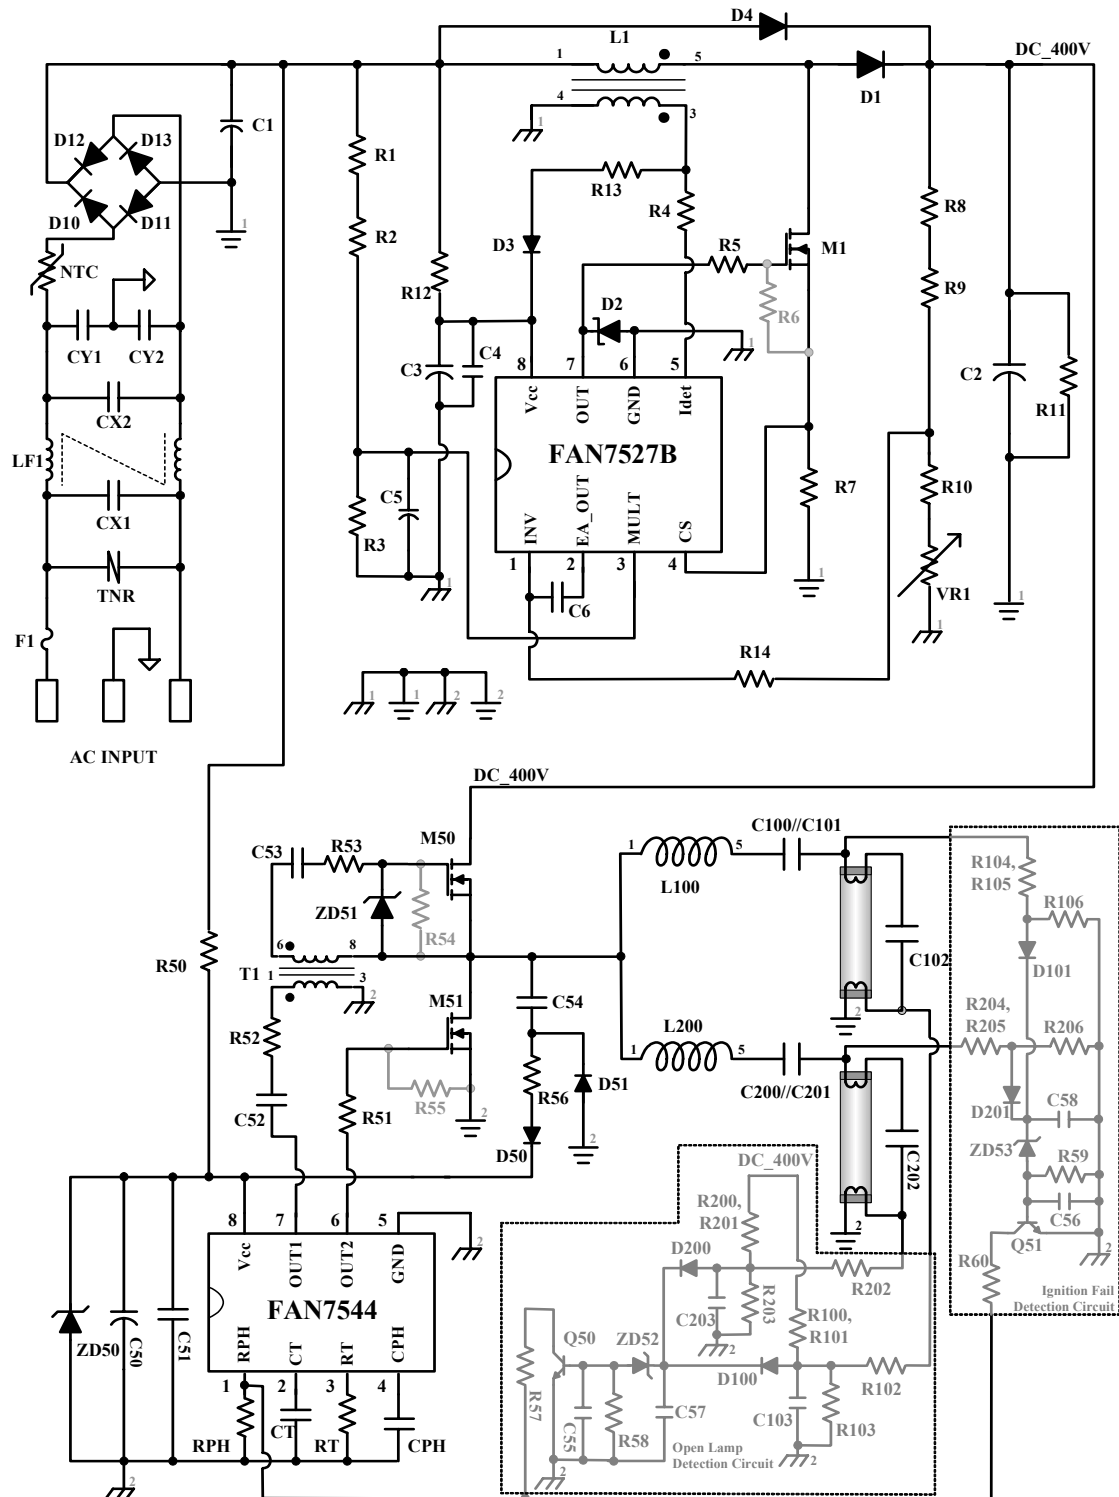

## Components List (for Wide-Range 32W× 2Lamps Application)

| Part number            | Value                  | Note                | Manufacturer |
|------------------------|------------------------|---------------------|--------------|
| <b>INPUT PART</b>      |                        |                     |              |
| F1                     | 250V, 3A               | Fuse                | -            |
| CX1                    | 47nF, 275Vac           | Box-Cap             | -            |
| CX2                    | 150nF, 275Vac          | Box-Cap             | -            |
| CY1, CY2               | 2200pF, 3000V          | Y-Cap               | -            |
| TNR                    | 470V                   | 471                 | -            |
| NTC                    | 10Ω                    | 10D09               | -            |
| D10, D11, D12, D13     | 400V, 1A               | 1N4004              | Fairchild    |
| <b>PFC PART</b>        |                        |                     |              |
| R1, R2, R8             | 910kΩ                  | Ceramic, 1206       | -            |
| R3                     | 22kΩ                   | Ceramic, 1206       | -            |
| R4                     | 25.5kΩ                 | Ceramic, 1206       | -            |
| R5                     | 10Ω                    | Ceramic, 1206       | -            |
| R6                     | 22kΩ                   | Ceramic, 1206       | -            |
| R7                     | 0.47Ω                  | 1W                  | -            |
| R9                     | 100kΩ                  | Ceramic, 1206       | -            |
| R10                    | 2.2kΩ                  | Ceramic, 1206       | -            |
| R11                    | 220kΩ                  | 1W                  | -            |
| R12                    | 150kΩ                  | 1W                  | -            |
| R13                    | 4.7Ω                   | Ceramic, 1206       | -            |
| R14                    | 0Ω                     | Ceramic, 1206       | -            |
| VR1                    | 10kΩ                   | Variable Resistor   | -            |
| C1                     | 0.22μF, 630V           | Miller-Cap          | -            |
| C2                     | 47μF, 450V             | Electrolytic        | -            |
| C3                     | 10μF, 50V              | Electrolytic        | -            |
| C4                     | 105                    | Ceramic, 0805       | -            |
| C5                     | 102                    | Ceramic, 0805       | -            |
| C6                     | 105                    | Ceramic, 0805       | -            |
| L1                     | 0.9mH(80T:6T)          | EI2820              | -            |
| D1, D4                 | 600V, 1A, Ultrafast    | UF4005              | Fairchild    |
| D2                     | Schottky Diode         | MBR0540             | Fairchild    |
| D3                     | Small Signal Diode     | FDLL4148            | Fairchild    |
| M1                     | 500V, 5A, Power Mosfet | FQP5N50C, FQPF5N50C | Fairchild    |
| <b>Ballast PART</b>    |                        |                     |              |
| R50                    | 390kΩ                  | 1W                  | -            |
| R51, R53               | 39Ω                    | Ceramic, 1206       | -            |
| R52, R57, R60          | 0Ω                     | Ceramic, 1206       | -            |
| R54, R55               | 47kΩ                   | Ceramic, 1206       | -            |
| R56                    | 5.6Ω                   | 1W                  | -            |
| R58, R59               | 62kΩ                   | Ceramic, 0805       | -            |
| RPH                    | 51kΩ                   | Ceramic, 1206       | -            |
| RT                     | 82kΩ                   | Ceramic, 1206       | -            |
| R100, R104, R200, R204 | 820kΩ                  | Ceramic, 1206       | -            |
| R101, R105, R201, R205 | 300kΩ                  | Ceramic, 1206       | -            |


| Part number                      | Value                  | Note                 | Manufacturer                  |
|----------------------------------|------------------------|----------------------|-------------------------------|
| R102, R202                       | 5.1k $\Omega$          | Ceramic, 1206        | -                             |
| R103, R203                       | 50k $\Omega$           | Ceramic, 1206        | -                             |
| R106, R206                       | 30k $\Omega$           | Ceramic, 1206        | -                             |
| C50                              | 4.7 $\mu$ F, 50V       | Electrolytic         | -                             |
| C51                              | 105                    | Ceramic, 0805        | -                             |
| C52, C53                         | 104                    | Ceramic, 1206        | -                             |
| C54                              | 1nF, 630V              | Miller-Cap           | -                             |
| C55, C56, C57, C58               | 104                    | Ceramic, 0805        | -                             |
| CT                               | 471                    | Ceramic, 0805        | -                             |
| CPH                              | 474                    | Ceramic, 0805        | -                             |
| C100, C101, C200, C201           | 6.8nF, 630V            | Miller-Cap           | -                             |
| C102, C202                       | 4.7nF, 1000V           | Miller-Cap           | -                             |
| L100, L200                       | 3.2mH(120T)            | EE2820               | -                             |
| T1                               | 4mH(50T:50T)           | EE1614               | -                             |
|                                  | 4mH(50T:100T)          |                      | C53: 0 $\Omega$ , ZD51 : Open |
| Q50                              | NPN transistor         | KST2222A             | Fairchild                     |
| M50, M51                         | 500V, 5A, Power Mosfet | FQP5N500C, FQPF5N50C | Fairchild                     |
| D50, D51, D100, D101, D200, D201 | Small Signal Diode     | FDLL4148             | Fairchild                     |
| ZD50, ZD51                       | 15V, 1W Zener Diode    | 1N4744A              | Fairchild                     |
| ZD52, ZD53                       | 15V, Zener Diode       | MMSZ5245B            | Fairchild                     |

## Mechanical Dimensions

### Package

Dimensions in millimeters/inches

### 8-SOP-225


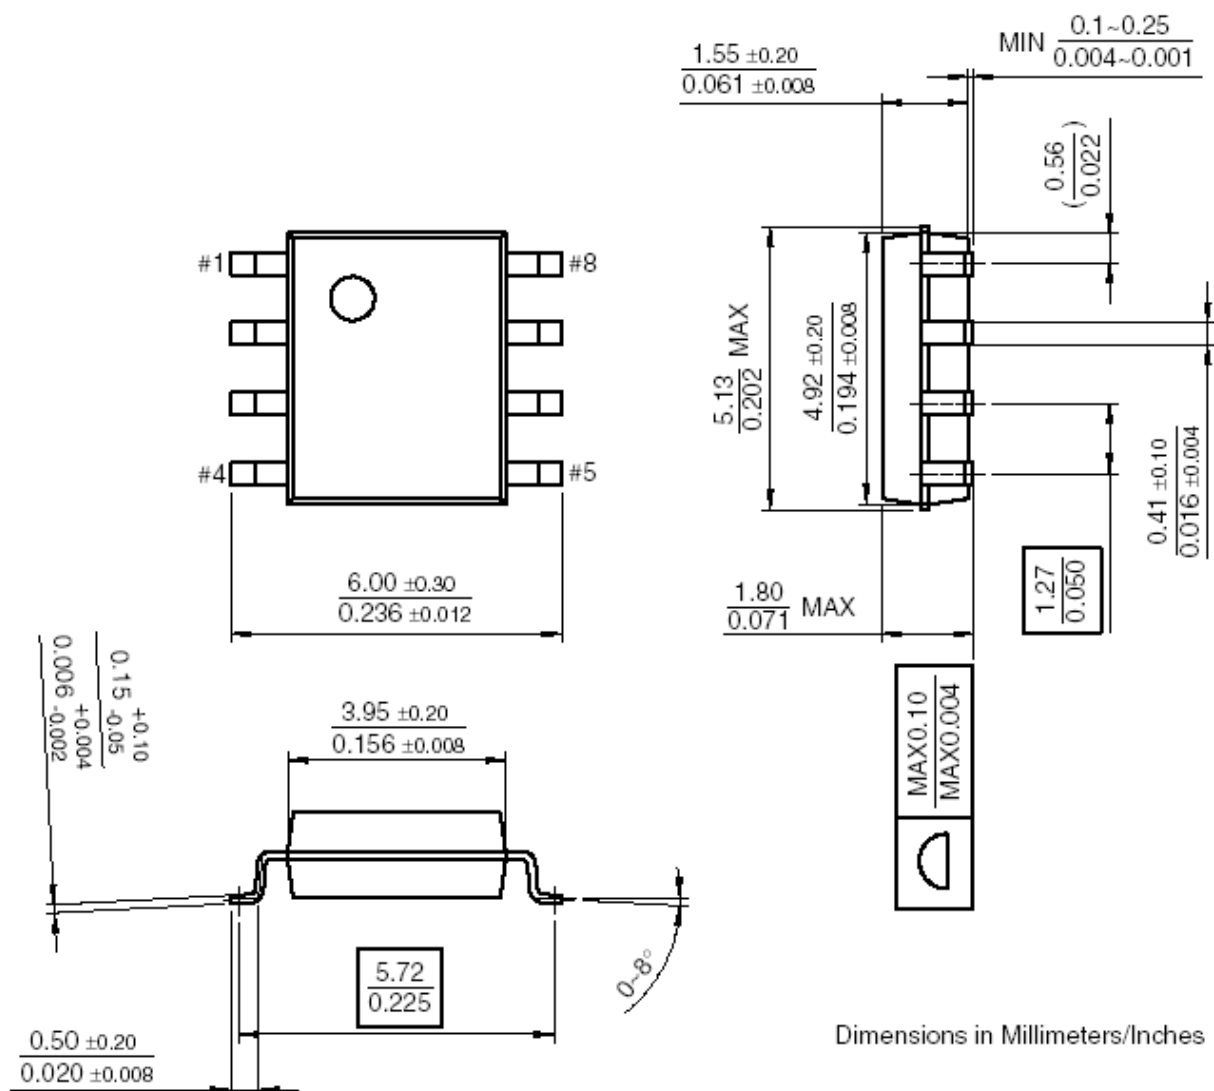


# Mechanical Dimensions (Continued)

## Package

Dimensions in millimeters/inches

## 8-DIP-300

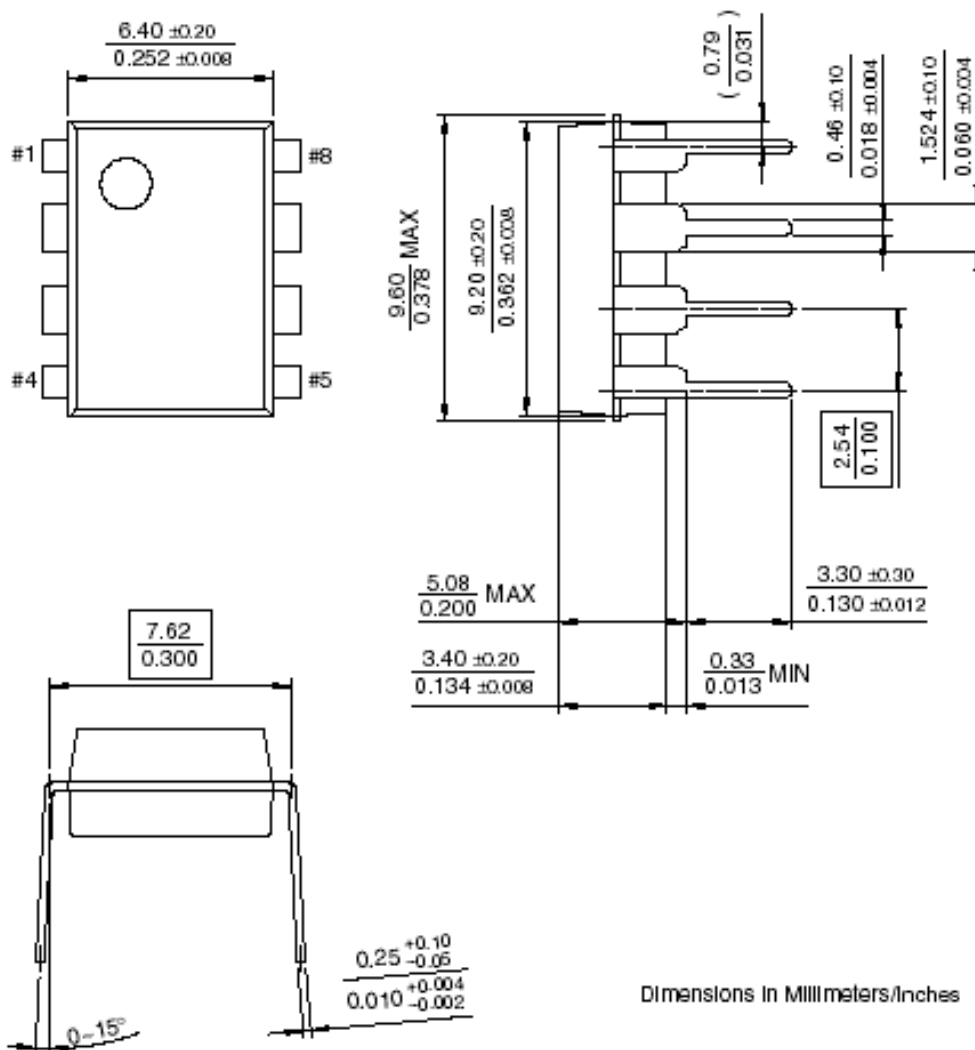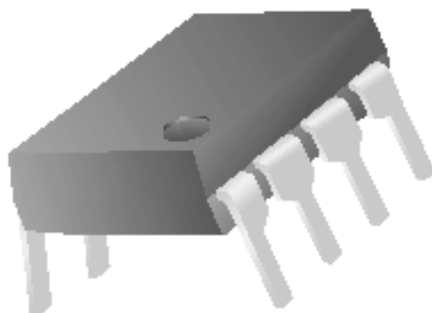

Dimensions in Millimeters/Inches

## Ordering Information

| Product Number | Package | Operating Temperature | Packing     |
|----------------|---------|-----------------------|-------------|
| FAN7544N       | 8DIP    | -25°C ~ +125°C        | Tube        |
| FAN7544M       | 8SOP    |                       |             |
| FAN7544MX      | 8SOP    |                       | Tape & Reel |

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.