


HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EE13 Platforms - THT TYPE

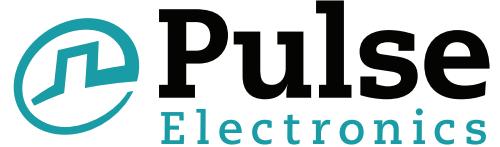

- AC/DC and DC/DC Switching Transformers
- Reinforced Insulation
- 3000Vrms Hi-Pot
- Topology: Flyback
- Custom Design Available

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C¹

PA2718NL	Pri. Inductance	(5 - 1)	1.74 mH ± 10%	
	Lk. Inductance w/	(5 - 1) (7-8)	98 µH MAX shorted	
	DCR	(5-1) (7-8)	5200	
			24	
	Hi-Pot	Pri-Sec	3000 Vrms	
	K1 Factor	7505		


NOTES:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} (\text{Gauss}) = K1_Factor * I_{pk} (\text{A})$$
3. In high volt-µsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$\text{CoreLoss (W)} = 2.58E-13 X (\text{Freq_kHz})^{1.35} X (\text{DB_Gauss})^{2.80}$$
where DB can be calculated as:
For Flyback Topology:
$$\text{DB} = K1_Factor * D(A)$$


For Forward Topology:
$$\text{DB} = K1_Factor * \text{Volt-}\mu\text{sec}$$
4. The “NL” suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the “NL” suffix, but an RoHS compliant version is required, please contact Pulse for availability.



CM - FLYBACK TRANSFORMER



HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EE13 Platforms - THT Type

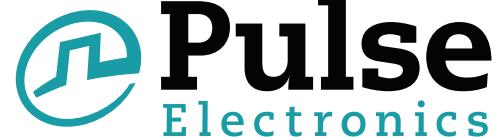

Mechanical

PA2718NL

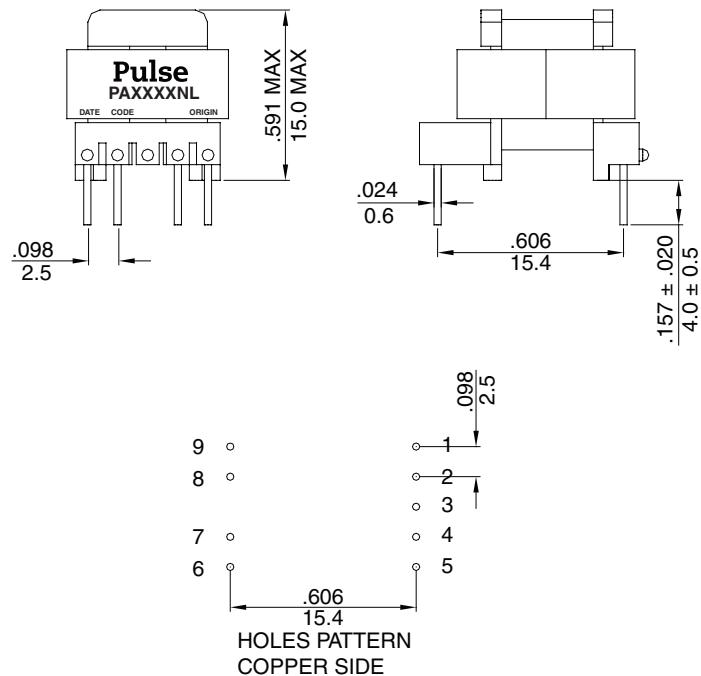

For More Information:

**Pulse North America
Headquarters**
12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

TEL: 858 674 8100
FAX: 858 674 8262

**Pulse European
Headquarters**
Einsteinstrasse 1
D-71083 Herrenberg
Germany

TEL: 49 7032 7806
FAX: 49 7032 7806

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
TEL: +86 755 26662672

TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China
Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia
150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia
No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 886 3 4643715
FAX: 886 3 4641911

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer." Pulse and the Squarewave logo are trademarks of Pulse Electronics, Inc., registered in the U.S. and other countries.

© Copyright, 2011. Pulse Electronics, Corporation. All rights reserved.