

# LM48860 Boomer® Audio Power Amplifier Series Ground-Referenced, Ultra Low Noise, Fixed Gain Stereo Headphone Amplifier

Check for Samples: [LM48860](#)

## FEATURES

- Fixed Logic Levels with Supply Voltage
- Ground Referenced Outputs
- High PSRR
- Available in Space-Saving DSBGA Package
- Ultra Low Current Shutdown Mode
- Improved Pop & Click Circuitry Eliminates Noises During Turn-On and Turn-Off Transitions
- No Output Coupling Capacitors, Snubber Networks, Bootstrap Capacitors, or Gain-Setting Resistors Required
- Shutdown Either Channel Independently

## APPLICATIONS

- Mobile Phones
- MP3 Players
- PDAs
- Portable Electronic Devices
- Notebook PCs

## KEY SPECIFICATIONS

- PSRR at 217Hz ( $V_{DD} = 3.0V$ ): 80dB (typ)
- Stereo Power Output at  $V_{DD} = 3V$ ,  $R_L = 16\Omega$ , THD+N = 1%: 40mW (typ)
- Shutdown Current 0.1μA (typ)
- Internal Fixed Gain: 1.5V/V (typ)
- Operating Voltage: 2.0V to 5.5V

## DESCRIPTION

The LM48860 is a ground referenced, fixed-gain audio power amplifier capable of delivering 40mW per channel of continuous average power into a 16Ω single-ended load with less than 1% THD+N from a 3V power supply.

The LM48860 features a new circuit technology that utilizes a charge pump to generate a negative reference voltage. This allows the outputs to be biased about ground, thereby eliminating output-coupling capacitors typically used with normal single-ended loads.

Boomer audio power amplifiers were designed specifically to provide high quality output power with a minimal amount of external components. The LM48860 does not require output coupling capacitors or bootstrap capacitors, and therefore is ideally suited for mobile phone and other low voltage applications where minimal power consumption is a primary requirement.

The LM48860 features a low-power consumption shutdown mode selectable for either channel separately. This is accomplished by driving either the  $\overline{SD\_RC}$  (Shutdown Right Channel) or  $\overline{SD\_LC}$  (Shutdown Left Channel) (or both) pins with logic low, depending on which channel is desired shutdown. Additionally, the LM48860 features an internal thermal shutdown protection mechanism.

The LM48860 contains advanced pop & click circuitry that eliminates noises which would otherwise occur during turn-on and turn-off transitions.

The LM48860 has an internal fixed gain of 1.5V/V.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2008–2013, Texas Instruments Incorporated

## Typical Application

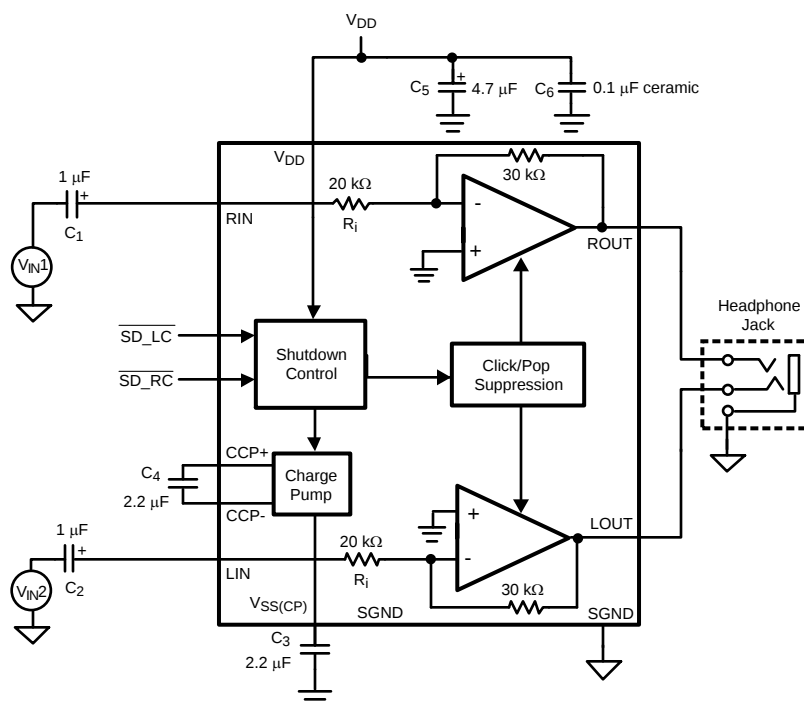


Figure 1. Typical Audio Amplifier Application Circuit

## Connection Diagram

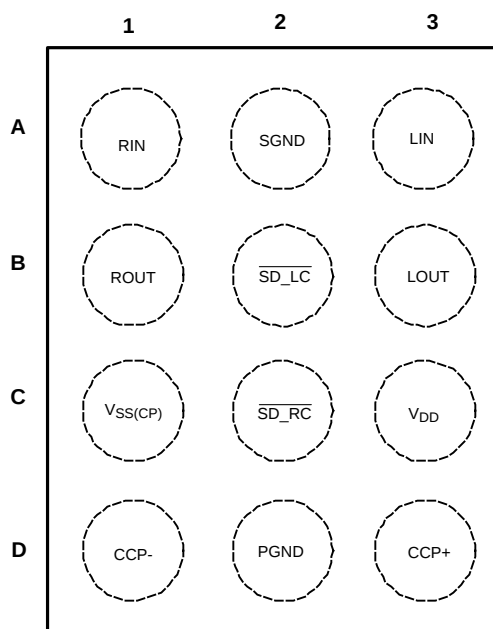


Figure 2. DSBGA - Top View  
See YZR0012 Package

### PIN DESCRIPTIONS

| Pin | Name                       | Function                                         |
|-----|----------------------------|--------------------------------------------------|
| A1  | RIN                        | Right Channel Input                              |
| A2  | SGND                       | Signal Ground                                    |
| A3  | LIN                        | Left Channel Input                               |
| B1  | ROUT                       | Right Channel Output                             |
| B2  | $\overline{\text{SD\_LC}}$ | Active Low Shutdown, Left Channel                |
| B3  | LOUT                       | Left Channel Output                              |
| C1  | $V_{\text{SS(CP)}}$        | Charge Pump Voltage Output                       |
| C2  | $\overline{\text{SD\_RC}}$ | Active-Low Shutdown, Right Channel               |
| C3  | $V_{\text{DD}}$            | Supply Voltage                                   |
| D1  | CCP-                       | Negative Terminal - Charge Pump Flying Capacitor |
| D2  | PGND                       | Power Ground                                     |
| D3  | CCP+                       | Positive Terminal - Charge Pump Flying Capacitor |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### Absolute Maximum Ratings<sup>(1)(2)</sup>

|                                  |                          |
|----------------------------------|--------------------------|
| Supply Voltage                   | 6.0V                     |
| Storage Temperature              | –65°C to +150°C          |
| Input Voltage                    | –0.3V to $V_{\text{DD}}$ |
| Power Dissipation <sup>(3)</sup> | Internally Limited       |
| ESD Rating <sup>(4)</sup>        | 2000V                    |
| ESD Rating <sup>(5)</sup>        | 200V                     |
| Junction Temperature             | 150°C                    |
| Thermal Resistance               |                          |
| $\theta_{\text{JA}}$ (typ) DSBGA | 59.3°C/W                 |

- (1) The *Electrical Characteristics* tables list ensure specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not specified.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (3) The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{\text{JMAX}}$ ,  $\theta_{\text{JA}}$ , and the ambient temperature,  $T_{\text{A}}$ . The maximum allowable power dissipation is  $P_{\text{DMAX}} = (T_{\text{JMAX}} - T_{\text{A}}) / \theta_{\text{JA}}$  or the number given in *Absolute Maximum Ratings*, whichever is lower. For the LM48860, see [power derating](#) curves for additional information.
- (4) Human body model, applicable std. JESD22-A114C.
- (5) Machine model, applicable std. JESD22-A115-A.

### Operating Ratings

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Temperature Range                                      |                               |
| $T_{\text{MIN}} \leq T_{\text{A}} \leq T_{\text{MAX}}$ | –40°C ≤ $T_{\text{A}}$ ≤ 85°C |
| Supply Voltage ( $V_{\text{DD}}$ )                     | 2.0V ≤ $V_{\text{DD}}$ ≤ 5.5V |

## Electrical Characteristics $V_{DD} = 3V$ <sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 3V$  and  $16\Omega$  load unless otherwise specified. Limits apply to  $T_A = 25^\circ C$ .

| Symbol          | Parameter                                         | Conditions                                                                              | LM48860                |                      | Units<br>(Limits)                    |
|-----------------|---------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------|----------------------|--------------------------------------|
|                 |                                                   |                                                                                         | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                                      |
| $I_{DD}$        | Quiescent Power Supply Current<br>Full Power Mode | $V_{DD} = 3.0V$ ,<br>$V_{IN} = 0V$ , inputs terminated<br>both channels enabled         | 4                      | 5.5                  | mA (max)                             |
|                 |                                                   | $V_{DD} = 5.0V$ ,<br>$V_{IN} = 0V$ , inputs terminated<br>both channels enabled         | 4.2                    |                      | mA                                   |
| $I_{SD}$        | Shutdown Current                                  | $SD\_LC = SD\_RC = GND$                                                                 | 0.1                    | 1                    | $\mu A$ (max)                        |
|                 |                                                   | $SD\_LC = SD\_RC = GND$ ,<br>$V_{DD} = 5.0V$                                            | 0.1                    | 1                    | $\mu A$ (max)                        |
| $V_{OS}$        | Output Offset Voltage                             | $R_L = 32\Omega$ , $V_{IN} = 0V$                                                        | 0.7                    | 5.5                  | mV (max)                             |
| $A_V$           | Voltage Gain                                      |                                                                                         | -1.5                   |                      | V/V                                  |
| $\Delta A_V$    | Channel-to-channel Gain<br>Matching               |                                                                                         | 1                      |                      | %                                    |
| $R_{IN}$        | Input Resistance                                  |                                                                                         | 20                     | 15<br>25             | k $\Omega$ (min)<br>k $\Omega$ (max) |
| $P_O$           | Output Power                                      | THD+N = 1% (max); $f = 1kHz$ ,<br>$R_L = 16\Omega$ , (two channels in phase)            | 40                     | 35                   | mW (min)                             |
|                 |                                                   | THD+N = 1% (max); $f = 1kHz$ ,<br>$R_L = 32\Omega$ , (two channels in phase)            | 50                     | 40                   | mW (min)                             |
| THD+N           | Total Harmonic Distortion + Noise                 | $P_O = 20mW$ , $f = 1kHz$ , $R_L = 16\Omega$<br>(two channels in phase)                 | 0.025                  |                      | %                                    |
|                 |                                                   | $P_O = 25mW$ , $f = 1kHz$ , $R_L = 32\Omega$<br>(two channels in phase)                 | 0.014                  |                      | %                                    |
| PSRR            | Power Supply Rejection Ratio<br>Full Power Mode   | $V_{RIPPLE} = 200mV_{PP}$ , Input Referred                                              |                        |                      |                                      |
|                 |                                                   | $f = 217Hz$                                                                             | 80                     | 73                   | dB (min)                             |
|                 |                                                   | $f = 1kHz$                                                                              | 75                     |                      | dB                                   |
|                 |                                                   | $f = 20kHz$                                                                             | 60                     |                      | dB                                   |
| SNR             | Signal-to-Noise Ratio                             | $R_L = 32\Omega$ , $P_{OUT} = 50mW$ ,<br>$f = 1kHz$ , BW = 20Hz to 22kHz,<br>A-weighted | 105                    |                      | dB                                   |
| $V_{IH}$        | Shutdown Input Voltage High                       | $V_{DD} = 2.0V$ to $5.5V$                                                               |                        | 1.2                  | V (min)                              |
| $V_{IL}$        | Shutdown Input Voltage Low                        | $V_{DD} = 2.0V$ to $5.5V$                                                               |                        | 0.45                 | V (max)                              |
| $X_{TALK}$      | Crosstalk                                         | $R_L = 16\Omega$ , $P_O = 1.6mW$ ,<br>$f = 1kHz$                                        | 75                     |                      | dB                                   |
| $\epsilon_{OS}$ | Output Noise                                      | A-weighted filter, $V_{IN} = 0V$                                                        | 8                      |                      | $\mu V$                              |
| $Z_{OUT}$       | Output Impedance                                  | $V_{SD} = GND$<br>Input Terminated                                                      |                        |                      |                                      |
|                 |                                                   | Input not terminated<br>$SD\_LC = SD\_RC = GND$                                         | 30<br>30               | 20                   | k $\Omega$ (min)<br>k $\Omega$       |
| $I_L$           | Input Leakage                                     |                                                                                         | $\pm 0.1$              |                      | nA                                   |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the *Absolute Maximum Ratings* or other conditions beyond those indicated in the *Recommended Operating Conditions* is not implied. The *Recommended Operating Conditions* indicate conditions at which the device is functional and the device should not be operated beyond such conditions. All voltages are measured with respect to the ground pin, unless otherwise specified.
- (2) The *Electrical Characteristics* tables list ensure specifications under the listed *Recommended Operating Conditions* except as otherwise modified or specified by the *Electrical Characteristics Conditions* and/or Notes. Typical specifications are estimations only and are not specified.
- (3) Typical values represent most likely parametric norms at  $T_A = +25^\circ C$ , and at the Recommended Operation Conditions at the time of product characterization and are not specified.
- (4) Datasheet min/max specification limits are ensured by test or statistical analysis.

## External Components Description

(Figure 1)

| Components |                | Functional Description                                                                                                                                                                                                                                                                                                          |
|------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.         | C <sub>1</sub> | Input coupling capacitor which blocks the DC voltage at the amplifier's input terminals. Also creates a high pass-pass filter with R <sub>i</sub> at $f_c = 1/(2R_i C_1)$ . Refer to the section <a href="#">Proper Selection of External Components</a> , for an explanation of how to determine the value of C <sub>1</sub> . |
| 2.         | C <sub>2</sub> | Input coupling capacitor which blocks the DC voltage at the amplifier's input terminals. Also creates a high pass-pass filter with R <sub>i</sub> at $f_c = 1/(2R_i C_2)$ . Refer to the <a href="#">Power Supply Bypassing</a> section for an explanation of how to determine the value of C <sub>2</sub> .                    |
| 3.         | C <sub>3</sub> | Output capacitor. Low ESR ceramic capacitor ( $\leq 100\text{m}\Omega$ )                                                                                                                                                                                                                                                        |
| 4.         | C <sub>4</sub> | Flying capacitor. Low ESR ceramic capacitor ( $\leq 100\text{m}\Omega$ )                                                                                                                                                                                                                                                        |
| 5.         | C <sub>5</sub> | Tantalum capacitor. Supply bypass capacitor which provides power supply filtering. Refer to the <a href="#">Power Supply Bypassing</a> section for information concerning proper placement and selection of the supply bypass capacitor.                                                                                        |
| 6.         | C <sub>6</sub> | Ceramic capacitor. Supply bypass capacitor which provides power supply filtering. Refer to the <a href="#">Power Supply Bypassing</a> section for information concerning proper placement and selection of the supply bypass capacitor.                                                                                         |

## Typical Performance Characteristics

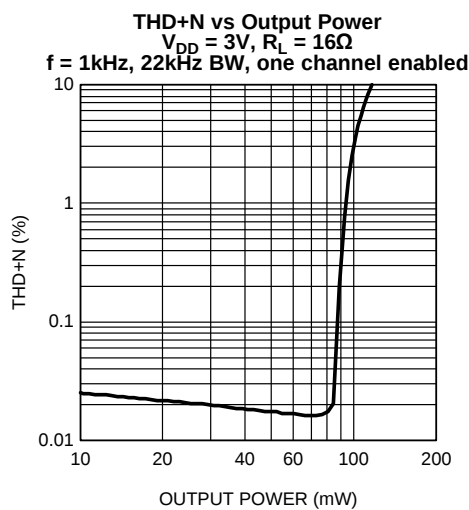


Figure 3.

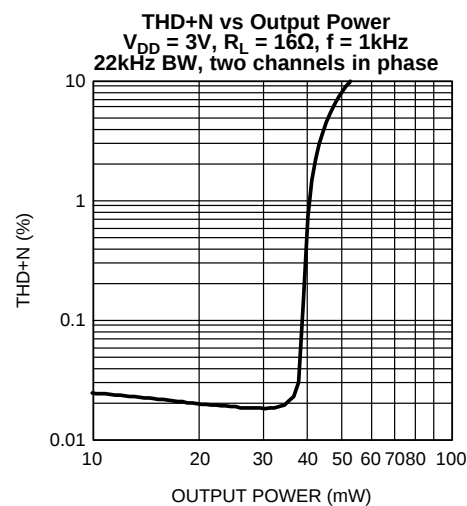


Figure 4.

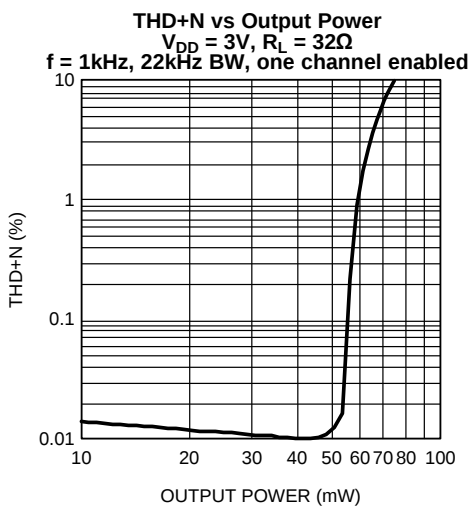


Figure 5.

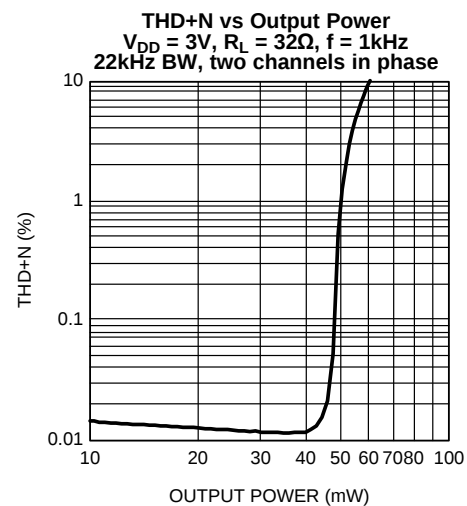


Figure 6.

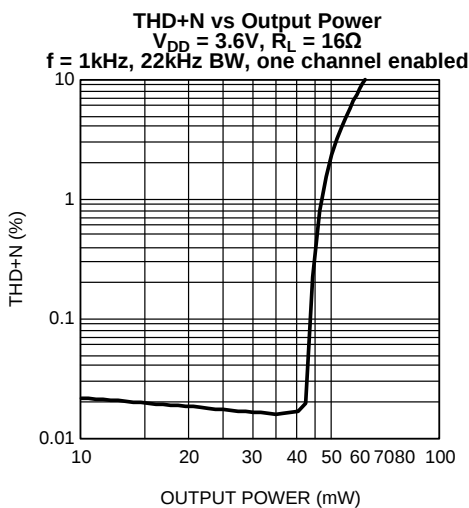


Figure 7.

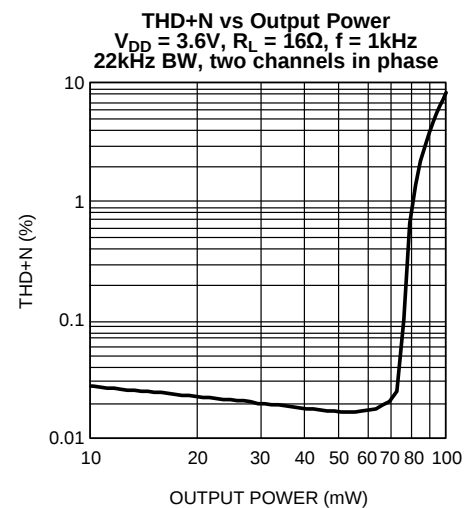


Figure 8.

## Typical Performance Characteristics (continued)

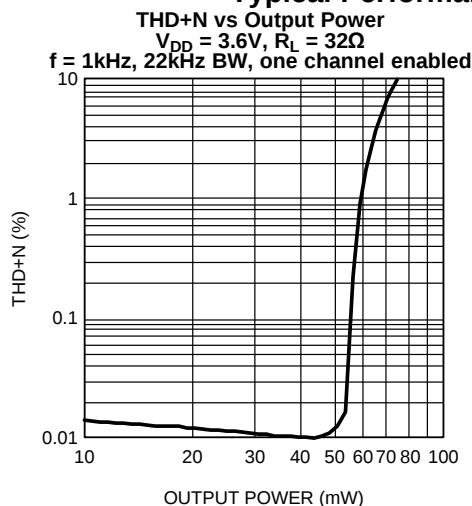


Figure 9.

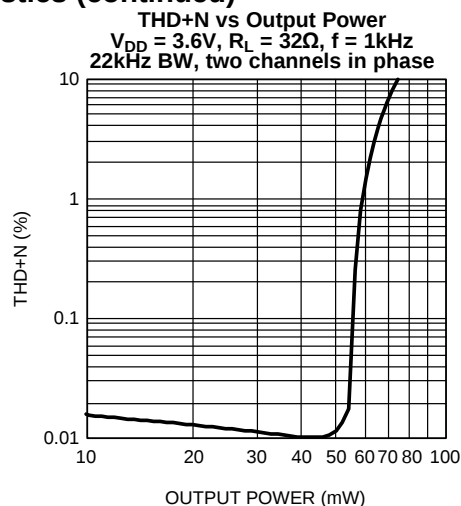


Figure 10.

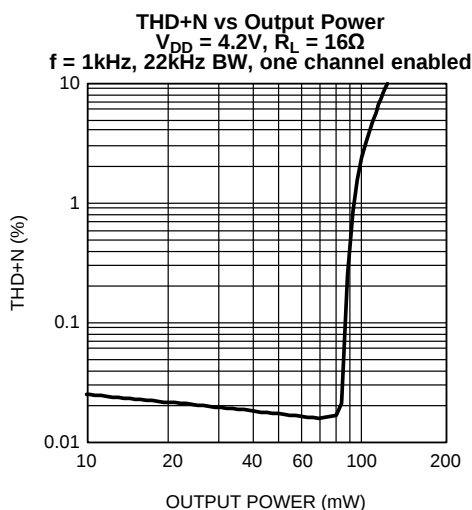


Figure 11.

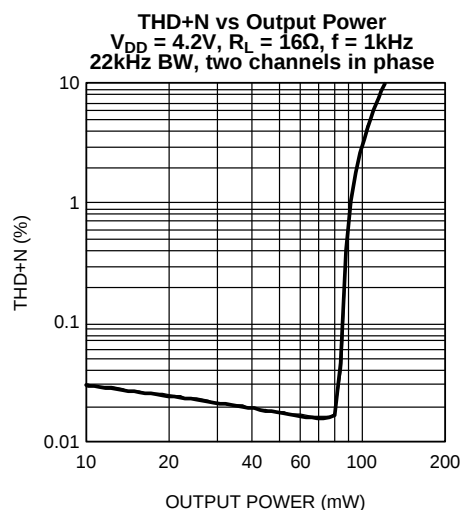


Figure 12.

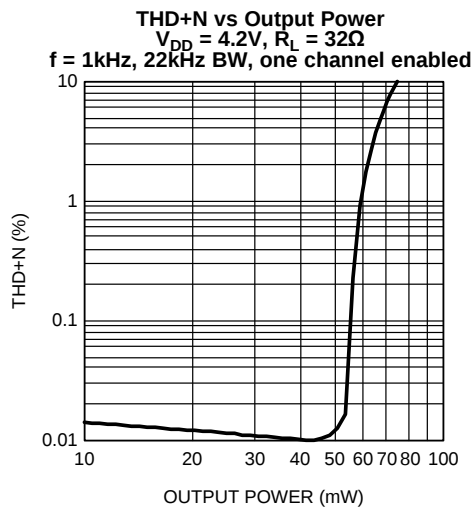


Figure 13.

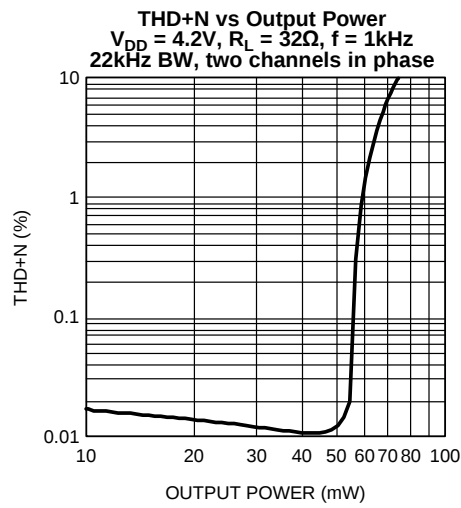


Figure 14.

### Typical Performance Characteristics (continued)

**THD+N vs Frequency**  
 $V_{DD} = 3V$ ,  $R_L = 16\Omega$   
 $P_O = 20mW$ , 22kHz BW

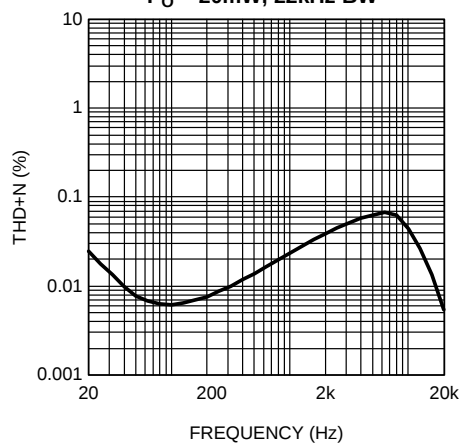


Figure 15.

**THD+N vs Frequency**  
 $V_{DD} = 3V$ ,  $R_L = 32\Omega$   
 $P_O = 20mW$ , 22kHz BW

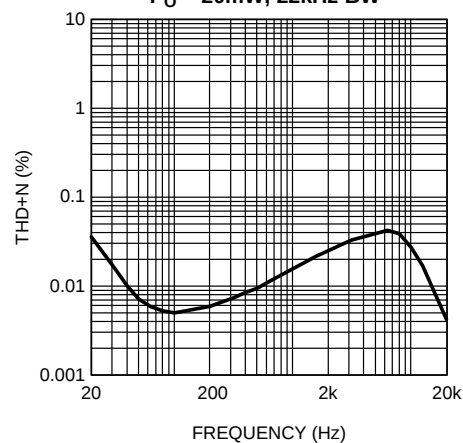


Figure 16.

**THD+N vs Frequency**  
 $V_{DD} = 3.6V$ ,  $R_L = 16\Omega$   
 $P_O = 30mW$ , 22kHz BW

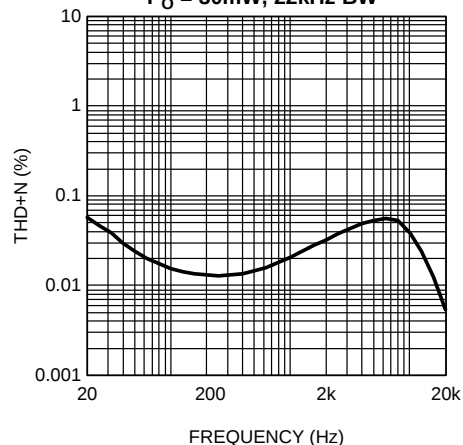


Figure 17.

**THD+N vs Frequency**  
 $V_{DD} = 3.6V$ ,  $R_L = 32\Omega$   
 $P_O = 30mW$ , 22kHz BW

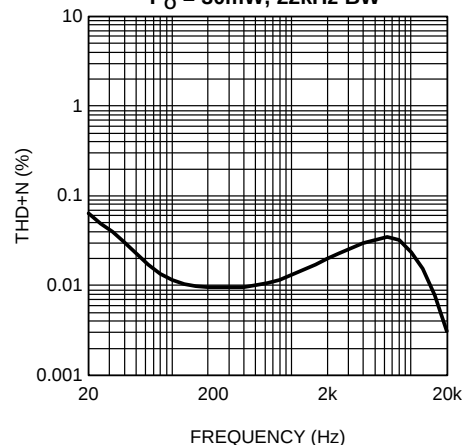


Figure 18.

**THD+N vs Frequency**  
 $V_{DD} = 4.2V$ ,  $R_L = 16\Omega$   
 $P_O = 30mW$ , 22kHz BW

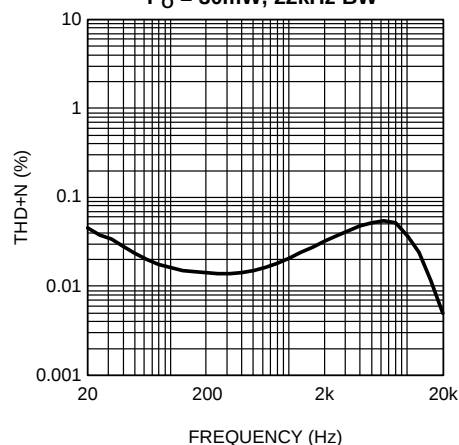


Figure 19.

**THD+N vs Frequency**  
 $V_{DD} = 4.2V$ ,  $R_L = 32\Omega$   
 $P_O = 30mW$ , 22kHz BW

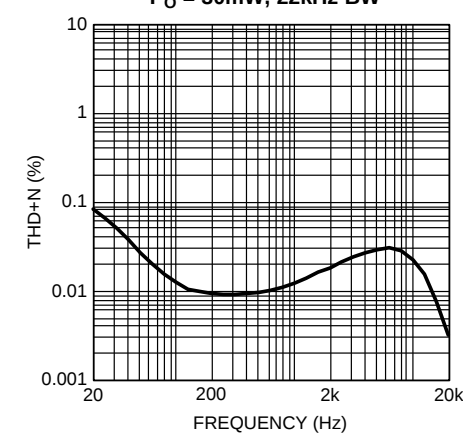


Figure 20.

## Typical Performance Characteristics (continued)

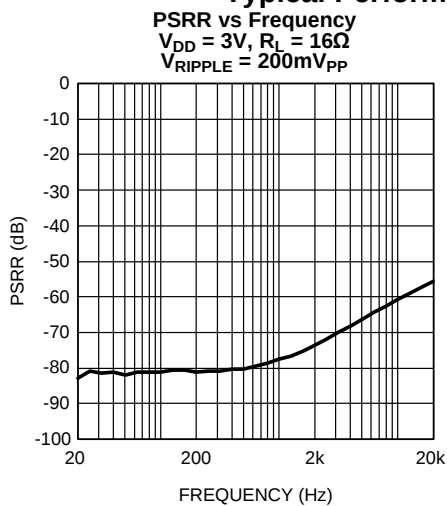


Figure 21.

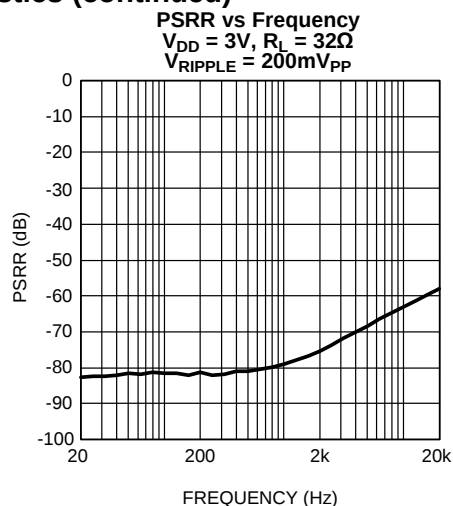


Figure 22.

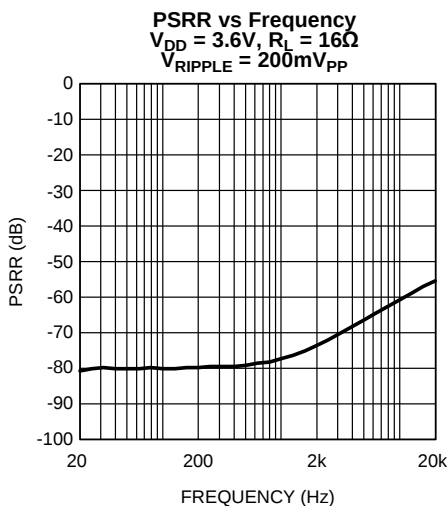


Figure 23.

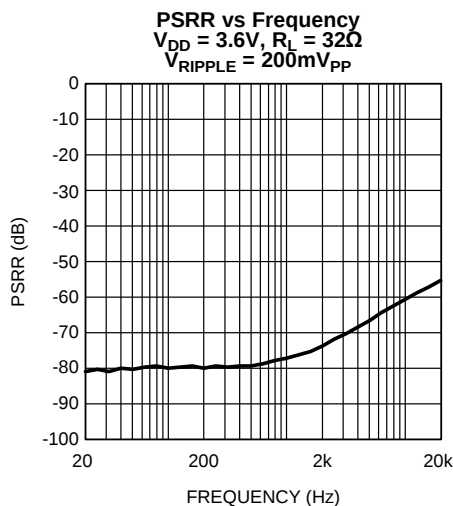


Figure 24.

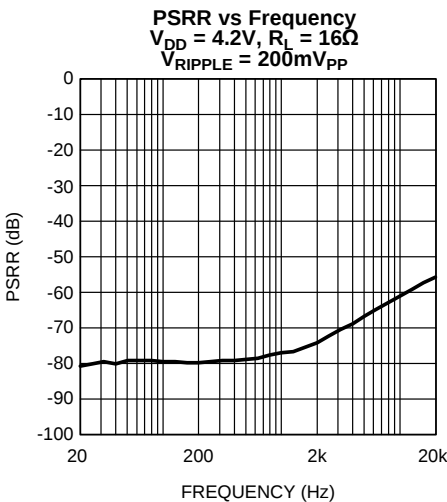


Figure 25.

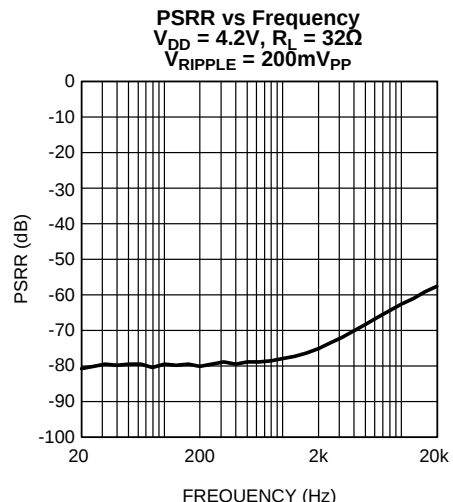


Figure 26.

### Typical Performance Characteristics (continued)

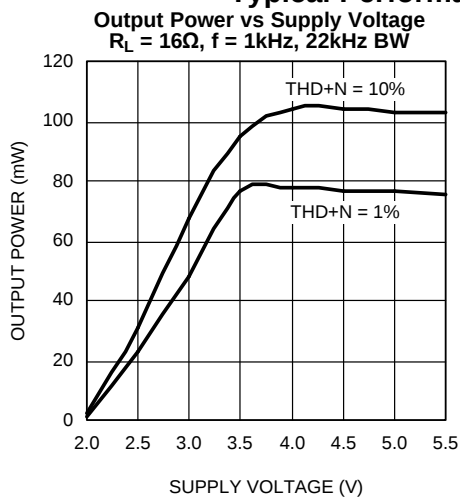


Figure 27.

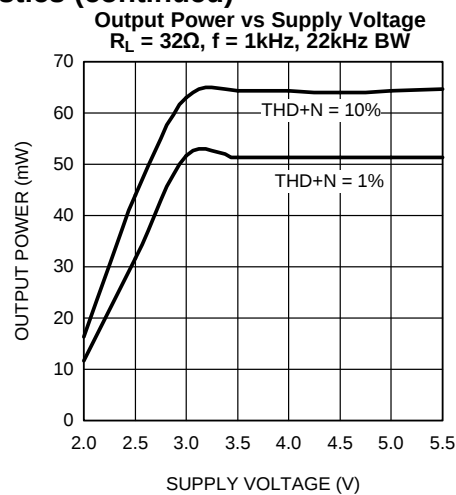


Figure 28.

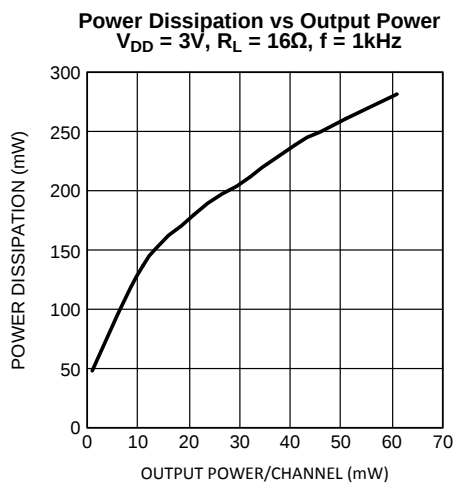


Figure 29.

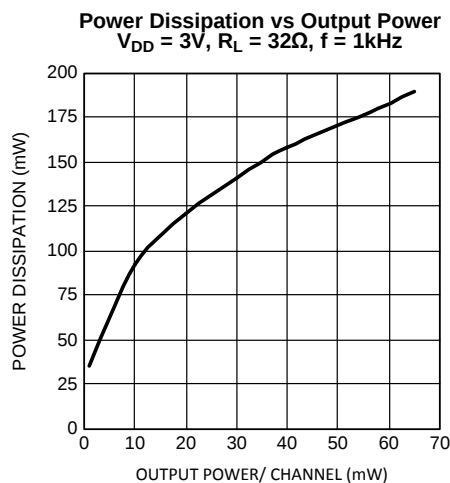


Figure 30.

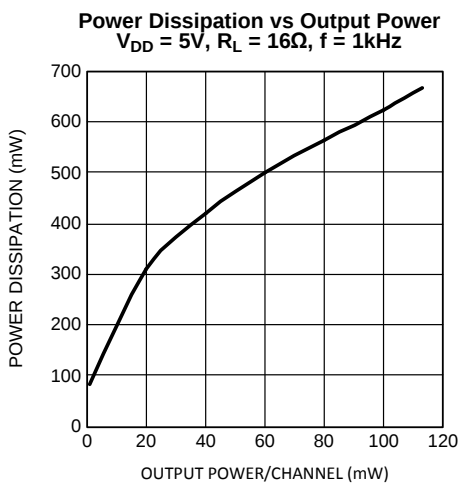


Figure 31.

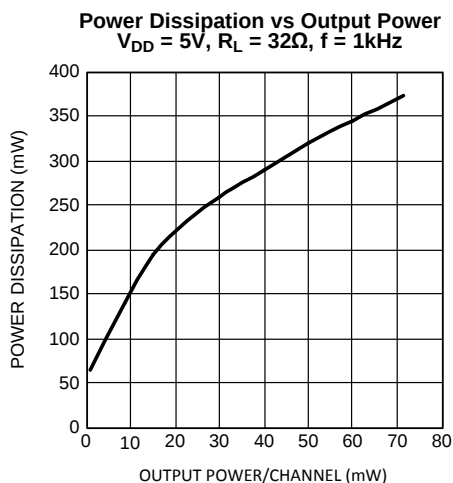


Figure 32.

## Typical Performance Characteristics (continued)

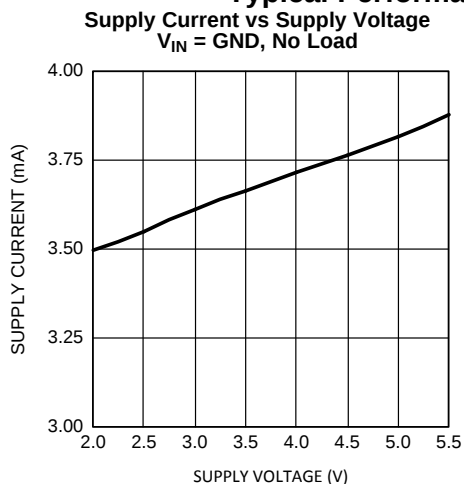


Figure 33.

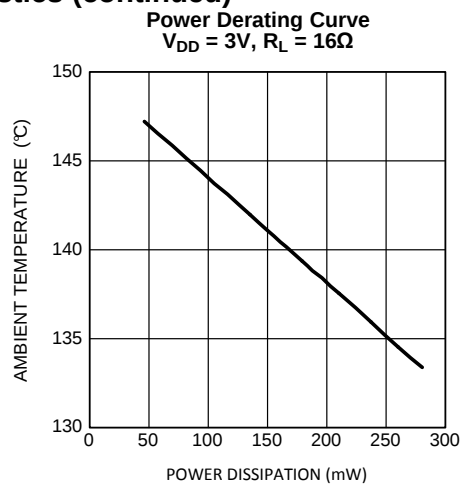


Figure 34.

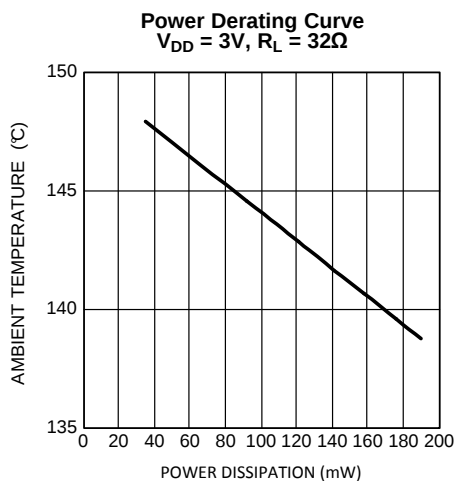


Figure 35.

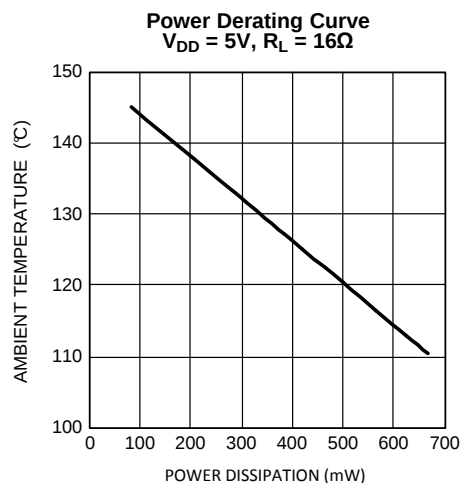


Figure 36.

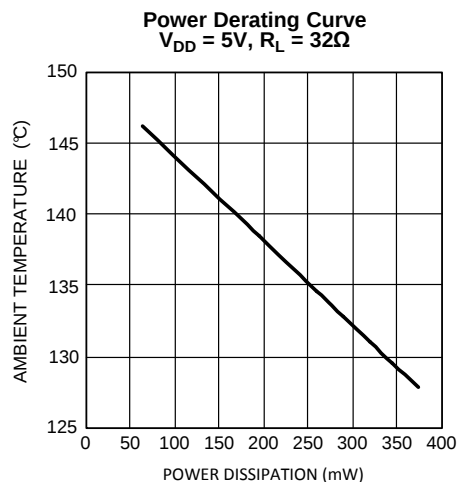


Figure 37.

## APPLICATION INFORMATION

### SUPPLY VOLTAGE SEQUENCING

It is a good general practice to first apply the supply voltage to a CMOS device before any other signal or supply on other pins. This is also true for the LM48860 audio amplifier which is a CMOS device.

Before applying any signal to the inputs or shutdown pins of the LM48860, it is important to apply a supply voltage to the  $V_{DD}$  pins. After the device has been powered, signals may be applied to the shutdown pins (see [MICRO POWER SHUTDOWN](#)) and input pins.

### ELIMINATING THE OUTPUT COUPLING CAPACITOR

The LM48860 features a low noise inverting charge pump that generates an internal negative supply voltage. This allows the outputs of the LM48860 to be biased about GND instead of a nominal DC voltage, like traditional headphone amplifiers. Because there is no DC component, the large DC blocking capacitors (typically 220 $\mu$ F) are not necessary. The coupling capacitors are replaced by two, small ceramic charge pump capacitors, saving board space and cost.

Eliminating the output coupling capacitors also improves low frequency response. In traditional headphone amplifiers, the headphone impedance and the output capacitor form a high pass filter that not only blocks the DC component of the output, but also attenuates low frequencies, impacting the bass response. Because the LM48860 does not require the output coupling capacitors, the low frequency response of the device is not degraded by external components.

In addition to eliminating the output coupling capacitors, the ground referenced output nearly doubles the available dynamic range of the LM48860 when compared to a traditional headphone amplifier operating from the same supply voltage.

### OUTPUT TRANSIENT ('CLICK AND POPS') ELIMINATED

The LM48860 contains advanced circuitry that virtually eliminates output transients ('clicks and pops'). This circuitry prevents all traces of transients when the supply voltage is first applied or when the part resumes operation after coming out of shutdown mode.

### AMPLIFIER CONFIGURATION EXPLANATION

As shown in [Figure 1](#), the LM48860 has two internal operational amplifiers. The two amplifiers have internally configured gain.

Since this is an output ground-referenced amplifier, the LM48860 does not require output coupling capacitors.

### POWER DISSIPATION

From the graph (THD+N vs Output Power,  $V_{DD} = 3V$ ,  $R_L = 16\Omega$ ,  $f = 1kHz$ , 22kHz BW, two channels in phase, page 6) assuming a 3V power supply and a 16 $\Omega$  load, the maximum power dissipation point and thus the maximum package dissipation point is 281mW. The maximum power dissipation point obtained must not be greater than the power dissipation that results from [Equation 1](#).

$$P_{DMAX} = (T_{JMAX} - T_A) / (\theta_{JA}) \quad (1)$$

For the DSBGA package  $\theta_{JA} = 59.3^\circ C/W$ .  $T_{JMAX} = 150^\circ C$  for the LM48860. Depending on the ambient temperature,  $T_A$ , of the system surroundings, Equation 1 can be used to find the maximum internal power dissipation supported by the IC packaging. If the maximum power dissipation from the graph is greater than that of [Equation 1](#), then either the supply voltage must be decreased, the load impedance increased or  $T_A$  reduced (see [power derating](#) curves). For the application of a 5V power supply, with a 16 $\Omega$  load, the maximum ambient temperature possible without violating the maximum junction temperature is approximately 110 $^\circ C$  provided that device operation is around the maximum power dissipation point. Power dissipation is a function of output power and thus, if typical operation is not around the maximum power dissipation point, the ambient temperature may be increased accordingly.

## POWER SUPPLY BYPASSING

As with any power amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. Applications that employ a 3V power supply typically use a 4.7μF capacitor in parallel with a 0.1μF ceramic filter capacitor to stabilize the power supply's output, reduce noise on the supply line, and improve the supply's transient response. Keep the length of leads and traces that connect capacitors between the LM48860's power supply pin and ground as short as possible.

## MICRO POWER SHUTDOWN

The voltage applied to the  $\overline{\text{SD\_LC}}$  (shutdown left channel) pin and the  $\overline{\text{SD\_RC}}$  (shutdown right channel) pin controls the LM48860's shutdown function. When active, the LM48860's micropower shutdown feature turns off the amplifiers' bias circuitry, reducing the supply current. The trigger point is 0.45V for a logic-low level, and 1.2V for logic-high level. The low 0.01μA (typ) shutdown current is achieved by applying a voltage that is as near as ground as possible to the  $\overline{\text{SD\_LC}}$ / $\overline{\text{SD\_RC}}$  pins. A voltage that is higher than ground may increase the shutdown current. Do not let  $\overline{\text{SD\_LC}}$ / $\overline{\text{SD\_RC}}$  float, connect either to high or low.

## SELECTING PROPER EXTERNAL COMPONENTS

Optimizing the LM48860's performance requires properly selecting external components. Though the LM48860 operates well when using external components with wide tolerances, best performance is achieved by optimizing component values.

### Charge Pump Capacitor Selection

Use low ESR (equivalent series resistance) (<100mΩ) ceramic capacitors with an X7R dielectric for best performance. Low ESR capacitors keep the charge pump output impedance to a minimum, extending the headroom on the negative supply. Higher ESR capacitors result in reduced output power from the audio amplifiers.

Charge pump load regulation and output impedance are affected by the value of the flying capacitor (C4). A larger valued C4 (up to 3.3μF) improves load regulation and minimizes charge pump output resistance. Beyond 3.3μF, the switch-on resistance dominates the output impedance.

The output ripple is affected by the value and ESR of the output capacitor (C3). Larger capacitors reduce output ripple on the negative power supply. Lower ESR capacitors minimize the output ripple and reduce the output impedance of the charge pump.

The LM48860 charge pump design is optimized for 2.2μF, low ESR, ceramic, flying and output capacitors.

### Input Capacitor Value Selection

Amplifying the lowest audio frequencies requires high value input coupling capacitors (C1 and C2 in [Figure 1](#)). A high value capacitor can be expensive and may compromise space efficiency in portable designs. In many cases, however, the speakers used in portable systems, whether internal or external, have little ability to reproduce signals below 150Hz. Applications using speakers with this limited frequency response reap little improvement by using high value input and output capacitors.

As shown in [Figure 1](#), the internal input resistor,  $R_i$  and the input capacitors, C1 and C2, produce a -3dB high-pass filter cutoff frequency that is found using [Equation 2](#).

$$f_{i-3dB} = 1 / 2\pi R_{iN} C \quad (\text{Hz}) \quad (2)$$

The value of  $R_{iN}$  can be found in the [Electrical Characteristics](#) tables.

## Demonstration Board PCB Layout

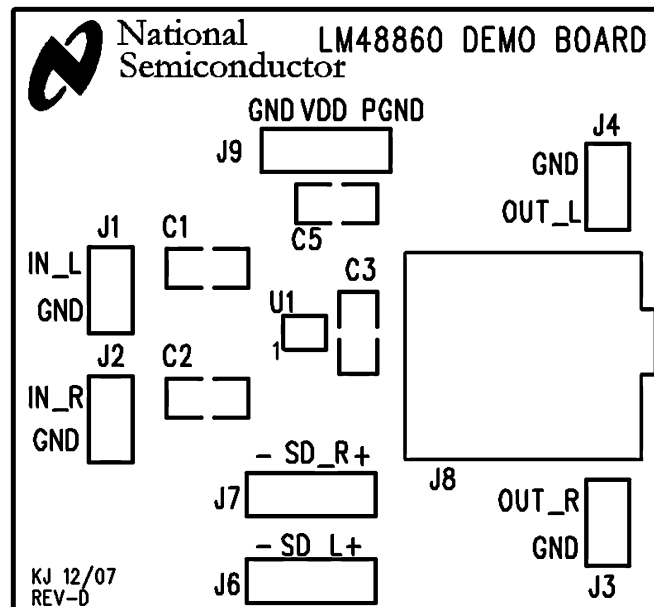


Figure 38. Top Silkscreen

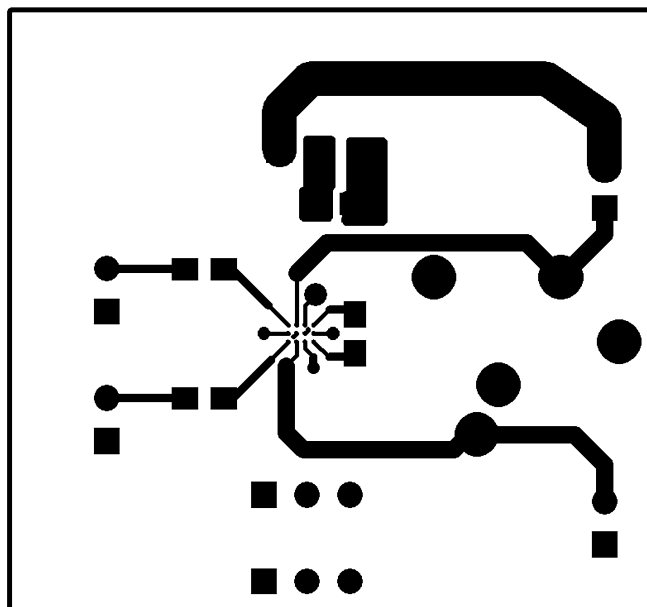


Figure 39. Top Layer

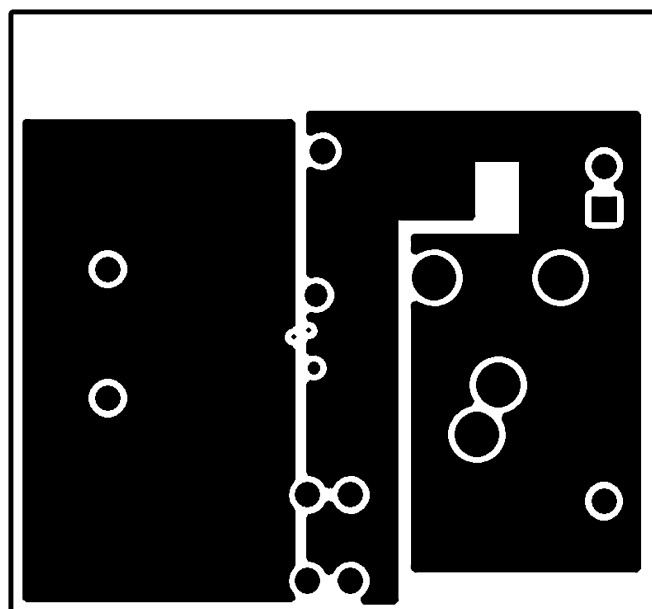


Figure 40. Midlayer 1

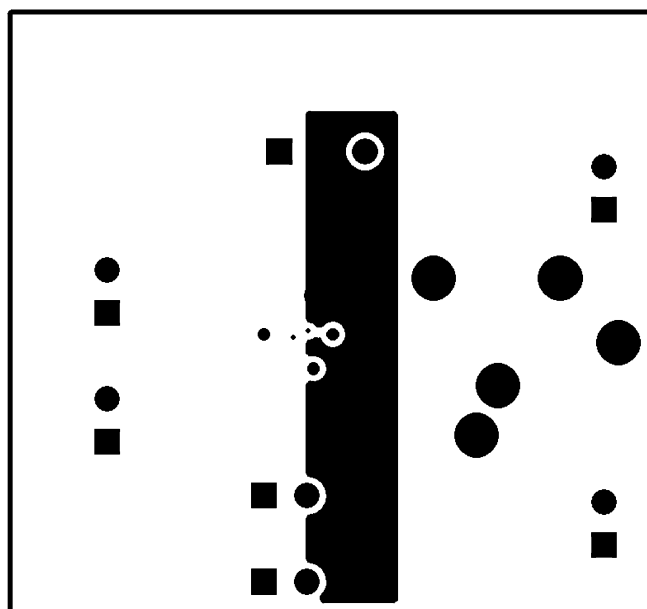


Figure 41. Midlayer 2

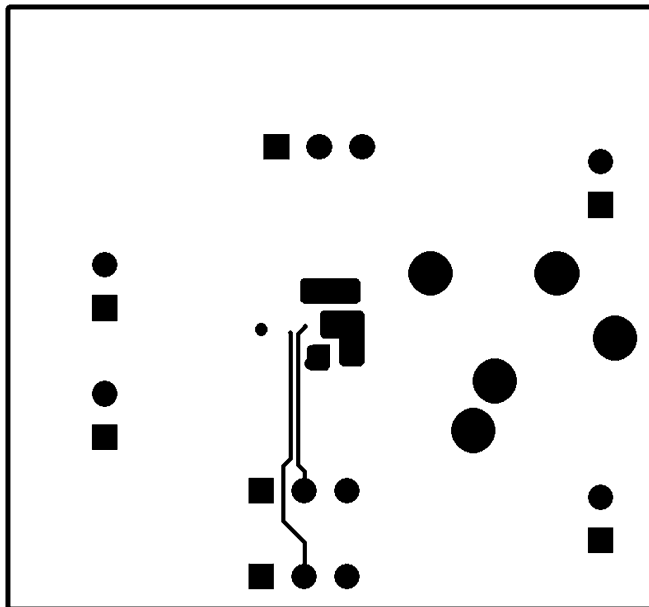


Figure 42. Bottom Layer

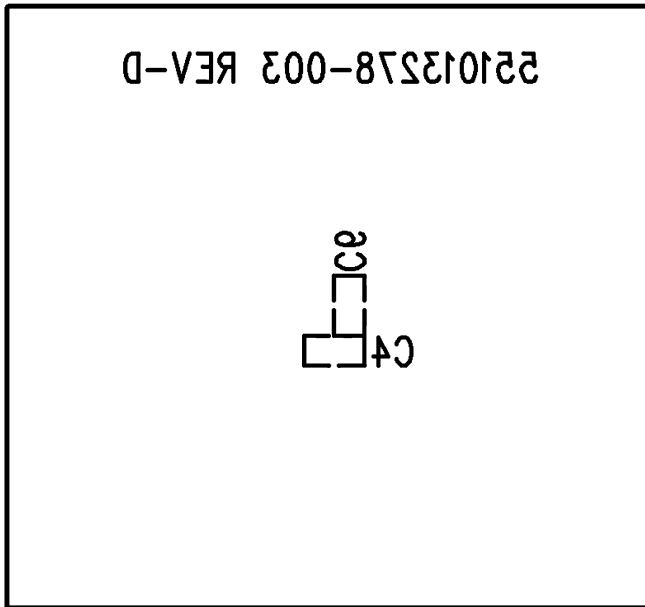


Figure 43. Bottom Silkscreen

**REVISION HISTORY**

| Rev  | Date       | Description                                                       |
|------|------------|-------------------------------------------------------------------|
| 1.0  | 01/16/08   | Initial release.                                                  |
| 1.01 | 01/29/08   | Text edits.                                                       |
| 1.02 | 02/14/08   | Fixed typos (x-axis) on few curves.                               |
| 1.03 | 10/17/08   | Edited the X1 and X2 limits under the Physical Dimension section. |
| D    | 05/02/2013 | Changed layout of National Data Sheet to TI format.               |

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM48860TL/NOPB</a>  | Active        | Production           | DSBGA (YZR)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 84    | GJ7                 |
| LM48860TL/NOPB.A                | Active        | Production           | DSBGA (YZR)   12 | 250   SMALL T&R       | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 84    | GJ7                 |
| <a href="#">LM48860TLX/NOPB</a> | Active        | Production           | DSBGA (YZR)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 84    | GJ7                 |
| LM48860TLX/NOPB.A               | Active        | Production           | DSBGA (YZR)   12 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 84    | GJ7                 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM48860TL/NOPB  | DSBGA        | YZR             | 12   | 250  | 178.0              | 8.4                | 1.68    | 2.13    | 0.76    | 4.0     | 8.0    | Q1            |
| LM48860TLX/NOPB | DSBGA        | YZR             | 12   | 3000 | 178.0              | 8.4                | 1.68    | 2.13    | 0.76    | 4.0     | 8.0    | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal




| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM48860TL/NOPB  | DSBGA        | YZR             | 12   | 250  | 208.0       | 191.0      | 35.0        |
| LM48860TLX/NOPB | DSBGA        | YZR             | 12   | 3000 | 208.0       | 191.0      | 35.0        |

YZR0012

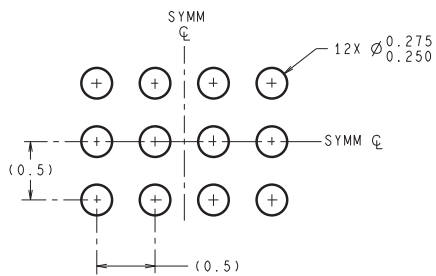

DIMENSIONS ARE IN MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

LAND PATTERN RECOMMENDATION

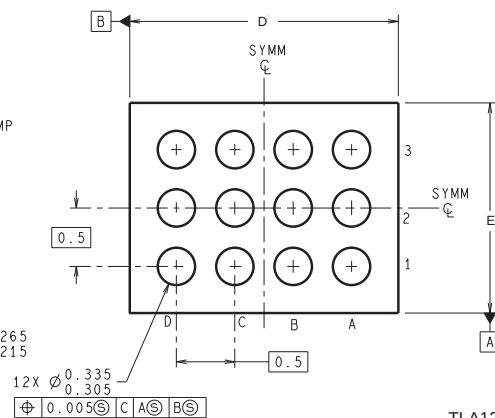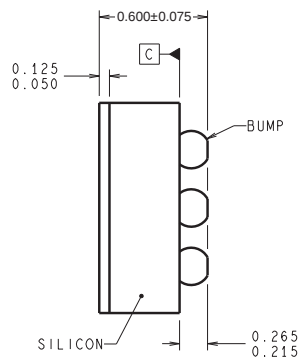

TLA12XXX (Rev C)

D: Max = 2.014 mm, Min = 1.954 mm

E: Max = 1.514 mm, Min = 1.454 mm

4215049/A 12/12

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.  
B. This drawing is subject to change without notice.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated