
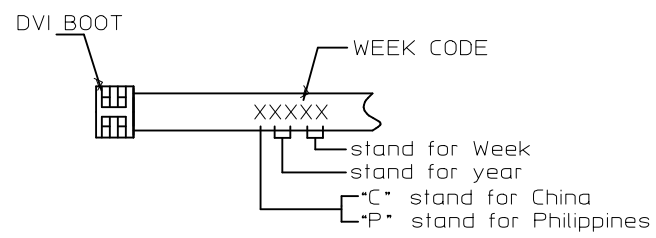


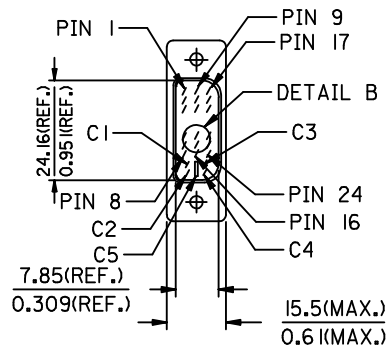
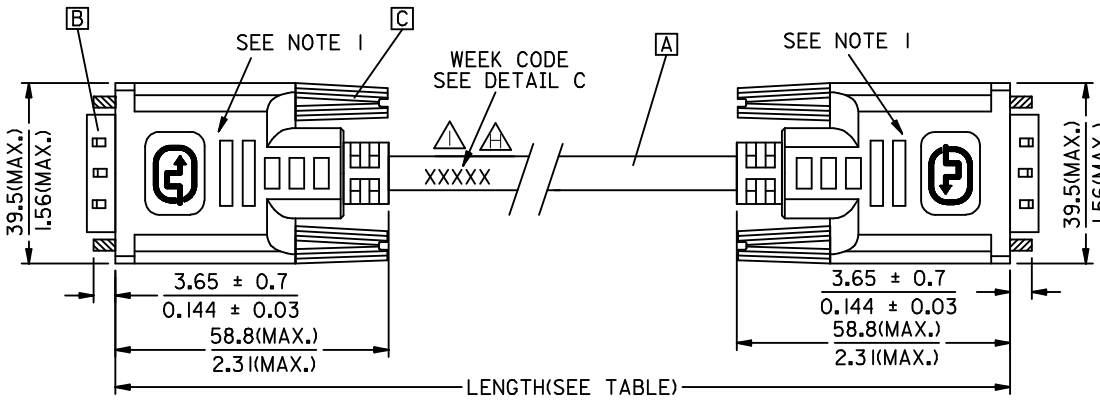


ECN NO	DATE	REV	REVISION	DESCRIPTION	CHANGER
CY14-5154	2013/08/31	H		CHANGE THE LABELING CONTENT FOR PRODUCTS TRANSFER TO PHILIPPINES	AHOU
CY14-5301	2013/09/12	I		CHANGE THE LABELING CONTENT FOR PRODUCTS TRANSFER TO PHILIPPINES	AHOU

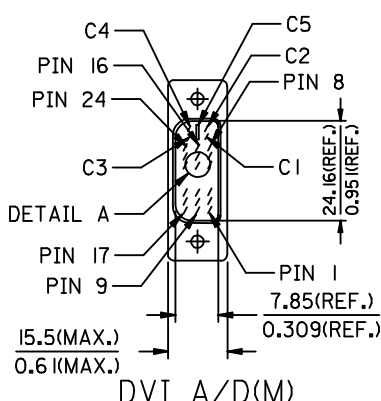

88741-9021	DVI-I-DVI-I A/D CABLE 5M IVORY	5000 ± 150 196.9 ± 5.9	IVORY	887808325
88741-9011	DVI-I-DVI-I A/D CABLE 3M IVORY	3000 ± 80 118.1 ± 3.1	IVORY	887808325
88741-9001	DVI-I-DVI-I A/D CABLE 2M IVORY	2000 ± 60 78.7 ± 2.4	IVORY	887808325
88741-9020	DVI-I-DVI-I A/D CABLE 5M BLK	5000 ± 150 196.9 ± 5.9	BLACK	887808326
88741-9010	DVI-I-DVI-I A/D CABLE 3M BLK	3000 ± 80 118.1 ± 3.1	BLACK	887808326
88741-9000	DVI-I-DVI-I A/D CABLE 2M BLK	2000 ± 60 78.7 ± 2.4	BLACK	887808326
MX P/N	DESCRIPTION	LENGTH	CABLE COLOR	CABLE P/N

ENTER DESCRIPTION EC NO: CPG2014-0810 DRWN: XJGU001 CHKD: AHOU APPR: XAWANG	QUALITY SYMBOLS FA=0 FC=0 FP=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		TITLE DVI-I - DVI-I A/D CABLE		DOCUMENT NO. SD-88741-011		SHEET NO. 1 OF 2		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

7

6

5

4

3

2

1

NOTE:1. OVERMOLD SPECIFICATION

1.1 DVI BOOT MOLDED WITH SNOW WHITE PVC RESIN P/N IS 887800076.

1.2 UL94V-0, COLOR: MAD432

1.3 HARDNESS (DUROMETER): SHORE A 90-95

2. MECHANICAL SPECIFICATION

2.1 CABLE SHOULD STAND THE PULL FORCE 89-11IN FOR 30 SECONDS

WITH NO VISIBLE TERMINATION DAMAGE.

2.2 CABLE SHOULD PASS THE FLEX TEST IN 100 CYCLES AT EACH

OF PLANES, PER EIA 364-41, CONDITION I.

3. CABLE ELECTRICAL SPECIFICATION

3.1 DIELECTRIC STRENGTH: 300VDC FOR 10mS.

3.2 SIGNAL LINE INSULATION RESISTANCE: 20 MEGA Ohms

3.3 COAXIAL LINES CHARACTERISTIC IMPEDANCE: 75±7.5 Ohms @TDR.

3.4 DIFFERENTIAL LINES CHARACTERISTIC IMPEDANCE: 100±7 Ohms @TDR.

4. DVI CONNECTOR SPECIFICATION

4.1 REFER TO PRODUCT SPEC. PS-74320-001.

4.2 CONTACT PLATING: AU FLASH.

5. SHORTCIRCUIT AMONG DRAIN WIRES SIGNAL GROUND IS ACCEPTABLE.

6. THIS PRODUCT MUST MEET MX RoHS COMPLIANCE.

7. CONNECTION DIAGRAM

SHIELD	SHIEDL	OUTER SHIELD
C5	C5	ANALOG GROUND
C4	C4	HORIZONTAL SYNC.
C3	C3	ANALOG BLUE
C2	C2	ANALOG GREEN
C1	C1	ANALOG RED
PIN 24	PIN 24	TMDS CLOCK-
PIN 23	PIN 23	TMDS CLOCK+
PIN 22	PIN 22	TMDS CLOCK SHIELD
PIN 19	PIN 19	TMDS DATA 0
PIN 18	PIN 18	TMDS DATA 0+
PIN 17	PIN 17	TMDS DATA 0-
PIN 16	PIN 16	HOT PLUG DETECT
PIN 15	PIN 15	GROUND(+5V & HV SYNC.)
PIN 14	PIN 14	POWER +5V
PIN 11	PIN 11	TMDS DATA 1
PIN 10	PIN 10	TMDS DATA 1+
PIN 9	PIN 9	TMDS DATA 1-
PIN 8	PIN 8	VERTICAL SYNC.
PIN 7	PIN 7	DDC DATA
PIN 6	PIN 6	DDC CLOCK
PIN 3	PIN 3	TMDS DATA 2
PIN 2	PIN 2	TMDS DATA 2+
PIN 1	PIN 1	TMDS DATA 2-
DVI_A/D	DVI_A/D	CABLE FUNCTION

8. MATERIAL LIST

C	DVI THUMB SCREW 887806129
B	DVI_I G/F CONNECTOR 743230031
A	DVI ANALOG DIGITAL CABLE (SEE TABLE)
ITEM	DESCRIPTION

ENTER DESCRIPTION EC NO: CPG2014-0810 DRWN:XJGU001 CHKD:AHOU APPR:XAWANG				DESCRIPTION REV	QUALITY SYMBOLS F_A=0 F_C=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
			mm			INCH	DRAWN BY XJGU001	DATE 2013/09/07	TITLE DVI-I - DVI-I A/D CABLE							
			± ---			± ---	CHECKED BY ZXDENG	DATE 2013/09/07								
			± ---			± ---	APPROVED BY XAWANG		DATE 2013/09/12		molex					
			± ---			± ---										
			ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.		SHEET NO.						
			DRAFT WHERE APPLICABLE			SEE TABLE		SD-88741-011		2 OF 2						
			MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

6

5

4

3

2

1

7	6	5	4	3	2	1																																																																												
E	NOTE:1. OVERMOLD SPECIFICATION 1.1 DVI BOOT MOLDED WITH SNOW WHITE PVC RESIN P/N IS 887800076. 1.2 UL94V-0, COLOR: MAD432 1.3 HARDNESS (DUROMETER): SHORE A 90-95 2. MECHANICAL SPECIFICATION 2.1 CABLE SHOULD STAND THE PULL FORCE 89-11IN FOR 30 SECONDS WITH NO VISIBLE TERMINATION DAMAGE. 2.2 CABLE SHOULD PASS THE FLEX TEST IN 100 CYCLES AT EACH OF PLANES, PER EIA 364-41, CONDITION 1. 3. CABLE ELECTRICAL SPECIFICATION 3.1 DIELECTRIC STRENGTH: 300VDC FOR 10mS. 3.2 SIGNAL LINE INSULATION RESISTANCE: 20 MEGA Ohms 3.3 COAXIAL LINES CHARACTERISTIC IMPEDANCE: 75±7.5 Ohms @TDR. 3.4 DIFFERENTIAL LINES CHARACTERISTIC IMPEDANCE: 100±7 Ohms @TDR. 4. DVI CONNECTOR SPECIFICATION 4.1 REFER TO PRODUCT SPEC. PS-74320-001. 4.2 CONTACT PLATING: AU FLASH. 5. SHORTCIRCUIT AMONG DRAIN WIRES SIGNAL GROUND IS ACCEPTABLE. 6. THIS PRODUCT MUST MEET MX RoHS COMPLIANCE.			7. CONNECTION DIAGRAM			E																																																																											
D				<table><tr><td>SHIELD</td><td>SHIELD</td><td>OUTER SHIELD</td></tr><tr><td>C5</td><td>C5</td><td>ANALOG GROUND</td></tr><tr><td>C4</td><td>C4</td><td>HORIZONTAL SYNC.</td></tr><tr><td>C3</td><td>C3</td><td>ANALOG BLUE</td></tr><tr><td>C2</td><td>C2</td><td>ANALOG GREEN</td></tr><tr><td>C1</td><td>C1</td><td>ANALOG RED</td></tr><tr><td>PIN 24</td><td>PIN 24</td><td>TMDS CLOCK-</td></tr><tr><td>PIN 23</td><td>PIN 23</td><td>TMDS CLOCK+</td></tr><tr><td>PIN 22</td><td>PIN 22</td><td>TMDS CLOCK SHIELD</td></tr><tr><td>PIN 19</td><td>PIN 19</td><td>TMDS DATA 0</td></tr><tr><td>PIN 18</td><td>PIN 18</td><td>TMDS DATA 0+</td></tr><tr><td>PIN 17</td><td>PIN 17</td><td>TMDS DATA 0-</td></tr><tr><td>PIN 16</td><td>PIN 16</td><td>HOT PLUG DETECT</td></tr><tr><td>PIN 15</td><td>PIN 15</td><td>GROUND(+5V & HV SYNC.)</td></tr><tr><td>PIN 14</td><td>PIN 14</td><td>POWER +5V</td></tr><tr><td>PIN 11</td><td>PIN 11</td><td>TMDS DATA 1</td></tr><tr><td>PIN 10</td><td>PIN 10</td><td>TMDS DATA 1+</td></tr><tr><td>PIN 9</td><td>PIN 9</td><td>TMDS DATA 1-</td></tr><tr><td>PIN 8</td><td>PIN 8</td><td>VERTICAL SYNC.</td></tr><tr><td>PIN 7</td><td>PIN 7</td><td>DDC DATA</td></tr><tr><td>PIN 6</td><td>PIN 6</td><td>DDC CLOCK</td></tr><tr><td>PIN 3</td><td>PIN 3</td><td>TMDS DATA 2</td></tr><tr><td>PIN 2</td><td>PIN 2</td><td>TMDS DATA 2+</td></tr><tr><td>PIN 1</td><td>PIN 1</td><td>TMDS DATA 2-</td></tr><tr><td>DVI_A/D</td><td>DVI_A/D</td><td>CABLE FUNCTION</td></tr></table>			SHIELD	SHIELD	OUTER SHIELD	C5	C5	ANALOG GROUND	C4	C4	HORIZONTAL SYNC.	C3	C3	ANALOG BLUE	C2	C2	ANALOG GREEN	C1	C1	ANALOG RED	PIN 24	PIN 24	TMDS CLOCK-	PIN 23	PIN 23	TMDS CLOCK+	PIN 22	PIN 22	TMDS CLOCK SHIELD	PIN 19	PIN 19	TMDS DATA 0	PIN 18	PIN 18	TMDS DATA 0+	PIN 17	PIN 17	TMDS DATA 0-	PIN 16	PIN 16	HOT PLUG DETECT	PIN 15	PIN 15	GROUND(+5V & HV SYNC.)	PIN 14	PIN 14	POWER +5V	PIN 11	PIN 11	TMDS DATA 1	PIN 10	PIN 10	TMDS DATA 1+	PIN 9	PIN 9	TMDS DATA 1-	PIN 8	PIN 8	VERTICAL SYNC.	PIN 7	PIN 7	DDC DATA	PIN 6	PIN 6	DDC CLOCK	PIN 3	PIN 3	TMDS DATA 2	PIN 2	PIN 2	TMDS DATA 2+	PIN 1	PIN 1	TMDS DATA 2-	DVI_A/D	DVI_A/D	CABLE FUNCTION	D
SHIELD	SHIELD	OUTER SHIELD																																																																																
C5	C5	ANALOG GROUND																																																																																
C4	C4	HORIZONTAL SYNC.																																																																																
C3	C3	ANALOG BLUE																																																																																
C2	C2	ANALOG GREEN																																																																																
C1	C1	ANALOG RED																																																																																
PIN 24	PIN 24	TMDS CLOCK-																																																																																
PIN 23	PIN 23	TMDS CLOCK+																																																																																
PIN 22	PIN 22	TMDS CLOCK SHIELD																																																																																
PIN 19	PIN 19	TMDS DATA 0																																																																																
PIN 18	PIN 18	TMDS DATA 0+																																																																																
PIN 17	PIN 17	TMDS DATA 0-																																																																																
PIN 16	PIN 16	HOT PLUG DETECT																																																																																
PIN 15	PIN 15	GROUND(+5V & HV SYNC.)																																																																																
PIN 14	PIN 14	POWER +5V																																																																																
PIN 11	PIN 11	TMDS DATA 1																																																																																
PIN 10	PIN 10	TMDS DATA 1+																																																																																
PIN 9	PIN 9	TMDS DATA 1-																																																																																
PIN 8	PIN 8	VERTICAL SYNC.																																																																																
PIN 7	PIN 7	DDC DATA																																																																																
PIN 6	PIN 6	DDC CLOCK																																																																																
PIN 3	PIN 3	TMDS DATA 2																																																																																
PIN 2	PIN 2	TMDS DATA 2+																																																																																
PIN 1	PIN 1	TMDS DATA 2-																																																																																
DVI_A/D	DVI_A/D	CABLE FUNCTION																																																																																
C				8. MATERIAL LIST			C																																																																											
B				<table><tr><td>C</td><td>DVI THUMB SCREW 887806129</td></tr><tr><td>B</td><td>DVI_I G/F CONNECTOR 743230031</td></tr><tr><td>A</td><td>DVI ANALOG DIGITAL CABLE (SEE TABLE)</td></tr><tr><td>ITEM</td><td>DESCRIPTION</td></tr></table>			C	DVI THUMB SCREW 887806129	B	DVI_I G/F CONNECTOR 743230031	A	DVI ANALOG DIGITAL CABLE (SEE TABLE)	ITEM	DESCRIPTION	B																																																																			
C	DVI THUMB SCREW 887806129																																																																																	
B	DVI_I G/F CONNECTOR 743230031																																																																																	
A	DVI ANALOG DIGITAL CABLE (SEE TABLE)																																																																																	
ITEM	DESCRIPTION																																																																																	
A	<table><tr><td rowspan="5">ENTER DESCRIPTION EC NO: DG2006-0186 DRWN:PDAI CHKD: APPR:TKAN</td><td rowspan="5">2006/03/09 2006/03/09 2006/03/10</td><td rowspan="5">DESCRIPTION REV</td><td rowspan="5">QUALITY SYMBOLS =0 =0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE ---</td><td>DESIGN UNITS METRIC</td><td rowspan="5"> THIRD ANGLE PROJECTION</td></tr><tr><td></td><td>mm</td><td>INCH</td><td>DRAWN BY PDAI</td><td>DATE 2006/03/07</td><td rowspan="2">TITLE DVI-I - DVI-I A/D CABLE</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td><td>CHECKED BY ZXDENG</td><td>DATE 2006/03/07</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td><td>APPROVED BY BORON</td><td>DATE 2006/03/07</td><td rowspan="2"> MOLEX INCORPORATED</td></tr><tr><td>2 PLACES</td><td>± ---</td><td>± ---</td><td colspan="2">MATERIAL NO. SEE TABLE</td><td>DOCUMENT NO. SD-88741-011</td><td rowspan="2">SHEET NO. 2 OF 2</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>			ENTER DESCRIPTION EC NO: DG2006-0186 DRWN:PDAI CHKD: APPR:TKAN	2006/03/09 2006/03/09 2006/03/10	DESCRIPTION REV	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		mm	INCH	DRAWN BY PDAI	DATE 2006/03/07	TITLE DVI-I - DVI-I A/D CABLE	4 PLACES	± ---	± ---	CHECKED BY ZXDENG	DATE 2006/03/07	3 PLACES	± ---	± ---	APPROVED BY BORON	DATE 2006/03/07	MOLEX INCORPORATED	2 PLACES	± ---	± ---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-88741-011	SHEET NO. 2 OF 2	1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		A																																				
ENTER DESCRIPTION EC NO: DG2006-0186 DRWN:PDAI CHKD: APPR:TKAN	2006/03/09 2006/03/09 2006/03/10	DESCRIPTION REV	QUALITY SYMBOLS =0 =0					GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE ---	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION																																																																			
									mm	INCH	DRAWN BY PDAI	DATE 2006/03/07	TITLE DVI-I - DVI-I A/D CABLE																																																																					
								4 PLACES	± ---	± ---	CHECKED BY ZXDENG	DATE 2006/03/07																																																																						
								3 PLACES	± ---	± ---	APPROVED BY BORON	DATE 2006/03/07	MOLEX INCORPORATED																																																																					
				2 PLACES	± ---	± ---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-88741-011	SHEET NO. 2 OF 2																																																																								
1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																													
tb_frame_A4_P_ME_T Rev. D 2004/04/02			6	5	4	3	2	1																																																																										