


Chassis Transformers

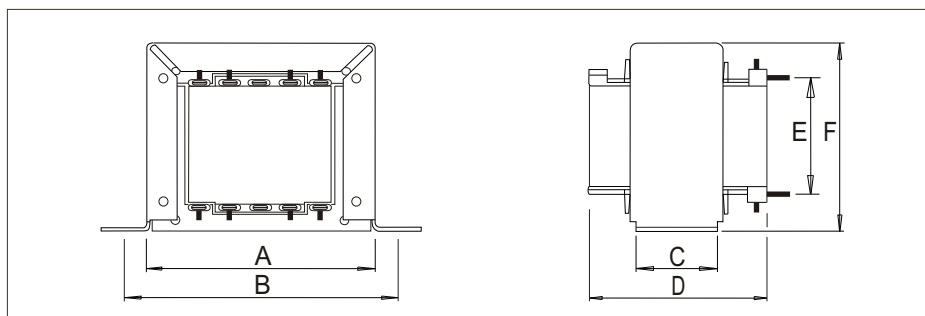

Power (VA)	Mass (kg)	Regulation (%)	A (mm)	B* (mm)	C (mm)	D (mm)	E (mm)	F (mm)
3	0.17	20	45	54	16	35	23	37
6	0.23	20	50	60	18	38	25	41
12	0.31	20	56	68	20	41	28	47
20	0.53	15	59	73	28	52	31	50
30	0.64	20	70	83	24	51	36	56
40	0.68	15	70	83	34	60	36	56
50	1	10	78	92	27	56	41	65

*Recommended fixing centres

Part Numbering System

Example - L 003 C 15 I

Output Power

003 = 3VA
006 = 6VA
012 = 12VA
020 = 20VA
030 = 30VA
040 = 40VA
050 = 50VA

Style

C = chassis

Voltage Output

06 = 2x6V
09 = 2x9V
12 = 2x12V
15 = 2x15V
18 = 2x18V
20 = 2x20V
24 = 2x24V

Finish Options

T = Thermal cutout*
L = Flying leads*
I = Vacuum impregnation
E = Additional Enveloping*
S = Single 230V Input

Example L003C15I = Chassis mounted 115V/230V input, 2x15V output, 3VA transformer with vacuum impregnated varnish finish and solder tag termination.

* Available for certain sizes - please call for details.

- Input voltages, single 230V or dual 115V/230V 50/60Hz
- Reinforced isolation - tested at 3kVrms
- Transformers dip coated in varnish as standard
- Solder tag terminations
- Operational ambient temperature range -20°C to +50°C



**chassis
transformers**

CONTACT US NOW
UNITED KINGDOM
CRYDOM

T +44 (0) 1202 897969

F +44 (0) 1202 891918

E magnetics@crydom.com

W www.crydom.co.uk